



# FASTENING SYSTEMS



## PRODUCT CATALOG

COLLATED FASTENERS • TOOLS • COMPRESSORS • ACCESSORIES



# Contents



**Grip-Rite Fastening Systems**

Grip-Rite Packaging .....	2-3
Fastener Label Color System .....	2

**Pneumatic Tools**

Framing.....	8-9
Metal Connector Nailer .....	10-11
Roofing .....	12
Siding/Fencing .....	13
Finish .....	14-15

**Collated Fasteners****Framing**

15° Wire Coil .....	26
21° Plastic Strip Round Head .....	27-29
28° Plastic Strip Clipped Head.....	30
28° Wire Weld Clipped Head .....	30
28° Wire Weld Round Head .....	31
30° Paper Tape Clipped Head.....	32
30° Paper Tape Round Head.....	33
Grip-Rite Fastener I.D. System - 21° Framing .....	34
33° Paper Tape Joist Hanger Nails .....	35
33° Plastic Strip Joist Hanger Nails .....	35

**Siding**

0° Plastic Coil .....	36
15° Plastic Coil .....	36
15° Wire Weld Coil.....	37

**Roofing**

15° Wire Coil.....	38
Laser Weld Plastic Cap & Staples .....	39

**Staples**

"L"-style Narrow Crown .....	40
"SX"-style Narrow Crown .....	41
"N"-style Medium Crown .....	42
"76"-style Medium Crown .....	42
"GS"-style Medium Crown .....	43

**Compressors**

Hand Carry .....	54-55
Wheeled Portable Electric.....	55-56
Wheeled Portable Gas .....	56-57
Tool Capacity Comparison Chart .....	58

**Accessories**

Air Hoses .....	60-61
Fittings .....	62-65
Tool & Compressor Oil.....	66
Service/Repair Kits.....	67

**Safety & Warranty**

Manual & Warning Icons.....	69
Pneumatic Tool & Compressor Warranty .....	70

**Dealer Resources**

<b>Fast Stats:</b> Tool Comparison .....	72-73
<b>Fast Stats:</b> Tool Comparison .....	74-75
<b>Fast Stats:</b> Compressor Comparison.....	76-77

Collated Fastener Icons .....	4-5
Selecting the Right Fastener .....	6

Staplers .....	16-17
Flooring .....	18
Mini Air Nailers .....	19
Tackers .....	20-21
Industrial.....	22-24

**Staples** (continued)

"BCS"-style Medium Crown.....	43
"BCS"-style Wide Crown.....	44
"GSW"-style Wide Crown.....	44
"P"-style Wide Crown.....	44

**Flooring**

15-1/2 Gauge Flooring Staples.....	45
Flooring Cleats .....	45

**Concrete**

Concrete T-Nails .....	45
------------------------	----

**Tacker Staples**

"50"-series .....	46
"54"-series .....	46
"A11"-series .....	46
"A19"-series .....	47
"SHCR"-series .....	47
"STCR"-series .....	47

**Finish**

15 Gauge "DA"-style.....	48
15 Gauge "FN"-style .....	49
16 Gauge Straight .....	50
16 Gauge Angled .....	51
18 Gauge Brads .....	52
23 Gauge Micropins.....	52



# Fastening Systems

FASTENING SYSTEM

TOOLS

COLLATED FASTENERS

COMPRESSORS

ACCESSORIES

SAFETY & RESOURCE

Grip-Rite takes the guesswork out of matching tools to collated fasteners.



Color-coded icons clearly match the right fasteners to the right tools.

## Label Color System

The life expectancy of a project can be directly impacted by the type of finish on the fasteners used. Grip-Rite's color-coded label system makes it easy to select the optimal fastener finish for every jobsite application. Look for the color band on the label for overall application categories.

### General Construction

- Bright Coated
- Electrogalvanized

### Outdoor Construction

- Electrogalvanized
- Hot Dipped Galvanized
- Exterior Galvanized

### Roofing/Siding

- Electrogalvanized
- Hot Dipped Galvanized

### PrimeGuard MAX - Lifetime Guarantee

- Stainless Steel (Framing, Roofing/Siding, Finish, Staples)
- Aluminum



## Fastener Packaging Features

Tool compatibility charts make sure you have the right fasteners for your tool.



Labels feature full-color, easy-to-see product photos.

Color label system clearly identifies the type of fastener finish.



Boxes include a finish cross-reference panel.

## Tool Packaging Features



Pneumatic tool packaging features detailed specifications on both the tool and type of fasteners required.



Many Grip-Rite pneumatic tools are equipped with hardshell durable cases, making transportation and storage easy while prolonging the life of the tool.

## New Fastener Packaging

We are proud to offer a range of new collated fastener packaging. From resealable 1,000- count tubs for smaller jobs to belt clip packs that allow a quick reload, Grip-Rite meets any fastener need.



## Collated Fastener Icon System

The collated fastener icon system is designed to assist the buyer with finding and selecting the right type of fastener for their pneumatic tool. The system features easy-to-read icons that describe the fastener along with assigning a specific color code. All Grip-Rite pneumatic tools feature these icons on their packaging and body frame allowing the buyer to easily find the needed fastener.

### How to Use

Color coding makes for a quick and easy way to match fastener to pneumatic tool

Fastener gauge, degree of collation, or specialty fastener abbreviation are a quick identifier



Descriptive text identifies overall fastener category

### Icon Key

#### Collated Framing Fasteners



Wire



Plastic



#### Collated Joist Hanger Fasteners



Plastic Strip



Paper Tape

#### Collated Roofing Fasteners



## Icon Key

### Collated Finish Fasteners



"FN"-style



"DA"-style



STRAIGHT NAIL



ANGLED NAIL



BRAD NAIL



PIN NAIL

### Collated Siding/Fencing Fasteners



Plastic



Wire



Plastic

### Collated Wide Crown Staples



"BCS"-style



"P"-style



"GSW"-style

### Collated Narrow Crown Staples



"L"-style



"SX"-style

### Collated Medium Crown Staples



"76"-style



"GS"-style



"N"-style



"BCS"-style

### Collated Hammer Tacker Staples



TACKER



TACKER



TACKER



TACKER



TACKER

### Collated Flooring Fasteners



FLOORING STAPLE



FLOORING CLEAT

### Collated Concrete T-Nails



CONCRETE T-NAIL

## Fastener Coatings & Finishes

Most fasteners are made of steel unless otherwise noted. All collated fasteners are coated for ease of penetration.

**Bright coated** - Bright, uncoated steel finish intended for use where corrosion resistance is not required.

**Electrogalvanized** - Zinc coating applied to steel with an electrical charge. Offers limited resistance to rust.

**Mechanically galvanized** - Zinc coating applied by tumbling with powdered zinc and glass beads. Offers increased corrosion resistance, comparable to hot dipped galvanized when equivalent amount of zinc is used.

**Hot dipped galvanized** - Zinc coating applied by dipping into molten zinc. All Grip-Rite hot dipped galvanized meet the ASTM A153 standard for hot dipped galvanization.

**Exterior galvanized** - A proprietary zinc/polymer coating that offers equal or superior corrosion protection to traditional hot dipped galvanizing. PrimeSource may provide exterior galvanized or hot dipped galvanized fasteners interchangeably, depending upon market conditions, at no additional cost.

**PrimeGuard MAX<sup>®</sup> Stainless steel** - Lifetime guarantee against rust. Including when used with treated lumber. Stainless steel fasteners are the only fasteners recommended for use with cedar and redwood.

**PrimeGuard MAX<sup>®</sup> Aluminum** - For specialty applications when working with aluminum, such as gutters and trim. Lifetime guarantee against rust. Not for use with treated lumber.

**PrimeGuard MAX<sup>®</sup> Copper** - For specialty applications when working with copper or where appearance is a factor (copper weathered by age and exposure to elements can provide desirable appearance).



## Common Nail Shanks



### Smooth

- Most common for everyday projects, provides the least amount of holding power



### Screw/spiral

- Designed to drive into hard woods and dense materials
- Nail actually turns when driven, much like wood screws
- Very good holding power



### Ring/annular thread

- Series of closely spaced concentric rings around shank
- Nail does not turn when driven; instead, the wood fibers are forced over the ring shoulders into their annular grooves like wedges
- Provides greatest holding power in soft or medium woods





Grip  
Rite

**AUTOMATIC RELOAD**

The red coil holder will  
close automatically  
when the magazine cover  
is open. This mechanism  
locks quick and positive  
in unloading.



---

# PNEUMATIC TOOLS

---

## 21° Plastic Strip Framing Nailer

GRTFR83

**21°**  
ROUND HEAD NAIL



### Applications

Framing, decking, fencing, sheathing, siding, subfloors, and trusses

### Features


- ☑ Selectable trigger, easily select between bump fire and sequential fire
- ☑ Innovative head valve assembly increases air efficiency
- ☑ Rotating aluminum rafter hook
- ☑ Dry fire lockout extends bumper life
- ☑ Tool-free depth adjustment

### Specifications

Firing Mode: Selectable trigger  
 Magazine Capacity: 75  
 Operating Pressure PSI: 70-120  
 Height: 12.4 in.  
 Length: 21.7 in.  
 Width: 4.5 in.  
 Tool Weight: 6.9 lb.

### Fastener

Type: 21° Round Head Framing Nails (pg. 27-39)  
 Collation: Plastic  
 Fastener Length: 2" to 3-1/4"  
 Fastener Diameter: .113" to .148"



**3 YEAR**  
Warranty

### Included with tool:

Safety glasses, hex wrenches, removable no-mar pad, tool oil, 1/4" male swivel plug, instruction manual

## 28° Wire Weld Framing Nailer

GRTFW83

**28°**  
WIRE WELD NAIL



### Applications

Framing, decking, fencing, sheathing, siding, subfloors, and trusses

### Features


- ☑ Selectable trigger, easily select between bump fire and sequential fire
- ☑ Innovative head valve assembly increases air efficiency
- ☑ Rotating aluminum rafter hook
- ☑ Dry fire lockout extends bumper life
- ☑ Tool-free depth adjustment

### Specifications

Firing Mode: Selectable trigger  
 Magazine Capacity: 95  
 Operating Pressure PSI: 70-120  
 Height: 13.25 in.  
 Length: 17.0 in.  
 Width: 4.5 in.  
 Tool Weight: 7.5 lb.

### Fastener

Type: 28° wire weld framing nails (pg. 31)  
 Collation: Wire  
 Fastener Length: 2" to 3-1/4"  
 Fastener Diameter: .113" to .131"

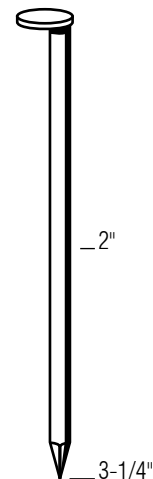

**3 YEAR**  
Warranty

### Included with tool:

Safety glasses, hex wrenches, removable no-mar pad, tool oil, 1/4" male swivel plug, instruction manual

## 30° Paper Tape Framing Nailer GRTFC83



### Applications

Framing, decking, fencing, sheathing, siding, subfloors, and trusses

### Features


- ☑ Selectable trigger, easily select between bump fire and sequential fire
- ☑ Innovative head valve assembly increases air efficiency
- ☑ Rotating aluminum rafter hook
- ☑ Dry fire lockout extends bumper life
- ☑ Tool-free depth adjustment

### Specifications

Firing Mode: Selectable trigger  
 Magazine Capacity: 80  
 Operating Pressure PSI: 70-120  
 Height: 13.5 in.  
 Length: 21.7 in.  
 Width: 4.5 in.  
 Tool Weight: 7.3 lb.

### Fastener

Type: 30°-34° offset round and clipped head framing nails (pg. 32-33)  
 Collation: Paper  
 Fastener Length: 2" to 3-1/4"  
 Fastener Diameter: .113" to .131"

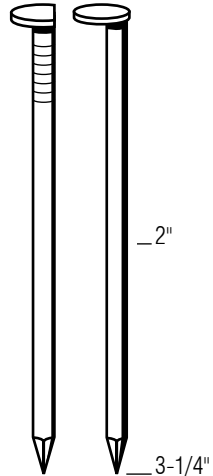

### Included with tool:

Safety glasses, hex wrenches, removable no-mar pad, tool oil, 1/4" male swivel plug, instruction manual

## 15° Coil Framing Nailer GRTC90



### Applications

Framing, sheathing, decking, sub-flooring, decks, pallets, and crates

### Features


- ☑ Selectable trigger, easily select between bump fire and sequential fire
- ☑ Shoots wire weld and plastic sheet coil framing nails
- ☑ 360° tool-free air exhaust
- ☑ Tool-free depth adjustment
- ☑ Belt hook included

### Specifications

Firing Mode: Selectable trigger  
 Magazine Capacity: 200-300  
 Operating Pressure PSI: 80-120  
 Height: 14.0 in.  
 Length: 12.2 in.  
 Width: 5.25 in.  
 Tool Weight: 6.6 lb.

### Fastener

Type: 15° Round Head Coil Framing Nails (pg. 27)  
 Collation: Wire and plastic sheet  
 Fastener Length: (Wire) 1-3/4" to 3-1/2"  
 (Plastic) 1-3/4" to 3"  
 Fastener Diameter: .099" to .148"

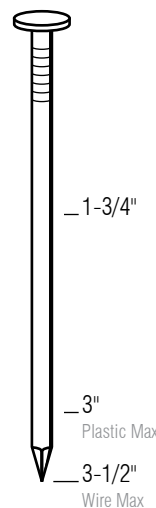

### Included with tool:

Safety glasses, hex wrenches, removable no-mar pad, tool oil, 1/4" male swivel plug, instruction manual

## 1-1/2" Multi-Blow Metal Connector Nailer

GR150



### Applications

Metal hangers, seismic & hurricane ties, anchors & connector straps

### Features


- ☑ Multi-blow functionality promotes safer usage
- ☑ Shoots both paper and plastic collated joist nails
- ☑ Lightweight and compact
- ☑ Nail tip serves as shooting guide - no probe needed
- ☑ Belt hook included

### Specifications

Firing Mode: Multi-blow  
 Magazine Capacity: 30  
 Operating Pressure PSI: 100-120  
 Height: 9.5 in.  
 Length: 12.3 in.  
 Width: 3.5 in.  
 Tool Weight: 4.4 lb.

### Fastener

Type: 30° to 34° metal connector nails (pg. 35)  
 Collation: Paper or plastic  
 Fastener Length: 1-1/2"  
 Fastener Diameter: .131" to .148"

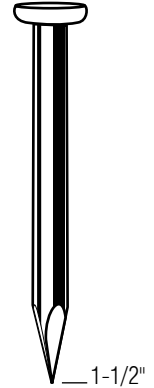

### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## 2-1/2" Multi-Blow Metal Connector Nailer

GR250



### Applications

Metal hangers, seismic & hurricane ties, anchors & connector straps

### Features


- ☑ Multi-blow functionality promotes safer usage
- ☑ Shoots both paper and plastic collated joist nails
- ☑ Lightweight and compact
- ☑ Nail tip serves as shooting guide - no probe needed
- ☑ Belt hook included

### Specifications

Firing Mode: Multi-blow  
 Magazine Capacity: 30  
 Operating Pressure PSI: 100-120  
 Height: 11.0 in.  
 Length: 11.8 in.  
 Width: 3.8 in.  
 Tool Weight: 4.8 lb.

### Fastener

Type: 30° to 34° metal connector nails (pg. 35)  
 Collation: Paper or plastic  
 Fastener Length: 1-1/2" to 2-1/2"  
 Fastener Diameter: .131" to .162"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## 1-1/2" Metal Connector Nailer GRSB150



### Applications

Metal hangers, seismic & hurricane ties, anchors & connector straps

### Features


- ☑ Designed to easily fit between 12" O.C. joists
- ☑ Nail tip serves as shooting guide - no probe needed
- ☑ Shoots 1-1/2" paper tape metal connector nails
- ☑ 360° tool-free air exhaust
- ☑ Belt hook included

### Specifications

Firing Mode: Sequential  
 Magazine Capacity: 33  
 Operating Pressure PSI: 100-120  
 Height: 10.5 in.  
 Length: 14.7 in.  
 Width: 4.2 in.  
 Tool Weight: 4.4 lb.

### Fastener

Type: 30° to 34° paper tape metal connector nails (pg. 35)  
 Collation: Paper  
 Fastener Length: 1-1/2"  
 Fastener Diameter: .131" to .148"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## 2-1/2" Metal Connector Nailer GRSB250



### Applications

Metal hangers, seismic & hurricane ties, anchors & connector straps

### Features


- ☑ Lightweight, durable magnesium housing
- ☑ Shoots both 1-1/2" & 2-1/2" paper tape metal connector nails
- ☑ Nail tip serves as shooting guide - no probe needed
- ☑ 360° tool-free air exhaust
- ☑ Belt hook included

### Specifications

Firing Mode: Sequential  
 Magazine Capacity: 33  
 Operating Pressure PSI: 80-120  
 Height: 14.0 in.  
 Length: 13.6 in.  
 Width: 4.2 in.  
 Tool Weight: 5.7 lb.

### Fastener

Type: 30° to 34° paper tape metal connector nails (pg. 35)  
 Collation: Paper  
 Fastener Length: 1-1/2" to 2-1/2"  
 Fastener Diameter: .131" to .162"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## Coil Roofing Nailer GRTCR175



### Applications

Roofing installation, insulation board, and soft wall sheathing

### Features


- ☑ Rotating belt hook
- ☑ 360° tool-free exhaust
- ☑ Tool-free depth adjustment
- ☑ Anti-skid grips
- ☑ Shingle placement guide

### Specifications

Firing Mode: Bump fire  
 Magazine Capacity: 120  
 Operating Pressure PSI: 70-120  
 Height: 9.5 in.  
 Length: 11.0 in.  
 Width: 4.6 in.  
 Tool Weight: 4.8 lb.

### Fastener

Type: 15° coil roofing nails (pg. 38)  
 Collation: Wire  
 Fastener Length: 3/4" to 1-3/4"  
 Fastener Diameter: .120"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## Plastic Cap Stapler GRC58A



### Applications

Roof felt and house wrap

### Features

- ☑ Extremely lightweight and compact
- ☑ Belt hook included
- ☑ Shoots both laser weld and string style plastic caps
- ☑ Load staples and caps in seconds
- ☑ 1" Caps and 5/8" staples come packaged together

### Specifications

Firing Mode: Bump Fire  
 Magazine Capacity: 110 Caps & Staples  
 Operating Pressure PSI: 110-120  
 Height: 8.75 in.  
 Length: 12.25 in.  
 Width: 2.75 in.  
 Tool Weight: 4.0 lb.

### Fastener

Type: GRCP5822 & GRCP5822L  
 Staples & Plastic Caps (pg. 39)  
 Staples: Adhesive  
 Caps: String & Laser Weld  
 Leg Length: 5/32" to 5/8"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## 15° Coil Siding Nailer GRTCS250



### Applications

Siding, fiber cement, fencing, cedar shake, soffit, and other manufacturing applications

### Features


- ☑ Shoots wire weld and plastic sheet coil siding nails
- ☑ Magazine tray slides open for easy loading
- ☑ 360° tool-free air exhaust
- ☑ Tool-free depth adjustment
- ☑ Rotating belt hook

### Specifications

Firing Mode: Bump fire  
 Magazine Capacity: 200-350  
 Operating Pressure PSI: 70-120  
 Height: 12.6 in.  
 Length: 10.7 in.  
 Width: 5.1 in.  
 Tool Weight: 4.8 lb.

### Fastener

Type: 15° coil siding & fencing nails (pg. 36-37)  
 Collation: Wire and plastic sheet  
 Fastener Length: (Wire) 1-3/4" to 2-1/2" (Plastic) 1-1/4" to 2-1/2"  
 Fastener Diameter: .090" to .099"



### Included with tool:

Carrying case, safety glasses, hex wrenches, removable no-mar pad, optional sequential trigger kit, tool oil, 1/4" male plug, instruction manual

## 0° Coil Siding Nailer GRTCS250Z



### Applications

Siding, fiber cement, fencing, cedar shake, soffit, and other manufacturing applications

### Features


- ☑ Selectable trigger, easily select between bump fire and sequential fire
- ☑ 360° tool-free air exhaust
- ☑ Tool-free depth adjustment
- ☑ Belt hook included
- ☑ No-mar pad protects work surfaces

### Specifications

Firing Mode: Selectable trigger  
 Magazine Capacity: 300  
 Operating Pressure PSI: 80-120  
 Height: 13.0 in.  
 Length: 12.0 in.  
 Width: 5.75 in.  
 Tool Weight: 4.1 lb.

### Fastener

Type: 0° coil siding & fencing nails (pg. 36)  
 Collation: Plastic Sheet  
 Fastener Length: 1-1/4" to 2-1/2"  
 Fastener Diameter: .083" to .099"



### Included with tool:

Safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## 15 Gauge Angled Finish Nailer GRTAN250



### Applications

Baseboard, cabinet, chair rail, trim, molding, and finish work

### Features


- ☑ Rotating belt hook
- ☑ 360° tool-free exhaust
- ☑ Tool-free depth adjustment
- ☑ No-mar pad protects work surface
- ☑ Tool-free nose latch for quick jam clearing

### Specifications

Firing Mode: Sequential trigger  
 Magazine Capacity: 100  
 Operating Pressure PSI: 70-120  
 Height: 11.6 in.  
 Length: 13.9 in.  
 Width: 4.4 in.  
 Tool Weight: 4.8 lb.

### Fastener

Type: 15 Gauge "DA" Series Angled Finish Nails (pg. 51)  
 Collation: Adhesive  
 Fastener Length: 1-1/4" to 2-1/2"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, removable no-mar pad, instruction manual, optional bump fire trigger

## 16 Gauge Finish Nailer GRTFN250



### Applications

Baseboard, cabinet, chair rail, trim, molding, and finish work

### Features


- ☑ Rotating belt hook
- ☑ 360° tool-free air exhaust
- ☑ Tool-free depth adjustment
- ☑ No-mar pad protects work surface
- ☑ Tool-free nose latch for quick jam clearing

### Specifications

Firing Mode: Sequential trigger  
 Magazine Capacity: 110  
 Operating Pressure PSI: 70-110  
 Height: 11.0 in.  
 Length: 12.5 in.  
 Width: 3.0 in.  
 Tool Weight: 3.9 lb.

### Fastener

Type: 16 Gauge Straight Finish Nails (pg. 50)  
 Collation: Adhesive  
 Fastener Length: 1" to 2-1/2"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, removable no-mar pad, instruction manual, optional bump fire trigger



## 18 Gauge Brad Nailer GRTBN200

**18**<sub>GA</sub>  
BRAD NAIL



### Applications

Cabinet, trim, baseboard, chair rail, and finish work

### Features


- Rotating belt hook
- 360° tool-free air exhaust
- Tool-free depth adjustment
- Tool-free nose latch for quick jam clearing
- No-mar pad protects work surfaces

### Specifications

Firing Mode: Sequential trigger  
 Magazine Capacity: 110  
 Operating Pressure PSI: 70-110  
 Height: 9.9 in.  
 Length: 9.7 in.  
 Width: 2.4 in.  
 Tool Weight: 2.9 lb.

### Fastener

Type: 18 Gauge Brad Nails (pg. 52)  
 Collation: Adhesive  
 Fastener Length: 5/8" to 2"



**3 YEAR**  
Warranty

### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, removable no-mar pad, instruction manual, optional bump fire trigger

## 23 Gauge Headless Pinner GRTPIN23A

**23**<sub>GA</sub>  
PIN NAIL



### Applications

Finish and trim, decorative trim, cabinetry, woodworking, picture frames, and crafts

### Features


- Tapered nose-piece for precise pin placement
- Rear exhaust protects work surface
- Shoots both round and flat pins
- Reload indicator
- Dual trigger safety prevents accidental firing

### Specifications

Firing Mode: Non restrictive  
 Magazine Capacity: 140  
 Operating Pressure PSI: 70-100  
 Height: 6.69 in.  
 Length: 8.75 in.  
 Width: 1.81 in.  
 Tool Weight: 2.15 lb.

### Fastener

Type: 23 Gauge Headless Pins (pg. 52)  
 Collation: Adhesive  
 Fastener Length: 1/2" to 1-3/16"



**3 YEAR**  
Warranty

### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## Wide Crown Stapler GRTS1200

**16** GA  
WIDE CROWN  
STAPLE



### Applications

Lathing, butt joints, foam board, corrugated carton to skid, furniture, and cabinet frames

### Features


- ☑ 16 gauge staples, 1" crown
- ☑ Tool-free depth adjustment
- ☑ Rotating belt hook
- ☑ 360° tool-free air exhaust
- ☑ Tool-free nose latch for quick jam clearing

### Specifications

Firing Mode: Selectable trigger  
Magazine Capacity: 150  
Operating Pressure PSI: 70-120  
Height: 10.0 in.  
Length: 14.8 in.  
Width: 3.2 in.  
Tool Weight: 4.8 lb.

### Fastener

Type: 16 Gauge 1" Crown Staples (pg. 44)  
Collation: Adhesive  
Leg Length: 3/4" to 2"

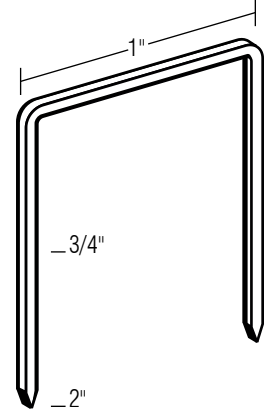

**3 YEAR**  
Warranty

### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male swivel plug, instruction manual

## Wide Crown Stapler GRTS1516

**16** GA  
WIDE CROWN  
STAPLE



### Applications

Baseboard, cabinet, chair rail, trim, molding, and finish work

### Features


- ☑ 16 gauge staples, 15/16" crown
- ☑ Tool-free depth adjustment
- ☑ Rotating belt hook
- ☑ 360° tool-free air exhaust
- ☑ Tool-free nose latch for quick jam clearing

### Specifications

Firing Mode: Selectable Trigger  
Magazine Capacity: 150  
Operating Pressure PSI: 70-120  
Height: 10.0 in.  
Length: 14.8 in.  
Width: 3.2 in.  
Tool Weight: 3.2 lb.

### Fastener

Type: 16 Gauge 15/16" crown staples (pg. 44)  
Collation: Adhesive  
Leg Length: 3/4" to 2"

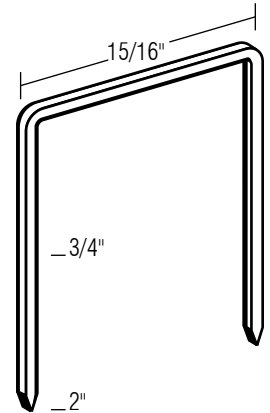

**3 YEAR**  
Warranty

### Included with tool:

Carrying case, safety glasses, hex wrenches, optional sequential trigger kit, tool oil, 1/4" male swivel plug, removable no-mar pad, instruction manual

## Medium Crown Stapler GRTSM200

**16**<sub>GA</sub>  
MEDIUM CROWN  
STAPLE



### Applications

Roof decking, floor decking, sub-flooring, sheathing, furniture, wood fencing, crates, and pallets

### Features

- ✓ 16 gauge staples, 7/16" crown
- ✓ Easy-tool depth adjustment
- ✓ Rotating belt hook
- ✓ 360° tool-free air exhaust
- ✓ Tool-free nose latch for quick jam clearing


**3 YEAR**  
Warranty

### Specifications

Firing Mode: Bump Fire  
Magazine Capacity: 150  
Operating Pressure PSI: 70-120  
Height: 11.3 in.  
Length: 15.2 in.  
Width: 3.6 in.  
Tool Weight: 4.8 lb.

### Fastener

Type: 16 Gauge 7/16" crown staples (pg. 42)  
Collation: Adhesive  
Leg Length: 1" to 2"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual

## Narrow Crown Stapler GRTSN150

**18**<sub>GA</sub>  
NARROW CROWN  
STAPLE



### Applications

Soffit, furniture, paneling, cabinets, trim, countertop blanks, and woodworking

### Features

- ✓ 18 gauge staples, 1/4" crown
- ✓ Tool-free depth adjustment
- ✓ Rotating belt hook
- ✓ 360° tool-free air exhaust
- ✓ Tool-free nose latch for quick jam clearing


**3 YEAR**  
Warranty

### Specifications

Firing Mode: Sequential Trigger  
Magazine Capacity: 140  
Operating Pressure PSI: 70-110  
Height: 10.02 in.  
Length: 11.3 in.  
Width: 2.25 in.  
Tool Weight: 2.8 lb.

### Fastener

Type: 18 Gauge 1/4" crown staples (pg. 40)  
Collation: Adhesive  
Leg Length: 3/4" to 1-1/2"



### Included with tool:

Carrying case, safety glasses, hex wrenches, tool oil, 1/4" male plug, instruction manual, optional bump fire trigger

## Pneumatic Hardwood Stapler GR200FS



### Applications

Hardwood flooring

### Features


- ☑ Pneumatic, single strike design
- ☑ Installs 1/2" to 33/32" tongue and groove flooring
- ☑ Mallet actuated to give you the tightest floors
- ☑ Precise - drives at 45° angle every time
- ☑ Lightweight die cast aluminum body offers job site durability

### Specifications

Firing Mode: Mallet Actuated  
Magazine Capacity: 92  
Operating Pressure PSI: 70-120  
Height: 18.8 in.  
Length: 18.0 in.  
Width: 3.1 in.  
Tool Weight: 9.0 lb.

### Fastener

Type: 15 to 15-1/2 Gauge Floor Staples 1/2" (pg. 45)  
Collation: Adhesive  
Leg Length: 1-1/2" to 2"



### Included with tool:

Carrying case, mallet, 1/2" adaptor pad and bumper, hex wrenches, O-ring kit, tool oil

## Pneumatic Hardwood Cleat Nailer GR200LCN



### Applications

Hardwood flooring

### Features


- ☑ Pneumatic, single strike design
- ☑ Installs 1/2" to 33/32" tongue and groove flooring
- ☑ Mallet actuated to give you the tightest floors
- ☑ Precise - drives at 45° angle every time
- ☑ Lightweight die cast aluminum body offers job site durability

### Specifications

Firing Mode: Mallet Actuated  
Magazine Capacity: 132  
Operating Pressure PSI: 70-120  
Height: 18.8 in.  
Length: 18.0 in.  
Width: 3.1 in.  
Tool Weight: 9.0 lb.

### Fastener

Type: L-Shaped Flooring Cleat (pg. 45)  
Collation: Adhesive  
Fastener Length: 1-1/2" to 2"

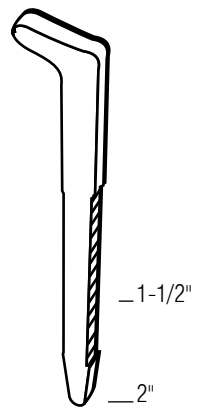

### Included with tool:

Carrying case, mallet, 1/2" adaptor pad and bumper, hex wrenches, O-ring kit, tool oil

## 16d Mini Air Nailer GRTMP16



### Applications

Drives loose nails into tight spaces

### Features

- ☑ One third the size and weight of standard palm nailers
- ☑ Lightweight and compact
- ☑ Easily fits into nail pouch
- ☑ Magnetic nose holds fastener
- ☑ Shoots up to most 16d (3-1/2") nails

### Specifications

Firing Mode: Push (Multi Blow)  
Operating Pressure PSI: 60-110  
Height: 2.8 in.  
Length: 4.0 in.  
Width: 2.2 in.  
Tool Weight: 1.0 lb.

### Fastener

Type: Hand Drive Nails  
Fastener Length: Up to 16d (3-1/2")

**3** YEAR  
Warranty

### Included with tool:

Hex wrenches, tool oil, 1/4" male swivel plug, instruction manual



## Tacker Stapler GRR11



### Applications

Insulation, carpeting, roofing, felt paper, poly sheeting, vapor barrier

### Features


- ☑ All steel construction
- ☑ Anti-rust chrome plating
- ☑ Quick jam clearing
- ☑ Comfort grip
- ☑ Rear load
- ☑ 90-day warranty

### Specifications

Firing Mode: Impact  
Magazine Capacity: High capacity  
Height: 2.25 in.  
Length: 12.0 in.  
Width: 1.63 in.  
Tool Weight: 1.95 lb.

### Fastener

Type: "A11"-Style (pg. 46)  
Collation: Adhesive  
Leg Length: 1/4" to 3/8"  
Fastener Crown: 3/8"



## Clinch Stapler GRR11C



### Applications

Wiring, upholstery, screening, vapor barrier, felt paper, carpet pad

### Features


- ☑ All steel construction
- ☑ Ergonomic handle and rubber stop
- ☑ Rear load
- ☑ Safety handle lock
- ☑ Adjustable wire guide
- ☑ 90-day warranty

### Specifications

Firing Mode: Clinch  
Magazine Capacity: High capacity  
Height: 6.13 in.  
Length: 7.38 in.  
Width: 1.25 in.  
Tool Weight: 1.9 lb.

### Fastener

Type: "A11"-Style (pg. 46)  
Collation: Adhesive  
Leg Length: 1/4" to 9/16"  
Fastener Crown: 3/8"



## Tacker Stapler GRR19



### Applications

Carpet pad, insulation, felt paper, poly sheeting, vapor barrier

### Features


- ☑ All steel construction
- ☑ Anti-rust chrome plating
- ☑ Quick jam clearing
- ☑ Comfort grip
- ☑ Lightweight
- ☑ 90-day warranty

### Specifications

Firing Mode: Impact  
Magazine Capacity: High capacity  
Height: 1.50 in.  
Length: 10.25 in.  
Width: 1.25 in.  
Tool Weight: 1.2 lb.

### Fastener

Type: "A19"-Style (pg. 47)  
Collation: Adhesive  
Leg Length: 1/4" to 3/8"  
Fastener Crown: 3/8"



## Tacker Stapler GR50BL



### Applications


Felt paper, poly sheeting, vapor barrier, insulation, carpeting

### Features

- ☑ All steel construction
- ☑ Anti-rust chrome plating
- ☑ Quick jam clearing
- ☑ Comfort grip
- ☑ Bottom load
- ☑ 90-day warranty

### Specifications

Firing Mode: Mechanical Drive  
 Magazine Capacity: High capacity  
 Height: 3.38 in.  
 Length: 11.6 in.  
 Width: 1.75 in.  
 Tool Weight: 2.10 lb.



### Fastener

Type: "50"-Style (pg. 46)  
 Collation: Adhesive  
 Leg Length: 1/4" to 3/8"  
 Fastener Crown: 1/2"

## Tacker Stapler GRSTCR5019



### Applications


Insulation, carpeting, roofing, felt paper, poly sheeting, vapor barrier

### Features

- ☑ All steel construction
- ☑ Anti-rust chrome plating
- ☑ Quick jam clearing
- ☑ Comfort grip
- ☑ Rear load
- ☑ 90-day warranty

### Specifications

Firing Mode: Impact  
 Magazine Capacity: High capacity  
 Height: 2.50 in.  
 Length: 12.0 in.  
 Width: 1.38 in.  
 Tool Weight: 2.10 lb.



### Fastener

Type: "STCR"-Style (pg. 47)  
 Collation: Adhesive  
 Leg Length: 1/4" to 3/8"  
 Fastener Crown: 7/16"

## 15° Coil Industrial Pallet Nailer GRTC57



### Applications

Pallets & Crates

### Features


- ☑ Heavy duty industrial design
- ☑ Reinforced nose-piece increases durability
- ☑ Adjustable reinforced metal nail tray
- ☑ Durable molded rubber comfort grip

### Specifications

Firing Mode: Bump fire  
 Magazine Capacity: 300-350  
 Operating Pressure PSI: 70-120  
 Height: 11.2 in.  
 Length: 11.9 in.  
 Width: 5.2 in.  
 Tool Weight: 5.9 lb.

### Fastener

Type: 15° Coil Pallet Nails  
 Collation: Wire  
 Fastener Length: 1" to 2-1/4"  
 Fastener Diameter: .083" to .090"



### Included with tool:

Safety glasses, hex wrenches, tool oil, parts diagram

## 15° Coil Industrial Pallet Nailer GRTC70



### Applications

Pallets & Crates

### Features


- ☑ Heavy duty industrial design
- ☑ Reinforced nose-piece increases durability
- ☑ Adjustable reinforced metal nail tray
- ☑ Durable molded rubber comfort grip
- ☑ Plastic nose-piece shield

### Specifications

Firing Mode: Bump fire  
 Magazine Capacity: 200-300  
 Operating Pressure PSI: 70-120  
 Height: 12.5 in.  
 Length: 13.4 in.  
 Width: 5.1 in.  
 Tool Weight: 7.9 lb.

### Fastener

Type: 15° Coil Pallet Nails  
 Collation: Wire  
 Fastener Length: 1-3/4" to 2-3/4"  
 Fastener Diameter: .090" to .113"



### Included with tool:

Safety glasses, hex wrenches, tool oil, parts diagram



## 15° Coil Industrial Pallet Nailer GRTC90P



### Applications

Pallets & Crates

### Features


- ☑ Heavy duty industrial design
- ☑ Reinforced nose-piece increases durability
- ☑ Adjustable reinforced metal nail tray
- ☑ Durable molded rubber comfort grip
- ☑ Plastic nose-piece shield

### Specifications

Firing Mode: Bump fire  
Magazine Capacity: 200-300  
Operating Pressure PSI: 70-120  
Height: 14.6 in.  
Length: 15.2 in.  
Width: 5.6 in.  
Tool Weight: 7.9 lb.

### Fastener

Type: 15° Coil Pallet Nails  
Collation: Wire  
Fastener Length: 1-1/2" to 3-1/2"  
Fastener Diameter: .099" to .148"



### Included with tool:

Safety glasses, hex wrenches, tool oil, parts diagram



## 16 Gauge Industrial Medium Crown Stapler GRTSM2016C



### Applications

Roof decking, floor decking, sub-flooring, sheathing, furniture, wood fencing, crates & pallets

### Features


- ☑ Heavy duty industrial design
- ☑ Durable molded rubber comfort grip
- ☑ Tool-free nose latch for quick jam clearing
- ☑ 360° tool-free air exhaust
- ☑ Easy tool-depth Adjustment

### Specifications

Firing Mode: Bump fire  
Magazine Capacity: 140  
Operating Pressure PSI: 70-120  
Height: 10.8 in.  
Length: 12.6 in.  
Width: 2.9 in.  
Tool Weight: 4.2 lb.

### Fastener

Type: 16 Gauge 7/16" Crown Staples (pg. 42)  
Collation: Adhesive  
Leg Length: 5/8" to 2"



### Included with tool:

Safety glasses, hex wrenches, tool oil, parts diagram

## 21° Industrial Plastic Strip Framing Nailer GRTFR130



### Applications

Framing & Pole Barn

### Features


- ☑ Heavy duty industrial design
- ☑ Easy tool-depth adjustment
- ☑ Fast and easy top loading
- ☑ Dry fire lockout extends bumper life
- ☑ Auxiliary handle for added support

### Specifications

Firing Mode: Bump Fire  
Magazine Capacity: 54  
Operating Pressure PSI: 80-120  
Height: 18.8 in.  
Length: 20.6 in.  
Width: 6.9 in.  
Tool Weight: 13.4 lb.

### Fastener

Type: 21° Round Head (pg. 27-29)  
Collation: Plastic Strip  
Fastener Length: 3-1/2" to 5-1/8"  
Fastener Diameter: .149" to .165"



### Included with tool:

Safety glasses, hex wrenches, tool oil, parts diagram- auxiliary handle

# COLLATED FASTENERS



## 15° Wire Coil Nails Framing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Bright Coated</b>				
2"	.099"	Smooth	GRC6P99D	3M
2-3/8"	.113"	Smooth	GRC8PD	3M
2-1/2"	.131"	Smooth	GRC8PZD	3M
3"	.120"	Smooth	GRC10PD	2.5M
3"	.131"	Smooth	GRC10PZD	2.5M
3-1/4"	.120"	Smooth	GRC12PD	2.5M
3-1/4"	.131"	Smooth	GRC12PZD	2.5M
2"	.099"	Ring	GRC6R99D	3M
2-3/8"	.099"	Ring	GRC8R99D	3M
2-3/8"	.113"	Ring	GRC8RD	3M
<b>ElectroGalvanized</b>				
2"	.099"	Smooth	GRC6P99DG	3M
2-3/8"	.099"	Smooth	GRC8P99DG	3M
2-1/2"	.131"	Smooth	GRC8PZDG	3M
3"	.120"	Smooth	GRC10PDG	2.5M
3-1/4"	.120"	Smooth	GRC12PDG	2.5M
3-1/4"	.131"	Smooth	GRC12PZDG	2.5M
2"	.099"	Ring	GRC6R99DG	3M
2-3/8"	.099"	Ring	GRC8R99DG	3M
2-3/8"	.113"	Ring	GRC8RDG	3M
2-1/2"	.131"	Ring	GRC8RZDG	3M
3"	.120"	Ring	GRC10RDG	2.5M
3-1/4"	.120"	Ring	GRC12RDG	2.5M

Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Hot Dipped Galvanized</b>				
2"	.099"	Smooth	GRC6P99DHG	3M
2-3/8"	.099"	Smooth	GRC8P99DHG	3M
3"	.120"	Smooth	GRC10PDHG	2.5M
3-1/4"	.120"	Smooth	GRC12PDHG	2.5M
2"	.099"	Ring	GRC6R99DHG	3M
2-3/8"	.099"	Ring	GRC8R99DHG	3M
2-3/8"	.113"	Ring	GRC8RDHG	3M
3"	.120"	Ring	GRC10RDHG	2.5M
3-1/4"	.120"	Ring	GRC12RDHG	2.5M
<b>#304 Stainless Steel</b>				
2"	.113"	Ring	MAXC62822	3.6M
2-1/2"	.113"	Ring	MAXC62825	3.6M
3"	.120"	Ring	MAXC62828	1.8M

Length	Shank Diameter	Shank	Tub	Pcs./Tub
<b>Resealable Plastic Tub</b>				
<b>#304 Stainless Steel</b>				
2"	.113"	Ring	MAXC62877	900
2-1/2"	.113"	Ring	MAXC62882	900
3"	.120"	Ring	MAXC62891	675

**For best results, use with a Grip-Rite GRTC90 15° Coil Framing Nailer. pg. 9**

## 21° Plastic Strip Round Head Nails Framing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Bright Coated</b>				
2"	.113"	Smooth	GR03L	2.5M
2"	.113"	Smooth	GR03	5M
2-1/4"	.148"	Smooth	GR7D148	4M
2-1/8"	.148"	Smooth	GR218148	5M
2-1/4"	.148"	Smooth	GR7DL148	4M
2-3/8"	.113"	Smooth	GR07L	2.5M
2-3/8"	.113"	Smooth	GR07	5M
2-3/8"	.120"	Smooth	GR238120	5M
2-3/8"	.148"	Smooth	GR8D148	4M
2-1/2"	.131"	Smooth	GR8D131	4M
2-1/2"	.131"	Smooth	GR212131	5M
3"	.120"	Smooth	GR301L	2M
3"	.120"	Smooth	GR301	4M
3"	.131"	Smooth	GR014L	2M
3"	.131"	Smooth	GR014	4M
3"	.148"	Smooth	GR3148	4M
3-1/4"	.120"	Smooth	GR444L	2M
3-1/4"	.120"	Smooth	GR444	4M
3-1/4"	.131"	Smooth	GR024L	2M
3-1/4"	.131"	Smooth	GR024	4M
3-1/4"	.148"	Smooth	GR3141483M	3M
3-1/4"	.148"	Smooth	GR314148	4M
3-1/4"	.162"	Smooth	GR3141623M	3M
3-3/8"	.131"	Smooth	GR338L	2M
3-3/8"	.131"	Smooth	GR338	4M
3-1/2"	.131"	Smooth	GR312131L	2M

Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Bright Coated</b>				
3-1/2"	.131"	Smooth	GR312131	4M
3-1/2"	.162"	Smooth	GR312162	2.5M
2"	.113"	Ring	GR04L	2.5M
2"	.113"	Ring	GR04	5M
2-1/8"	.148"	Ring	GR7D148R	4M
2-1/4"	.148"	Ring	GR7DL148R	4M
2-3/8"	.113"	Ring	GR08RL	2.5M
2-3/8"	.113"	Ring	GR08R	5M
2-3/8"	.120"	Ring	GR238120R	5M
3"	.131"	Ring	GR014R	4M
2-1/4"	.148"	Screw	GR214148S	5M
2-3/8"	.113"	Screw	GR016	5M
3"	.120"	Screw	GR3120S	4M
3"	.131"	Screw	GR3131S	4M
3-1/4"	.148"	Screw	GR314148S	4M
<b>Electrogalvanized</b>				
2"	.113"	Smooth	GR05GL	2.5M
2-3/8"	.113"	Smooth	GR09GL	2.5M
2-3/8"	.113"	Smooth	GR09G	5M
2-1/2"	.131"	Smooth	GR212131G	5M
3"	.120"	Smooth	GR301GL	2M
3"	.120"	Smooth	GR301G	4M
3"	.131"	Smooth	GR033G	4M
3-1/4"	.120"	Smooth	GR444GL	2M
3-1/4"	.120"	Smooth	GR444G	4M
3-1/4"	.131"	Smooth	GR034GL	2M
3-1/4"	.131"	Smooth	GR034G	4M
3-1/2"	.131"	Smooth	GR312131G	4M
2"	.113"	Ring	GR04G	5M
2-3/8"	.113"	Ring	GR08GL	2.5M
2-3/8"	.113"	Ring	GR08G	5M
3"	.120"	Ring	GR408GL	2M
3"	.120"	Ring	GR408G	4M
3-1/4"	.120"	Ring	GR444RG	4M
3-1/4"	.131"	Ring	GR314R131G	4M

Fastener charts continue on the following page.

## 21° Plastic Strip Round Head Nails (continued)

### Framing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Hot Dipped Galvanized</b>				
2"	.113"	Smooth	GR05HG	5M
2-1/4"	.113"	Smooth	GR449HG	4M
2-3/8"	.113"	Smooth	GR09HGL	2.5M
2-3/8"	.113"	Smooth	GR09HG	5M
2-3/8"	.148"	Smooth	GR8D148HG	5M
2-1/2"	.131"	Smooth	GR8D131HG	4M
2-1/2"	.131"	Smooth	GR212131HG	5M
3"	.120"	Smooth	GR301HGL	2M
3"	.120"	Smooth	GR301HG	4M
3"	.120"	Smooth	GR015HG	4M
3"	.131"	Smooth	GR033HG	4M
3"	.148"	Smooth	GR3148HG	4M
3-1/4"	.120"	Smooth	GR444HGL	2M
3-1/4"	.120"	Smooth	GR444HG	4M
3-1/4"	.131"	Smooth	GR034HGL	2M
3-1/4"	.131"	Smooth	GR034HG	4M
3-1/4"	.148"	Smooth	GR31448HG3	3M
3-1/4"	.148"	Smooth	GR314148HG	4M
3-3/8"	.131"	Smooth	GR338HG	4M
3-1/2"	.131"	Smooth	GR312131HG	4M
3-1/2"	.162"	Smooth	GR312162HG	3M
3-1/2"	.162"	Smooth	GR31262HG3	3M
2"	.113"	Ring	GR04HG	5M
2-3/8"	.113"	Ring	GR08HGL	3M
2-3/8"	.113"	Ring	GR08RHG	5M
2-1/2"	.131"	Ring	GR212131RH	5M

Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Hot Dipped Galvanized</b>				
3-1/4"	.131"	Smooth	GR034HG	4M
3-1/4"	.148"	Smooth	GR31448HG3	3M
3-1/4"	.148"	Smooth	GR314148HG	4M
3-3/8"	.131"	Smooth	GR338HG	4M
3-1/2"	.131"	Smooth	GR312131HG	4M
3-1/2"	.162"	Smooth	GR312162HG	3M
3-1/2"	.162"	Smooth	GR31262HG3	3M
2"	.113"	Ring	GR04HG	5M
2-3/8"	.113"	Ring	GR08HGL	3M
2-3/8"	.113"	Ring	GR08RHG	5M
2-1/2"	.131"	Ring	GR212131RH	5M
3"	.120"	Ring	GR408HGL	2M
3"	.120"	Ring	GR408HG	4M
3-1/4"	.120"	Ring	GR444RHGL	4M
3-3/8"	.131"	Ring	GR338RHG	4M
2-3/8"	.113"	Screw	GR016HG	5M
3-1/4"	.120"	Screw	GR444SHGL	2M
3-1/4"	.120"	Screw	GR444SHG	4M
3-1/4"	.131"	Screw	GR034SHG	4M
3-1/4"	.148"	Screw	GR314148SH	4M
<b>#304 Stainless Steel</b>				
2-3/8"	.120"	Ring	MAXC62803	2M
3"	.120"	Ring	MAXC62804	2M
3"	.131"	Ring	MAXC62806	2M
3-1/4"	.120"	Ring	MAXC62810	2M
3-1/4"	.131"	Ring	MAXC62812	2M
3-1/4"	.148"	Ring	MAXC62814	2M
3-1/2"	.131"	Ring	MAXC62808	2M
2-1/2"	.120"	Screw	MAXC62801	2M
2-1/2"	.148"	Screw	MAXC62802	2M
3"	.120"	Screw	MAXC62805	2M
3"	.131"	Screw	MAXC62807	2M
3-1/4"	.120"	Screw	MAXC62811	2M
3-1/4"	.131"	Screw	MAXC62813	2M
3-1/2"	.148"	Screw	MAXC62809	2M

## 21° Plastic Strip Round Head Nails Framing

Resealable Plastic Tub				
Length	Shank Diameter	Shank	Tub	Pcs./ Tub
<b>Bright Coated</b>				
2-3/8"	.113"	Smooth	GR071M	1M
3"	.120"	Smooth	GR3011M	1M
3"	.131"	Smooth	GR0141M	1M
3-1/4"	.131"	Smooth	GR0241M	1M
2-3/8"	.113"	Ring	GR08R1M	1M
<b>Hot Dipped Galvanized</b>				
3"	.131"	Smooth	GR033HG1M	1M
3-1/4"	.131"	Smooth	GR034HG1M	1M
2"	.113"	Ring	GR04HG1M	1M
2-3/8"	.113"	Ring	GR08RHG1M	1M
3"	.120"	Ring	GR408HG1M	1M

For best results, use with Grip-Rite GRTFR83 21° Plastic Strip Framing Nailer. pg. 8

Resealable Plastic Tub				
Length	Shank Diameter	Shank	Tub	Pcs./ Tub
<b>#304 Stainless Steel</b>				
2"	.113"	Ring	MAXC62878	1M
2-3/8"	.120"	Ring	MAXC62886	1M
3"	.120"	Ring	MAXC62892	1M
3"	.131"	Ring	MAXC62894	1M
3-1/4"	.120"	Ring	MAXC62902	1M
3-1/4"	.131"	Ring	MAXC62905	1M
3-1/4"	.120"	Screw	MAXC62904	1M
3-1/4"	.131"	Screw	MAXC62907	1M
3-1/4"	.148"	Screw	MAXC62910	1M
<b>#316 Stainless Steel</b>				
2"	.113"	Ring	MAXC62879	1M
2-1/4"	.113"	Ring	MAXC62884	1M
2-3/8"	.120"	Ring	MAXC62887	1M
3"	.120"	Ring	MAXC62893	1M
3"	.131"	Ring	MAXC62895	1M
3-1/4"	.120"	Ring	MAXC62903	1M
3-1/4"	.131"	Ring	MAXC62906	1M
3-1/2"	.131"	Ring	MAXC62900	1M
2-1/2"	.120"	Screw	MAXS62883	1M
3"	.131"	Screw	MAXC62896	1M



## 28° Plastic Strip Clipped Head Nails Framing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Bright Coated</b>				
2-3/8"	.113"	Smooth	GR603L	2.5M
3"	.120"	Smooth	GR615L	2M
3"	.120"	Smooth	GR615	4M
3"	.131"	Smooth	GR606L	2M
3-1/4"	.131"	Smooth	GR607L	2M
2-3/8"	.113"	Ring	GR609RL	2.5M
<b>ElectroGalvanized</b>				
2-3/8"	.113"	Smooth	GR611GL	2.5M
3"	.120"	Smooth	GR615GL	2M
3-1/4"	.131"	Smooth	GR613GL	2M
3"	.120"	Ring	GR617GL	2M

## 28° Wire Weld Clipped Head Nails Framing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Bright Coated</b>				
2"	.113"	Smooth	GRS6D	2.5M
2-3/8"	.113"	Smooth	GRS8D	2.5M
3"	.120"	Smooth	GRS10D	2M
3"	.131"	Smooth	GRS10DZ	2M
3-1/4"	.120"	Smooth	GRS12D	2M
3-1/4"	.131"	Smooth	GRS12DZ	2M
3-1/2"	.131"	Smooth	GRS16DZ	2M
2"	.113"	Ring	GRS6DR	2.5M
2-3/8"	.113"	Ring	GRS8DR	2.5M

Length	Shank Diameter	Shank	Box	Pcs./Box
<b>ElectroGalvanized</b>				
2-3/8"	.113"	Smooth	GRS8DG	2.5M
3-1/4"	.120"	Smooth	GRS12DG	2M
3-1/4"	.131"	Smooth	GRS12DZG	2M
3-1/2"	.131"	Smooth	GRS16DZG	2M
2"	.113"	Ring	GRS6DRG	2.5M
2-3/8"	.113"	Ring	GRS8DRG	2.5M
3"	.120"	Ring	GRS10DRG	2M
<b>Hot Dipped Galvanized</b>				
2"	.113"	Smooth	GRS6DHG	2.5M
2-3/8"	.113"	Smooth	GRS8DHG	2.5M
3"	.120"	Smooth	GRS10DHG	2M
3-1/4"	.120"	Smooth	GRS12DHG	2M
3-1/4"	.131"	Smooth	GRS12DZHG	2M
3-1/2"	.131"	Smooth	GRS16DZHG	2M
2"	.113"	Ring	GRS6DRHG	2.5M
2-3/8"	.113"	Ring	GRS8DRHG	2.5M
3"	.120"	Ring	GRS10DRHG	2M
3-1/4"	.120"	Ring	GRS12DRHG	2M
3-1/4"	.120"	Screw	GRS12DSHG	2M

For best results, use with Grip-Rite GRTFW83  
28° Wire Framing Nailer. pg. 8



## 28° Wire Weld Offset Round Head Nails Framing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Bright Coated</b>				
2"	.113"	Smooth	GRS6DRH	2.5M
2-3/8"	.113"	Smooth	GRS8DRH	2.5M
2-3/8"	.120"	Smooth	GRS8DYRH	2.5M
3"	.120"	Smooth	GRS10DRH	2M
3"	.131"	Smooth	GRS10DZRH	2M
3-1/4"	.120"	Smooth	GRS12DRH	2M
3-1/4"	.131"	Smooth	GRS12DZRH	2M
3-1/2"	.131"	Smooth	GRS16DZRH	2M
2"	.113"	Ring	GRS6DRRH	2.5M
2-3/8"	.113"	Ring	GRS8DRRH	2.5M
2-3/8"	.120"	Ring	GRS8DYRRH	2.5M
<b>Hot Dipped Galvanized</b>				
2-3/8"	.113"	Smooth	GRS8DHGRH	2.5M
2-3/8"	.120"	Smooth	GRS8DYHGRH	2.5M
3"	.120"	Smooth	GRS10DRHHG	2M
3-1/4"	.120"	Smooth	GRS12DRHHG	2M
3-1/4"	.131"	Smooth	GRS12ZRHHG	2M
3-1/2"	.131"	Smooth	GRS16ZRHHG	2M
2"	.113"	Ring	GRS6DRRHHG	2.5M
2-3/8"	.113"	Ring	GRS8DRRHHG	2.5M
2-3/8"	.120"	Ring	GRS8YRRHHG	2.5M
3"	.120"	Ring	GRS10RRHHG	2M

Resealable Plastic Tub				
Length	Shank Diameter	Shank	Tub	Pcs./Tub
<b>Bright Coated</b>				
2-3/8"	.113"	Smooth	GRW8H1	1M
3"	.120"	Smooth	GRW10H1	1M
3"	.131"	Smooth	GRW10ZH1	1M
3-1/4"	.120"	Smooth	GRW12H1	1M
3-1/4"	.131"	Smooth	GRW12ZH1	1M
3-1/2"	.131"	Smooth	GRW16ZH1	1M
2-3/8"	.113"	Ring	GRW8RH1	1M
2-3/8"	.120"	Ring	GRW8YRH1	1M
<b>Hot Dipped Galvanized</b>				
3"	.131"	Smooth	GRW10ZHGH1	1M
3-1/4"	.131"	Smooth	GRW12ZHGH1	1M
2"	.113"	Ring	GRW6RHGH1	1M
2-3/8"	.113"	Ring	GRW8RHGH1	1M
2-3/8"	.120"	Ring	GRW8YRHGH1	1M
3"	.120"	Ring	GRW10RHGH1	1M
<b>#304 Stainless Steel</b>				
2-3/8"	.120"	Ring	MAXC62890	1M
3"	.131"	Ring	MAXC62897	1M
3-1/4"	.131"	Ring	MAXC62911	1M

For best results, use with Grip-Rite GRTFW83  
28° Wire Framing Nailer. pg. 8

## 30° Paper Tape Clipped Head Nails Framing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Bright Coated</b>				
2"	.113"	Smooth	GRSP6D	2.5M
2-3/8"	.113"	Smooth	GRSP8D	2.5M
3"	.120"	Smooth	GRSP10D	2M
3"	.131"	Smooth	GRSP10DZ	2M
3-1/4"	.120"	Smooth	GRSP12D	2M
3-1/4"	.131"	Smooth	GRSP12DZ	2M
3-1/2"	.131"	Smooth	GRSP16DZ	2M
2"	.113"	Ring	GRSP6DR	2.5M
2-3/8"	.113"	Ring	GRSP8DR	2.5M
3"	.120"	Ring	GRSP10DR	2M
<b>Bright Coated - Long Strip</b>				
3"	.120"	Smooth	GRRVSP10D	2.5M
3"	.131"	Smooth	GRRVSP10DZ	2.5M
3-1/4"	.120"	Smooth	GRRVSP12D	2.5M
3-1/4"	.131"	Smooth	GRSP12DZ	2.5M
2-3/8"	.113"	Ring	GRRVSP8DR	2.5M
2-3/8"	.120"	Ring	GRRP8DZR5M	5M

Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Electrogalvanized</b>				
2"	.113"	Smooth	GRSP6DG	2.5M
2-3/8"	.113"	Smooth	GRSP8DG	2.5M
3"	.120"	Smooth	GRSP10DG	2M
3"	.131"	Smooth	GRSP10DZG	2M
3-1/4"	.131"	Smooth	GRSP12DZG	2M
2"	.113"	Ring	GRSP6DRG	2.5M
2-3/8"	.113"	Ring	GRSP8DRG	2.5M
3"	.120"	Ring	GRSP10DRG	2M
3-1/4"	.120"	Ring	GRSP12DRG	2M
<b>Hot Dipped Galvanized</b>				
2"	.113"	Smooth	GRSP6DHG	2.5M
2-3/8"	.113"	Smooth	GRSP8DHG	2.5M
3"	.120"	Smooth	GRSP10DHG	2M
3-1/4"	.131"	Smooth	GRSP12DZHG	2M
3-1/2"	.131"	Smooth	GRSP16DZHG	2M
2"	.113"	Ring	GRSP6DRHG	2.5M
2-3/8"	.113"	Ring	GRSP8DRHG	2.5M
3"	.120"	Ring	GRSP10DRHG	2M
3-1/4"	.120"	Ring	GRSP12DRHG	2M
3-1/4"	.131"	Ring	GRSP12ZRHG	2M
<b>Hot Dipped Galvanized - Long Strip</b>				
3"	.131"	Ring	GRRP10ZRHG	2.5M

**For best results, use with Grip-Rite GRTFC83 30° Paper Tape Framing Nailer. pg. 9**

## 30° Paper Tape Offset Round Head Nails Framing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Bright Coated</b>				
2"	.113"	Smooth	GRSP6DH	2.5M
2-3/8"	.113"	Smooth	GRSP8DH	2.5M
3"	.120"	Smooth	GRSP10DH	2M
3"	.131"	Smooth	GRSP10DZH	2M
3-1/4"	.120"	Smooth	GRSP12DH	2M
3-1/4"	.131"	Smooth	GRSP12DZH	2M
3-1/2"	.131"	Smooth	GRSP16DZH	2M
2"	.113"	Ring	GRSP6DRH	2.5M
2-3/8"	.113"	Ring	GRSP8DRH	2.5M
<b>Electrogalvanized</b>				
3-1/4"	.131"	Smooth	GRSP12DZGH	2M
2-3/8"	.113"	Ring	GRSP8DRGH	2.5M
<b>Hot Dipped Galvanized</b>				
2-3/8"	.113"	Smooth	GRSP8DRHHG	2.5M
3"	.120"	Smooth	GSP10DHGH	2M
3"	.131"	Smooth	GSP10DZHGH	2M
3-1/4"	.131"	Smooth	GSP12DZHHG	2M
3-1/2"	.131"	Smooth	GRSP16RHHG	2M
2"	.113"	Ring	GSP6DRHHG	2.5M
2-3/8"	.113"	Ring	GSP8DRHHG	2.5M
3"	.120"	Ring	GSP10DRHHG	2M
3"	.131"	Ring	GSP10ZRHGH	2M
3-1/4"	.120"	Ring	GSP12DRHHG	2M
3-1/4"	.131"	Ring	GSP12ZRHGH	2M

Resealable Plastic Tub				
Length	Shank Diameter	Shank	Tub	Pcs./Tub
<b>Bright Coated</b>				
2-3/8"	.113"	Smooth	GRP8H1	1M
3"	.120"	Smooth	GRP10H1	1M
3"	.131"	Smooth	GRP10ZH1	1M
3-1/4"	.131"	Smooth	GRP12ZH1	1M
2-3/8"	.113"	Ring	GRP8RH1	1M
<b>Hot Dipped Galvanized</b>				
3"	.131"	Smooth	GRP10ZHGH1	1M
3-1/4"	.131"	Smooth	GRP12ZHGH1	1M
2"	.113"	Ring	GRP6RHGH1	1M
2-3/8"	.113"	Ring	GRP8RHGH1	1M
3"	.120"	Ring	GRP10RHGH1	1M
<b>#304 Stainless Steel</b>				
2"	.120"	Ring	MAXC62880	1M
2-3/8"	.120"	Ring	MAXC62888	1M
3"	.131"	Ring	MAXC62898	1M
3-1/4"	.120"	Ring	MAXC62908	1M
3-1/2"	.131"	Ring	MAXC62901	1M
<b>#316 Stainless Steel</b>				
2-3/8"	.120"	Ring	MAXC62889	1M
3"	.131"	Ring	MAXC62899	1M
3-1/4"	.131"	Ring	MAXC62909	1M

**For best results, use with Grip-Rite GRTFC83 30° Paper Tape Framing Nailer. pg. 9**

## The Grip-Rite Fastener I.D. System

The Grip-Rite Fastener I.D. System allows both contractors and building inspectors to identify hand drive and collated nails by the numbers stamped on the fastener heads. The number is the key to all the relevant information about the fastener, including its size, description, type, and item number. The stamped head is one of the most recognized and reputable coding systems for fasteners. This convenient system makes identifying fasteners, both before and after installation, easier than ever.

Grip-Rite I.D. System fasteners are subjected to rigorous testing and comply with most building code standards, including ICC-ES ESR-1539. This ensures peace of mind when building to specifications.

## 21° Plastic Strip Round Head Nails Framing



Length	Shank Diameter	Shank	Head Stamp	Box	Pcs./Box
<b>Bright Coated - Fastener I.D. System</b>					
1-1/2"	.148"	Smooth	10	GRX2110	6M
2-1/8"	.148"	Smooth	5	GRX2105	4M
2-1/4"	.148"	Smooth	3	GRX2103	4M
2-3/8"	.113"	Smooth	7	GRX2107	5M
2-3/8"	.148"	Smooth	2	GRX2102	4M
2-1/2"	.131"	Smooth	1	GRX21015M	5M
3"	.131"	Smooth	14	GRX2114	4M
3"	.148"	Smooth	25	GRX2125	4M
3-1/4"	.131"	Smooth	24	GRX2124	4M
3-1/4"	.148"	Smooth	4	GRX2104	4M
3-1/4"	.148"	Smooth	4	GRX21043M	3M
3-1/2"	.162"	Smooth	9	GRX2109	2.5M
3-1/2"	.162"	Smooth	9	GRX21093M	3M
2-3/8"	.113"	Ring	20	GRX2120	5M
2-3/8"	.148"	Ring	21	GRX2121	4M
3"	.131"	Ring	23	GRX2123	4M
2-1/8"	.148"	Screw	17	GRX2117	4M
2-1/4"	.148"	Screw	22	GRX2122	4M
2-3/8"	.148"	Screw	11	GRX2111	4M

## 33° Paper Tape Joist Hanger Nails Framing



Resealable Plastic Tubs				
Length	Shank Diameter	Shank	Tub	Pcs./ Tub
<b>Heat Treated - Electrogalvanized</b>				
1-1/2"	.148"	Smooth	GRJH4D1M	1M
2-1/2"	.148"	Smooth	GRJH8D1M	1M
2-1/2"	.162"	Smooth	GRJH81621	1M
<b>Heat Treated - Hot Dipped Galvanized</b>				
1-1/2"	.148"	Smooth	GRJH4DHG1M	1M
<b>#316 Stainless Steel</b>				
1-1/2"	.148"	Ring	MAXC64255	1.5M
2-1/2"	.148"	Ring	MAXC64254	1M

## 33° Plastic Strip Joist Hanger Nails Framing



Length	Shank Diameter	Shank	Box	Pcs./ Box
<b>Heat Treated - Bright Coated</b>				
1-1/2"	.131"	Smooth	GRJH4ZHT	4M
1-1/2"	.148"	Smooth	GRJH4DHT3	3M
2-1/2"	.131"	Smooth	GRJH8ZHT25	2.5M
2-1/2"	.148"	Smooth	GRJH8DHT25	2.5M
2-1/2"	.162"	Smooth	GRJZ8162HT	2M
<b>Heat Treated - Electrogalvanized</b>				
1-1/2"	.131"	Smooth	GRJH4DZHT	4M
1-1/2"	.148"	Smooth	GRJH4DCHT	3M
2-1/2"	.148"	Smooth	GRJH8DCHT	2M
2-1/2"	.162"	Smooth	GRJH8162HT	2M
<b>Heat Treated - Hot Dipped Galvanized</b>				
1-1/2"	.131"	Smooth	GRJH4DZHG	4M
1-1/2"	.148"	Smooth	GRJH4DCHG	3M
2-1/2"	.148"	Smooth	GRJH8DCHG	2M
2-1/2"	.162"	Smooth	GRJH8162HG	2M

For best results, use with Grip-Rite GR150, GRSB150, & GRSB250 Joist Hanger Nailers. pg. 10-11

Length	Shank Diameter	Shank	Box	Pcs./ Box
<b>Heat Treated - Bright Coated</b>				
1-1/2"	.148"	Smooth	GRJSN112	2M
2-1/2"	.148"	Smooth	GRJSN212	1.5M
<b>Heat Treated - Hot Dipped Galvanized</b>				
1-1/2"	.148"	Smooth	GRJSN112HG	2M
2-1/2"	.148"	Smooth	GRJSN212HG	1.5M

For best results, use with Grip-Rite GR150 30° Joist Hanger Nail. pg. 10

## 0° Plastic Sheet Nails Siding/Fencing



## 15° Plastic Sheet Nails Siding/Fencing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Electrogalvanized</b>				
1-7/8"	.092"	Smooth	GR150G	9M
2-1/4"	.099"	Smooth	GR153G	7.2M
1-7/8"	.092"	Ring	GR151G	9M
2-1/4"	.099"	Ring	GR158G	7.2M
<b>Electrogalvanized - 9 micron</b>				
1-7/8"	.092"	Smooth	GR150G9	9M
2-1/4"	.099"	Smooth	GR153G9	7.2M
1-7/8"	.092"	Ring	GR151G9	9M
2-1/4"	.099"	Ring	GR158G9	7.2M
<b>Hot Dipped Galvanized</b>				
1-7/8"	.092"	Smooth	GR150HG	9M
2-1/4"	.099"	Smooth	GR153HG	7.2M
1-7/8"	.092"	Ring	GR151HG	9M
2-1/4"	.099"	Ring	GR158HG	7.2M
<b>#304 Stainless Steel</b>				
1-7/8"	.099"	Ring	MAXC62829	9M
2-1/4"	.099"	Ring	MAXC62830	7.2M

**For best results, use with a Grip-Rite GRTCS250Z 0° Plastic Sheet Coil Siding/Fencing Nailer. pg. 13**

Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Electrogalvanized</b>				
2"	.092"	Smooth	GRPC6D92G	6M
2-1/4"	.092"	Smooth	GRPC7D92G	4.8M
1-3/4"	.092"	Ring	GRPC5R92G	6M
2"	.092"	Ring	GRPC6R92G	6M
2-1/4"	.092"	Ring	GRPC7R92G	4.8M
<b>Hot Dipped Galvanized</b>				
2"	.092"	Smooth	GRPC6D92HG	6M
2-1/4"	.092"	Smooth	GRPC7D92HG	4.8M
2-1/2"	.092"	Smooth	GRPC8D92HG	4.8M
3"	.113"	Smooth	GRPC10PHG	4.8M
1-3/4"	.092"	Ring	GRPC5R92HG	6M
1-3/4"	.090"	Ring	GRPC5R9HDG	6.3M
2"	.092"	Ring	GRPC6R92HG	6M
2-1/4"	.092"	Ring	GRPC7R92HG	4.8M
2-1/2"	.092"	Ring	GRPC8R92HG	4.8M
<b>#304 Stainless Steel</b>				
1-1/2"	.092"	Ring	MAXC62831	3.2M
1-3/4"	.092"	Ring	MAXC62840	3.2M
2"	.092"	Ring	MAXC62834	3.2M
2-3/16"	.092"	Ring	MAXC62838	3.2M
2-1/2"	.092"	Ring	MAXC62836	3.2M
<b>#316 Stainless Steel</b>				
1-1/2"	.092"	Ring	MAXC62832	3.2M
1-3/4"	.092"	Ring	MAXC62833	3.2M
2"	.092"	Ring	MAXC62835	3.2M
2-3/16"	.092"	Ring	MAXC62839	3.2M
2-1/2"	.092"	Ring	MAXC62837	3.2M

**For best results, use with a Grip-Rite GRTCS250 15° Coil Siding/Fencing Nailer. pg. 13**

## 15° Wire Weld Nails Siding/Fencing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>Electrogalvanized</b>				
2-3/16"	.092"	Smooth	GRC7P90DG	3M
1-1/4"	.080"	Ring	GRC3R80DG	3M
1-1/2"	.080"	Ring	GRC4R80DG	3M
1-3/4"	.080"	Ring	GRC5R80DG	3M
1-3/4"	.090"	Ring	GRC5R90DG	3M
2"	.092"	Ring	GRC6R90DG	3M
2-3/16"	.092"	Ring	GRC7R90DG	3M
2-1/2"	.092"	Ring	GRC8R90DG	3M
<b>Hot Dipped Galvanized</b>				
2-3/16"	.092"	Smooth	GRC7P90DHG	3M
2-1/2"	.092"	Smooth	GRC8P90DHG	3M
1-1/4"	.080"	Ring	GRC3R80DHG	3M
1-1/2"	.080"	Ring	GRC4R80DHG	3M
1-3/4"	.080"	Ring	GRC5R80DHG	3M
1-3/4"	.090"	Ring	GRC5R90DHG	3M
2"	.092"	Ring	GRC6R90DHG	3M
2-3/16"	.092"	Ring	GRC7R90DHG	3M
2-1/2"	.092"	Ring	GRC8R90DHG	3M

For best results, use with a Grip-Rite GRTCS250 15° Coil Siding/Fencing Nailer. pg. 13

Length	Shank Diameter	Shank	Box	Pcs./Box
<b>#304 Stainless Steel</b>				
1-1/4"	.090"	Ring	MAXC62817	3.6M
1-1/2"	.090"	Ring	MAXC62816	3.6M
1-3/4"	.090"	Ring	MAXC62818	3.6M
2"	.090"	Ring	MAXC62820	3.6M
2-3/16"	.090"	Ring	MAXC62827	3.6M
2-1/2"	.090"	Ring	MAXC62823	3.6M
<b>#316 Stainless Steel</b>				
1-1/2"	.090"	Ring	MAXC62815	1.8M
1-3/4"	.090"	Ring	MAXC62819	1.8M
2"	.090"	Ring	MAXC62821	1.8M
2-3/16"	.090"	Ring	MAXC62826	1.8M
2-1/2"	.090"	Ring	MAXC62824	1.8M

<b>Resealable Plastic Tub</b>				
Length	Shank Diameter	Shank	Tub	Pcs./Tub
<b>Electrogalvanized</b>				
2-3/16"	.092"	Ring	GRC7R92G1	1.2M
<b>Hot Dipped Galvanized</b>				
2-3/16"	.092"	Smooth	GRC7P92HG1	1.2M
2"	.092"	Ring	GRC6R92HG1	1.2M
2-3/16"	.092"	Ring	GRC7R92HG1	1.2M
<b>#304 Stainless Steel</b>				
1-1/4"	.090"	Ring	MAXC62874	1.2M
1-1/2"	.090"	Ring	MAXC62872	1.2M
1-3/4"	.090"	Ring	MAXC62875	1.2M
2"	.090"	Ring	MAXC62876	1.2M
2-3/16"	.090"	Ring	MAXC62885	1.2M
2-1/2"	.090"	Ring	MAXC62881	900

## 15° Coil Roofing Nails Roofing



Length	Shank Diameter	Shank	Box	Pcs./Box
<b>ElectroGalvanized</b>				
3/4"	.120"	Smooth	GRCR19GAL	7.2M
7/8"	.120"	Smooth	GRCR2DCGAL	7.2M
1"	.120"	Smooth	GRCR2DGAL	7.2M
1-1/4"	.120"	Smooth	GRCR3DGAL	7.2M
1-1/2"	.120"	Smooth	GRCR4DGAL	7.2M
1-3/4"	.120"	Smooth	GRCR5DGAL	7.2M
3/4"	.120"	Ring	GRCR19RGAL	7.2M
1-1/4"	.120"	Ring	GRCR3DRGAL	7.2M
1-1/2"	.120"	Ring	GRCR4DRGAL	7.2M
<b>Hot Dipped Galvanized</b>				
1"	.120"	Smooth	GRCR2DHDG	7.2M
1-1/4"	.120"	Smooth	GRCR3DHDG	7.2M
1-1/2"	.120"	Smooth	GRCR4DHDG	7.2M
1-3/4"	.120"	Smooth	GRCR5DHDG	7.2M

Resealable Plastic Tubs				
Length	Shank Diameter	Shank	Tub	Pcs./Tub
<b>ElectroGalvanized</b>				
1-1/4"	.120"	Smooth	GRCR3TRC	600
1-3/4"	.120"	Smooth	GRCR5TRC	720
1-1/4"	.120"	Ring	GRCR3RTRC	600
<b>#304 Stainless Steel</b>				
1-1/4"	.120"	Ring	MAXS62873	600
1-1/2"	.120"	Ring	MAXC62871	600

Length	Shank Diameter	Shank	Box	Pcs./Box
<b>#304 Stainless Steel</b>				
3/4"	.120"	Smooth	MAXC62861	3.6M
3/4"	.120"	Smooth	MAXC62862	7.2M
7/8"	.120"	Smooth	MAXC62866	3.6M
7/8"	.120"	Smooth	MAXC62867	7.2M
1"	.120"	Smooth	MAXC62841	3.6M
1"	.120"	Smooth	MAXC62842	7.2M
1-1/2"	.120"	Smooth	MAXC62846	3.6M
1-1/2"	.120"	Smooth	MAXC62847	7.2M
1-1/4"	.120"	Smooth	MAXS62851	3.6M
1-1/4"	.120"	Smooth	MAXS62852	7.2M
1-3/4"	.120"	Smooth	MAXC62856	3.6M
1-3/4"	.120"	Smooth	MAXC62857	7.2M
3/4"	.120"	Ring	MAXC62863	3.6M
3/4"	.120"	Ring	MAXC62864	7.2M
7/8"	.120"	Ring	MAXC62868	3.6M
7/8"	.120"	Ring	MAXC62869	7.2M
1"	.120"	Ring	MAXC62845	3.6M
1"	.120"	Ring	MAXC62843	7.2M
1-1/2"	.120"	Ring	MAXC62848	3.6M
1-1/2"	.120"	Ring	MAXC62849	7.2M
1-1/4"	.120"	Ring	MAXS62853	3.6M
1-1/4"	.120"	Ring	MAXS62854	7.2M
1-3/4"	.120"	Ring	MAXC62858	3.6M
1-3/4"	.120"	Ring	MAXC62859	7.2M
<b>#316 Stainless Steel</b>				
3/4"	.120"	Ring	MAXC62865	3.6M
7/8"	.120"	Ring	MAXC62870	3.6M
1"	.120"	Ring	MAXC62844	3.6M
1-1/4"	.120"	Ring	MAXS62855	3.6M
1-1/2"	.120"	Ring	MAXC62850	3.6M
1-3/4"	.120"	Ring	MAXC62860	3.6M

**For best results, use with a Grip-Rite GRTCR175 15° Coil Roofing Nailer. pg. 12**



## Laser Welded Plastic Caps & Staples Roofing



Leg	Crown	Cap Size	Box	Pcs./Box
<b>Electrogalvanized</b>				
5/8"	1/2"	1" Dia.	GRCP5822L	2.2M

For best results, use with a Grip-Rite GRC58A Plastic Cap Stapler. pg. 12



## "L"-style Narrow Crown Staples

**18**<sup>GA</sup>  
NARROW CROWN STAPLE



Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
1/2"	1/4"	GRL08	5M
5/8"	1/4"	GRL10	5M
3/4"	1/4"	GRL11	5M
7/8"	1/4"	GRL12	5M
1"	1/4"	GRL13	5M
1-1/8"	1/4"	GRL14	5M
1-1/4"	1/4"	GRL15	5M
1-1/2"	1/4"	GRL17	5M

**For best results, use with Grip-Rite GRTSN150 1/4" Narrow Crown Stapler. pg. 17**

## Resealable Belt Clip Packs

Leg	Crown	Belt Clip SKU	Pcs./Pack	Packs/Master Carton
<b>Electrogalvanized</b>				
1/2"	1/4"	GRL08M	1M	5
5/8"	1/4"	GRL10M	1M	5
3/4"	1/4"	GRL11M	1M	5
7/8"	1/4"	GRL12M	1M	5
1"	1/4"	GRL13M	1M	5
1-1/8"	1/4"	GRL14M	1M	5
1-1/4"	1/4"	GRL15M	1M	5
1-1/2"	1/4"	GRL17M	1M	5
3/4", 1/2", 1" - 300 each	1/4"	GRLMIX	900	5
<b>#304 Stainless Steel</b>				
1-1/4"	1/4"	MAXC63469	1M	5
1-1/2"	1/4"	MAXC63470	1M	5
<b>#316 Stainless Steel</b>				
1-1/4"	1/4"	MAXC64158	500	5
1-1/2"	1/4"	MAXC64159	500	5

## “SX”-style Narrow Crown Staples

**18**<sub>GA</sub>  
NARROW CROWN  
STAPLE



Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
1/2"	7/32"	GRSX12G	5M
5/8"	7/32"	GRSX58G	5M
3/4"	7/32"	GRSX34G	5M
7/8"	7/32"	GRSX78G	5M
1"	7/32"	GRSX1G	5M
1-1/8"	7/32"	GRSX118G	5M
1-3/16"	7/32"	GRSX1316G	5M
1-1/4"	7/32"	GRSX114G	5M
1-3/8"	7/32"	GRSX138G	5M
1-1/2"	7/32"	GRSX112G	5M

### Resealable Belt Clip Packs

Leg	Crown	Belt Clip SKU	Pcs./Pack	Packs/Master Carton
<b>Electrogalvanized</b>				
1/2"	7/32"	GRSX12GM	1M	5
5/8"	7/32"	GRSX58GM	1M	5
3/4"	7/32"	GRSX34GM	1M	5
7/8"	7/32"	GRSX78GM	1M	5
1"	7/32"	GRSX1GM	1M	5
1-1/8"	7/32"	GRSX118GM	1M	5
1-3/16"	7/32"	GRSX1316GM	1M	5
1-1/4"	7/32"	GRSX114GM	1M	5
1-3/8"	7/32"	GRSX138GM	1M	5
1-1/2"	7/32"	GRSX112GM	1M	5

## "N"-style Medium Crown Staples



Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
7/8"	7/16"	GRN12	10M
1"	7/16"	GRN13	10M
1-1/8"	7/16"	GRN14	10M
1-1/4"	7/16"	GRN15	10M
1-3/8"	7/16"	GRN16	10M
1-1/2"	7/16"	GRN17	10M
1-3/4"	7/16"	GRN19	10M
2"	7/16"	GRN21	10M

Resealable Belt Clip Packs				
Leg	Crown	Belt Clip SKU	Pcs./Pack	Packs/Master Carton
<b>#304 Stainless Steel</b>				
1-1/4"	7/16"	MAXB64890	1M	5
1-1/2"	7/16"	MAXB64891	1M	5
2"	7/16"	MAXB64892	1M	5
<b>#316 Stainless Steel</b>				
1-1/4"	7/16"	MAXB64913	500	5
1-1/2"	7/16"	MAXB64914	500	5
2"	7/16"	MAXB64915	500	5

## "76"-style Medium Crown Staples



Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
1"	7/16"	GR7632	10M
1-1/4"	7/16"	GR7640	10M
1-1/2"	7/16"	GR7648	10M
1-3/4"	7/16"	GR7656	10M
2"	7/16"	GR7664	10M

Resealable Belt Clip Packs				
Leg	Crown	Belt Clip SKU	Pcs./Pack	Packs/Master Carton
<b>#304 Stainless Steel</b>				
1-1/4"	7/16"	MAXB64893	500	5
1-1/2"	7/16"	MAXB64894	500	5
<b>#316 Stainless Steel</b>				
1-1/4"	7/16"	MAXB64916	500	5
1-1/2"	7/16"	MAXB64917	500	5

For best results, use with Grip-Rite GRTSM200 or GRTSM2016C 7/16" Medium Crown Stapler. pg. 17

## “GS”-style Medium Crown Staples

**16**<sub>GA</sub>  
MEDIUM CROWN STAPLE



Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
3/4"	1/2"	GRGS1634	10M
1"	1/2"	GRGS161	10M
1-1/4"	1/2"	GRGS16114	10M
1-1/2"	1/2"	GRGS16112	10M
2"	1/2"	GRGS162	10M

## “BCS”-style Medium Crown Staples

**16**<sub>GA</sub>  
MEDIUM CROWN STAPLE



Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
1"	1/2"	GRBCS1105	10M
1-1/4"	1/2"	GRBCS1107	10M
1-1/2"	1/2"	GRBCS1109	10M
1-3/4"	1/2"	GRBCS1111	10M
2"	1/2"	GRBCS1112	10M




Vinyl siding adaptor comes with the GRTSM2016C

FASTENING SYSTEM  
TOOLS  
COLLATED FASTENERS  
COMPRESSORS  
ACCESSORIES  
SAFETY & RESOURCE

## “BCS”-style Wide Crown Staples


**16**<sub>GA</sub>  
WIDE CROWN STAPLE

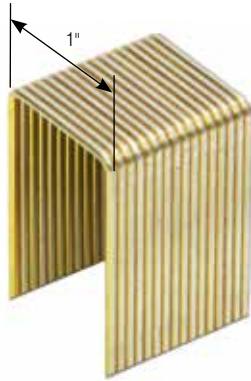

Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
5/8"	1"	GRBCS1096	10M
3/4"	1"	GRBCS1097	10M
7/8"	1"	GRBCS1098	10M
1"	1"	GRBCS1099	10M
1-1/4"	1"	GRBCS1101	10M
1-1/2"	1"	GRBCS1102	10M
1-3/4"	1"	GRBCS1116	10M
2"	1"	GRBCS1117	10M

## “GSW”-style Wide Crown Staples

**16**<sub>GA</sub>  
WIDE CROWN STAPLE

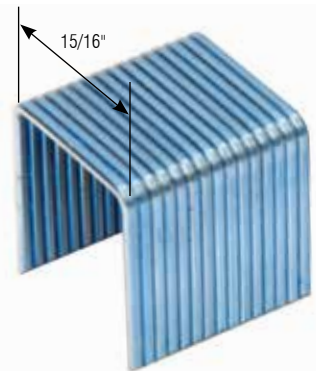


Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
5/8"	15/16"	GRGSW1658	10M
3/4"	15/16"	GRGSW1634	10M
7/8"	15/16"	GRGSW1678	10M
1"	15/16"	GRGSW161	10M
1-1/4"	15/16"	GRGSW16114	10M
1-1/2"	15/16"	GRGSW16112	10M
1-3/4"	15/16"	GRGSW16134	10M
2"	15/16"	GRGSW162	10M

**For best results, use with Grip-Rite GRTS1516 15/16" Wide Crown Stapler. pg. 16**

## “P”-style Wide Crown Staples

**16**<sub>GA</sub>  
WIDE CROWN STAPLE



Leg	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
5/8"	1"	GRP10	10M
3/4"	1"	GRP11	10M
7/8"	1"	GRP12	10M
1"	1"	GRP13	10M
1-1/4"	1"	GRP15	10M
1-1/2"	1"	GRP17	10M
1-3/4"	1"	GRP19	10M
2"	1"	GRP21	10M

**For best results, use with Grip-Rite GRTS1200 1" Wide Crown Stapler. pg. 16**

## 15-1/2 Gauge Flooring Staples



Length	Crown	Box	Pcs./Box
<b>Electrogalvanized</b>			
1-1/2"	1/2"	GRBCS1512	5M
1-3/4"	1/2"	GRBCS1514	5M
2"	1/2"	GRBCS1516	5M

For best results, use with Grip-Rite GR200FS Flooring Stapler. pg. 18

## "L" Hardwood Flooring Cleats



## Concrete T-Nails




Length	Box	Pcs./Box
<b>Electrogalvanized</b>		
1-1/2"	GRFLN150	1M
1-3/4"	GRFLN175	1M
2"	GRFLN200	1M

Length	Box	Pcs./Box
<b>Electrogalvanized</b>		
5/8"	GRBT461XH	2.5M
9/16"	GRBT484GXH	2.5M
1-3/8"	GRBT481XH	2.5M
2-1/4"	GRBT499XH	2.5M

For best results, use with Grip-Rite GR200LCN "L"-cleat Flooring Nailer. pg. 18


## "A11"-style Tacker Staples



Leg	Crown	Box	Pcs./Box	Boxes/Shipping Carton
<b>Electrogalvanized</b>				
1/4"	3/8"	GRA1114	5M	20
5/16"	3/8"	GRA11516	5M	20
3/8"	3/8"	GRA1138	5M	20

For best results, use with Grip-Rite GRR11 or GRR11C "A11"-style Tacker Staplers. pg. 20


## "54"-style Tacker Staples



Leg	Crown	Box	Pcs./Box	Boxes/Shipping Carton
<b>Electrogalvanized</b>				
1/2"	3/8"	GRA1112	5M	20

For best results, use with Grip-Rite GRR11C "A11"-style Tacker Stapler. pg. 20

## "50"-style Tacker Staples




Leg	Crown	Box	Pcs./Box	Boxes/Shipping Carton
<b>Electrogalvanized</b>				
1/4"	1/2"	GR50814C	5M	20
5/16"	1/2"	GR5010516C	5M	20
3/8"	1/2"	GR501238C	5M	20

For best results, use with Grip-Rite GR50BL "50"-style Tacker Staplers. pg. 21




### "A19"-style Tacker Staples



Leg	Crown	Box	Pcs./Box	Boxes/Shipping Carton
<b>Electrogalvanized</b>				
1/4"	3/8"	GRA1914	5M	20

For best results, use with Grip-Rite GRR19 "A19"-style Tacker Stapler. pg. 20


### "STCR"-style Tacker Staples



Leg	Crown	Box	Pcs./Box	Boxes/Shipping Carton
<b>Electrogalvanized</b>				
1/4"	7/16"	GRSTCR14	5M	20
5/16"	7/16"	GRSTCR516	5M	20
3/8"	7/16"	GRSTCR38	5M	20
1/2"	7/16"	GRSTCR12	5M	20
9/16"	7/16"	GRSTCR12	5M	20

For best results, use with Grip-Rite GRSTCR5019 "STCR"-style Tacker Stapler. pg. 21

### "SHCR"-style Tacker Staples



Leg	Crown	Box	Pcs./Box	Boxes/Shipping Carton
<b>Electrogalvanized</b>				
1/4"	3/8"	GRSHCR14	5M	20
3/8"	3/8"	GRSHCR38	5M	20



# Collated Fasteners

FASTENING SYSTEM

TOOLS

COLLATED FASTENERS

## 15 Gauge "DA"-style Angled Finish Nails Finish



Length	Box	Pcs./ Box
<b>Electrogalvanized</b>		
1-1/4"	GRDA15GL	4M
1-1/2"	GRDA17GL	4M
1-3/4"	GRDA19GL	4M
2"	GRDA21GL	4M
2-1/4"	GRDA23GL	4M
2-1/2"	GRDA25GL	4M
<b>Bright Coated</b>		
1-1/4"	GRDA15L	4M
1-1/2"	GRDA17L	4M
1-3/4"	GRDA19L	4M
2"	GRDA21L	4M
2-1/4"	GRDA23L	4M
2-1/2"	GRDA25L	4M

## Resealable Belt Clip Packs

Length	Belt Clip SKU	Pcs./ Pack	Packs/ Master Carton
<b>Electrogalvanized</b>			
1-1/4"	GRDA15GLM	1M	5
1-1/2"	GRDA17GLM	1M	5
1-3/4"	GRDA19GLM	1M	5
2"	GRDA21GLM	1M	5
2-1/4"	GRDA23GLM	1M	5
2-1/2"	GRDA25GLM	1M	5
<b>#304 Stainless Steel</b>			
1-1/2"	MAXB64879	1M	5
2"	MAXB64880	1M	5
2-1/2"	MAXB64881	1M	5
<b>#316 Stainless Steel</b>			
1-1/2"	MAXB64902	500	5
2"	MAXB64903	500	5
2-1/2"	MAXB64904	500	5

For best results, use with a Grip-Rite GRTAN250 15 Gauge Finish Nailer. pg. 14

COMPRESSORS

ACCESSORIES

SAFETY & RESOURCE

## Belt Clip System

Our belt clip packs are available in a wide range of finish nails and staples.

### Finish Nails



### Narrow Crown Staples



## 15 Gauge "FN"-style Angled Finish Nails Finish



Length	Box	Pcs./ Box
<b>ElectroGalvanized</b>		
1-1/4"	GRFN1520	3.65M
1-1/2"	GRFN1524	3.65M
1-3/4"	GRFN1528	3.65M
2"	GRFN1532	3.65M
2-1/2"	GRFN1540	3.65M

Resealable Belt Clip Packs			
Length	Belt Clip SKU	Pcs./ Pack	Packs/ Master Carton
<b>ElectroGalvanized</b>			
1-1/4"	GRFN1520M	1M	5
1-1/2"	GRFN1524M	1M	5
1-3/4"	GRFN1528M	1M	5
2"	GRFN1532M	1M	5
2-1/2"	GRFN1540M	1M	5
<b>#304 Stainless Steel</b>			
1-1/2"	MAXB64882	1M	5
2"	MAXB64883	1M	5
2-1/2"	MAXB64884	1M	5
<b>#316 Stainless Steel</b>			
1-1/2"	MAXB64905	500	5
2"	MAXB64906	500	5
2-1/2"	MAXB64907	500	5





# Collated Fasteners

FASTENING SYSTEM

TOOLS

COLLATED FASTENERS

COMPRESSORS

ACCESSORIES

SAFETY & RESOURCE

## 16 Gauge Straight Finish Nails Finish



Length	Box	Pcs./ Box
<b>Electrogalvanized</b>		
1-1/2"	GRAF112	2M
2"	GRAF2	2M
2-1/2"	GRAF212	2M

For best results, use with a Grip-Rite GRTFN250 16 Gauge Finish Nailer. pg. 14

### Resealable Belt Clip Packs

Length	Belt Clip SKU	Pcs./ Pack	Packs/ Master Carton
<b>Electrogalvanized</b>			
3/4"	GRF1634M	1M	5
7/8"	GRF1678M	1M	5
1"	GRF161M	1M	5
1-1/8"	GRF16118M	1M	5
1-1/4"	GRF16114M	1M	5
1-1/2"	GRF16112M	1M	5
1-3/4"	GRF16134M	1M	5
2"	GRF162M	1M	5
2-1/4"	GRF16214M	1M	5
2-1/2"	GRF16212M	1M	5
1-1/4", 2", 2-1/2" - 300 each	GRF16MIX	900	5
<b>#304 Stainless Steel</b>			
1-1/2"	MAXB64872	1M	5
2"	MAXB64873	1M	5
2-1/2"	MAXB64874	1M	5
<b>#316 Stainless Steel</b>			
1-1/2"	MAXB64895	500	5
2"	MAXB64896	500	5
2-1/2"	MAXB64897	500	5



### Belt Clip System

Our new belt clip packs make reloading your finishing tool quick and easy. Lightweight and durable, these packs feature a resealable lid and sturdy belt clasp for holding fasteners in an easy to reach location. A wide assortment of styles and sizes are available.



## 16 Gauge Angled Finish Nails Finish



Length	Box	Pcs./ Box
<b>Electrogalvanized</b>		
1-1/2"	GRAF112	2M
2"	GRAF2	2M
2-1/2"	GRAF212	2M

<b>Resealable Belt Clip Packs</b>			
Length	Belt Clip SKU	Pcs./ Pack	Packs/ Master Carton
<b>Electrogalvanized</b>			
1-1/2"	GRAF112M	1M	5
2"	GRAF2M	1M	5
2-1/2"	GRAF212M	1M	5
<b>#304 Stainless Steel</b>			
1-1/2"	MAXB64885	1M	5
2"	MAXB64886	1M	5
2-1/2"	MAXB64887	1M	5
<b>#316 Stainless Steel</b>			
1-1/2"	MAXB64908	500	5
2"	MAXB64909	500	5
2-1/2"	MAXB64910	500	5



## 18 Gauge Brad Nails

Finish



Length	Box	Pcs./ Box
<b>Electrogalvanized</b>		
5/8"	GRF1858	5M
3/4"	GRF1834	5M
1"	GRF181	5M
1-1/8"	GRF18118	5M
1-3/16"	GRF181316	5M
1-1/4"	GRF18114	5M
1-1/2"	GRF18112	5M
1-3/4"	GRF18134	5M
2"	GRF182	5M

For best results, use with Grip-Rite GRTBN200 18 Gauge Brad Nailer. pg. 15

## Resealable Belt Clip Packs

Length	Belt Clip SKU	Pcs./ Pack	Packs/ Master Carton
<b>Electrogalvanized</b>			
5/8"	GRF1858M	1M	6
3/4"	GRF1834M	1M	6
1"	GRF181M	1M	6
1-1/8"	GRF18118M	1M	6
1-3/16"	GRF181316M	1M	6
1-1/4"	GRF18114M	1M	6
1-1/2"	GRF18112M	1M	6
1-3/4"	GRF18134M	1M	6
2"	GRF182M	1M	6
1-1/4", 1-1/2", 2" - 300 each	GRF18MIX	900	6
<b>#304 Stainless Steel</b>			
1"	MAXB64875	1M	6
1-1/4"	MAXB64876	1M	6
1-1/2"	MAXB64877	1M	6
2"	MAXB64878	1M	6
<b>#316 Stainless Steel</b>			
1"	MAXB64898	500	6
1-1/4"	MAXB64899	500	6
1-1/2"	MAXB64900	500	6
2"	MAXB64901	500	6

## 23 Gauge Headless Micropins

Finish



Length	Pack SKU	Pcs./ Pack	Packs/ Master Carton
<b>Electrogalvanized</b>			
1/2"	GR12PIN	3M	5
5/8"	GR58PIN	3M	5
3/4"	GR34PIN	3M	5
1"	GR1PIN	3M	5
1-3/16"	GR1316PIN	3M	5
5/8", 3/4", 1", 1-3/16"-800 each	GRMIXPIN	3.2M	5

For best results, use with Grip-Rite GRTPIN23A Headless Pinner. pg. 15

# COMPRESSORS



## 1 Gallon Oil-Free Compressor GR100



### Features

- ☑ Designed for trim carpentry and other small projects
- ☑ Ultra quiet
- ☑ Recessed gauges
- ☑ Roll cage design protects vital components
- ☑ Electric, induction motor and oil-free pump

### Specifications

Peak HP: 1.0  
 Tank Capacity: 1.0 gal.  
 Motor Type: Induction  
 Lubrication: Oil-free  
 Draw: 5 amps  
 On/Off PSI: 95/125  
 CFM @ 90 PSI: 0.6  
 Decibels: 69  
 Height: 13.4 in.  
 Length: 14.6 in.  
 Width: 14.2 in.  
 Weight: 23 lb.

### Compressor to Tool Ratio\*

Finish: 1  
 Staplers: 1  
 Roofing: 0  
 Framing: 0

\*Tool capacity can vary due to rate of actuation.



## 2 Gallon Oil-Free Compressor GR152CM



### Features

- ☑ Designed for small to mid-size projects
- ☑ Rugged roll cage for job site durability
- ☑ Recessed gauges
- ☑ Extremely quiet and lightweight
- ☑ Electric, induction motor and oil-free pump
- ☑ Easy-grip handles for job site portability

### Specifications

Peak HP: 2.0  
 Tank Capacity: 2.0 gal.  
 Motor Type: Induction  
 Lubrication: Oil-free  
 Draw: 8 amps  
 On/Off PSI: 95/125  
 CFM @ 90 PSI: 2.6  
 Decibels: 75  
 Max PSI: 150  
 Pump Up: 50 seconds  
 Recovery: 10 seconds  
 Height: 14.9 in.  
 Length: 18.9 in.  
 Width: 14.9 in.  
 Weight: 37 lb.

### Compressor to Tool Ratio\*

Finish: 3  
 Staplers: 2  
 Roofing: 1  
 Framing: 1

\*Tool capacity can vary due to rate of actuation.





## 4.3 Gallon Twin Stack Compressor GR254CTS



### Features

- ✓ Designed for professional and contractor use
- ✓ Electric, induction motor and oil-splash lubricated pump
- ✓ Compact twin tank stack design
- ✓ Extremely quiet and lightweight
- ✓ Industrial grade motor with ball bearings for greater durability
- ✓ Heavy duty pump with cast iron cylinder

### Specifications

Peak HP: 2.5  
 Tank Capacity: 4.3 gal.  
 Motor Type: Induction  
 Lubrication: Oil  
 Draw: 14.2 amps  
 On/Off PSI: 95/125  
 CFM @ 90 PSI: 4.  
 Decibels: 79  
 Max PSI: 135  
 Pump Up: 74 seconds  
 Recovery: 23 seconds  
 Height: 17 in.  
 Length: 20 in.  
 Width: 15 in.  
 Weight: 56 lb.

### Compressor to Tool Ratio\*

Finish: 5  
 Staplers: 3  
 Roofing: 2  
 Framing: 2

\*Tool capacity can vary due to rate of actuation.



## 4 Gallon Low RPM Compressor GR2540LR



### Features

- ✓ Ultra quiet 1725 RPM electric motor
- ✓ Locking pull-out handle provides leverage for maximum mobility
- ✓ 10" no-flat tire never loses air
- ✓ Recessed gauges, rugged roll cage design for job site durability
- ✓ Electric, induction motor and oil splash pump
- ✓ 12 amps - Will not trip breakers

### Specifications

Peak HP: 2.5  
 Tank Capacity: 4.0 gal.  
 Motor Type: Induction  
 Lubrication: Oil  
 Draw: 14 amps  
 On/Off PSI: 110/150  
 CFM @ 90 PSI: 4.5  
 Max PSI: 150  
 Pump Up: 77 seconds  
 Recovery: 19 seconds  
 Decibels: 89  
 Height: 20 in.  
 Length: 23.6 in.  
 Width: 22 in.  
 Weight: 88 lb.

### Compressor to Tool Ratio\*

Finish: 5  
 Staplers: 3  
 Roofing: 2  
 Framing: 2

\*Tool capacity can vary due to rate of actuation.



## 9 Gallon Electric Wheelbarrow Compressor GR309EDV



### Features

- ☑ 3 HP, dual voltage (115/230v) motor - CSA/US approved
- ☑ 9 gallon twin tanks
- ☑ Double female quick connect couplers
- ☑ No- flat tire never loses air
- ☑ Easy view oil site gauge
- ☑ Heavy duty 3/8" regulator

### Specifications

Peak HP: 3.0  
 Tank Capacity: 9 gal.  
 Motor/Pump RPM: 1755/1060  
 Motor Type: Induction  
 Lubrication: Oil  
 Draw @ 115v: 15 amps  
 Draw @ 230v: 7.5 amps  
 On/Off PSI: 95/125  
 CFM @ 100 PSI: 6.9  
 Max PSI: 135  
 Height: 23 in.  
 Length: 45 in.  
 Width: 19 in.  
 Weight: 162 lb.

### Compressor to Tool Ratio\*

Finish: 5  
 Staplers: 4  
 Roofing: 3  
 Framing: 3

\*Tool capacity can vary due to rate of actuation.

**1 YEAR**  
Warranty

## 10 Gallon Gas Wheelbarrow Compressor GR55G10X



### Features

- ☑ 5.5 HP Honda motor with low oil shut off
- ☑ 10 gallon twin tanks - largest in the industry in the wheelbarrow format
- ☑ Easy one step belt tightening system
- ☑ No- flat tire never loses air
- ☑ Easy view oil site gauge
- ☑ Triple female quick connect couplers
- ☑ Heavy duty 3/8" regulator

### Specifications

Gas Engine: Honda GX160  
 Peak HP: 5.5  
 Tank Capacity: 10 gal.  
 Throttle: Pneumatic  
 Lubrication: Oil  
 On/Off PSI: 95/125  
 CFM @ 100 PSI: 12.5  
 Decibels: 77  
 Height: 25 in.  
 Length: 47 in.  
 Width: 19 in.  
 Weight: 198 lb.

### Compressor to Tool Ratio\*

Finish: 6  
 Staplers: 5  
 Roofing: 4  
 Framing: 4

\*Tool capacity can vary due to rate of actuation.

**1 YEAR**  
Warranty

## 10 Gallon Gas Wheelbarrow Compressor GR90G10X



### Features

- ✓ 9 HP Honda motor with low oil shut off
- ✓ 10 gallon twin tanks - largest in the industry in the wheelbarrow format
- ✓ Easy one step belt tightening system
- ✓ No- flat tire never loses air
- ✓ Easy view oil site gauge
- ✓ Triple female quick connect couplers
- ✓ Heavy duty 3/8" regulator

### Specifications

Gas Engine: Honda GX270  
 Peak HP: 9.0  
 Tank Capacity: 10 gal.  
 Throttle: Pneumatic  
 Lubrication: Oil  
 On/Off PSI: 95/125  
 CFM @ 100 PSI: 18.5  
 Decibels: 79  
 Height: 28 in.  
 Length: 46 in.  
 Width: 19 in.  
 Weight: 246 lb.

### Compressor to Tool Ratio\*

Finish: 8  
 Staplers: 7  
 Roofing: 6  
 Framing: 6

\*Tool capacity can vary due to rate of actuation.



Grip-Rite® is a trademark of PrimeSource Building Products, Inc.  
 Other product and company names listed may be trademarks of their respective owners.



Our wheelbarrow compressors are proudly  
**Assembled in the U.S.A.**

## Tool Capacity Comparison


**GR100**

**GR152CM**

**GR254CTS**

**GR2540LR**

Finish Tool Capacity*	1 x	3 x	5 x	5 x
Stapler Capacity*	1 x	2 x	3 x	3 x
Roofing Nailer Capacity*	0	1 x	2 x	2 x
Framing Nailer Capacity*	0	1 x	2 x	2 x


**GR309EDV**

**GR55G10X**

**GR90G10X**

Finish Tool Capacity*	5 x	6 x	8 x
Stapler Capacity*	4 x	5 x	7 x
Roofing Nailer Capacity*	3 x	4 x	6 x
Framing Nailer Capacity*	3 x	4 x	6 x

\*Tool capacity can vary due to rate of actuation



# ACCESSORIES



## Polyurethane Air Hoses


### Features

- ☑ Field repairable
- ☑ Brass 4 or 6-ball coupler and male plug included
- ☑ 40% lighter than rubber & PVC hoses
- ☑ Flexible and lightweight
- ☑ Resists kinking
- ☑ Reinforced hose end protectors for durability
- ☑ Swivel ball-bearing fittings to reduce twisting
- ☑ Superior resistance to lubricating oil and grease
- ☑ One-year warranty

### Specifications

Swivel fittings, coupler, and plug included  
 Working PSI: 200  
 Burst PSI: 800


SKU	Size		Coupler & Plug Included
	Diameter	Length	
GRPU1425C	1/4 in.	25 ft.	Yes
GRPU1450C	1/4 in.	50 ft.	Yes
GRPU14100C	1/4 in.	100 ft.	Yes
GRPU3825C	3/8 in.	25 ft.	Yes
GRPU3850C	3/8 in.	50 ft.	Yes
GRPU38100C	3/8 in.	100 ft.	Yes

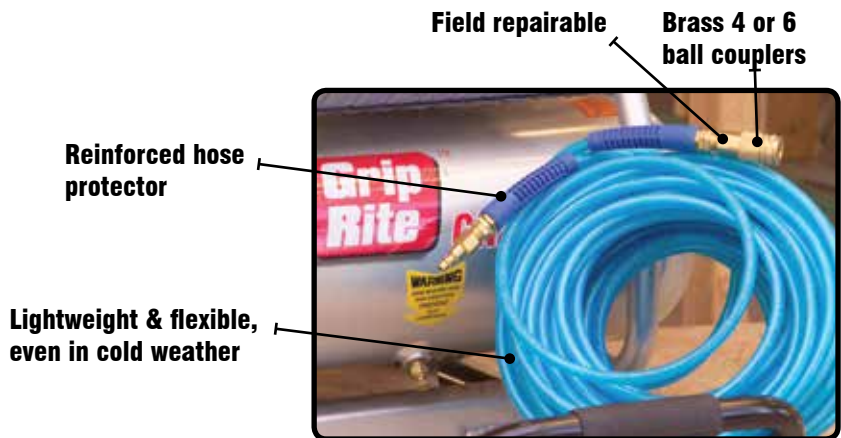


## Field Repair Instructions

Our polyurethane & premium rubber air hoses feature easy field repairable setups.

### Polyurethane Air Hoses

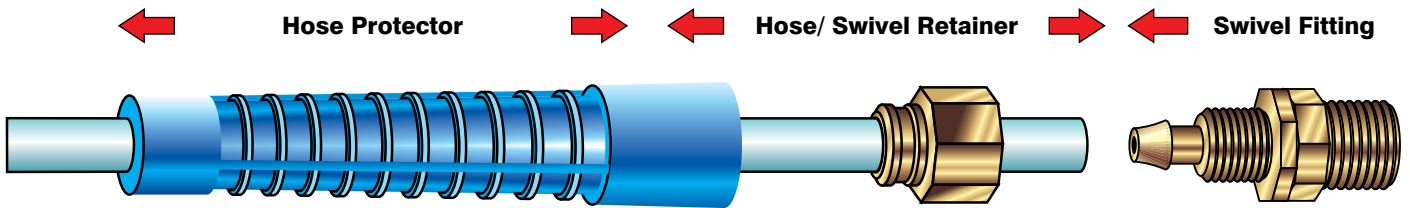

### Premium Rubber Air Hoses

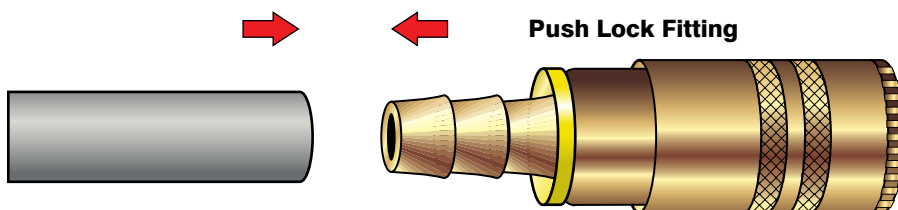

## PVC Air Hoses


### Features

- ☑ Brass 4 or 6 ball coupler and male plug included
- ☑ Flexible and lightweight
- ☑ Oil resistant PVC tubing
- ☑ Abrasion resistant PVC cover
- ☑ Temperature range: 0° to 150°F
- ☑ One-year warranty

### Specifications

Coupler & plug included  
 Working PSI: 300  
 Burst PSI: 1200

SKU	Size		Coupler & Plug Included
	Diameter	Length	
GRPVC1450C	1/4 in.	50 ft.	Yes
GRPVC1410C	1/4 in.	100 ft.	Yes
GRPVC3850C	3/8 in.	50 ft.	Yes
GRPVC3810C	3/8 in.	100 ft.	Yes

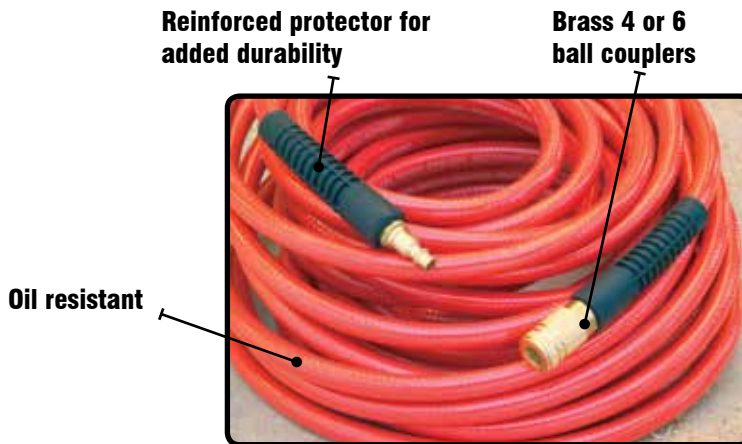

## Premium Rubber Air Hoses


### Features

- ☑ Field repairable
- ☑ Push lock 4 or 6 ball coupler and plug included
- ☑ Flexible in cold weather
- ☑ Heavy duty reinforcing
- ☑ Abrasion resistant cover
- ☑ Temperature range: -40° to 212°F
- ☑ 4:1 burst ratio
- ☑ One-year warranty

### Specifications

Push lock coupler & plug included  
 Working PSI: 300  
 Burst PSI: 1200

SKU	Size		Coupler & Plug Included
	Diameter	Length	
GRPRB1425C	1/4 in.	25 ft.	Yes
GRPRB1450C	1/4 in.	50 ft.	Yes
GRPRB1410C	1/4 in.	100 ft.	Yes
GRPRB14SPL	1/4 in.	200 ft.	No
GRPVRB3825C	3/8 in.	25 ft.	Yes
GRPRB3850C	3/8 in.	50 ft.	Yes
GRPRB3810C	3/8 in.	100 ft.	Yes
GRPRB38SPL	3/8 in.	200 ft.	No

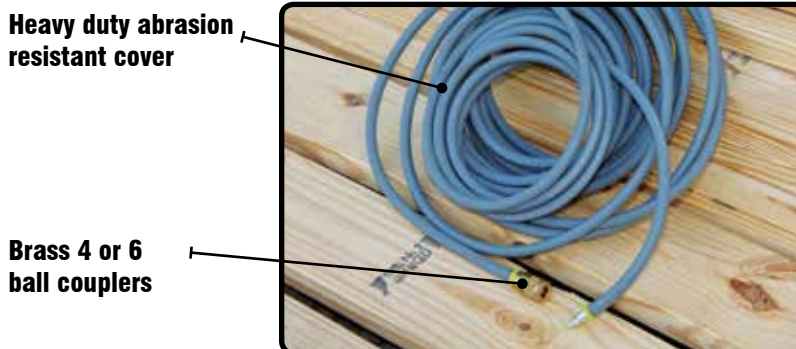

## Standard Fittings

### Industrial Plugs (2 count)



Series	Specifications		NPT		Material	Carded SKU	Pack Count	Bulk SKU	Pack Count
	Body Size	Style	Size	Thread					
I/M	1/4"	Plug	1/4"	Male	Steel	GRF14MPD	4	GRF14MPB	25
I/M	1/4"	Plug	3/8"	Male	Steel	GRF14MPD2	4	GRF14MPB2	25
I/M	1/4"	Plug	1/4"	Female	Steel	GRF14FPD	4	GRF14FPB	25
I/M	1/4"	Plug	3/8"	Female	Steel	GRF14FPD2	4	GRF14FPB2	25
I/M	3/8"	Plug	1/4"	Male	Steel	GRF38MPD	4	GRF38MPB	25
I/M	3/8"	Plug	3/8"	Male	Steel	GRF38MPD2	4	GRF38MPB2	25
I/M	3/8"	Plug	1/4"	Female	Steel	GRF38FPD	4	GRF38FPB	25
I/M	3/8"	Plug	3/8"	Female	Steel	GRF38FPD2	4	GRF38FPB2	25

### Automotive Plugs (2 count)



Auto	1/4"	Plug	1/4"	Female	Steel	GRF14FPAD	4	GRF14FPAB	25
Auto	1/4"	Plug	1/4"	Male	Steel	GRF14MPAD	4	GRF14MPAB	25
Auto	1/4"	Plug	3/8"	Male	Steel	GRF14MPAD2	4	—	—
Auto	3/8"	Plug	1/4"	Male	Steel	GRF38MPAD	4	GRF38MPAB	25
Auto	3/8"	Plug	3/8"	Male	Steel	GRF38MPAD2	4	—	—

### Industrial Swivel Plugs



I/M	1/4"	Plug	1/4"	Male	Steel	GRF14SPD	4	GRF14SPB	25
I/M	1/4"	Plug	3/8"	Male	Steel	GRF14SPD2	4	GRF14SPB2	25
I/M	3/8"	Plug	1/4"	Male	Steel	GRF38SPD	4	GRF38SPB	25
I/M	3/8"	Plug	3/8"	Male	Steel	GRF38SPD2	4	GRF38SPB2	25

### Industrial Couplers



I/M	1/4"	Coupler	1/4"	Male	Brass	GRF14MCID	4	GRF14MCIB	10
I/M	1/4"	Coupler	3/8"	Male	Brass	GRF14MCID2	4	GRF14MCIB2	10
I/M	1/4"	Coupler	1/4"	Female	Brass	GRF14FCID	4	GRF14FCIB	10
I/M	1/4"	Coupler	3/8"	Female	Brass	GRF14FCID2	4	GRF14FCIB2	10
I/M	3/8"	Coupler	1/4"	Male	Brass	GRF38MCID	4	GRF38MCIB	10
I/M	3/8"	Coupler	3/8"	Male	Brass	GRF38MCID2	4	GRF38MCIB2	10
I/M	3/8"	Coupler	1/4"	Female	Brass	GRF38FCID	4	GRF38FCIB	10
I/M	3/8"	Coupler	3/8"	Female	Brass	GRF38FCID2	4	GRF38FCIB2	10

### Automotive Couplers



Auto	1/4"	Coupler	1/4"	Male	Brass	GRF14MCAD	4	GRF14MCAB	10
Auto	1/4"	Coupler	1/4"	Female	Brass	GRF14FCAD	4	GRF14FCAB	10
Auto	1/4"	Coupler	3/8"	Male	Brass	GRF14MCAD2	4	—	—
Auto	3/8"	Coupler	1/4"	Male	Steel	GRS38MCAD	4	—	—
Auto	3/8"	Coupler	3/8"	Male	Steel	GRS38MCAD2	4	—	—
Auto	3/8"	Coupler	1/4"	Female	Steel	GRS38FCAD	4	—	—

### Universal Couplers



I/M	1/4"	Coupler	1/4"	Male	Brass	GRF14MCUD	4	GRF14MCUB	10
I/M	1/4"	Coupler	3/8"	Male	Brass	GRF14MCUD2	4	GRF14MCUB2	10
I/M	1/4"	Coupler	1/4"	Female	Brass	GRF14FCUD	4	GRF14FCUB	10
I/M	1/4"	Coupler	3/8"	Female	Brass	GRF14FCUD2	4	GRF14FCUB2	10
I/M	3/8"	Coupler	1/4"	Male	Brass	GRF38MCUD	4	GRF38MCUB	10
I/M	3/8"	Coupler	3/8"	Male	Brass	GRF38MCUD2	4	GRF38MCUB2	10
I/M	3/8"	Coupler	1/4"	Female	Brass	GRF38FCUD	4	GRF38FCUB	10
I/M	3/8"	Coupler	3/8"	Female	Brass	GRF38FCUD2	4	GRF38FCUB2	10

I/M=Industrial Milton; AUTO=Automotive; U=Universal; NPT=National Pipe Thread Tapered Thread



## Standard Fittings

### Manifolds & Splitters



		Specifications			NPT Size	Material	Carded SKU	Pack Count	Bulk SKU	Pack Count
Series	Body Size	Style								
—	1/4"	Round Manifold – 1/4" in x 1/4" out		1/4"	Aluminum	GR14MAND	4	—	—	
—	1/4"	Round Manifold – 3/8" in x 1/4" out		1/4"	Aluminum	GR38MAND	4	—	—	
I/M	1/4"	Tripod		1/4"	Coupler: Brass Plug: Steel	GR14SPLTD	4	—	—	
I/M	3/8"	Tripod		1/4"	Coupler: Brass Plug: Steel	GR38SPLTD	4	—	—	
I/M	1/4"	Flat		1/4"	Coupler: Brass Plug: Steel	GR14SPLTDF	4	—	—	
I/M	3/8"	Flat		1/4"	Coupler: Brass Plug: Steel	GR38SPLTDF	4	—	—	

### Barbed Splicers & Clamps



—	1/4"	Splicer with 3 Clamps		—	Brass	GRF14BSPLD	4	—	—
—	3/8"	Splicer with 3 Clamps		—	Brass	GRF38BSPLD	4	—	—
—	11 mm	2 Ear O-Clamp		—	Steel	—	—	GRFOC11H	100
—	13 mm	2 Ear O-Clamp		—	Steel	—	—	GRFOC13H	100
—	15 mm	2 Ear O-Clamp		—	Steel	—	—	GRFOC15H	100
—	17 mm	2 Ear O-Clamp		—	Steel	—	—	GRFOC17H	100

### Polyurethane Air Hose Fittings



Hose Size	Description		NPT Size	Material	Carded SKU	Pack Count	Bulk SKU	Pack Count
1/4"	Splicer		—	Brass	GRPU14SPLD	4	GRPU14SPLB	25
3/8"	Splicer		—	Brass	GRPU38SPLD	4	GRPU38SPLB	25
1/4"	Ball Bearing Replacement Fitting with Strain Revealer		1/4"	Brass	—	—	GRIPU14RFB	10
3/8"	Ball Bearing Replacement Fitting with Strain Revealer		1/4"	Brass	—	—	GRIPU38RFB	10

### Industrial Plug & Coupler Kits



Specifications		NPT			Material	Carded SKU	Pack Count	Bulk SKU	Pack Count
Series	Body Size	Size	Thread						
2-piece Kit									
I/M	1/4"	1/4"	Female: 1 x Coupler Male: 1 x Plug	Coupler: Brass Plug: Steel	GRFKIT14	—	—	4	
I/M	3/8"	1/4"	Female: 1 x Coupler Male: 1 x Plug	Coupler: Brass Plug: Steel	GRFKIT38	—	—	4	
5-piece Kit									
I/M	1/4"	1/4"	Female: 1 x Coupler 1 x Plug Male: 3 x Plug	Coupler: Brass Plug: Steel	GRF14PCIK	—	—	4	
I/M	3/8"	1/4"	Female: 1 x Coupler 1 x Plug Male: 3 x Plug	Coupler: Brass Plug: Steel	GRF38PCIK	—	—	4	

### Adapters



Specifications		NPT		Material	Carded SKU	Pack Count	Bulk SKU	Pack Count
Body Size	Style	Size	Thread					
1/4"	1/4" Female x 1/4" Female Adapter Fitting	1/4"	Female	Brass	GRF14FHTD	4	—	—
1/4"	1/4" Male x 1/4" Male Adapter Fitting	1/4"	Male	Brass	GRF14MHTD	4	—	—
3/8"	3/8" Female x 1/4" Male Reducer Fitting	1/4"	Male	Brass	GRF38MHTD	4	—	—

## Push-Lock Fittings

### Push-Lock Plugs (2 count)



		Specifications							
Series	Body Size	Style	Hose Size	Material	Carded SKU	Pack Count	Bulk SKU	Pack Count	
I/M	1/4"	Plug	1/4"	Steel	GRF14PPD	4	GRF14PPB	25	
I/M	1/4"	Plug	3/8"	Steel	GRF14PPD2	4	GRF14PPB2	25	
I/M	3/8"	Plug	1/4"	Steel	GRF38PPD	4	GRF38PPB2	25	
I/M	3/8"	Plug	3/8"	Steel	GRF38PPD2	4	GRF38PPB	25	

### Push-Lock Couplers



### Push-Lock Splicers



### Push-Lock Hose Ends (2 count)




		Specifications						
Body Size	Style	Hose Size	NPT Thread	Material	Carded SKU	Pack Count	Bulk SKU	Pack Count
1/4"	Hose End	1/4"	Male	Brass	GRF14PLTD	4	GRF14PLTB	25
1/4"	Hose End	3/8"	Male	Brass	GRF14PLTD2	4	GRF14PLTB2	25
3/8"	Hose End	1/4"	Male	Brass	GRF38PLTD	4	GRF38PLTB	25
3/8"	Hose End	3/8"	Male	Brass	GRF38PLTD2	4	GRF38PLTB2	25

### Push-Lock Plug & Coupler Kits



		Specifications				
Series	Body Size	Style	Hose Size	Material	Carded SKU	Pack Count
I/M	1/4"	2-piece kit	1/4"	Coupler: Brass Plug: Steel	GRFKIT14PL	4
I/M	3/8"	2-piece kit	3/8"	Coupler: Brass Plug: Steel	GRFKIT38PL	4

I/M=Industrial Milton; AUTO=Automotive; U=Universal; NPT=National Pipe Thread Tapered Thread

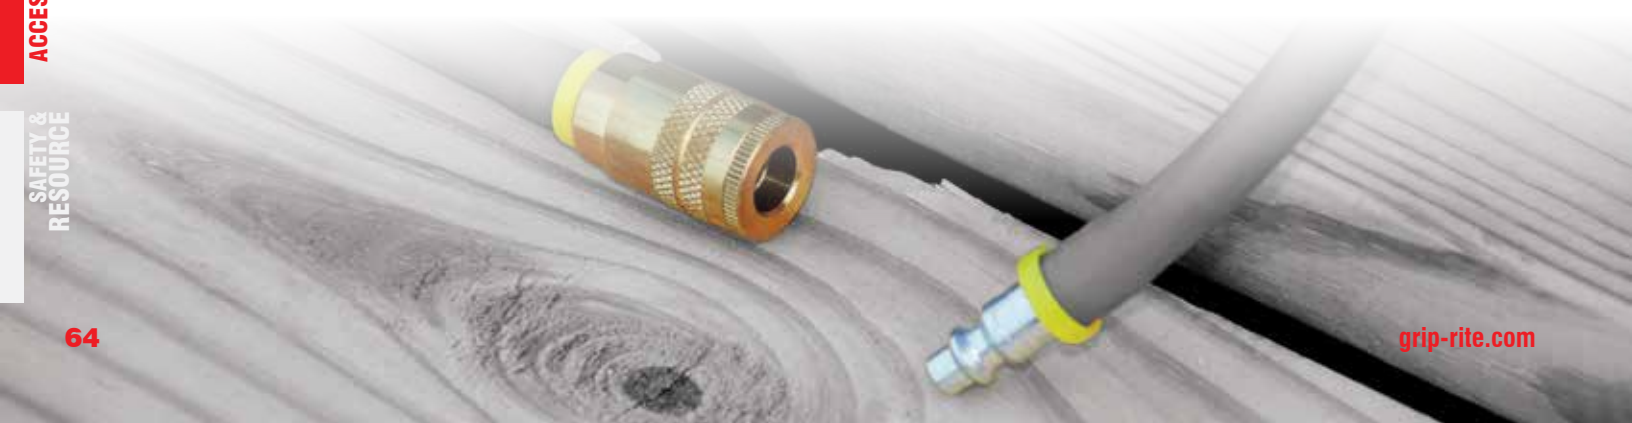

## Other Accessories

### Blow Guns & Accessories Kits



Specifications		Description	Carded SKU	Pack Count
Series	Body Size			
I/M	1/4"	Standard Blow Gun	GRFBG	4
I/M	1/4"	In-line blow gun assembly w/ couplers	GRF14BGA	4
AUTO	1/4"	In-line blow gun assembly w/ couplers	GRF14BGAA	4
I/M	1/4"	7-Piece Accessory Kit w/ Blow Gun	GRFKIT7	4
I/M	1/4"	25-Piece Accessory Kit w/ Blow Gun	GRFKIT25	4

### Air Chucks & Gauges



NPT Size	Description	Material	Carded SKU	Pack Count
1/4"	Ball Foot Air Chuck - 1/4" Female NPT	Brass	GRF14CHUCK	4
1/4"	2" Gauge Bottom Mount	Chrome	GR160B14C	8
1/4"	2" Gauge Back Mount	Chrome	GR160A14C	2
--	Tire Gauge	Chrome	GRFTGAUGE	4

### Drain Cocks



Specifications						
Series	Body Size	Style	NPT Thread	Material	Carded SKU	Pack Count
I/M	1/4"	Wing Nut	Male	Brass	GRF14TDCW	4

### Recoil Hoses



Body Size	Description	Carded SKU	Pack Count
1/4"	25 ft. Recoil Hose - Nylon	GRCH1425CY	4
1/4"	50 ft. Recoil Hose - Nylon	GRCH1450CY	4

I/M=Industrial Milton; AUTO=Automotive; U=Universal; NPT=National Pipe Thread Tapered Thread

## Tool & Compressor Oil

The tools and compressors used on job sites can be a significant investment. Grip-Rite lubricants help to keep these tools operating at their peak efficiency by minimizing wear on internal components, supporting a longer operating life.

Grip-Rite lubricants are designed for use with Grip-Rite tools and compressors, along with most other brands. From a convenient 4 oz. bottle that fits easily into a pouch, to a high-grade 16 oz. compressor oil.

### Features

- ☑ Designed for use with Grip-Rite pneumatic tools and compressors, along with most other brands
- ☑ High quality non-detergent lubricants
- ☑ Prevents rust
- ☑ Increases life of rubber parts
- ☑ Foiled induction sealed bottles prevent leaks



## Service & Repair Kits

Grip-Rite offers service kits for all of its pneumatic tools. All our kits come with genuine Grip-Rite parts, detailed instructions, and the necessary lubricant. Use our “GRRBK” rebuild kits to replace all your soft parts and our “GRDAK” rebuild kits to replace all your soft parts and driver blade. Below are the kit part #'s for the corresponding tool model.



Tool Model #	Driver Assembly Kit	Rebuild Kit
GRTBN200	GRDAK100	GRRBK100
GRTFN250	GRDAK200	GRRBK200
GRTAN250	GRDAK300	GRRBK300
GRTCR175	GRDAK400	GRRBK400
GRTCH350	GRDAK500	GRRBK500
GRTRH350	GRDAK600	GRRBK600
GR150	GRDAK700	GRRBK700
GR250	GRDAK800	GRRBK800
GRC58	GRDAK900	GRRBK900
GRTPN600	GRDAK1000	GRRBK1000
GRTSM200	GRDAK1100	GRRBK1100
GRTSN150	GRDAK1200	GRRBK1200
GRC58A	GRDAK1300	GRRBK1300
GRTPIN23	GRDAK1400	GRRBK1400
GRTMP16	GRDAK1500	GRRBK1500

Tool Model #	Driver Assembly Kit	Rebuild Kit
GRTCS250	GRDAK1600	GRRBK1600
GRTS1200	GRDAK1700	GRRBK1700
GRSB150	GRDAK1800	GRRBK1800
GRSB250	GRDAK1900	GRRBK1900
GRTBN125	GRDAK2000	GRRBK2000
GRTSN100	GRDAK2100	GRRBK2100
GRTNCN90	GRDAK2200	GRRBK2200
GRTFR83	GRDAK2300	GRRBK2300
GRTS1516	GRDAK2400	GRRBK2400
GRTC70	GRDAK2500	GRRBK2500
GRTCS250Z	GRDAK2700	GRRBK2700
GRTFC83	GRDAK2800	GRRBK2800
GRTFW83	GRDAK2900	GRRBK2900

# SAFETY & WARRANTY



## Pneumatic Tool Safety

### RISK OF PERSONAL INJURY

Failure to follow all safety and operating instructions, or misuse of the tool, can result in serious injury to tool operator and bystanders.



**WEAR SAFETY GLASSES**



**WEAR HEARING PROTECTION**




**NEVER OPERATE PNEUMATIC TOOLS WITH OXYGEN OR OTHER BOTTLED GASES**



**DO NOT EXCEED MAXIMUM RECOMMENDED OPERATING AIR PRESSURE OF 120 PSI / 8.3 Bar.**




**NEVER CONNECT THE TOOL TO AN AIR SUPPLY THAT HAS THE POTENTIAL TO EXCEED 180 PSI/12.4 Bar.**



**USE AN AIR HOSE RATED FOR 180 PSI/12.4 Bar OR GREATER**




**ONLY USE A RELIEVING-TYPE AIR COUPLING IN THE TOOL AIR INLET OPENING.**



**AVOID DRIVING FASTENERS INTO KNOTS, ON TOP OF OTHER FASTENERS, AT WORKPIECE EDGES, OR INTO BRITTLE MATERIALS.**




**KEEP TOOLS POINTED IN A SAFE DIRECTION WHEN LOADING FASTENERS.**




**KEEP HANDS AND BODY PARTS AWAY FROM AREA BEING FASTENED.**



**DO NOT OVERREACH OR WORK WHILE ON UNSTABLE FOOTING**



**DO NOT USE TOOL IF TOOL MALFUNCTIONS OR BEGINS LEAKING AIR.**



**DISCONNECT THE TOOL FROM THE AIR SUPPLY TO RELOAD, CLEAR JAMS, OR PERFORM MAINTENANCE.**



**DO NOT MODIFY PNEUMATIC TOOLS**



**DO NOT LOAD TOOL WITH TRIGGER OR WORKPIECE CONTACT DEPRESSED.**



**KEEP FINGER OFF TRIGGER UNTIL TOOL IS IN POSITION TO DRIVE A FASTENER.**



**USE CORRECT FASTENERS**



**NEVER LEAVE A LOADED, PRESSURIZED TOOL UNATTENDED**



**KEEP TOOLS OUT OF THE REACH OF CHILDREN**



# Safety & Warranty

FASTENING SYSTEM

TOOLS

COLLATED FASTENERS

COMPRESSORS

ACCESSORIES

SAFETY & RESOURCE

## Pneumatic Tool/Compressor Warranty

Pneumatic nailers, staplers & compressors marketed under the **GRIP-RITE®** brand are warranted to be free from defects in workmanship & materials (except rubber o-rings, bumpers, seals, driver blades, dipsticks, & air filters) for a period of three (3) years for tools and one (1) year for compressors from the date of original purchase.

## 30 Day Satisfaction Guarantee

If you are the original purchaser and not 100% satisfied with the performance of your **GRIP-RITE®** pneumatic tool or compressor, you have the option to return the product to the original place of purchase, with a dated sales receipt, within 30 days from the date of purchase for a full refund.

This warranty and 30 day satisfaction guarantee will not apply when:

- The original receipt (or copy of the original receipt), showing the original purchase date, is not provided with tools/compressors sent in for warranty repair or replacement
- The tool/compressor has been misused, abused or improperly maintained
- Alterations have been made to the original tool/compressor
- Repairs have been attempted/made to the original tool/compressor by any entity other than a proprietary **PRIMESOURCE®** service/warranty center or authorized service/warranty center
- Non- **GRIP-RITE TOOLS™** / **GRIP-RITE COMPRESSORS™** parts have been used
- The tool has suffered any physical damage due to the use of non-**PRIMESOURCE®** approved fasteners\*
- Repairs are required due to normal wear & tear
- The tool/compressor has been inadequately packaged leading to damage in-transit to the service/warranty center

\*Approved fasteners include the following brands **GRIP-RITE®**, **FAS'NERS UNLIMITED™**

IN NO EVENT SHALL **PRIMESOURCE®** BE LIABLE FOR ANY INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGE FROM THE SALE OR USE OF THESE PRODUCTS. THIS DISCLAIMER APPLIES BOTH DURING & AFTER THE TERM OF WARRANTY.

THIS IS OUR WARRANTY & IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (EXCEPT AS MAY BE OTHERWISE PROVIDED BY LAW).

This limited warranty gives you specific legal rights, and you may also have other rights, which vary, from state to state.

## Pneumatic Tool/Compressor Service Information

Should any mechanical problems develop during the life of your equipment the following options are available for service and parts:

- Call (800)676-7777 where you will be routed to the nearest **GRIP-RITE®** distribution center and directed to the nearest authorized service/warranty center
- Logging on to our website at [www.grip-rite.com](http://www.grip-rite.com) where you will find a list of our authorized service centers
- Contact the **PRIMESOURCE®** Factory Warranty Center directly at Phone: (800)207-9259 or Fax: (800)207-9614

## Steps To Take When Shipping Tools

- Adequately package the product to avoid damage in-transit (in the case of pneumatic tools, the original blow mold plastic carrying case is considered adequate packaging)
- Provide the original/copy of the receipt showing the original purchase date
- Insure your shipment with the shipping company. **PRIMESOURCE®** will not be responsible for any tool/compressor that is lost or damaged by the shipper in transit to the **PRIMESOURCE®** service/warranty center.





# DEALER RESOURCES



## Grip-Rite® Fastening System Center

- ✓ Customized product displays offer the ideal product for any target market
- ✓ Sharp heavy-duty displays available in 2 ft. and 4 ft. configurations
- ✓ Signage and point-of-sale materials drive customers to the display and simplify selection process
- ✓ Eye-catching, informative packaging makes it easy to mix and match a variety of product



### 4 ft. Heavy-duty Display Racks

SKU: GR4X8UNIT

- ✓ Customized tool and fastener display centers
- ✓ Adjustable shelves
- ✓ 45 in. x 24 in. x 96 in. (including signage)

### 2 ft. Heavy-duty Display Racks

SKU: GR2X8UNIT


- ✓ Customized tool and fastener display centers
- ✓ Adjustable shelves
- ✓ 45 in. x 24 in. x 96 in. (including signage)



**Contact PrimeSource today for programs and availability 800-676-7777**

**Display Headers**

- ☑ Durable high-impact sinage
- ☑ Range of header designs available to fit any product assortment
- ☑ "3D" finish fastener display available

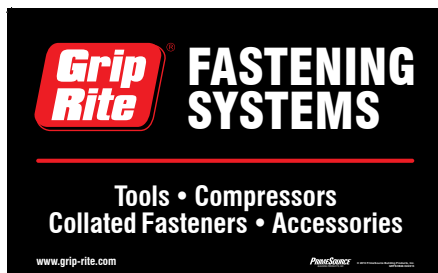

Fastening System headers range in size and products listed. Call to ask about availability.



**Light Box Header**

SKU: GR24LTBX1

**3D Belt Clip Finish Nails Header**

SKU: GRCFHB2922



## Pneumatic Tools



**GRTFR83**  
Framing



**GRTFC83**  
Framing



**GRTCN90**  
Framing



**GR150**  
Framing - Specialty



**GRSB150**  
Framing - Specialty



**GRSB250**  
Framing - Specialty

<b>Firing Mode</b>	Selectable Trigger, Bump or Sequential	Selectable Trigger, Bump or Sequential	Selectable Trigger, Bump or Sequential	Push	Sequential	Sequential
<b>Magazine Capacity</b>	75 Nails	65 Nails	200-300 Nails	30 Nails	33 Nails	33 Nails
<b>Operating Pressure</b>	70-120 PSI	70-120 PSI	70-120 PSI	100-120 PSI	100-120 PSI	80-120 PSI
<b>Fastener Type</b>	21° Plastic Strip Round Head Framing Nails	30°-34° Offset Round & Clipped Head Paper Tape Framing Nails	15° Wire & Plastic Sheet Coil Nails	30°-34° Paper Tape & Plastic Strip Metal Connector Nails	30° to 34° Paper Tape Metal Connector Nails	30° to 34° Paper Tape Metal Connector Nails
	<b>21°</b>	<b>30°</b>	<b>15°</b>	<b>MC MC</b>	<b>MC</b>	<b>MC</b>
<b>Fastener Range</b>	Length: 2" to 3-1/4" Diameter: .113" to .148"	Length: 2" to 3-1/4" Diameter: .113" to .131"	Length: 1-3/4" to 3-1/2" (Wire) 1-3/4" to 3" (Plastic) Diameter: .099" to .148"	Length: 1-1/2" Diameter: .131" to .148"	Length: 1-1/2" Diameter: .131" to .148"	Length: 1-1/2" to 2-1/2" Diameter: .131" to .162"
<b>Weight</b>	6.9 lb.	7.3 lb.	6.6 lb.	4.4 lb.	4.4 lb.	5.7 lb.



**GRTCS250**  
Siding/Fencing



**GRTCS250Z**  
Siding/Fencing



**GRTCR175**  
Roofing



**GRC58A**  
Roofing



**GRTS1516 / GRTS1200**  
Stapler



**GRTSM200**  
Stapler

<b>Firing Mode</b>	Bump Fire (sequential kit included)	Selectable Trigger, Bump or Sequential	Bump Fire	Bump Fire	Bump Fire (sequential kit included)	Bump Fire (sequential kit included)
<b>Magazine Capacity</b>	200-350 Nails	300 Nails	120 Nails	110 Caps & Staples	150 Staples	150 Staples
<b>Operating Pressure</b>	70-120 PSI	80-120 PSI	70-120 PSI	100-120 PSI	70-120 PSI	70-120 PSI
<b>Fastener Type</b>	15° Wire & Plastic Sheet Coil Nails	0° Plastic Sheet Coil Nails	15° Wire Coil Roofing Nails	80 series staples & plastic caps	16 Gauge 15/16" Crown Staples / 1" Crown Staples	16 Gauge 7/16" Crown Staples
	<b>15°</b>	<b>0°</b>	<b>RF</b>	<b>CP CP</b>	<b>16<sub>GA</sub> 16<sub>GA</sub></b>	<b>16<sub>GA</sub></b>
<b>Fastener Range</b>	Length: 1-3/4" to 2-1/2" (Wire & Plastic) Diameter: .090" to .099"	Length: 1-1/4" to 2-1/2" Diameter: .083" to .113"	3/4" to 1-3/4"	Staples: 5/32" to 5/8" Caps: 1" diameter	3/4" to 2" leg	1" to 2" leg
<b>Weight</b>	4.8 lb.	4.1 lb.	4.8 lb.	4.0 lb.	4.8 lb.	4.8 lb.



**GRTSN150**  
Stapler



**GRTAN250**  
Finish



**GRTFN250**  
Finish



**GRTBN200**  
Finish



**GRTPIN23A**  
Finish



**GR200FS**  
Flooring

<b>Firing Mode</b>	Sequential (bump fire kit included)	Sequential (bump fire kit included)	Sequential (bump fire kit included)	Sequential	Dual Safety Trigger	Mallet Actuated
<b>Magazine Capacity</b>	140 Staples	65 Nails	110 Nails	110 Nails	140 Pins	92 Staples
<b>Operating Pressure</b>	70-110 PSI	70-120 PSI	70-120 PSI	70-110 PSI	70-100 PSI	70-120 PSI
<b>Fastener Type</b>	18 Gauge 1/4" Crown Staples	15 Gauge "DA" Series Finish Nails	16 Gauge Finish Nails	18 Gauge Brad Nails	23 Gauge Headless Pins	15 to 15-1/2 Gauge 1/2" Crown Floor Staples
	<b>18</b> <sub>GA</sub>	<b>15</b> <sub>GA</sub>	<b>16</b> <sub>GA</sub>	<b>18</b> <sub>GA</sub>	<b>23</b> <sub>GA</sub>	<b>FS</b>
<b>Fastener Range</b>	3/4" to 1-1/2" leg	1-1/4" to 2-1/2"	1" to 2-1/2"	5/8" to 2"	1/2" to 1-3/16"	1-1/2" to 2" leg
<b>Weight</b>	2.8 lb.	4.8 lb.	3.9 lb.	2.9 lb.	2.15 lb.	9.0 lb.



**GR200LCN**  
Flooring



**GRTSM2016C**  
Industrial - Stapler



**GRTCN57**  
Industrial - Pallet



**GRTCN70**  
Industrial - Pallet



**GRTCN90P**  
Industrial - Pallet



**GRTFR130**  
Industrial - Framing

<b>Firing Mode</b>	Mallet Actuated	Bump Fire	Bump Fire	Bump Fire	Bump Fire	Bump Fire
<b>Magazine Capacity</b>	132 Cleats	140 Staples	300-350 Nails	200-300 Nails	200-300 Nails	54 Nails
<b>Operating Pressure</b>	70-120 PSI	70-120 PSI	70-120 PSI	70-120 PSI	70-120 PSI	70-120 PSI
<b>Fastener Type</b>	L-Shaped Flooring Cleat	16 Gauge 7/16" Crown Staples	15° Wire Coil Pallet Nails	15° Wire Coil Pallet Nails	15° Wire Coil Pallet Nails	21° Plastic Strip Round Head Framing Nails
	<b>FC</b>	<b>16</b> <sub>GA</sub>				
<b>Fastener Range</b>	1-1/2" to 2"	5/8" to 2" leg	Length: 1" to 2-1/4" Diameter: .083" to .090"	Length: 1-3/4" to 2-3/4" Diameter: .090" to .113"	Length: 1-1/2" to 3-1/2" Diameter: .099" to .148"	Length: 3-1/2" to 5-1/8" Diameter: .149" to .165"
<b>Weight</b>	9.0 lb.	4.20 lb.	5.9 lb.	7.9 lb.	7.9 lb.	13.4 lb.

## Compressors



**GR100**



**GR152CM**



**GR254CTS**



**GR2540LR**

	GR100	GR152CM	GR254CTS	GR2540LR
<b>Peak Horsepower</b>	1.0 HP	2.0 HP	2.5 HP	2.5 HP
<b>Tank Capacity</b>	1.0 gal.	2.0 gal.	4.3 gal.	4.0 gal.
<b>Lubrication</b>	Oil-free	Oil-free	Oil	Oil
<b>Draw</b>	5 amps	8 amps	14.2 amps	12 amps
<b>Decibels</b>	69	75	79	76
<b>PSI On/Off</b>	95 / 125	95 / 125	95 / 125	110 / 150
<b>CFM</b>	0.6 at 90 PSI	2.6 at 90 PSI	4.0 at 100 PSI	4.2 at 90 PSI
<b>Pump-Up</b>	50 seconds	50 seconds	74 seconds	76 seconds
<b>Recovery</b>	34 seconds	10 seconds	23 seconds	18 seconds
<b>RPM</b>	3450	3450	3450	1725
<b>Height</b>	13.4 in.	14.9 in.	17.0 in.	20.0 in.
<b>Length</b>	14.6 in.	18.9 in.	20.0 in.	23.6 in.
<b>Width</b>	14.2 in.	14.9 in.	15.0 in.	22.0 in.
<b>Weight</b>	23 lb.	37 lb.	56 lb.	90 lb.
<b>Motor Type</b>	Induction	Induction	Induction	Induction
<b>Life Expectancy</b>	4,000 hours	4,000 hours	10,000 hours	10,000 hours





**GR309EDV**



**GR55G10X**



**GR90G10X**

<b>Peak Horsepower</b>	3.0 HP	5.5 HP	9.0 HP
<b>Tank Capacity</b>	9.0 gal.	10.0 gal.	10.0 gal.
<b>Lubrication</b>	Oil	Oil	Oil
<b>Draw</b>	115 volts: 15 amps 230 volts: 7.5 amps	N/A	N/A
<b>Decibels</b>	79	77	79
<b>PSI On/Off</b>	95 / 125	95 / 125	95 / 125
<b>CFM</b>	7.2 at 100 PSI	12.5 at 100 PSI	18.5 at 100 PSI
<b>Pump-Up</b>	83 seconds	59 seconds	41 seconds
<b>Recovery</b>	19 seconds	15 seconds	10 seconds
<b>RPM</b>	1060	1210	1250
<b>Height</b>	23.0 in.	25.0 in.	28.0 in.
<b>Length</b>	45.0 in.	47.0 in.	49.0 in.
<b>Width</b>	19.0 in.	19.0 in.	19.0 in.
<b>Weight</b>	162 lb.	198 lb.	220 lb.
<b>Motor Type</b>	Induction	Honda® Gas Engine	Honda® Gas Engine
<b>Life Expectancy</b>	10,000 hours	10,000 hours	10,000 hours



Grip-Rite® is a trademark of PrimeSource Building Products, Inc.  
Other product and company names listed may be trademarks of their respective owners.

**800-676-7777**



800-676-7777  
[www.grip-rite.com](http://www.grip-rite.com)  
[www.primesourcebp.com](http://www.primesourcebp.com)

**PRIMESOURCE**<sup>®</sup>  
BUILDING PRODUCTS, INC.

© 2013 PrimeSource Building Products, Inc. All rights reserved.