



PHILIPS

LED lighting

**REAL
PROs**
**REAL
QUALITY**

Professional LED lighting **catalog**

Discover our wide portfolio of smart and efficient LED lighting solutions for both indoor and outdoor application areas.

October
2020

Why choose Philips for lighting solutions

An **LED light** for every need,
from the **world leader** in lighting

Best products:

Our LED lighting provides you with:

Unbeatable quality

Industry-leading quality and reliability ensure our lights keep their output and light quality over the full warranted lifetime.

Easy-to-install

The efficient design of the CoreLine fixtures enables replacement of existing lights, with no need for expensive re-wiring or new ceiling configurations. Our LED lamps are compatible with most dimmers and transformers for easy installation, retaining their full specifications and lifetimes for lowest Total Cost of Ownership.

Leading the way

With Philips lighting you get much more than high quality and easy-to-install lighting solutions – you get LED lighting that's setting the reference in the industry. It has never been easier to bring the power of connected lighting to small- and medium-sized enterprises thanks to our Interact Ready range that works seamlessly with the intuitive Interact Pro software.

For the full dimmer and transformer compatibility list, visit:
www.lighting.philips.com/main/products/ledlamps



Best partner:

Close cooperation before, during and after projects is important to us:

“They really managed to satisfy our needs well. They really have cared a lot and showed a lot of commitment...”

Technical consulting and intense customer support:

“Quick and competent responses to questions”

Close cooperation with local wholesalers was a key element of assuring on-time product availability:

“Philips is flexible to offer different delivery options”

Best portfolio:

We offer the right lighting for every application.

Our Philips CoreLine range consists of a full range of luminaire types that offer innovative, high quality and easy-to-install lighting for every project where light really matters. Philips Ledinaire is our essential range of trusted luminaires for everyday lighting jobs that need good performance. And that for a price that's on your side! Our LED tubes offer best in class lighting and ultimate compatibility. And we offer a full range of LED lamps, in any form and shape, that allow you to create the perfect ambience while saving energy.

For our warranty document, visit:
www.lighting.philips.com/main/support/support/warranty.html

Select the right LED luminaire or lamp

A partner that understands the challenges you face, saves you time. Which is why we offer a comprehensive portfolio of LED luminaires and lamps. The right product, for every job. For more information and online tools, check: www.lighting.philips.com/main/support/purchase/installer.

		CorePro	MASTER Value	MASTER	MasterConnect <small>interact ready.</small>
Solution		Simple replacement of fluorescent tubes for average use	Strong performance in demanding applications with intense usage	Best in class performance for very demanding applications	For smart lighting applications with personal/automated light control
Performance					
Price					
Products		167 types	60 types	132 types	1 type
Life span		30,000	50,000	50,000 - 70,000	50,000 + insight into remaining life span
Warranty		3 years	5 years	5 years	5 years

		Ledinaire	CoreLine	CoreLine Interact Ready <small>interact ready.</small>
Solution		Essential range of trusted products	Suitable for every project where light really matters	For smart lighting applications with personal/automated light control
Performance				
Price				
Products		13 types	17 types	6 types
Life span		50,000 L65/L70	50,000 L70/L80	50,000 + insight into remaining life span
Warranty		3 years	5 years	5 years

Contents

9

Interact Ready

- 9 Coreline waterproof
- 9 Coreline recessed non-office compliant
- 10 Coreline recessed office compliant
- 10 Coreline surface-mounted non-office compliant
- 11 Coreline surface-mounted office compliant
- 11 Coreline downlight
- 12 Masterconnect ledtube em/mains t8
- 12 Indoor Accessories

14

CoreLine LED luminaires

- 14 Coreline recessed office compliant
- 15 Coreline recessed non-office compliant
- 16 Coreline panel office compliant
- 17 Coreline panel office compliant
- 17 Coreline panel non-office compliant
- 18 Coreline 2.0
- 18 Coreline batten
- 19 Coreline surface-mounted office compliant
- 20 Coreline surface-mounted non-office compliant
- 21 Coreline wall-mounted
- 23 Coreline waterproof
- 25 Coreline slimdownlight
- 26 Coreline downlight
- 27 Coreline recessed spot
- 28 Coreline projector
- 28 Coreline bollard
- 29 Coreline highbay
- 30 Coreline highbay gen4
- 31 Coreline trunking
- 33 Coreline tempo x-large
- 33 Coreline tempo large
- 34 Coreline tempo small
- 34 Coreline malaga led

37

Ledinaire LED luminaires

- 37 Ledinaire panel office compliant
- 37 Ledinaire panel non-office compliant
- 38 Ledinaire recessed non-office compliant
- 38 Ledinaire surface-mounted office compliant
- 38 Ledinaire surface-mounted non-office compliant
- 39 Ledinaire wall-mounted wI060v
- 39 Ledinaire square wall-mounted
- 40 Downlight dn060b
- 40 Ledinaire slim downlight dn065b g2 & dn065c
- 41 Ledinaire downlight dn029b
- 41 Ledinaire waterproof
- 42 Ledinaire floodlight
- 43 Ledinaire batten
- 44 Ledinaire high-bay
- 45 Ledinaire Waterproof Tube Housing



Contents

47

LED lamps and tubes

- 47 Master ledspot expertcolor mv
- 47 Sceneswitch ledspot
- 48 Master ledspot expertcolor lv
- 49 Master value ledspot lv
- 50 Master value ledspot mv
- 51 Master ledspot par
- 52 Master ledspot lv ar111
- 53 Corepro ledspot reflectors
- 53 Corepro ledspot lv
- 54 Corepro ledspot mv
- 55 Corepro ledcapsule lv
- 55 Corepro ledcapsule mv
- 56 Corepro ledlinear mv

58

LED Bulbs

- 58 Decorative ledbulbs
- 60 Accessory
- 60 Master ledbulbs
- 61 Sceneswitch ledbulbs
- 61 Classic filament ledbulbs
- 65 Classic frosted led lamps
- 65 Corepro ledbulbs
- 67 Classic filament led candles and lusters
- 67 Corepro led candles and lusters

68

LED Candles & Lustres

- 68 Decorative led candles and lusters
- 68 Classic filament led candles and lusters
- 71 Classic frosted led candles and lusters
- 72 Master led candles and lusters
- 73 Corepro led candles and lusters
- 73 Candle led
- 74 Standard led candles & lusters

76

LED Tubes

- 76 MASTER LEDtube EM/Mains T8
- 77 Master Value LEDtube T8
- 78 Corepro ledtube em/mains t8
- 79 Master ledtube instantfit hf t8
- 80 Master ledtube universal t8
- 80 Corepro led tube universal t8
- 81 Master ledtube instantfit hf t5
- 82 Master ledtube mains t5
- 82 LEDtube Mains T5
- 83 Corepro led pls
- 83 Corepro led pll
- 84 Corepro ledtube circular
- 84 Other ledtube

85

LED PL-lamps

- 85 Corepro led plc 2p
- 85 Corepro led plc 4p
- 86 Corepro led plc

89

TrueForce LED


- 89 TrueForce LED Industrial and Retail (Highbay – MH)
- 89 Trueforce CorePro LED HPL
- 90 Trueforce core led industrial and retail (highbay – hpi/son/hpl)
- 90 Trueforce led public (road – son)
- 91 Trueforce led public (road/area – sox)
- 91 Trueforce led public (urban/road – hpl/son)

The future is connected

The future starts now, are you ready for it?
Combine Philips Interact Ready lamps and luminaires with Interact Pro software,
to create smart lighting systems for your customers.

Philips Interact Ready lighting works with the Interact Pro dashboard and app.

Get connected in **5 simple steps**

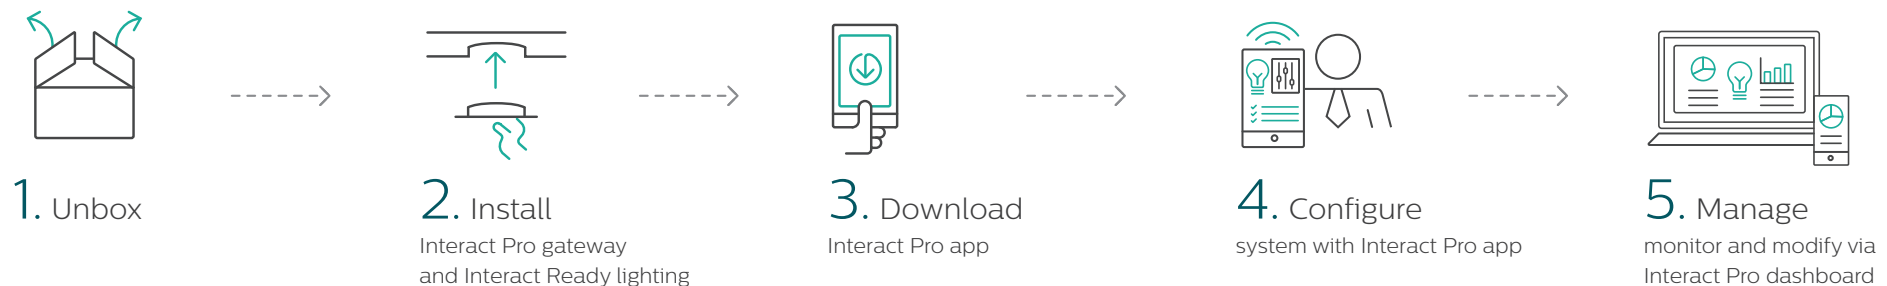

The Interact Pro dashboard and app work with a range of Philips luminaires and lamps and a set of wireless switches and sensors that are Interact Ready.

You can customize the software's settings for specific workspaces. Whether you're connecting 20 light points or 200, Interact Pro helps everyone to work smarter.

Overview of most popular **Interact Ready** lamps and luminaires

Philips Interact Ready lighting

interact
ready.



CoreLine
Waterproof Interact Ready



MasterConnect LEDtube T8
Ultra Output



CoreLine SlimDownlight
Interact Ready



CoreLine panel
Interact Ready



CoreLine batten
Interact Ready


works
with

Interact Pro software


interact Pro



Interact Pro gateway



Interact Pro app

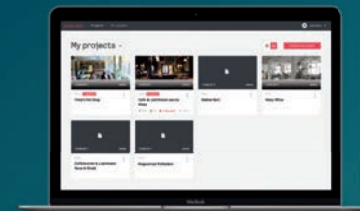


Interact Pro dashboard

Interact Ready

Now that more and more products are being connected to the internet, they are becoming smarter. This provides more flexibility, saves extra costs and offers more comfort. This means there is an opportunity for the installation sector to be part of the smart lighting on the internet, to offer a better experience for the end user. So far, small and medium-sized enterprises (SMEs) have remained excluded from these developments, but that is now a thing of the past. The luminaires and lamps from the list below are the first Interact Ready LED products and work seamlessly with the intuitive Interact Pro app and dashboard.

Coreline waterproof


www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Color Temp.	IP rating	EOC code
	W	lm	lm/W	K		
WT120C G2 LED40S/840 IA1 L1200	30	4000	133	4000	IP65	39713500
WT120C G2 LED40S/840 IA1 ELB3 L1200	33	4000	116	4000	IP65	39980100
WT120C G2 LED60S/840 IA1 L1500	45.5	6000	132	4000	IP65	39714200
WT120C G2 LED60S/840 IA1 ELB3 L1500	50	6000	120	4000	IP65	39981800

Coreline recessed non-office compliant

www.philips.com/interact-ready




Product Type	LED	Lumen Output	Efficiency	Color Temp.	IP rating	EOC code
	W	lm	lm/W	K		
① RC134B LED37S/830 W30L120 IA1 NOC	35.4	3700	104.5	3000	IP20/44	99657700
② RC134B LED37S/830 W60L60 IA1 NOC	35.4	3700	104.5	3000	IP20/44	99650800

Interact Ready

Coreline recessed office compliant


www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Color Temp.	IP rating	EOC code
	W	lm	lm/W	K		
RC134B LED37S/830 W30L120 IA1 OC	35.4	3700	104.5	3000	IP20/44	99656000
RC134B LED37S/830 W60L60 IA1 OC	35.4	3700	104.5	3000	IP20/44	99651500

Coreline surface-mounted non-office compliant

www.philips.com/interact-ready




Product Type	LED	Lumen Output	Efficiency	Color Temp.	IP rating	EOC code
	W	lm	lm/W	K		
① SM134V LED37S/830 W20L120 IA1 NOC	35.4	3700	104.5	3000	IP20	99664500
② SM134V LED37S/830 W60L60 IA1 NOC	35.4	3700	104.5	3000	IP20	99668300

Interact Ready

Coreline surface-mounted office compliant


www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Color Temp.	IP rating	EOC code
	W	lm	lm/W	K		
SM134V LED37S/830 W20L120 IA1 OC	35.4	3700	104.5	3000	IP20	99666900
SM134V LED37S/830 W60L60 IA1 OC	35.4	3700	104.5	3000	IP20	99669000

Coreline downlight

www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
DN140B LED20S/830 C IA1	22	2200	100	120	●	3000	IP20	32614600
DN140B LED20S/840 C IA1	22	2200	100	120	●	4000	IP20	32615300
DN140B LED20S/830 C ELB3 IA1	25	2200	88	120	●	3000	IP20	32841600
DN140B LED20S/830 WR ELB3 IA1	25	2200	88	120	●	3000	IP20	32839300
DN140B LED20S/840 C ELB3 IA1	25	2200	88	120	●	4000	IP20	32842300
DN140B LED20S/840 WR ELB3 IA1	25	2200	88	120	●	4000	IP20	32840900

Interact Ready

Masterconnect ledtube em/mains t8

www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficacy	Beam Angle	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°		K	Hrs.		
MASTERConnect LEDtube IA 1200mm UO 16.5W830 T8	16.5	2300	139.39	160	83	3000	50.000	A++	77342000
MASTERConnect LEDtube IA 1200mm UO 16.5W840 T8	16.5	2500	151.52	160	83	4000	50.000	A++	77344400
MASTERConnect LEDtube IA 1200mm UO 16.5W865 T8	16.5	2500	151.52	160	83	6500	50.000	A++	77346800
MASTERConnect LEDtube IA 1500mm UO 25.5W830 T8	25.5	3400	133.33	160	83	3000	50.000	A++	77348200
MASTERConnect LEDtube IA 1500mm UO 25.5W840 T8	25.5	3700	145.10	160	83	4000	50.000	A++	77350500
MASTERConnect LEDtube IA 1500mm UO 25.5W865 T8	25.5	3700	145.10	160	83	6500	50.000	A++	77352900

Indoor Accessories

www.philips.com/interact-ready



Product Type	LED	EOC code
	W	
OCC SENSOR IA CM IP42 WH	1	77752700
OCC-DL SENSOR IA CM IP42 WH	1	77754100

Philips CoreLine

The reference for innovative good quality, easy-to-use lighting solutions for every project where light really matters

Find the **right** solution in our range using the **Selector tool** productfinder.lighting.philips.com

Find out **more** about **all 16** different CoreLine luminaires on philips.com/coreline



 Innovative  Easy to install  High Quality

CoreLine Waterproof



interact
ready.

- New, robust design with improved mechanical and electrical design for a faster and more flexible installation
- Wide-beam light distribution for more effective lighting
- Energy savings (up to 140lm/W) and longer lifetime (50k hrs L75) to reduce operating costs

CoreLine panel



interact
ready.

- New option: Warm and cool white light, as well as four lumen packages in one luminaire
- New connector and accessory design for simpler and faster installation
- Wieland cable versions available for easy connection
- Color coded labeling for easy type identification

CoreLine batten



interact
ready.

- Ideal for setting up seamless and aesthetic light-lines creations
- Smart product architecture for tool-free and flexible installation, with through-wiring possibility
- Perfect replacement with different lengths and lumen options
- Optional integrated wireless connectivity (Interact Ready), that works with Interact Pro
- Optionally available: DALI and Emergency Lighting (3h)

Contents

Interact
Ready

CoreLine

Ledinaire

LED Lamps

LED Bulbs

LED Candles
& Lusters

LED Tubes

LED
PL-lamps

TrueForce



CoreLine LED luminaires

Philips CoreLine offers a full range of LED lighting solutions that keeps installation time to a minimum, while saving a maximum of energy. Whether old or new, optimal lighting can transform a building into something truly special and turn it into a place where people enjoy working and living. Give your customers that “wow” moment with Philips CoreLine: the complete range of high quality LED lighting that's setting the reference in the market. Because when light really matters, you don't want to take a chance.

Coreline recessed office compliant

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
RC134B LED27S/840 PSD W30L120 OC	22	2700	123	●	4000	IP44	34812000
RC134B LED27S/840 PSD W60L60 OC	22	2700	123	●	4000	IP44	34810600
RC134B LED27S/830 PSD W30L120 OC	23	2700	117	●	3000	IP44	34816800
RC134B LED27S/830 PSD W60L60 OC	23	2700	117	●	3000	IP44	34814400
RC134B LED27S/840 PSD W30L120 ELB3 OC	25.5	2700	106	●	4000	IP44	34837300
RC134B LED27S/840 PSD W60L60 ELB3 OC	25.5	2700	106	●	4000	IP44	34822900
RC134B LED37S/830 PSD W30L120 OC	31.5	3700	117	●	3000	IP44	34815100
RC134B LED37S/830 PSD W60L60 OC	31.5	3700	117	●	3000	IP44	34813700
RC134B LED37S/840 PSD W30L120 OC	31.5	3700	117	●	4000	IP44	34811300
RC134B LED37S/830 PSU W30L120 OC	34.5	3700	107	✕	3000	IP44	34832800
RC134B LED37S/830 PSU W60L60 OC	34.5	3700	107	✕	3000	IP44	34831100
RC134B LED37S/830 PSD W30L120 ELB3 OC	35	3700	106	●	3000	IP44	34843400
RC134B LED37S/840 PSD W30L120 ELB3 OC	35	3700	106	●	4000	IP44	34838000

CoreLine LED luminaires

Coreline recessed non-office compliant

www.philips.com/coreline





Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
RC134B LED27S/840 PSD W30L120 NOC	26.5	2700	102	●	4000	IP44	34826700
RC134B LED27S/840 PSD W60L60 NOC	26.5	2700	102	●	4000	IP44	34825000
RC134B LED27S/840 PSU W30L120 NOC	27	2700	100	⊗	4000	IP44	34824300
RC134B LED27S/840 PSU W60L60 NOC	27	2700	100	⊗	4000	IP44	34823600
RC134B LED27S/830 PSU W30L120 NOC	28.5	2700	95	⊗	3000	IP44	34797000
RC134B LED27S/830 PSU W60L60 NOC	28.5	2700	95	⊗	3000	IP44	34795600
RC134B LED27S/830 PSD W30L120 NOC	30.5	2700	89	●	3000	IP44	34803800
RC134B LED27S/830 PSD W60L60 NOC	30.5	2700	89	●	3000	IP44	34801400
RC134B LED27S/840 PSD W30L120 ELB3 NOC	30.5	2700	89	●	4000	IP44	34835900
RC134B LED27S/840 PSD W60L60 ELB3 NOC	30.5	2700	89	●	4000	IP44	34828100
RC134B LED27S/840 PSU W30L120 ELB3 NOC	30.5	2700	89	⊗	4000	IP44	34833500
RC134B LED27S/840 PSU W60L60 ELB3 NOC	30.5	2700	89	⊗	4000	IP44	34827400
RC134B LED27S/830 PSU W30L120 ELB3 NOC	32	2700	84	⊗	3000	IP44	34839700
RC134B LED27S/830 PSD W30L120 ELB3 NOC	34	2700	79	●	3000	IP44	34841000
RC134B LED37S/830 PSU W30L120 NOC	34	3700	109	⊗	3000	IP44	34796300
RC134B LED37S/830 PSU W60L60 NOC	34	3700	109	⊗	3000	IP44	34794900
RC134B LED37S/830 PSD W30L120 NOC	35.5	3700	104	●	3000	IP44	34802100
RC134B LED37S/830 PSD W60L60 NOC	35.5	3700	104	●	3000	IP44	34800700
RC134B LED37S/840 PSD W30L120 ELB3 NOC	35.5	3700	104	●	4000	IP44	34836600
RC134B LED37S/840 PSD W30L120 NOC	35.5	3700	104	●	4000	IP44	34799400
RC134B LED37S/830 PSU W30L120 ELB3 NOC	38	3700	97	⊗	3000	IP44	34840300
RC134B LED37S/830 PSD W30L120 ELB3 NOC	39	3700	95	●	3000	IP44	34842700
RC134B LED37S/840 PSD W60L60 ELB3 NOC	39	3700	95	●	4000	IP44	34820500



CoreLine LED luminaires

Coreline panel office compliant

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
RC132V G4LED34_43S/830_840 PSU W60L60 OC	30~35	4300	125	-	✗	3000	IP20/44	36054600
RC132V G4LED34_43S/830_840 PSUW30L120 OC	30~35	4300	125	-	✗	3000	IP20/44	36056000
RC133V G4LED34_43S/830_840 PSU W62L62 OC	30~35	4300	125	-	✗	3000	IP20/44	36055300
RC132V G4 LED34S/830 PSD W30L120 OC	29	3400	117	-	●	3000	IP20/44	36052200
RC132V G4 LED34S/830 PSD W60L60 OC	29	3400	117	-	●	3000	IP20/44	36046100
RC132V G4 LED34S/830 PSU W60L60 OC	29	3400	117	-	✗	3000	IP20/44	36042300
RC132V G4 LED36S/840 PSD W30L120 OC	29	3600	123	-	●	4000	IP20/44	36051500
RC132V G4 LED36S/840 PSD W60L60 OC	29	3600	123	-	●	4000	IP20/44	36045400
RC132V G4 LED36S/840 PSU W30L120 OC	29	3600	123	-	✗	4000	IP20/44	36044700
RC132V G4 LED36S/840 PSU W60L60 OC	29	3600	123	-	✗	4000	IP20/44	36041600
RC133V G4 LED34S/830 PSD W62L62 OC	29	3400	117	-	●	3000	IP20/44	36049200
RC133V G4 LED36S/840 PSD W62L62 OC	29	3600	123	-	●	4000	IP20/44	36048500
RC133V G4 LED36S/840 PSU W62L62 OC	29	3600	123	-	✗	4000	IP20/44	36043000
RC132V G4 LED43S/840 PSD W60L60 OC	34.5	4300	125	-	●	4000	IP20/44	36047800
RC133V G4 LED43S/840 PSD W62L62 OC	34.5	4300	125	-	●	4000	IP20/44	36050800



CoreLine LED luminaires

Coreline panel office compliant

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
RC132V G4 LED36/840 PSU W60L60 OC TP(a)	29	3600	123	-	✗	4000	IP20/44	36053900
RC132V G4 LED36/840 PSU W60L60 OC TP(a)E	29	3600	123	-	✗	4000	IP20/44	96722200
RC132V G4 LED36S/840 PSD W30L120 OC ELB3	33	3600	123	-	●	4000	IP20/44	96715400
RC132V G4 LED36S/840 PSD W60L60 OC ELB3	33	3600	123	-	●	4000	IP20/44	96710900
RC132V G4 LED36S/840 PSU W30L120 OC ELB3	33	3600	123	-	✗	4000	IP20/44	96714700
RC132V G4 LED36S/840 PSU W60L60 OC ELB3	33	3600	123	-	✗	4000	IP20/44	96711600
RC132V G4 LED43S/840 PSD W60L60 OC ELB3	37	4300	125	-	●	4000	IP20/44	96719200

Coreline panel non-office compliant

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
RC132V G4 LED34S/830 PSU W60L60 NOC	29	3400	117	-	✗	3000	IP20/44	36036200
RC132V G4 LED36S/840 PSU W30L120 NOC	29	3600	123	-	✗	4000	IP20/44	36040900
RC132V G4 LED36S/840 PSU W60L60 NOC	29	3600	123	-	✗	4000	IP20/44	36035500
RC133V G4 LED34S/830 PSU W62L62 NOC	29	3400	117	-	✗	3000	IP20/44	36039300
RC133V G4 LED36S/840 PSU W62L62 NOC	29	3600	123	-	✗	4000	IP20/44	36038600
RC132V G4 LED43S/840 PSU W60L60 NOC	34.5	4300	125	-	✗	4000	IP20/44	36037900

CoreLine LED luminaires

Coreline 2.0


www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
SM100C LED25S/840 PSU W20L120	27.1	2700	101	✗	4000	IP20	01825899
SM100C LED25S/840 PSU W60L60	27.1	2700	101	✗	4000	IP20	01825999

Coreline batten

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
BN126C LED20S/830 PSU TW1 L600	17	2000	118	✗	3000	IP20(front)	36345599
BN126C LED22S/840 PSU TW1 L600	17	2200	129	✗	4000	IP20(front)	36344899
BN126C LED23S/830 PSU TW1 L1200	18	2300	128	✗	3000	IP20(front)	36347999
BN126C LED25S/840 PSU TW1 L1200	18	2500	139	✗	4000	IP20(front)	36346299
BN126C LED32S/830 PSU TW1 L1500	25.5	3200	125	✗	3000	IP20(front)	36353099
BN126C LED35S/840 PSU TW1 L1500	25.5	3500	137	✗	4000	IP20(front)	36352399
BN126C LED38S/830 PSU TW1 L1200	31	3800	123	✗	3000	IP20(front)	36349399
BN126C LED41S/840 PSU TW1 L1200	31	4100	132	✗	4000	IP20(front)	36348699
BN126C LED48S/830 PSU TW1 L1500	40	4800	120	✗	3000	IP20(front)	36355499
BN126C LED52S/840 PSU TW1 L1500	40	5200	130	✗	4000	IP20(front)	36354799
BN126C LED60S/830 PSU TW1 L1200	49	6000	122	✗	3000	IP20(front)	36351699
BN126C LED60S/830 PSU TW1 L1800	49	6000	122	✗	3000	IP20(front)	36359299
BN126C LED64S/840 PSU TW1 L1200	49	6400	131	✗	4000	IP20(front)	36350999
BN126C LED64S/840 PSU TW1 L1800	49	6400	131	✗	4000	IP20(front)	36358599
BN126C LED74S/830 PSU TW1 L1500	59	7400	125	✗	3000	IP20(front)	36357899
BN126C LED80S/840 PSU TW1 L1500	59	8000	136	✗	4000	IP20(front)	36356199
BN126C LED100S/840 PSU TW1 L1800	75	10,000	133	✗	4000	IP20(front)	36360899
BN126C LED94S/830 PSU TW1 L1800	75	9400	125	✗	3000	IP20(front)	36361599



CoreLine LED luminaires

Coreline surface-mounted office compliant

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
SM134V LED27S/840 PSD W20L120 OC	22	2700	123	●	4000	IP20	34864900
SM134V LED27S/840 PSD W60L60 OC	22	2700	123	●	4000	IP20	34862500
SM134V LED27S/830 PSD W20L120 OC	23	2700	117	●	3000	IP20	34868700
SM134V LED27S/830 PSD W60L60 OC	23	2700	117	●	3000	IP20	34866300
SM134V LED27S/840 PSD W20L120 ELB3 OC	25.5	2700	106	●	4000	IP20	34889200
SM134V LED27S/840 PSD W60L60 ELB3 OC	25.5	2700	106	●	4000	IP20	34874800
SM134V LED37S/840 PSU W20L120 OC	30.5	3700	121	⊗	4000	IP20	34882300
SM134V LED37S/830 PSD W20L120 OC	31.5	3700	117	●	3000	IP20	34867000
SM134V LED37S/830 PSD W60L60 OC	31.5	3700	117	●	3000	IP20	34865600
SM134V LED37S/840 PSD W20L120 OC	31.5	3700	117	●	4000	IP20	34863200
SM134V LED37S/840 PSD W60L60 OC	31.5	3700	117	●	4000	IP20	34861800
SM134V LED37S/830 PSU W20L120 OC	34.5	3700	107	⊗	3000	IP20	34884700
SM134V LED37S/830 PSU W60L60 OC	34.5	3700	107	⊗	3000	IP20	34883000
SM134V LED37S/840 PSD W20L120 ELB3 OC	35	3700	106	●	4000	IP20	34890800
SM134V LED37S/840 PSD W60L60 ELB3 OC	35	3700	106	●	4000	IP20	34873100

CoreLine LED luminaires

Coreline surface-mounted non-office compliant

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
SM134V LED27S/840 PSD W20L120 NOC	26.5	2700	102	●	4000	IP20	34878600
SM134V LED27S/840 PSD W60L60 NOC	26.5	2700	102	●	4000	IP20	34877900
SM134V LED27S/840 PSU W20L120 NOC	27	2700	100	⊗	4000	IP20	34876200
SM134V LED27S/840 PSU W60L60 NOC	27	2700	100	⊗	4000	IP20	34875500
SM134V LED27S/830 PSU W20L120 NOC	28.5	2700	95	⊗	3000	IP20	34854000
SM134V LED27S/830 PSU W60L60 NOC	28.5	2700	95	⊗	3000	IP20	34852600
SM134V LED27S/830 PSD W20L120 NOC	30.5	2700	89	●	3000	IP20	34860100
SM134V LED27S/830 PSD W60L60 NOC	30.5	2700	89	●	3000	IP20	34858800
SM134V LED27S/840 PSD W20L120 ELB3 NOC	30.5	2700	89	●	4000	IP20	34887800
SM134V LED27S/840 PSD W60L60 ELB3 NOC	30.5	2700	89	●	4000	IP20	34880900
SM134V LED27S/840 PSU W20L120 ELB3 NOC	30.5	2700	89	⊗	4000	IP20	34885400
SM134V LED27S/840 PSU W60L60 ELB3 NOC	30.5	2700	89	⊗	4000	IP20	34879300
SM134V LED27S/830 PSU W20L120 ELB3 NOC	32	2700	84	⊗	3000	IP20	34891500
SM134V LED27S/830 PSD W20L120 ELB3 NOC	34	2700	79	●	3000	IP20	34893900
SM134V LED37S/830 PSU W20L120 NOC	34	3700	109	⊗	3000	IP20	34853300
SM134V LED37S/830 PSU W60L60 NOC	34	3700	109	⊗	3000	IP20	34851900
SM134V LED37S/840 PSU W20L120 NOC	34	3700	109	⊗	4000	IP20	34870000
SM134V LED37S/840 PSU W60L60 NOC	34	3700	109	⊗	4000	IP20	34869400
SM134V LED37S/830 PSD W20L120 NOC	35.5	3700	104	●	3000	IP20	34859500
SM134V LED37S/830 PSD W60L60 NOC	35.5	3700	104	●	3000	IP20	34857100
SM134V LED37S/840 PSD W20L120 ELB3 NOC	35.5	3700	104	●	4000	IP20	34888500
SM134V LED37S/840 PSD W20L120 NOC	35.5	3700	104	●	4000	IP20	34856400
SM134V LED37S/840 PSD W60L60 NOC	35.5	3700	104	●	4000	IP20	34855700
SM134V LED37S/830 PSU W20L120 ELB3 NOC	38	3700	97	⊗	3000	IP20	34892200
SM134V LED37S/840 PSU W20L120 ELB3 NOC	38	3700	97	⊗	4000	IP20	34886100
SM134V LED37S/840 PSU W60L60 ELB3 NOC	38	3700	97	⊗	4000	IP20	34871700
SM134V LED37S/830 PSD W20L120 ELB3 NOC	39	3700	95	●	3000	IP20	34894600
SM134V LED37S/840 PSD W60L60 ELB3 NOC	39	3700	95	●	4000	IP20	34872400

CoreLine LED luminaires

Coreline wall-mounted

www.philips.com/coreline




= Dimmable
 = Non-Dimmable
 L70 at 50,000
 1/6 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	Motion/Daylight sensor	EOC code
	W	lm	lm/W	°		K			
1 WL130V LED12S/830 PSU WH	12	1200	100	120	✗	3000	IP65		38778599
1 WL130V LED12S/840 PSU WH	12	1200	100	120	✗	4000	IP65		38779299
2 WL131V LED12S/830 PSED EL3 WH	12	1200	100	120	●	3000	IP65	-	40268600
2 WL131V LED12S/830 PSR EL3 MDU WH	12	1200	100	120	●	3000	IP65	yes	40282200
2 WL131V LED12S/830 PSU WH	12	1200	100	120	✗	3000	IP65		34000599
2 WL131V LED12S/840 PSED EL3 WH	12	1200	100	120	●	4000	IP65	-	40269300
2 WL131V LED12S/840 PSR EL3 MDU WH	12	1200	100	120	●	4000	IP65	yes	40283900
2 WL131V LED12S/840 PSU WH	12	1200	100	120	✗	4000	IP65		34001299
2 WL131V LED12S/830 PSED WH	13	1200	90	120	●	3000	IP65		38792199
2 WL131V LED12S/840 PSED WH	13	1200	90	120	●	4000	IP65		38793899
2 WL131V LED12S/830 PSR MDU WH	15	1200	80	120	●	3000	IP65	yes	38786099
2 WL131V LED12S/830 PSU EL3 WH	15	1200	80	120	✗	3000	IP65	-	96094000
2 WL131V LED12S/840 PSR MDU WH	15	1200	80	120	●	4000	IP65	yes	38787799
2 WL131V LED12S/840 PSU EL3 WH	15	1200	80	120	✗	4000	IP65	-	96095700
1 WL130V LED20S/830 PSU WH	22	2000	90	120	✗	3000	IP65		38780899
1 WL130V LED20S/840 PSU WH	22	2000	90	120	✗	4000	IP65		38781599
2 WL131V LED20S/830 PSED EL3 WH	22	2000	91	120	●	3000	IP65	-	40270900
2 WL131V LED20S/830 PSR EL3 MDU WH	22	2000	91	120	●	3000	IP65	yes	40284600
2 WL131V LED20S/830 PSU WH	22	2000	90	120	✗	3000	IP65		34002999
2 WL131V LED20S/840 PSED EL3 WH	22	2000	91	120	●	4000	IP65	-	40271600
2 WL131V LED20S/840 PSR EL3 MDU WH	22	2000	91	120	●	4000	IP65	yes	40285300
2 WL131V LED20S/840 PSU WH	22	2000	90	120	✗	4000	IP65		34003699
1 WL130V LED20S/830 PSU MDU WH	23	2000	80	120	✗	3000	IP65	yes	38782299
1 WL130V LED20S/840 PSU MDU WH	23	2000	80	120	✗	4000	IP65	yes	38783999
2 WL131V LED20S/830 PSED WH	23	2000	90	120	●	3000	IP65		38794599
2 WL131V LED20S/840 PSED WH	23	2000	90	120	●	4000	IP65		38795299
2 WL131V LED20S/830 PSR MDU WH	25	2000	80	120	●	3000	IP65	yes	38788499
2 WL131V LED20S/830 PSU EL3 WH	25	2000	80	120	✗	3000	IP65	-	96096400
2 WL131V LED20S/840 PSR MDU WH	25	2000	80	120	●	4000	IP65	yes	38789199
2 WL131V LED20S/840 PSU EL3 WH	25	2000	80	120	✗	4000	IP65	-	96097100
2 WL131V LED34S/830 PSED EL3 WH	36	3400	94	120	●	3000	IP65	-	40274700

CoreLine LED luminaires

Coreline wall-mounted - continued

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	Motion/Daylight sensor	EOC code
	W	lm	lm/W	°		K			
WL131V LED34S/830 PSED WH	36	3400	94	120	●	3000	IP65	-	40272300
WL131V LED34S/830 PSR EL3 MDU WH	36	3400	94	120	●	3000	IP65	yes	40286000
WL131V LED34S/830 PSU WH	36	3400	95	120	⊗	3000	IP65	-	38784699
WL131V LED34S/840 PSED EL3 WH	36	3400	94	120	●	4000	IP65	-	40275400
WL131V LED34S/840 PSED WH	36	3400	94	120	●	4000	IP65	-	40273000
WL131V LED34S/840 PSR EL3 MDU WH	36	3400	94	120	●	4000	IP65	yes	40287700
WL131V LED34S/840 PSU WH	36	3400	95	120	⊗	4000	IP65	-	38785399
WL131V LED34S/830 PSR MDU WH	38	3400	90	120	●	3000	IP65	yes	38790799
WL131V LED34S/840 PSR MDU WH	38	3400	90	120	●	4000	IP65	yes	38791499



CoreLine LED luminaires

Coreline waterproof

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	Motion/Daylight sensor	EOC code
	W	lm	lm/W	°		K			
1 WT120C G2 LED18S/840 PSU PCO L600	15	1800	120	-	✗	4000	IP65		34976399
2 WT120C G2 LED19S/840 PSU L600	15	1900	127	-	✗	4000	IP65		84045900
2 WT120C G2 LED19S/840 PSU MDU L600	16	1900	119	-	✗	4000	IP65		96244900
1 WT120C G2 LED25S/840 PSU PCO L1200	20.5	2500	125	-	✗	4000	IP65		34977099
2 WT120C G2 LED27S/840 PSU L1200	20.5	2700	135	-	✗	4000	IP65		84046600
2 WT120C G2 LED27S/840 PSU TW3 L1200	21	2700	129	-	✗	4000	IP65		91685800
2 WT120C G2 LED27S/840 PSU MDU L1200	21.5	2700	126	-	✗	4000	IP65		96248700
2 WT120C G2 LED27S/840 PSU MDU TW3 L1200	21.5	2700	125	-	✗	4000	IP65		96249400
1 WT120C G2 LED31S/840 PSU PCO L1500	24.3	3100	129	-	✗	4000	IP65		34978799
2 WT120C G2 LED34S/840 PSU L1500	24.3	3400	142	-	✗	4000	IP65		84047300
2 WT120C G2 LED34S/840 PSU TW3 L1500	25	3400	136	-	✗	4000	IP65		91686500
2 WT120C G2 LED27S/840 PSU ELB3 L1200	25.5	2700	104	-	✗	4000	IP65		85418000
2 WT120C G2 LED34S/840 PSU MDU L1500	25.5	3400	133	-	✗	4000	IP65		96267800
2 WT120C G2 LED34S/840 PSU MDU TW3 L1500	25.5	3400	133	-	✗	4000	IP65		96268500
2 WT120C G2 LED27S/840 PSD ELB3 L1200	27	2700	100	-	●	4000	IP65		88311200
1 WT120C G2 LED37S/840 PSU PCO L1200	28.6	3700	132	-	✗	4000	IP65		34979499
2 WT120C G2 LED40S/840 PSU L1200	28.6	4000	143	-	✗	4000	IP65		84048000
2 WT120C G2 LED40S/840 PSU TW1 WEC L1200	29	4000	133	-	✗	4000	IP65		16317400
2 WT120C G2 LED40S/840 PSU WEC L1200	29	4000	133	-	✗	4000	IP65		16316700
2 WT120C G2 LED34S/840 PSU ELB3 L1500	29.5	3400	113	-	✗	4000	IP65		85420300
2 WT120C G2 LED40S/840 PSU MDU L1200	30	4000	133	-	✗	4000	IP65		96256200
2 WT120C G2 LED40S/840 PSU MDU TW3 L1200	30	4000	133	-	✗	4000	IP65		96257900
2 WT120C G2 LED40S/840 PSU TW3 L1200	30	4000	133	-	✗	4000	IP65		91687200
2 WT120C G2 LED34S/840 PSD ELB3 L1500	30.5	3400	111	-	●	4000	IP65		88313600
2 WT120C G2 LED34S/840 PSU MDU ELB3 L1500	31	3400	110	-	✗	4000	IP65	yes	96271500
2 WT120C G2 LED40S/840 PSU ELB3 L1200	34	4000	114	-	✗	4000	IP65		85419700
2 WT120C G2 LED40S/840 PSD ELB3 L1200	35	4000	114	-	●	4000	IP65		88312900
2 WT120C G2 LED40S/840 PSU MDU ELB3 L1200	35	4000	114	-	✗	4000	IP65	yes	96263000
1 WT120C G2 LED57S/840 PSU PCO L1500	42.9	5700	136	-	✗	4000	IP65		34980099
2 WT120C G2 LED60S/840 PSU L1500	42.9	6000	143	-	✗	4000	IP65		84049700
2 WT120C G2 LED60S/840 PSU TW1 WEC L1500	44	6000	133	-	✗	4000	IP65		16319800
2 WT120C G2 LED60S/840 PSU TW3 L1500	44	6000	133	-	✗	4000	IP65		91688900
2 WT120C G2 LED60S/840 PSU WEC L1500	44	6000	133	-	✗	4000	IP65		16318100
2 WT120C G2 LED60S/840 PSU MDU L1500	45	6000	133	-	✗	4000	IP65		96275300
2 WT120C G2 LED60S/840 PSU MDU TW3 L1500	45	6000	133	-	✗	4000	IP65		96276000



CoreLine LED luminaires

CoreLine waterproof - Continued

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	Motion/Daylight sensor	EOC code
	W	lm	lm/W	°		K			
① WT120C G2 LED60S/840 PSD ELB3 L1500	49	6000	118		●	4000	IP65		88314300
① WT120C G2 LED60S/840 PSU ELB3 L1500	49	6000	120		⊗	4000	IP65		85421000
① WT120C G2 LED60S/840 PSU MDU ELB3 L1500	50	6000	120		⊗	4000	IP65	yes	96282100
② WT120C G2 LED75S/840 PSU PCO L1500	57.1	7500	132	-	⊗	4000	IP65		34981799
① WT120C G2 LED80S/840 PSU L1500	57.1	8000	140	-	⊗	4000	IP65		40928900
① WT120C G2 LED80S/840 PSU TW3 L1500	60	8000	131		⊗	4000	IP65		40930200
① WT120C G2 LED80S/840 PSU MDU L1500	61	8000	131		⊗	4000	IP65		96286900
① WT120C G2 LED80S/840 PSU L1500 ELB3	63	8000	121		⊗	4000	IP65		40931900

CoreLine LED luminaires

Coreline slimdownlight

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
DN145B LED6S/830 PSU II WH	6.5	650	100	⊗	3000	IP20/44	33945099
DN145B LED6S/840 PSU II WH	6.5	650	100	⊗	4000	IP20/44	33946799
DN145B LED10S/830 PSU II WH	11	1100	100	⊗	3000	IP20/44	33947499
DN145B LED10S/840 PSU II WH	11	1100	100	⊗	4000	IP20/44	33948199
DN145C LED10S/830 PSU II WH	11	1100	100	⊗	3000	IP44	33951199
DN145C LED10S/840 PSU II WH	11	1100	100	⊗	4000	IP44	33952899
DN145B LED10S/830 PSD-E II WH	13	1100	85	●	3000	IP20/44	96100899
DN145B LED10S/840 PSD-E II WH	13	1100	85	●	4000	IP20/44	96101599
DN145B LED20S/830 PSU II WH	21	2100	100	⊗	3000	IP20/44	33949899
DN145B LED20S/840 PSU II WH	21	2100	100	⊗	4000	IP20/44	33950499
DN145C LED20S/830 PSU II WH	21	2100	100	⊗	3000	IP44	33953599
DN145C LED20S/840 PSU II WH	21	2100	100	⊗	4000	IP44	33954299
DN145B LED20S/830 PSD-E II WH	22.5	2100	93	●	3000	IP20/44	96102299
DN145B LED20S/840 PSD-E II WH	22.5	2100	93	●	4000	IP20/44	96103999

CoreLine LED luminaires

Coreline downlight

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
DN140B LED10S/830 PSU C IP54 PI6	9.5	1100	116	120	✗	3000	IP20/54	32604700
DN140B LED10S/830 PSU C PI6	9.5	1100	116	120	✗	3000	IP20	32588000
DN140B LED10S/830 PSU WR PI6	9.5	1100	116	120	✗	3000	IP20	32580400
DN140B LED10S/840 PSU C IP54 PI6	9.5	1100	116	120	✗	4000	IP20/54	32605400
DN140B LED10S/840 PSU C PI6	9.5	1100	116	120	✗	4000	IP20	32589700
DN140B LED10S/830 PSD-E C	11.5	1100	96	120	●	3000	IP20	32590300
DN140B LED10S/830 PSD-E C IP54	11.5	1100	96	120	●	3000	IP20/54	32606100
DN140B LED10S/830 PSD-E WR IP54	11.5	1100	96	120	●	3000	IP20/54	32598900
DN140B LED10S/840 PSD-E C	11.5	1100	96	120	●	4000	IP20	32591000
DN140B LED10S/840 PSD-E C IP54	11.5	1100	96	120	●	4000	IP20/54	32607800
DN140B LED10S/840 PSD-E WR IP54	11.5	1100	96	120	●	4000	IP20/54	32599600
DN140B LED10S/830 PSD-E C ELB3	14.5	1100	76	120	●	3000	IP20	32835500
DN140B LED10S/830 PSD-E WR ELB3	14.5	1100	76	120	●	3000	IP20	32831700
DN140B LED10S/840 PSD-E C ELB3	14.5	1100	76	120	●	4000	IP20	32836200
DN140B LED10S/840 PSD-E WR ELB3	14.5	1100	76	120	●	4000	IP20	32832400
DN140B LED20S/830 PSU C IP54 PI6	19	2200	116	120	✗	3000	IP20/54	32608500
DN140B LED20S/830 PSU C PI6	19	2200	116	120	✗	3000	IP20	32592700
DN140B LED20S/840 PSU C IP54 PI6	19	2200	116	120	✗	4000	IP20/54	32609200
DN140B LED20S/840 PSU C PI6	19	2200	116	120	✗	4000	IP20	32593400
DN140B LED20S/830 PSD-E C	20.5	2200	107	120	●	3000	IP20	32594100
DN140B LED20S/830 PSD-E C IP54	20.5	2200	107	120	●	3000	IP20/54	32610800
DN140B LED20S/830 PSD-E WR IP54	20.5	2200	107	120	●	3000	IP20/54	32602300
DN140B LED20S/840 PSD-E C	20.5	2200	107	120	●	4000	IP20	32595800
DN140B LED20S/840 PSD-E C IP54	20.5	2200	107	120	●	4000	IP20/54	32611500
DN140B LED20S/840 PSD-E WR IP54	20.5	2200	107	120	●	4000	IP20/54	32603000
DN140B LED20S/830 PSD-E C ELB3	23.5	2200	94	120	●	3000	IP20	32837900
DN140B LED20S/830 PSD-E WR ELB3	23.5	2200	94	120	●	3000	IP20	32833100
DN140B LED20S/840 PSD-E C ELB3	23.5	2200	94	120	●	4000	IP20	32838600
DN140B LED20S/840 PSD-E WR ELB3	23.5	2200	94	120	●	4000	IP20	32834800



CoreLine LED luminaires

Coreline recessed spot


www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
RS140B LED6-32-/827 PSR PI6 WH	8	650	82	32	●	2700	IP65	38277399
RS140B LED6-32-/830 PSR PI6 WH	8	650	82	32	●	3000	IP65	38278099
RS140B LED6-32-/840 PSR PI6 WH	8	650	82	32	●	4000	IP65	38279799
RS141B LED6-32-/827 PSR PI6 ALU	8	650	82	32	●	2700	IP44	38290299
RS141B LED6-32-/827 PSR PI6 WH	8	650	82	32	●	2700	IP44	38280399
RS141B LED6-32-/830 PSR PI6 ALU	8	650	82	32	●	3000	IP44	38291999
RS141B LED6-32-/830 PSR PI6 WH	8	650	82	32	●	3000	IP44	38281099
RS141B LED6-32-/840 PSR PI6 ALU	8	650	82	32	●	4000	IP44	38292699
RS141B LED6-32-/840 PSR PI6 WH	8	650	82	32	●	4000	IP44	38282799
RS142B LED6-32-/827 PSR PI6 WH FR	8	650	82	32	●	2700	IP44	38417399
RS142B LED6-32-/830 PSR PI6 WH FR	8	650	82	32	●	3000	IP44	38418099
RS140B LED12-36-/830 PSR PI6 ALU	15	1200	82	36	●	3000	IP65	38423499
RS140B LED12-36-/830 PSR PI6 WH	15	1200	82	36	●	3000	IP65	38421099
RS140B LED12-36-/840 PSR PI6 ALU	15	1200	82	36	●	4000	IP65	38424199
RS140B LED12-36-/840 PSR PI6 WH	15	1200	82	36	●	4000	IP65	38422799
RS141B LED12-36-/830 PSR PI6 WH	15	1200	82	36	●	3000	IP44	38419799
RS141B LED12-36-/840 PSR PI6 WH	15	1200	82	36	●	4000	IP44	38420399

Coreline recessed spot - Accessory

www.philips.com/coreline

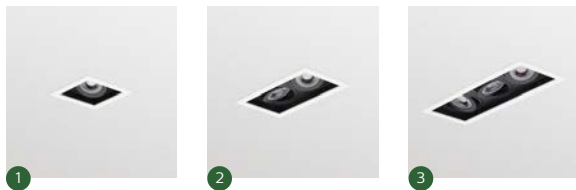


Product Type	IP rating	EOC code
1 RS143Z CFRM GRID 1x1 WH	IP20	38832499
2 RS143Z CFRM GRID 1x2 WH	IP20	38833199
3 RS143Z CFRM GRID 1x3 WH	IP20	38834899

CoreLine LED luminaires

Coreline projector


www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
1 ST150T LED22S-23-/830 PSU BK	24	2200	90	24	✗	3000	IP20	79067799
2 ST150T LED22S-23-/830 PSU WH	24	2200	90	24	✗	3000	IP20	79069199
1 ST150T LED22S-23-/840 PSU BK	24	2200	90	24	✗	4000	IP20	79068499
2 ST150T LED22S-23-/840 PSU WH	24	2200	90	24	✗	4000	IP20	79070799
1 ST150T LED22S-36-/830 PSU BK	24	2200	90	36	✗	3000	IP20	79071499
2 ST150T LED22S-36-/830 PSU WH	24	2200	90	36	✗	3000	IP20	79073899
1 ST150T LED22S-36-/840 PSU BK	24	2200	90	36	✗	4000	IP20	79072199
2 ST150T LED22S-36-/840 PSU WH	24	2200	90	36	✗	4000	IP20	79074599

Coreline bollard

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
BCP155 LED100/NW PSU 220-240V S 7043	12	1000	85	✗	4000	IP65	38378700
BCP155 LED100/WW PSU 220-240V S 7043	12	1000	85	✗	3000	IP65	38377000
BCP155 LED100/NW PSU 220-240V A 7043	13	1000	80	✗	4000	IP65	38376300
BCP155 LED100/WW PSU 220-240V A 7043	13	1000	80	✗	3000	IP65	38375600

CoreLine LED luminaires

Coreline bollard - Accesory

www.philips.com/coreline




1 PACK

Product Type	EOC code
ZCP150 ANB L500	38379400

Coreline highbay

www.philips.com/coreline



L70 at 50.000




1 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
BY120P G3 LED105S/840 PIR WB GR	85	10.500	129	-	●	4000	IP65	31716800
BY120P G3 LED105S/865 PIR WB GR	85	10.500	125	-	●	6500	IP65	31717500
BY121P G3 LED205S/840 PIR WB GR	155	20.500	130	-	●	4000	IP65	31714400
BY121P G3 LED205S/865 PIR WB GR	155	20.500	130	-	●	6500	IP65	31715100

CoreLine LED luminaires

Coreline highbay gen4

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
BY120P G4 LED100S/840 PSU NB	69	10.000	145	55	✘	4000	IP65	33571100
BY120P G4 LED100S/840 PSU WB	69	10.000	145	90 x 90	✘	4000	IP65	33570400
BY120P G4 LED100S/865 PSU NB	69	10.000	145	55	✘	6500	IP65	33567400
BY120P G4 LED100S/865 PSU WB	69	10.000	145	90 x 90	✘	6500	IP65	33566700
BY120P G4 LED100S/840 PSD NB	73	10.000	137	55	●	4000	IP65	33702900
BY120P G4 LED100S/840 PSD WB	73	10.000	137	90 x 90	●	4000	IP65	33703600
BY120P G4 LED100S/865 PSD NB	73	10.000	137	55	●	6500	IP65	33704300
BY120P G4 LED100S/865 PSD WB	73	10.000	137	90 x 90	●	6500	IP65	33705000
BY121P G4 LED200S/840 PSU NB	138	20.000	145	55	✘	4000	IP65	33569800
BY121P G4 LED200S/840 PSU WB	138	20.000	145	90 x 90	✘	4000	IP65	33568100
BY121P G4 LED200S/865 PSU NB	138	20.000	145	55	✘	6500	IP65	33565000
BY121P G4 LED200S/865 PSU WB	138	20.000	145	90 x 90	✘	6500	IP65	33564300
BY121P G4 LED200S/840 PSD NB	146	20.000	137	55	●	4000	IP65	33698500
BY121P G4 LED200S/840 PSD WB	146	20.000	137	90 x 90	●	4000	IP65	33699200
BY121P G4 LED200S/865 PSD NB	146	20.000	137	55	●	6500	IP65	33700500
BY121P G4 LED200S/865 PSD WB	146	20.000	137	90 x 90	●	6500	IP65	33701200
BY122P G4 LED250S/840 PSU NB	172	25.000	145	55	✘	4000	IP65	33664000
BY122P G4 LED250S/840 PSU WB	172	25.000	145	90 x 90	✘	4000	IP65	33665700
BY122P G4 LED250S/865 PSU NB	172	25.000	145	55	✘	6500	IP65	33666400
BY122P G4 LED250S/865 PSU WB	172	25.000	145	90 x 90	●	6500	IP65	33667100
BY122P G4 LED250S/840 PSD NB	183	25.000	137	55	●	4000	IP65	33879800
BY122P G4 LED250S/840 PSD WB	183	25.000	137	90 x 90	●	4000	IP65	33880400
BY122P G4 LED250S/865 PSD NB	183	25.000	137	55	●	6500	IP65	33881100
BY122P G4 LED250S/865 PSD WB	183	25.000	137	90 x 90	●	6500	IP65	33882800

CoreLine LED luminaires

Coreline trunking

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
1 LL120X LED150S/840 1x PSD O 7 WH	108	15.000	139	120	●	4000	IP20	38090100
2 LL120X LED150S/840 2x PSD O 7 VLC WH	108	15.000	139	120	●	4000	IP20	38089500
2 LL120X LED150S/840 2x PSU O 5 WH	108	15.000	139	120	⊗	4000	IP20	38100700
1 LL120X LED150S/865 2x PSU O 5 WH	108	15.000	139	120	⊗	6500	IP20	38142700
3 LL120X LED152S/830 2x PSD DA20 7 VLC WH	108	15.200	141	120	●	3000	IP20	38151900
3 LL120X LED152S/830 2x PSD WB 7 VLC WH	108	15.200	141	120	●	3000	IP20	38115100
3 LL120X LED152S/830 2x PSU A 5 WH	108	15.200	141	120	⊗	3000	IP20	38140300
3 LL120X LED152S/830 2x PSU DA20 5 WH	108	15.200	141	120	⊗	3000	IP20	38109000
3 LL120X LED152S/830 2x PSU MB 5 WH	108	15.200	141	120	⊗	3000	IP20	38116800
3 LL120X LED152S/830 2x PSU VWB 5 WH	108	15.200	141	120	⊗	3000	IP20	38106900
3 LL120X LED152S/830 2x PSU WB 5 WH	108	15.200	141	120	⊗	3000	IP20	38104500
3 LL120X LED160S/840 1x PSD MB 7 WH	108	16.000	148	120	●	4000	IP20	38108300
3 LL120X LED160S/840 1x PSD NB 7 WH	108	16.000	148	120	●	4000	IP20	38107600
3 LL120X LED160S/840 1x PSD WB 7 WH	108	16.000	148	120	●	4000	IP20	38095600
3 LL120X LED160S/840 1x PSD WB 7X2.5 WH	108	16.000	148	120	●	4000	IP20	38097000
3 LL120X LED160S/840 2x PSD A 7 VLC WH	108	16.000	148	120	●	4000	IP20	38138000
3 LL120X LED160S/840 2x PSD A 7X2.5 VLC WH	108	16.000	148	120	●	4000	IP20	38119900
3 LL120X LED160S/840 2x PSD DA20 7 VLC WH	108	16.000	148	120	●	4000	IP20	38136600
3 LL120X LED160S/840 2x PSD MB 7 VLC WH	108	16.000	148	120	●	4000	IP20	38098700
3 LL120X LED160S/840 2x PSD MB 9 VLC WH	108	16.000	148	120	●	4000	IP20	38134200
3 LL120X LED160S/840 2x PSD NB 7 VLC WH	108	16.000	148	120	●	4000	IP20	38113700
3 LL120X LED160S/840 2x PSD NB 9 VLC WH	108	16.000	148	120	●	4000	IP20	38110600
3 LL120X LED160S/840 2x PSD VWB 7 VLC WH	108	16.000	148	120	●	4000	IP20	38105200
3 LL120X LED160S/840 2x PSD VWB 7X2.5 VLC	108	16.000	148	120	●	4000	IP20	38184700
3 LL120X LED160S/840 2x PSD WB 7 VLC WH	108	16.000	148	120	●	4000	IP20	38087100
3 LL120X LED160S/840 2x PSD WB 7X2.5 VLC W	108	16.000	148	120	●	4000	IP20	38086400
3 LL120X LED160S/840 2x PSD WB 9 VLC WH	108	16.000	148	120	●	4000	IP20	38099400
3 LL120X LED160S/840 2x PSU A 5 WH	108	16.000	148	120	⊗	4000	IP20	38129800
3 LL120X LED160S/840 2x PSU DA20 5 WH	108	16.000	148	120	⊗	4000	IP20	38093200
3 LL120X LED160S/840 2x PSU MB 5 WH	108	16.000	148	120	⊗	4000	IP20	38091800
3 LL120X LED160S/840 2x PSU MB 7 WH	108	16.000	148	120	⊗	4000	IP20	38161800
3 LL120X LED160S/840 2x PSU NB 5 WH	108	16.000	148	120	⊗	4000	IP20	38096300
3 LL120X LED160S/840 2x PSU NB 7 WH	108	16.000	148	120	⊗	4000	IP20	38168700
3 LL120X LED160S/840 2x PSU VWB 5 WH	108	16.000	148	120	⊗	4000	IP20	38117500
3 LL120X LED160S/840 2x PSU VWB 5X2.5 WH	108	16.000	148	120	⊗	4000	IP20	38179300

CoreLine LED luminaires

Coreline trunking - continued

www.philips.com/coreline



= Dimmable
 = Non-Dimmable
 L80 at 50.000
 1 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
① LL120X LED160S/840 2x PSU VWB 7 WH	108	16.000	148	120		4000	IP20	38175500
① LL120X LED160S/840 2x PSU WB 5 WH	108	16.000	148	120		4000	IP20	38088800
① LL120X LED160S/840 2x PSU WB 7 WH	108	16.000	148	120		4000	IP20	38112000
② LL120X LED150S/840 1x PSD PCO 7 WH	126	15.000	120	120		4000	IP20	98765000
② LL120X LED150S/840 2x PSD PCO 7 VLC WH	126	15.000	120	120		4000	IP20	98766700
② LL120X LED150S/840 2x PSU PCO 5 WH	126	15.000	120	120		4000	IP20	98887900

Coreline trunking - Accessory

www.philips.com/coreline




1 PACK

Product Type	IP rating	EOC code
LL120X 5X2.5 WH BC	IP20	34646400
LL120X 7X2.5 WH BC	IP20	34648800

CoreLine LED luminaires

Coreline tempo x-large


www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
BVP140 LED360-4S 30K6/740 PSD OFA52 D9	225	30.600	136	●	4000	IP66	87288500
BVP140 LED360-4S 30K6/740 PSU OFA52	225	30.600	136	⊗	4000	IP66	87280900
BVP140 LED360-4S 31K3/740 PSD S D9	225	31.320	139	●	4000	IP66	87292200
BVP140 LED360-4S 31K3/740 PSU S	225	31.320	139	⊗	4000	IP66	87284700
BVP140 LED420-4S 35K3/740 PSD OFA52 D9	250	35.280	141	●	4000	IP66	87287800
BVP140 LED420-4S 35K3/740 PSU OFA52	250	35.280	141	⊗	4000	IP66	87279300
BVP140 LED420-4S 36K1/740 PSD S D9	250	36.120	144	●	4000	IP66	87291500
BVP140 LED420-4S 36K1/740 PSU S	250	36.120	144	⊗	4000	IP66	87283000
BVP140 LED480-4S 40K3/740 PSD OFA52 D9	295	40.320	137	●	4000	IP66	87286100
BVP140 LED480-4S 40K3/740 PSU OFA52	295	40.320	137	⊗	4000	IP66	87278600
BVP140 LED480-4S 41K3/740 PSD S D9	295	41.280	140	●	4000	IP66	87290800
BVP140 LED480-4S 41K3/740 PSU S	295	41.280	140	⊗	4000	IP66	87282300

Coreline tempo large

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
BVP130 LED160-4S/740 OFA52	126	16.000	130	⊗	4000	IP66	09641000
BVP130 LED160-4S/740 S	126	16.000	130	⊗	4000	IP66	09644100
BVP130 LED210-4S/740 OFA52	164	21.000	130	⊗	4000	IP66	09640300
BVP130 LED210-4S/740 S	164	21.000	130	⊗	4000	IP66	09643400
BVP130 LED260-4S/740 OFA52	220	26.000	120	⊗	4000	IP66	09639700
BVP130 LED260-4S/740 S	220	26.000	120	⊗	4000	IP66	09642700

CoreLine LED luminaires

Coreline tempo small


www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
BVP110 LED42/NW A	38	4200	111	✗	4000	IP65	30635300
BVP110 LED42/NW S	38	4200	111	✗	4000	IP65	30636000

Coreline malaga led

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
BRP101 LED37/740 DM FU	29.6	3054	103	✗	4000	IP65	44820200
BRP101 LED37/740 I DM	29.6	3054	103	✗	4000	IP65	99815100
BRP101 LED37/740 II DM	29.6	3054	103	✗	4000	IP65	99816800
BRP101 LED37/740 II DM MSP	29.6	3054	103	✗	4000	IP65	12566700
BRP101 LED37/740 II DW SDM10	29.6	3054	103	✗	4000	IP65	44819600
BRP102 LED55/740 DW PZM-35	39	4600	118	✗	4000	IP65	44821900
BRP102 LED55/740 I DM	39	4600	118	✗	4000	IP65	99817500
BRP102 LED55/740 II DM	39	4600	118	✗	4000	IP65	99818200
BRP102 LED75/740 I DM	56.5	6133	109	✗	4000	IP65	99819900
BRP102 LED75/740 II DM	56.5	6133	109	✗	4000	IP65	99820500
BRP102 LED75/740 II DM SDM10	56.5	6133	109	✗	4000	IP65	44822600
BRP102 LED110/740 I DM	83	9006	111	✗	4000	IP65	99821200
BRP102 LED110/740 II DM	83	9006	111	✗	4000	IP65	99822900
BRP102 LED110/740 II DW FU	83	9006	111	✗	4000	IP65	44823300

CoreLine LED luminaires

Coreline malaga led - Accesory

www.philips.com/coreline



1 PACK

Product Type	EOC code
ZRP220 AD60/60 A5	62134100



Philips Ledinaire

The essential range of trusted products for everyday lighting jobs that need good performance

Find the **right** solution in our range using the **Selector tool** productfinder.lighting.philips.com

Find out **more** about **all 12** different Ledinaire luminaires on philips.com/ledinaire



Trusted



Reliable



Great value

Ledinaire Surface-mounted



NEW

- Surface downlight solution
- IP44 rating perfect for indoor applications
- Full transparent cover providing homogeneous light effect
- Optional motion detection and daylight sensor

Ledinaire batten



- LED tube versions for easy replacement of light sources
- Mounting accessories included
- Trusted performance, low early failures

Ledinaire waterproof



- Easy to use: light levels tuned to conventional
- Reliable driver, less early failures
- High efficacy up to 120 lm/W

Contents

Interact
Ready

CoreLine

Ledinaire

LED Lamps

LED Bulbs

LED Candles
& Lusters

LED Tubes

LED
PL-lamps

TrueForce




Ledinaire LED luminaires

Easily make the switch to LED lighting without high investments. The Philips Ledinaire portfolio consists of 9 popular LED luminaires. Choose affordable, reliable and energy-efficient lighting from the leading name in LED.

Ledinaire panel office compliant

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
RC065B LED34S/840 PSU W60L60 OC	34	3400	100	-	✗	4000	IP20	38647499
RC065B LED34S/865 PSU W60L60 OC	34	3400	100	-	✗	6500	IP20	36204599
RC066B LED34S/840 PSU W62L62 OC	34	3400	100	-	✗	4000	IP20	36558999

Ledinaire panel non-office compliant

www.lighting.philips.com/main/products/ledinaire







Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
RC065B LED34S/840 PSU W60L60 NOC	34	3400	100	-	✗	4000	IP20	79180399
RC065B LED34S/865 PSU W60L60 NOC	34	3400	100	-	✗	6500	IP20	36206999

Ledinaire LED luminaires

Ledinaire recessed non-office compliant

www.lighting.philips.com/main/products/ledinaire







 = Dimmable
 = Non-Dimmable
 L65 at 50.000
 1 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
RC060B LED34S/840 PSU W60L60 NOC	34	3400	100	110		4000	IP20	06958500
RC060B LED40S/840 PSU W60L60 NOC	40	4000	100	110		4000	IP20	35040000

Ledinaire surface-mounted office compliant

www.lighting.philips.com/main/products/ledinaire







 = Dimmable
 = Non-Dimmable
 L65 at 50.000
 1 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
SM060C LED34S/840 PSU W20L120 OC	34	3400	100	80		4000	IP20	35039400

Ledinaire surface-mounted non-office compliant

www.lighting.philips.com/main/products/ledinaire




 = Dimmable
 = Non-Dimmable
 L65 at 50.000
 1 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
SM060C LED34S/840 PSU W20L120 NOC	34	3400	100	110		4000	IP20	06962200
SM060C LED40S/840 PSU W20L120 NOC	40	4000	100	110		4000	IP20	35041700

Ledinaire LED luminaires

Ledinaire wall-mounted wL060v


www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	Motion/Daylight sensor	EOC code
	W	lm	lm/W	°		K			
WLO60V LED11S/830 PSU II WH	12	1100	90	120	✘	3000	IP44		33909299
WLO60V LED11S/840 PSU II WH	12	1100	90	120	✘	4000	IP44		33910899
WLO60V LED17S/830 PSU II WH	18.5	1700	90	120	✘	3000	IP44		33911599
WLO60V LED17S/840 PSU II WH	18.5	1700	90	120	✘	4000	IP44		33912299
WLO60V LED17S/830 PSU MDU II WH	19.5	1700	90	120	✘	3000	IP44	yes	33913999
WLO60V LED17S/840 PSU MDU II WH	19.5	1700	90	120	✘	4000	IP44	yes	33914699

Ledinaire square wall-mounted

www.lighting.philips.com/main/products/ledinaire




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	Motion/Daylight sensor	EOC code
	W	lm	lm/W	°		K			
WLO55V LED6S/830 PSR MDU WH	6	600	100	110	●	3000	IP65	yes	35409599
WLO55V LED6S/830 PSU WH	6	600	100	110	✘	3000	IP65		34941199
WLO55V LED6S/840 PSR MDU WH	6	600	100	110	●	4000	IP65	yes	35064699
WLO55V LED6S/840 PSU WH	6	600	100	110	✘	4000	IP65		34942899
WLO55V LED6S/830 PSU EL3 WH	8	600	75	110	✘	3000	IP65		96774199
WLO55V LED6S/840 PSU EL3 WH	8	630	79	110	✘	4000	IP65		96773499

Ledinaire LED luminaires

Downlight dn060b


www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
DN060B LED8S/830 PSU WH	9	800	89	90 x 90	✗	3000	IP20	30662999
DN060B LED8S/840 PSU WH	9	800	89	90 x 90	✗	4000	IP20	30664399
DN060B LED18S/830 PSU WH	18	1800	100	90 x 90	✗	3000	IP20	30661299
DN060B LED18S/840 PSU WH	18	1800	100	90 x 90	✗	4000	IP20	30663699

Ledinaire slim downlight dn065b g2 & dn065c

www.lighting.philips.com/main/products/ledinaire




Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
DN065B G2 LED10/830 11W 220V D150 RD EU	11	950	86.00	✗	3000	IP20	67939200
DN065B G2 LED10/830 11W 220V L150 SQ EU	11		86.00	✗	3000	IP20	67947700
DN065B G2 LED10/840 11W 220V D150 RD EU	11	1000	90.00	✗	4000	IP20	67941500
DN065B G2 LED10/840 11W 220V L150 SQ EU	11		90.00	✗	4000	IP20	67949100
DN065C LED10/830 11W 220V D175 RD EU	11	950	86.00	✗	3000	IP20(front)	72007000
DN065C LED10/840 11W 220V D175 RD EU	11	1000	90.00	✗	4000	IP20(front)	72009400
DN065B G2 LED19/830 22W 220V D200 RD EU	22	1900	86.00	✗	3000	IP20	67943900
DN065B G2 LED20/840 22W 220V D200 RD EU	22	2000	90.00	✗	4000	IP20	67945300
DN065C LED20/830 23W 220V D225 RD EU	23	1900	82.00	✗	3000	IP20(front)	72011700
DN065C LED20/840 23W 220V D225 RD EU	23	2000	86.00	✗	4000	IP20(front)	72013100

Ledinaire LED luminaires

Ledinaire downlight dn029b


www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Efficiency	Dimmable	IP rating	EOC code
	W	lm/W			
DN029B LED8/CCT 8W 220-240V D90 EU	8.5	100.00	✘	IP20/44	66018500
DN029B LED12/CCT 14W 220-240V D150 EU	14	85.00	✘	IP20/44	66020800
DN029B LED20/CCT 24W 220-240V D200 EU	24	83.00	✘	IP20/44	66022200

Ledinaire waterproof

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
WT060C LED18S/840 PSU L600	15	1800	120	120	✘	4000	IP66	36007299
WT055C LED18S/840 PSU L600	16.5	1800	110	-	✘	4000	IP65	79296199
WT055C LED18S/840 PSU TW1 L600	16.5	1800	110	-	✘	4000	IP65	79297899
WT060C LED25S/840 PSU L1200	20	2500	120	120	✘	4000	IP66	36291599
WT060C LED25S/840 PSU TW1 L1200	20	2500	120	120	✘	4000	IP66	36292299
WT060C LED34S/840 PSU L1500	28	3400	120	120	✘	4000	IP66	36293999
WT060C LED34S/840 PSU TW1 L1500	28	3400	120	120	✘	4000	IP66	36294699
WT060C LED36S/840 PSU L1200	30	3600	120	120	✘	4000	IP66	36009699
WT060C LED36S/840 PSU TW1 L1200	30	3600	120	120	✘	4000	IP66	36010299
WT060C LED36S/865 PSU L1200	30	3600	120	120	✘	6500	IP66	36015799
WT055C LED36S/840 PSU L1200	33	3600	110	-	✘	4000	IP65	79298599
WT055C LED36S/840 PSU TW1 L1200	33	3600	110	-	✘	4000	IP65	79299299
WT060C LED56S/840 PSU L1500	46	5600	120	120	✘	4000	IP66	36011999
WT060C LED56S/840 PSU TW1 L1500	46	5600	120	120	✘	4000	IP66	36012699
WT060C LED56S/865 PSU L1500	46	5600	120	120	✘	6500	IP66	36017199
WT055C LED56S/840 PSU L1500	51	5600	110	-	✘	4000	IP65	79300599
WT055C LED56S/840 PSU TW1 L1500	51	5600	110	-	✘	4000	IP65	79301299
WT060C LED 80S/840 PSU L1800	65	8000	120	120	✘	4000	IP66	36295399

Ledinaire LED luminaires

Ledinaire floodlight

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	Motion/Daylight sensor	EOC code
	W	lm	lm/W		K			
1 BVP154 LED10/830 PSU 10W VWB CE	10	1000	100	✗	3000	IP65		32970399
2 BVP154 LED10/830 PSU 10W VWB MDU CE	10	1000	100	✗	3000	IP65	yes	33131799
1 BVP154 LED10/840 PSU 10W VWB CE	10	1050	105	✗	4000	IP65		32971099
2 BVP154 LED10/840 PSU 10W VWB MDU CE	10	1050	105	✗	4000	IP65	yes	33132499
3 BVP154 LED20/830 PSU 20W VWB CE	20	2000	100	✗	3000	IP65		32972799
2 BVP154 LED20/830 PSU 20W VWB MDU CE	20	2000	100	✗	3000	IP65	yes	33133199
3 BVP154 LED21/840 PSU 20W VWB CE	20	2100	105	✗	4000	IP65		32973499
2 BVP154 LED21/840 PSU 20W VWB MDU CE	20	2100	105	✗	4000	IP65	yes	33134899
4 BVP154 LED50/830 PSU 50W VWB CE	50	5000	100	✗	3000	IP65		32974199
5 BVP154 LED50/830 PSU 50W VWB MDU CE	50	5000	100	✗	3000	IP65	yes	33135599
4 BVP154 LED52/840 PSU 50W VWB CE	50	5250	105	✗	4000	IP65		32975899
5 BVP154 LED52/840 PSU 50W VWB MDU CE	50	5250	105	✗	4000	IP65	yes	33136299
6 BVP155 LED100/840 PSU 100W AWB CE	100	10.000	100	✗	4000	IP65		33128799
7 BVP155 LED105/840 PSU 100W VWB CE	100	10.500	105	✗	4000	IP65		33125699
8 BVP155 LED150/840 PSU 150W AWB CE	150	15.000	100	✗	4000	IP65		33129499

Ledinaire floodlight - continued

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W		K		
1 BVP155 LED157/840 PSU 150W VWB CE	150	15.750	105	✗	4000	IP65	33126399
2 BVP155 LED200/840 PSU 200W AWB CE	200	20.000	100	✗	4000	IP65	33130099
3 BVP155 LED210/840 PSU 200W VWB CE	200	21.000	105	✗	4000	IP65	33127099

Ledinaire LED luminaires

Ledinaire batten

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
BN013C LED5S/830 L300	5	475	100	-	☒	3000	IP20	34953499
BN013C LED5S/840 L300	5	500	100	-	☒	4000	IP20	34952799
BN013C LED10S/830 L600	10	940	100	-	☒	3000	IP20	34955899
BN013C LED10S/840 L600	10	1000	100	-	☒	4000	IP20	34954199
BN013C LED14S/830 L900	15	1410	100	-	☒	3000	IP20	34957299
BN013C LED15S/840 L900	15	1500	100	-	☒	4000	IP20	34956599
BN060C 1xTLED16/840 L1200	18	1600	89	-	☒	4000	IP20	07007999
BN013C LED19S/830 L1200	20	1880	100	-	☒	3000	IP20	34959699
BN013C LED20S/840 L1200	20	2000	100	-	☒	4000	IP20	34958999
BN013C LED24S/830 L1500	24	2350	100	-	☒	3000	IP20	34961999
BN013C LED25S/840 L1500	24	2500	100	-	☒	4000	IP20	34960299
BN060C 2xTLED16/840 L1200	36	3200	89	-	☒	4000	IP20	07009399

Ledinaire batten - Accesory

www.lighting.philips.com/main/products/ledinaire





Product Type	IP rating	EOC code
BN060Z C600 (10 PCS)	IP20	07029199


Ledinaire LED luminaires



Ledinaire high-bay

www.lighting.philips.com/main/products/ledinaire



 = Dimmable
 = Non-Dimmable

 L65 at 50.000
 4 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	IP rating	EOC code
	W	lm	lm/W	°		K		
BY020P LED100S/840 PSU WB GR	97	10.000	103	100		4000	IP65	33996299
BY021P LED200S/840 PSU WB GR	190	20.000	105	100		4000	IP65	33998699

Ledinaire high-bay - Accessory

www.lighting.philips.com/main/products/ledinaire



 4/6 PACK

Product Type	EOC code
BY020Z AC	33992499
BY021Z AC	33994899

Ledinaire LED luminaires

Ledinaire Waterproof Tube Housing

www.lighting.philips.com/main/products/ledinaire



9/12 PACK

Product Type	IP rating	EOC code
WT050C 1xTLED L1200	IP43/65	36602999
WT050C 1xTLED L1500	IP43/65	36604399
WT050C 2xTLED L1200	IP43/65	36603699
WT050C 2xTLED L1500	IP43/65	36605099

Create the perfect ambience for every space

MASTER LEDspot ExpertColor features a light spectrum similar to halogens, for a true color experience.

MASTER LEDspot ExpertColor




LED lamps and tubes

LED lamps save you up to 69% energy and offer the same light quality as conventional lamps. Philips MASTER LED lamps provide you with constant colors, high performance and maximum dimming compatibility. CorePro lamps are good for energy savings of up to 69% and have a lifespan of 30,000 hours. The complete range of Philips LED lamps is designed as a 1-on-1 replacement for currently installed conventional lighting.

Master ledspot expertcolor mv

www.philips.com/ledlamps



Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
MASTER LED ExpertColor 3.9-35W GU10 927 25D	35	3.9	265	67.95	700	25	●	97	2700	40.000	A+	70749400
MASTER LED ExpertColor 3.9-35W GU10 927 36D	35	3.9	265	67.95	540	36	●	97	2700	40.000	A+	70755500
MASTER LED ExpertColor 3.9-35W GU10 930 25D	35	3.9	280	71.00	750	25	●	97	3000	40.000	A+	70751700
MASTER LED ExpertColor 3.9-35W GU10 930 36D	35	3.9	280	71.00	560	36	●	97	3000	40.000	A+	70757900
MASTER LED ExpertColor 3.9-35W GU10 940 25D	35	3.9	300	76.00	800	25	●	97	4000	40.000	A+	70753100
MASTER LED ExpertColor 3.9-35W GU10 940 36D	35	3.9	300	76.00	600	36	●	97	4000	40.000	A+	70759300
MASTER LED ExpertColor 5.5-50W GU10 927 25D	50	5.5	355	64.55	1000	25	●	97	2700	40.000	A+	70761600
MASTER LED ExpertColor 5.5-50W GU10 927 36D	50	5.5	355	64.55	800	36	●	97	2700	40.000	A+	70767800
MASTER LED ExpertColor 5.5-50W GU10 930 25D	50	5.5	375	68.00	1000	25	●	97	3000	40.000	A+	70763000
MASTER LED ExpertColor 5.5-50W GU10 930 36D	50	5.5	375	68.00	800	36	●	97	3000	40.000	A+	70769200
MASTER LED ExpertColor 5.5-50W GU10 940 25D	50	5.5	400	72.00	1050	25	●	97	4000	40.000	A+	70765400
MASTER LED ExpertColor 5.5-50W GU10 940 36D	50	5.5	400	72.00	800	36	●	97	4000	40.000	A+	70771500

Sceneswitch ledspot

www.philips.com/ledlamps



Product Type	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
LED SceneSwitch 50W GU10 WW 36D ND SRT4	1.5	345	69.00	36	⊗	80	-	15.000	A+	71093701
LED SceneSwitch 50W GU10 WW 36D RF ND 1BC/6	1.5	345	69.00	36	⊗	80	-	15.000	A+	71093700

LED lamps and tubes

Master ledspot expertcolor lv

www.philips.com/ledlamps




Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
1 MASTER LED ExpertColor 6.5-35W MR16 930 36D	35	6.5	440	67.69	1400	36	●	97	3000	40.000	A+	73885600
2 MASTER LED ExpertColor 6.5-35W MR16 927 10D	35	6.5	410	63.00	4600	10	●	97	2700	40.000	A	73871900
1 MASTER LED ExpertColor 6.5-35W MR16 927 24D	35	6.5	420	64.62	2200	24	●	97	2700	40.000	A	73877100
1 MASTER LED ExpertColor 6.5-35W MR16 927 36D	35	6.5	420	64.62	1300	36	●	97	2700	40.000	A	73883200
1 MASTER LED ExpertColor 6.5-35W MR16 927 60D	35	6.5	400	61.54	410	60	●	97	2700	40.000	A	75751200
2 MASTER LED ExpertColor 6.5-35W MR16 930 10D	35	6.5	430	66.15	5000	10	●	97	3000	40.000	A	73873300
1 MASTER LED ExpertColor 6.5-35W MR16 930 24D	35	6.5	440	67.69	2350	24	●	97	3000	40.000	A+	73879500
1 MASTER LED ExpertColor 6.5-35W MR16 930 60D	35	6.5	440	67.69	440	60	●	97	3000	40.000	A+	75753600
2 MASTER LED ExpertColor 6.5-35W MR16 940 10D	35	6.5	440	67.69	5000	10	●	97	4000	40.000	A+	73875700
1 MASTER LED ExpertColor 6.5-35W MR16 940 24D	35	6.5	460	70.77	2350	24	●	97	4000	40.000	A+	73881800
1 MASTER LED ExpertColor 6.5-35W MR16 940 36D	35	6.5	460	70.77	1400	36	●	97	4000	40.000	A+	73887000
1 MASTER LED ExpertColor 6.5-35W MR16 940 60D	35	6.5	440	67.69	440	60	●	97	4000	40.000	A+	75755000
3 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 927 10D EZ10	50	7.2	450	62.50	4500	10	●	97	2700	40.000		69220200
4 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 927 24D EZ10	50	7.2	450	62.50	2200	24	●	97	2700	40.000		69230100
4 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 927 36D EZ10	50	7.2	450	62.50	1350	36	●	97	2700	40.000		69236300
3 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 930 10D EZ10	50	7.2	480	66.67	5000	10	●	97	3000	40.000		69224000
4 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 930 24D EZ10	50	7.2	480	66.67	2400	24	●	97	3000	40.000		69232500
4 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 930 36D EZ10	50	7.2	480	66.67	1450	36	●	97	3000	40.000		69238700
3 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 940 10D EZ10	50	7.2	480	66.67	5000	10	●	97	4000	40.000		69228800
4 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 940 24D EZ10	50	7.2	480	66.67	2400	24	●	97	4000	40.000		69234900
4 MASTER LED ExpertColor MR16 ExpertColor7.2-50W 940 36D EZ10	50	7.2	480	66.67	1450	36	●	97	4000	40.000		69240000
2 MASTER LED ExpertColor 7.5-43W MR16 927 36D	43	7.5	485	64.67	1400	36	●	92	2700	40.000	A	73544200
2 MASTER LED ExpertColor 7.5-43W MR16 930 24D	43	7.5	500	66.67	2600	24	●	92	3000	40.000	A	73540400
2 MASTER LED ExpertColor 7.5-43W MR16 930 36D	43	7.5	500	66.67	1550	36	●	92	3000	40.000	A	73546600
2 MASTER LED ExpertColor 7.5-43W MR16 940 24D	43	7.5	520	69.33	2800	24	●	92	4000	40.000	A	73542800
2 MASTER LED ExpertColor 7.5-43W MR16 940 36D	43	7.5	520	69.33	1650	36	●	92	4000	40.000	A	73548000
2 MASTER LED ExpertColor 7.5-43W MR16 927 24D	43	7.5	485	64.67	2400	24	●	92	2700	40.000	A	73538100

LED lamps and tubes

Master value ledspot lv

www.philips.com/ledlamps




Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
1 MAS LEDspotLV 3.5-20W 827 MR11 24D	20	3.5	210	60.00	1000	24	✗	80	2700	40.000	A+	41019600
2 MAS LEDspotLV DimTone 5-35W MR16 36D	35	5	345	69.00	600	36	●	80	2700	25.000	A+	81538000
3 MAS LED spot VLE D 5.5-35W MR16 827 36D	35	5.5	450	81.82	1000	36	●	80	2700	25.000	A+	70823100
3 MAS LED spot VLE D 5.5-35W MR16 827 60D	35	5.5	450	81.82	500	60	●	80	2700	25.000	A+	70829300
3 MAS LED spot VLE D 5.5-35W MR16 830 36D	35	5.5	460	83.64	1000	36	●	80	3000	25.000	A+	70825500
3 MAS LED spot VLE D 5.5-35W MR16 830 60D	35	5.5	460	83.64	500	60	●	80	3000	25.000	A+	70831600
3 MAS LED spot VLE D 5.5-35W MR16 840 36D	35	5.5	490	89.09	1100	36	●	80	4000	25.000	A+	70827900
3 MAS LED spot VLE D 5.5-35W MR16 840 60D	35	5.5	490	89.09	550	60	●	80	4000	25.000	A+	70833000
4 MAS LEDspotLV DimTone 6.5-35W MR16 24D	35	6.5	410	63.08	1800	24	●	80	2700	25.000	A	44213500
4 MAS LEDspotLV DimTone 6.5-35W MR16 36D	35	6.5	410	63.08	900	36	●	80	2700	25.000	A	44215900
2 MAS LED SPOT VLE D 7-50W MR16 827 36D	50	7	621	88.00	1500	36	●	80	2700	25.000	A+	81554000
2 MAS LED SPOT VLE D 7-50W MR16 830 36D	50	7	630	90.00	1500	36	●	80	3000	25.000	A+	81556400
2 MAS LED SPOT VLE D 7-50W MR16 840 36D	50	7	660	94.00	1650	36	●	80	4000	25.000	A+	81558800
5 MAS LEDspotLV DimTone 7-50W MR16 36D	50	7	621	88.00	1000	36	●	80	2700	25.000	A+	65820500

LED lamps and tubes

Master value ledspot mv

www.philips.com/ledlamps



Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
1 MASTER LED spot VLE D 3.7-35W GU10 927 36D	35	3.7	260	78.38	500	36	●	90	2700	25.000	A+	70773900
1 MASTER LED spot VLE D 3.7-35W GU10 927 60D	35	3.7	260	78.38	330	60	●	90	2700	25.000	A+	70779100
1 MASTER LED spot VLE D 3.7-35W GU10 930 36D	35	3.7	270	81.08	500	36	●	90	3000	25.000	A+	70775300
1 MASTER LED spot VLE D 3.7-35W GU10 930 60D	35	3.7	270	81.08	340	60	●	90	3000	25.000	A+	70781400
1 MASTER LED spot VLE D 3.7-35W GU10 940 36D	35	3.7	285	85.14	500	36	●	90	4000	25.000	A++	70777700
1 MASTER LED spot VLE D 3.7-35W GU10 940 60D	35	3.7	285	85.14	350	60	●	90	4000	25.000	A++	70783800
1 MASTER LED spot VLE DT 3.7-35W GU10 927 36D	35	3.7	260	78.38	500	36	●	90	2700	25.000	A+	70809500
1 MASTER LED spot VLE D 4.9-50W GU10 927 36D	50	4.9	355	80.61	650	36	●	90	2700	25.000	A+	70785200
1 MASTER LED spot VLE D 4.9-50W GU10 927 60D	50	4.9	355	80.61	400	60	●	90	2700	25.000	A+	70791300
1 MASTER LED spot VLE D 4.9-50W GU10 930 36D	50	4.9	365	82.65	650	36	●	90	3000	25.000	A+	70787600
1 MASTER LED spot VLE D 4.9-50W GU10 930 60D	50	4.9	365	82.65	400	60	●	90	3000	25.000	A+	70793700
1 MASTER LED spot VLE D 4.9-50W GU10 940 36D	50	4.9	380	85.71	700	36	●	90	4000	25.000	A+	70789000
1 MASTER LED spot VLE D 4.9-50W GU10 940 60D	50	4.9	380	85.71	400	60	●	90	4000	25.000	A+	70795100
1 MASTER LED spot VLE DT 4.9-50W GU10 927 36D	50	4.9	355	80.61	650	36	●	90	2700	25.000	A+	70811800
2 MASTER LEDspot VLE D 5-50W GU10 827 36D 5CT	50	5	345	69.00	650	36	●	80	2700	25.000	A+	73950800
2 MASTER LEDspot VLE D 5-50W GU10 830 36D 5CT	50	5	345	69.00	650	36	●	80	3000	25.000	A+	74716900
3 MASTER LED spot VLE D 6.2-80W GU10 927 36D	80	6.2	575	92.00	850	36	●	90	2700	25.000	A++	67541700
3 MASTER LED spot VLE D 6.2-80W GU10 930 36D	80	6.2	575	92.00	850	36	●	90	3000	25.000	A++	70525100
3 MASTER LED spot VLE D 6.2-80W GU10 940 36D	80	6.2	575	92.00	850	36	●	90	4000	25.000	A++	70523700
3 MASTER LED spot VLE D 6.2-80W GU10 965 36D	80	6.2	575	92.00	850	36	●	90	6500	25.000	A++	70607400
3 MASTER LED spot VLE D 650lm GU10 930 120D		6.2	650	104.00	200	120	●	90	3000	25.000	A+	70609800
3 MASTER LED spot VLE D 680lm GU10 940 120D		6.2	680	109.00	200	120	●	90	4000	25.000	A+	70611100
3 MASTER LED spot VLE D 680lm GU10 965 120D		6.2	680	109.00	200	120	●	90	6500	25.000	A+	70613500
4 MASTER LED spot VLE D 650lm GU10 830 120D		7	650	92.86		120	●	80	3000	25.000	A+	72431600
4 MASTER LED spot VLE D 680lm GU10 840 120D		7	680	97.14		120	●	80	4000	25.000	A+	72433000
4 MASTER LED spot VLE D 680lm GU10 865 120D		7	680	97.14		120	●	80	6500	25.000	A+	72435400
1 MASTER LED spot VLE D 7-80W GU10 830 36D	80	7	590	84.29	1200	36	●	80	3000	25.000	A+	70797500
1 MASTER LED spot VLE D 7-80W GU10 840 36D	80	7	610	87.14	1200	36	●	80	4000	25.000	A+	70799900
1 MASTER LED spot VLE D 7-80W GU10 865 36D	80	7	610	87.14	1200	36	●	80	6500	25.000	A+	70801900

LED lamps and tubes

Master ledspot par

www.philips.com/ledlamps




Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
1 MAS LEDspot CLA D 6-50W 827 PAR20 25D	50	6	500	86.67	1500	25	●	80	2700	25,000	A+	71356300
1 MAS LEDspot CLA D 6-50W 840 PAR20 25D	50	6	540	92.50	1500	25	●	80	4000	25,000	A+	71368600
2 MAS LEDspot CLA ND 9-60W 827 PAR38 25D	60	9	750	88.89	1800	25	⊗	80	2700	15,000	A+	71456000
3 MAS LEDspot CLA D 9.5-75W 830 PAR30S 25D	75	9.5	760	85.26	3500	25	●	80	3000	25,000	A+	71390700

LED lamps and tubes

Master ledspot lv ar111

www.philips.com/ledlamps




Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
1 MAS LEDspotLV D 11-50W 927 AR111 24D	50	11	560	50.91	2900	24	●	90	2700	40.000	A	51488700
1 MAS LEDspotLV D 11-50W 927 AR111 40D	50	11	550	50.00	1100	40	●	90	2700	40.000	A	51492400
2 MAS LEDspotLV D 11-50W 927 AR111 8D	50	11	560	50.91	7800	8	●	90	2700	40.000	A	57833900
1 MAS LEDspotLV D 11-50W 930 AR111 24D	50	11	580	52.73	3000	24	●	90	3000	40.000	A	51490000
1 MAS LEDspotLV D 11-50W 930 AR111 40D	50	11	570	51.82	1150	40	●	90	3000	40.000	A	51494800
2 MAS LEDspotLV D 11-50W 930 AR111 8D	50	11	580	52.73	8000	8	●	90	3000	40.000	A	57835300
1 MAS LEDspotLV D 15-75W 927 AR111 24D	75	15	800	53.33	3900	24	●	90	2700	40.000	A	51496200
1 MAS LEDspotLV D 15-75W 927 AR111 40D	75	15	800	53.33	1400	40	●	90	2700	40.000	A	51500600
1 MAS LEDspotLV D 15-75W 930 AR111 24D	75	15	810	54.00	4000	24	●	90	3000	40.000	A	51498600
1 MAS LEDspotLV D 15-75W 930 AR111 40D	75	15	810	54.00	1450	40	●	90	3000	40.000	A	51502000
1 MAS LEDspotLV D 15-75W 940 AR111 24D	75	15	830	55.33	4100	24	●	90	4000	40.000	A	71834600
1 MAS LEDspotLV D 15-75W 940 AR111 40D	75	15	830	55.33	1500	40	●	90	4000	40.000	A	71836000
1 MAS LEDspotLV D 20-100W 827 AR111 24D	100	20	1180	59.00	5800	24	●	80	2700	25.000	A	51504400
1 MAS LEDspotLV D 20-100W 827 AR111 40D	100	20	1160	58.00	2300	40	●	80	2700	25.000	A	70745600
1 MAS LEDspotLV D 20-100W 830 AR111 24D	100	20	1200	60.00	6000	24	●	80	3000	25.000	A	70743200
1 MAS LEDspotLV D 20-100W 830 AR111 40D	100	20	1180	59.00	2350	40	●	80	3000	25.000	A	70747000
1 MAS LEDspotLV D 20-100W 840 AR111 24D	100	20	1250	62.50	6100	24	●	80	4000	25.000	A	72532000
1 MAS LEDspotLV D 20-100W 840 AR111 40D	100	20	1250	62.50	2400	40	●	80	4000	25.000	A	72534400

LED lamps and tubes

Corepro ledspot reflectors

www.philips.com/ledlamps



Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
1 CorePro LEDspot ND1.4-25W R50 E14 827 36D	25	1.4	105	75.00		36	✗	80	2700	15.000	A++	81173300
2 CorePro LEDspot ND1.8-30W R39 E14 827 36D	30	1.8	150	83.00	250	36	✗	80	2700	15.000	A++	81171900
1 CorePro LEDspot ND2.8-40W R50 E14 827 36D	40	2.8	210	75.00		36	✗	80	2700	15.000	A++	81175700
3 CorePro LEDspot ND 3-40W R63 E27 827 36D	40	3	210	70.00		36	✗	80	2700	15.000	A+	81179500
4 CorePro LEDspot ND 4-60W R80 E27 827 36D	60	4	345	86.00		36	✗	80	2700	15.000	A+	81183200
1 CorePro LEDspot D 4.3-60W R50 E14 827 36D	60	4.3	320	74.00		36	●	80	2700	15.000	A+	81177100
3 CorePro LEDspot D 4.5-60W R63 E27 827 36D	60	4.5	345	76.00		36	●	80	2700	15.000	A+	81181800
4 CorePro LEDspot ND 8-100W R80 E27 827 36D	100	8	670	83.00		36	✗	80	2700	15.000	A+	81185600

Corepro ledspot lv

www.philips.com/ledlamps




Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
1 CorePro LED spot 2.3-20W 827 MR11 36D	20	2.3	184	80.00	400	36	✗	80	2700	25.000	A++	65948600
2 CorePro LED spot 2.6-20W 827 MR11 36D	20	2.6	190	63.33	400	36	✗	80	2700	15.000	A+	70868200
3 CorePro LED spot ND 3-20W MR16 827 36D	20	3	230	76.00	600	36	✗	80	2700	15.000	A++	71061600
4 CorePro LED spot ND 5-35W MR16 827 36D	35	5	345	69.00	650	36	✗	80	2700	15.000	A+	71063000
4 CorePro LED spot ND 5-35W MR16 840 36D	35	5	390	78.00	650	36	✗	80	4000	15.000	A+	71065400
5 CorePro LED spot ND 7-50W MR16 827 36D	50	7	621	88.00	1400	36	✗	80	2700	15.000	A+	81471000
5 CorePro LED spot ND 7-50W MR16 830 36D	50	7	621	88.00	1400	36	✗	80	3000	15.000	A+	81477200
5 CorePro LED spot ND 7-50W MR16 840 36D	50	7	660	94.00	1500	36	✗	80	4000	15.000	A+	81479600

LED lamps and tubes

Corepro ledspot mv

www.philips.com/ledlamps




Product Type	Traditional	LED	Lumen Output	Efficacy	Luminous Intensity	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	cd	°			K	Hrs.		
1 Corepro LEDspot 2.7-25W GU10 827 36D	25	2.7	215	79.00	470	36	✗	80	2700	15.000	A++	75209800
2 Corepro LEDspot 2.7-25W GU10 830 36D	25	2.7	225	83.00	490	36	✗	80	3000	15.000	A++	72829100
2 Corepro LEDspot 2.7-25W GU10 840 36D	25	2.7	230	85.00	500	36	✗	80	4000	15.000	A++	72831400
1 Corepro LEDspot 3.5-35W GU10 827 36D	35	3.5	255	72.00	545	36	✗	80	2700	15.000	A+	75253100
2 Corepro LEDspot 3.5-35W GU10 830 36D	35	3.5	265	75.00	565	36	✗	80	3000	15.000	A++	72833800
2 Corepro LEDspot 3.5-35W GU10 840 36D	35	3.5	275	78.00	590	36	✗	80	4000	15.000	A++	72835200
3 CorePro LEDspot 4-35W GU10 827 36D DIM	35	4	250	62.00	500	36	●	80	2700	15.000	A+	72133900
4 CorePro LEDspot 4-35W GU10 830 36D DIM	35	4	260	65.00	540	36	●	80	3000	15.000	A+	72135300
4 CorePro LEDspot 4-35W GU10 840 36D DIM	35	4	270	67.00	540	36	●	80	4000	15.000	A+	73022500
1 Corepro LEDspot 4.6-50W GU10 827 36D	50	4.6	355	77.00	700	36	✗	80	2700	15.000	A+	75251700
2 Corepro LEDspot 4.6-50W GU10 830 36D	50	4.6	370	80.00	740	36	✗	80	3000	15.000	A+	72837600
2 Corepro LEDspot 4.6-50W GU10 840 36D	50	4.6	390	84.00	770	36	✗	80	4000	15.000	A++	72839000
2 Corepro LEDspot 4.6-50W GU10 865 36D	50	4.6	390	84.00	770	36	✗	80	6500	15.000	A++	72841300
3 CorePro LEDspot 5-50W GU10 827 36D DIM	50	5	350	70.00	650	36	●	80	2700	15.000	A+	72137700
4 CorePro LEDspot 5-50W GU10 830 36D DIM	50	5	365	73.00	710	36	●	80	3000	15.000	A+	72139100
4 CorePro LEDspot 5-50W GU10 840 36D DIM	50	5	380	76.00	710	36	●	80	4000	15.000	A+	73024900
4 CorePro LEDspot 5-65W GU10 830 36D ND	65	5	460	92.00	800	36	✗	80	3000	15.000	A++	74385000
4 CorePro LEDspot 5-65W GU10 840 36D ND	65	5	485	97.00	800	36	✗	80	4000	15.000	A++	74387400

LED lamps and tubes

Corepro ledcapsule lv


www.philips.com/ledlamps



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 CorePro LEDcapsuleLV 0.9-10W G4 827	10	0.9	110	122.00	✗	80	2700	15.000	A++	79312100
2 CorePro LEDcapsuleLV 1.7-20W G4 827	20	1.7	205	120.00	✗	80	2700	15.000	A++	79310700
2 CorePro LEDcapsuleLV 1.7-20W GY6.35 827	20	1.7	210	123.00	✗	80	2700	15.000	A++	79767900
3 CorePro LEDcapsuleLV 2-20W G4 827 D	20	2	200	100.00	●	80	2700	15.000	A++	57865000
4 CorePro LEDcapsuleLV 2.5-28W G4 827	28	2.5	300	120.00	✗	80	2700	15.000	A++	82694200

Corepro ledcapsule mv

www.philips.com/ledlamps



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 CorePro LEDcapsule ND 1.9-25W G9 827	25	1.9	204	107.37	✗	80	2700	15.000	A++	71392100
1 CorePro LEDcapsule ND 1.9-25W G9 830	25	1.9	210	110.53	✗	80	3000	15.000	A++	72423100
2 CorePro LEDcapsule 2-25W ND G9 827 G	25	2	200	100.00	✗	80	2700	10.000	A++	73500500
2 CorePro LEDcapsule 2-25W ND G9 830 G	25	2	220	110.00	✗	80	3000	10.000	A++	73502900
3 CorePro LEDcapsuleMV 2.3-25W G9 827 D	25	2.3	215	93.48	●	80	2700	15.000	A++	57869800
4 CorePro LEDcapsule ND 3.2-40W G9 827	40	3.2	400	125.00	✗	80	2700	15.000	A++	81526700
5 CorePro LEDcapsule 3.5-40W ND G9 827 G	40	3.5	380	108.00	✗	80	2700	10.000	A++	73506700
5 CorePro LEDcapsule 3.5-40W ND G9 830 G	40	3.5	400	114.00	✗	80	3000	10.000	A++	73508100
6 CorePro LEDcapsule ND 4.8-60W G9 827	60	4.8	570	118.00	✗	80	2700	15.000	A++	65780200



LED lamps and tubes



Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
1 CorePro LED linear R7S 78mm 4-40W 830 G	40	4	475	118.00		✗	80	3000	10.000	A++	73512800
2 CorePro LED linear R7S 118mm 6.5-60W 830	60	6.5	806	124	300	✗	80	3000	20.000	A++	52253000
3 CorePro LEDlinear ND 7.5-60W R7S 78mm830	60	7.5	950	126.67		✗	80	3000	15.000	A++	71394500
3 CorePro LEDlinear ND 7.5-60W R7S 78mm840	60	7.5	1000	133.33		✗	80	4000	15.000	A++	71396900
4 CorePro LED linear R7S 118mm 8.1-60W 830 G	60	8.1	900	111.00		✗	80	3000	10.000	A+	73516600
4 CorePro LED linear R7S 118mm 8.1-60W 840 G	60	8.1	970	119.00		✗	80	4000	10.000	A++	73518000
5 CorePro LED linear D 14-120W R7S 118 830	120	14	2000	142.86		●	80	3000	15.000	A++	71400300
5 CorePro LED linear D 14-120W R7S 118 840	120	14	2000	142.86		●	80	4000	15.000	A++	71406500
6 CorePro LED linear R7S 118mm 14-100W 830 D	100	14	1600	114.29		●	80	3000	15.000	A+	57879700
7 CorePro LED linear R7S 118mm 14-100W 840 D	100	14	1800	128.57		●	80	4000	15.000	A++	57881000
8 CoreProLED linearD 17.5-150W R7S 118 830	150	17.5	2460	140.00		●	80	3000	15.000	A++	64673800
8 CoreProLED linearD 17.5-150W R7S 118 840	150	17.5	2460	140.00		●	80	4000	15.000	A++	64675200

Designed to be seen

Today our work spaces need to fulfil multiple functions. We produce, meet, present, sell and require our lighting to be adaptable to meet every need and mood. There is a growing demand for lighting to be decorative and stylish; it needs to be designed to be seen. The Philips Deco collections are highly stylish giant filament LED bulbs, designed to make a statement and accentuate your customer's office or shop interior, or to complement the style in a hotel, bar or restaurant. Complement multiple design preferences with Philips unique filament designs.



Deco LED Vintage Giant

Accentuates a traditional warm & cozy vintage atmosphere.



Deco LED Modern Giant


Modern, a bright and sleek, fresh, forward design.

Easy to upgrade, simple to install

Both collections get the most out of classic designs, so you're able to select the perfect shape, from a choice of 'Globe', 'Teardrop' or 'Tubular' shaped bulbs. Dimmable and non-dimmable.

LED Bulbs


Decorative ledbulbs



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 CLA LEDBulb SP ND 5-25W E27 GOLD G93 CL	25	5	250	50.00	✗	80	2000	15.000	A	74415400
2 CLA LEDBulb SP ND 5-25W E27 GOLD ST64 CL	25	5	250	50.00	✗	80	2000	15.000	A	74413000
3 LED classic-giant 25W E27 A160 GOLD ND	25	5	300	60.00	✗	80	2000	15.000	A	76806800
4 LED classic-giant 25W E27 G200 GOLD ND	25	5	300	60.00	✗	80	2000	15.000	A	76808200
5 LED giant 25W E27 A160 4000K smoky D	25	6.5	270	41.00	●	80	4000	15.000	A	81510600
6 LED giant 25W E27 G200 4000K smoky D	25	6.5	270	41.00	●	80	4000	15.000	A	81506900
7 LED giant 25W E27 T65 4000K smoky D	25	6.5	270	41.00	●	80	4000	15.000	A	81512000
6 LED giant E27 G200 modern D + black CORD	25	6.5	270	41.00	●	80	4000	15.000	A	62948900
8 LEDClassic 30W Mushroom E27 2000K GOLD D	30	5	350	70.00	●	80	2000	15.000	A+	59351300


LED Bulbs

Decorative ledbulbs - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 LED classic-giant 40W E27 A160 GOLD DIM	40	6.5	470	72.00	●	80	2000	15.000	A+	80349300
2 LED classic-giant 40W E27 G200 GOLD DIM	40	6.5	470	72.00	●	80	2000	15.000	A+	80347900
3 LED classic-giant 40W E27 T65 GOLD DIM	40	6.5	470	72.00	●	80	2000	15.000	A+	80351600
2 LED giant E27 G200 VIN D + rosegold CORD	40	6.5	470	72.00	●	80	2000	15.000	A+	62950200
4 LEDClassic 40W Diamond E27 2700K CL D	40	5	500	100.00	●	80	2700	15.000	A+	59353700
5 CLA LEDBulb D 7.5-48W A60 B22 820 GOLD	48	7.5	610	81.33	●	80	2000	15.000	A+	70958000
6 LED classic CM 48W A60 E27 WW CL D SRT4	48	7.5	610	81.33	●	80	2700	15.000	A+	70926900
7 CLA LEDBulb D 8-50W A60 E27 822 GOLD	50	8	630	78.00	●	80	2200	15.000	A+	84154900
8 CLA LEDBulb D 8-50W G120 E27 822 GOLD	50	8	630	78.00	●	80	2200	15.000	A+	81437600

Decorative ledbulbs - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 CLA LEDBulb D 8-50W ST64 E27 822 GOLD	50	8	630	78.00	●	80	2200	15.000	A+	81435200
2 LEDClassic 50W G120 E27 2700K CM D	50	8	700	87.00	●	80	2700	15.000	A+	59341400

LED Bulbs

Accessory



Product Type	LED	Efficacy	EOC code
	W	lm/W	
1 CORD/classic/E27/gold 1CT EU RF	40	0.00	16777900
2 CORD/modern/E27/black 1CT EU RF	40	0.00	16776200
3 CORD/VIN/E27/rose gold 1CT EU	40	0.00	62405700

Master ledbulbs



Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
1 MASTER LED bulb DT 5.5-40WE27 927-922 A60FR	40	5.5	470	85.00	200	●	90	-	25.000	A+	70709800
2 MASTER LEDbulb DT 6-40W B22 A60 CL	40	6	470	78.00		●	80	-	25.000	A+	48130100
3 MASTER LEDbulb DT 6-40W E27 A60 CL	40	6	470	78.00		●	80	-	25.000	A+	48128800
4 MASTER LED bulb DT 9-60W E27 927-922 A60 FR	60	9	806	89.00	200	●	90	-	25.000	A+	70711100
5 MASTER LEDbulb DT 8.5-60W B22 A60 CL	60	8.5	806	94		●	80	-	25.000	A+	48134900
6 MASTER LEDbulb DT 8.5-60W E27 A60 CL	60	8.5	806	94		●	80	-	25.000	A+	48132500
7 MASTER LED bulb DT 12-75WE27 927-922 A67 FR	75	12	1055	87.00	200	●	90	-	25.000	A+	82618800
8 MASTER LEDbulb DT 11-75W A67 B22 827 FR	75	11	1055	96		●	80	-	25.000	A+	55553800
8 MASTER LEDbulb DT 15-100W A67 B22 827 FR	100	15	1521	101		●	80	-	25.000	A+	55557600
7 MASTERLEDbulb DT 14-100WE27 927-922 A67FR	100	14	1521	108.00	200	●	90	-	25.000	A+	69564400


LED Bulbs

Sceneswitch ledbulbs



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 LEDClassic SSW 60W A60 E27 WW CL ND 1SRT		7.5	806-320-150	107.00	✗	80	-	15.000	A+	74309602
2 LED Scene Switch 60W A60 E27 WW FR ND 1SRT4	60	8	806-320-80	100.00	✗	80	-	15.000	A+	58884002


Classic filament ledbulbs



	Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	W	lm	lm/W	°			K	Hrs.		
NEW	1 LED CLA giant 25W E27 G200 pink DIM	25	4.5	270	60.00		●	80	1800	15.000	A+	26957600
NEW	2 LED classic 25W G120 E27 gradient D 1PF	25	4.5	250	55.00		●	80	1800	15.000	A	26961300
NEW	3 LED classic 25W G93 E27 pink D 1PF/4	25	4.5	250	55.00		●	80	1800	15.000	A	26955200
NEW	4 LED classic 25W ST64 E27 gradient D SRT	25	4.5	250	55.00		●	80	1800	15.000	A	26959000
NEW	5 LED classic 25W ST64 E27 pink D SRT4	25	4.5	250	55.00		●	80	1800	15.000	A	26953800
NEW	6 LED classic 25W G93 E27 GOLD SP D SRT4	25	5.5	250	45.00		●	80	2000	15.000	A	67607000
NEW	7 LED CLA giant 28W E27 G200 gradient D	28	4.5	300	66.00		●	80	1800	15.000	A+	26963700
NEW	8 CLA LEDBulb DT 5-40W B22 CRI90 A60 FR	40	5	470	94.00	270	●	90	2700	15.000	A+	77124900

LED Bulbs

Classic filament ledbulbs - continued



Product Type		Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	W	lm	lm/W	°			K	Hrs.		
NEW	1 CLA LEDBulb DT 5-40W E27 CRI90 A60 FR	40	5	470	94.00	270	●	90	2700	15.000	A+	78009800
NEW	1 CLA LEDBulb ND 4.5-40W E27 830 A60 FR	40	4.5	470	104.00		⊗	80	3000	15.000	A++	25004800
	2 CLA LED bulb ND 4-40W B22 827 A60 CL	40	4	470	118.00		⊗	80	2700	15.000	A++	76868600
	3 CLA LEDBulb D 5-40W A60 B22 827 CL	40	5.5	470	85.00		●	80	2700	15.000	A+	70942900
	4 CLA LEDBulb D 5.5-40W A60 E27 827 CL	40	5.5	470	85.00		●	80	2700	15.000	A+	70940500
	5 CLA LEDBulb DT6.7-40W E27 CRI90 A60 CL	40	6.7	470	70.00		●	90	-	15.000	A+	64616500
	6 CLA LEDBulb ND 4-40W A60 E27 827 CL	40	4.3	470	109.00		⊗	80	2700	15.000	A++	63086700
	7 CLA LEDBulb ND 4-40W ST64 E27 827 CL	40	4	470	118.00		⊗	80	2700	15.000	A++	57403400
	6 CLA LEDBulb ND 4.3-40W E27 827 A60 CL	40	4.3	470	109.00		⊗	80	2700	15.000	A++	80867200
NEW	8 CLA LEDBulb DT 7-60W B22 CRI90 A60 FR	60	7	806	115.00	270	●	90	2700	15.000	A++	77126300
NEW	1 CLA LEDBulb DT 7-60W E27 CRI90 A60 FR	60	7	806	115.00	270	●	90	2700	15.000	A++	78013500
NEW	1 CLA LEDBulb ND 7-60W E27 830 A60 FR	60	7	806	115.00		⊗	80	3000	15.000	A++	25006200

LED Bulbs

Classic filament ledbulbs - continued




● = Dimmable
 ⊗ = Non-Dimmable

2/4/6/10 PACK
 B22 / E27

Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
1 CLA LEDBulb D 8-60W A60 B22 827 CL	60	8	806	100.00		●	80	2700	15.000	A+	70946700
2 CLA LEDBulb D 8-60W A60 E27 827 CL	60	8	806	100.00		●	80	2700	15.000	A+	70944300
3 CLA LEDBulb D 8-60W G93 E27 827 CL	60	8	806	100.00		●	80	2700	15.000	A+	81431400
4 CLA LEDBulb D 8-60W ST64 B22 827 CL	60	8	806	100.00		●	80	2700	15.000	A+	81429100
5 CLA LEDBulb D 8-60W ST64 E27 827 CL	60	8	806	100.00		●	80	2700	15.000	A+	81427700
6 CLA LEDBulb DT9-60W E27 CRI90 ST64 CL	60	9	806	89.00		●	90	-	15.000	A+	64652300
1 CLA LEDBulb ND 7-60W B22 WW A60 CL	60	7	806	115.00		⊗	80	2700	15.000	A++	74277800
4 CLA LEDBulb ND 7-60W B22 WW ST64 CL	60	7	806	115.00		⊗	80	2700	15.000	A++	74279200
2 CLA LEDBulb ND 7-60W E27 WW A60 CL	60	7	806	115.00		⊗	80	2700	15.000	A++	74273000
3 CLA LEDBulb ND 7-60W E27 WW G93 CL	60	7	806	115.00		⊗	80	2700	15.000	A++	74271600
5 CLA LEDBulb ND 7-60W E27 WW ST64 CL	60	7	806	115.00		⊗	80	2700	15.000	A++	74275400
NEW 7 CLA LEDBulb DT10.5-75W B22 CRI90 A60 FR	75	10.5	1055	100.00	270	●	90	2700	15.000	A+	77108900
NEW 8 CLA LEDBulb DT10.5-75W E27 CRI90 A60 FR	75	10.5	1055	100.00	270	●	90	2700	15.000	A+	77106500
NEW 8 CLA LEDBulb ND 8.5-75W E27 830 A60 FR	75	8.5	1055	124.00		⊗	80	3000	15.000	A++	25008600


LED Bulbs

Classic filament ledbulbs - continued



	Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	W	lm	lm/W	°			K	Hrs.		
	1 CLA LEDBulb ND 8-75W E27 827 A60 CL	75	8	1055	131.00		⊗	80	2700	15.000	A++	80951800
	1 CLA LEDBulb ND 8.5-75W A60 E27 827 CL	75	8.5	1055	124.00		⊗	80	2700	15.000	A++	64908100
NEW	2 CLA LEDBulb DT12-100W E27 CRI90 A60 FR	100	12	1521	126.00	270	●	90	2700	15.000	A++	77102700
NEW	2 CLA LEDBulb ND 10.5-100W E27 830 A60 FR	100	10.5	1521	144.00		⊗	80	3000	15.000	A++	25010900
	3 CLA LEDBulb ND 10.5-100W A60 E27 827 CL	100	10.5	1521	144.00		⊗	80	2700	15.000	A++	64910400
	4 CLA LEDBulb ND 11-100W E27 827 A67 CL	100	11	1521	138.00		⊗	80	2700	15.000	A++	80959400
NEW	5 LED classic 120W A67 E27 CDL FR ND 1SRT4	120	13	2000	153.00		⊗	80	6500	15.000	A++	76455500
NEW	6 LED classic 120W A67 E27 CW CL ND 1SRT4	120	13	2000	153.00		⊗	80	4000	15.000	A++	76437100
NEW	5 LED classic 120W A67 E27 CW FR NDRF1SRT4	120	13	2000	153.00		⊗	80	4000	15.000	A++	76453100
NEW	6 LED classic 120W A67 E27 WW CL ND SRT4	120	13	2000	153.00		⊗	80	2700	15.000	A++	76435700
NEW	5 LED classic 120W A67 E27 WW FR NDRFSRT4	120	13	2000	153.00		⊗	80	2700	15.000	A++	76451700
NEW	5 LED classic 150W A67 E27 CDL FR ND 1SRT4	150	17.5	2452	140.00		⊗	80	6500	15.000	A++	76461600
NEW	7 LED classic 150W A67 E27 CW CL ND 1SRT4	150	17	2452	144.00		⊗	80	4000	15.000	A++	76439500
NEW	5 LED classic 150W A67 E27 CW FR ND 1SRT4	150	17.5	2452	140.00		⊗	80	4000	15.000	A++	76459300
NEW	5 LED classic 150W A67 E27 WW FR NDRFSRT4	150	17.5	2452	140.00		⊗	80	2700	15.000	A++	76457900
	8 CLA LEDBulb ND 17-150W A67 E27 827 CL	150	17	2452	144.00		⊗	80	2700	15.000	A++	65784000

Classic filament ledbulbs - continued



	Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	W	lm	lm/W			K	Hrs.		
NEW	LED classic 200W A95 E27 CDL FR ND 1PF/4	200	23	3452	150.00	⊗	80	6500	15.000	A++	76467800
NEW	LED classic 200W A95 E27 CW FR ND 1PF/4	200	23	3452	150.00	⊗	80	4000	15.000	A++	76465400
NEW	LED classic 200W A95 E27 WW FR ND 1PF	200	23	3452	150.00	⊗	80	2700	15.000	A++	76463000

LED Bulbs

Classic frosted led lamps



Product Type	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W			K	Hrs.		
LED classic 40W A60 E27 WW FR ND ICT/10	4.5	470	104.00	✗	80	2700	15.000	A++	41965601

Corepro ledbulbs




Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
1 CorePro LEDbulb D 5-40W A60 B22 927	40	5	470	94.00	150	●	90	2700	15.000	A+	66070300
2 CorePro LEDbulb D 5-40W A60 E27 927	40	5	470	94.00	150	●	90	2700	15.000	A+	66062800
3 CorePro LEDbulb D 5.5-40W A60 E27 827	40	5.5	470	85.45	150	●	80	2700	15.000	A+	76266000
3 CorePro LEDbulb ND 5-40W A60 E27 830	40	5	470	94.00	200	✗	80	3000	15.000	A+	57993000
3 CorePro LEDbulb ND 5-40W A60 E27 840	40	5	470	94.00	200	✗	80	4000	15.000	A+	57779000
4 CorePro LEDbulb ND 5.5-40W A60 B22 827	40	5.5	470	85.00	200	✗	80	2700	15.000	A+	57765300
3 CorePro LEDbulb ND 5.5-40W A60 E27 827	40	5.5	470	85.00	200	✗	80	2700	15.000	A+	57757800
5 CorePro LEDbulb D 8.5-60W A60 B22 927	60	8.5	806	94.00	150	●	90	2700	15.000	A+	66072700
6 CorePro LEDbulb D 8.5-60W A60 E27 827	60	8.5	806	94.00	200	●	80	-	15.000	A+	76270700
7 CorePro LEDbulb D 8.5-60W A60 E27 927	60	8.5	806	94.00	150	●	90	2700	15.000	A+	66064200
3 CorePro LEDbulb ND 7.5-60W A60 E27 830	60	7.5	806	107.00	200	✗	80	3000	15.000	A+	57771400
3 CorePro LEDbulb ND 7.5-60W A60 E27 840	60	7.5	806	107.00	200	✗	80	4000	15.000	A+	57777600
4 CorePro LEDbulb ND 8-60W A60 B22 827	60	8	806	100.00	200	✗	80	2700	15.000	A+	57763900
3 CorePro LEDbulb ND 8-60W A60 E27 827	60	8	806	100.00	200	✗	80	2700	15.000	A+	57755400
8 CorePro LEDbulb D 10.5-75W A60 B22 927	75	10.5	1055	100.00	150	●	90	2700	15.000	A+	66074100



LED Bulbs

Corepro ledbulbs - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
1 CorePro LEDbulb D 10.5-75W A60 E27 927	75	10.5	1055	100.00	150	●	90	2700	15.000	A+	66066600
2 CorePro LEDbulb D 11-75W A60 E27 827	75	11	1055	95.00	200	●	80	-	15.000	A+	76274500
3 CorePro LEDbulb ND 10-75W A60 E27 840	75	10	1055	105.00	200	⊗	80	4000	15.000	A+	51032200
4 CorePro LEDbulb ND 10-75W A60 E27 865	75	10	1055	105.00	200	⊗	80	6500	15.000	A+	49758600
4 CorePro LEDbulb ND 10.5-75W A60 E27 830	75	10.5	1055	100.00	200	⊗	80	3000	15.000	A+	49752400
5 CorePro LEDbulb ND 11-75W A60 B22 827	75	11	1055	95.00	200	⊗	80	2700	15.000	A+	57761500
3 CorePro LEDbulb ND 11-75W A60 E27 827	75	11	1055	95.00	200	⊗	80	2700	15.000	A+	49076100
6 CorePro LEDbulb D 13-100W A60 B22 927	100	13	1521	117.00	150	●	90	2700	15.000	A+	66076500
1 CorePro LEDbulb D 13-100W A60 E27 927	100	13	1521	117.00	150	●	90	2700	15.000	A+	66068000
7 CorePro LEDbulb D 13.5-100W A60 E27 827	100	13.5	1521	112.00	200	●	80	-	15.000	A+	81667700
3 CorePro LEDbulb ND 12.5-100W A60 E27 840	100	12.5	1521	121.00	200	⊗	80	4000	15.000	A+	51030800
5 CorePro LEDbulb ND 13-100W A60 B22 827	100	13	1521	117.00	200	⊗	80	2700	15.000	A+	51002500
3 CorePro LEDbulb ND 13-100W A60 E27 827	100	13	1521	117.00	200	⊗	80	2700	15.000	A+	49074700
3 CorePro LEDbulb ND 13-100W A60 E27 830	100	13	1521	117.00	200	⊗	80	3000	15.000	A+	57767700
8 CorePro LEDbulb ND 15.5-120WA67E27 840FR	120	15.5	2000	129.00	150	⊗	80	4000	15.000	A++	66218900
8 CorePro LEDbulb ND 17-120WA67E27 827FR	120	17	2000	117.00	150	⊗	80	2700	15.000	A+	66216500


Corepro ledbulbs - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
CorePro LEDbulb ND 17.5-150WA67E27 840FR	150	17.5	2500	142.00	150	⊗	80	4000	15.000	A++	66222600
CorePro LEDbulb ND 19-150WA67E27 827FR	150	19	2500	131.00	150	⊗	80	2700	15.000	A++	66220200


LED Bulbs

Classic filament led candles and lusters



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
LED classic 50W G120 E27 2200K GOLD 1PF	50	8	630	78.00	●	80	2200	15.000	A+	57543701


Corepro led candles and lusters



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Corepro Lustre ND 4-25W E14 827 P45 CL	25	4	250	62.50	✘	80	2700	15.000	A+	50759900
2 CorePro lustre ND 4-25W E14 827 P45 FR	25	4	250	62.50	✘	80	2700	15.000	A+	78703700
3 Corepro Lustre ND 4-25W E27 827 P45 CL	25	4	250	62.50	✘	80	2700	15.000	A+	50767400
4 CorePro lustre ND 4-25W E27 827 P45 FR	25	4	250	62.50	✘	80	2700	15.000	A+	78705100
1 Corepro lustre ND 5.5-40W E14 827 P45 CL	40	5.5	470	90.91	✘	80	2700	15.000	A+	45483100
2 CorePro lustre ND 5.5-40W E14 827 P45 FR	40	5.5	470	85.45	✘	80	2700	15.000	A+	47489100
1 Corepro lustre ND 5.5-40W E14 840 P45 CL	40	5.5	520	94.55	✘	80	4000	15.000	A+	54344300
5 CorePro lustre ND 5.5-40W E14 865 P45 FR	40	5.5	520	94.55	✘	80	6500	15.000	A+	74683700
3 Corepro Lustre ND 5.5-40W E27 827 P45 CL	40	5.5	470	90.91	✘	80	2700	15.000	A+	50763600
4 Corepro Lustre ND 5.5-40W E27 827 P45 FR	40	5.5	470	90.91	✘	80	2700	15.000	A+	50765000
6 CorePro lustre ND 7-60W E14 827 P48 FR	60	7	806	115.00	✘	80	2700	15.000	A++	70301400
6 CorePro lustre ND 7-60W E14 840 P48 FR	60	7	830	118.00	✘	80	4000	15.000	A++	70307600
5 CorePro lustre ND 7-60W E14 865 P48 FR	60	7	830	118.57	✘	80	6500	15.000	A++	74687500
7 CorePro lustre ND 7-60W E27 827 P48 FR	60	7	806	115.00	✘	80	2700	15.000	A++	70303800
7 CorePro lustre ND 7-60W E27 840 P48 FR	60	7	830	118.00	✘	80	4000	15.000	A++	70309000

LED Candles & Lusters

Decorative led candles and lusters



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Classic LEDCandle D 5-32W B35 E14 822 GOLD	32	5	350	70.00	●	80	2200	15.000	A+	81439000
2 Classic LEDCandle D 5-32W BA35 E14 822 GOLD	32	5	350	70.00	●	80	2200	15.000	A+	81443700
3 Classic LEDLuster D 5-32W P45 E14 822 GOLD	32	5	350	70.00	●	80	2200	15.000	A+	81567000
4 Classic LEDLuster D 5-32W P45 E27 822 GOLD	32	5	350	70.00	●	80	2200	15.000	A+	81441300

Classic filament led candles and lusters



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Classic LEDCandle ND 2-25W B35 B15 827 CL	25	2	250	125.00	⊗	80	2700	15.000	A++	76688000
2 Classic LEDCandle ND 2-25W B35 B22 827 CL	25	2	250	125.00	⊗	80	2700	15.000	A++	76690300
3 Classic LEDCandle ND 2-25W B35 E14 827 CL	25	2	250	125.00	⊗	80	2700	15.000	A++	57407200
4 Classic LEDCandle ND 2-25W BA35 E14 827 CL	25	2	250	125.00	⊗	80	2700	15.000	A++	57409600
5 Classic LEDCandle ND 2-25W ST35 E14 827 CL	25	2	250	125.00	⊗	80	2700	15.000	A++	57411900
6 Classic LEDLuster ND 2-25W P45 B22 827 CL	25	2	250	125.00	⊗	80	2700	15.000	A++	76696500
7 Classic LEDLuster ND 2-25W P45 E14 827 CL	25	2	250	125.00	⊗	80	2700	15.000	A++	57413300
8 Classic LEDLuster ND 2-25W P45 E27 827 CL	25	2	250	125.00	⊗	80	2700	15.000	A++	57415700
3 LED classic 25W B35 E14 WW CL ND 1CT/6	25	2	250	125.00	⊗	80	2700	15.000	A++	71005700

LED Candles & Lusters

Classic filament led candles and lusters - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Classic LEDCandle D 2.7-25W B35 E14 827 CL	25	2.7	250	92.59	●	80	2700	15.000	A++	70980100
2 Classic LEDLuster D 2.7-25W P45 E14 827 CL	25	2.7	250	92.59	●	80	2700	15.000	A++	70986300
3 Classic LEDLuster D 2.7-25W P45 E27 827 CL	25	2.7	250	92.59	●	80	2700	15.000	A++	70988700
4 Classic LEDCandle DT3.5-25W E14 CRI90 B35 CL	25	3.5	250	71.00	●	90	-	15.000	A+	64622600
5 Classic LEDLuster DT3.5-25W E14 CRI90 P45 CL	25	3.5	250	71.00	●	90	-	15.000	A+	64638700
6 Classic LEDLuster DT3.5-25W E27 CRI90 P45 CL	25	3.5	250	71.00	●	90	-	15.000	A+	64636300
7 LED classic 15W P45 E27 GOLD SP D SRT4		3.5	136	38.00	●	80	2000	15.000	A	67611700
8 Classic LEDCandle ND 4.3-40W B15 827 B35 CL	40	4.3	470	109.00	⊗	80	2700	15.000	A++	80855900


Classic filament led candles and lusters - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Classic LEDCandle ND 4.3-40W B22 827 B35 CL	40	4.3	470	109.00	⊗	80	2700	15.000	A++	80857300
2 Classic LEDCandle ND 4.3-40W E14 827 B35 CL	40	4.3	470	109.00	⊗	80	2700	15.000	A++	80853500
3 Classic LEDLuster ND 4.3-40W E14 827 P45 CL	40	4.3	470	109.00	⊗	80	2700	15.000	A++	80971600
4 Classic LEDLuster ND 4.3-40W E27 827 P45 CL	40	4.3	470	109.00	⊗	80	2700	15.000	A++	80973000
5 Classic LEDCandle D 5-40W B35 B22 827 CL	40	5	470	94.00	●	80	2700	15.000	A+	70984900
6 Classic LEDCandle D 5-40W B35 E14 827 CL	40	5	470	94.00	●	80	2700	15.000	A+	70982500
7 Classic LEDCandle D 5-40W BA35 E14 827 CL	40	5	470	94.00	●	80	2700	15.000	A+	70996200
8 Classic LEDLuster D 5-40W P45 B22 827 CL	40	5	470	94.00	●	80	2700	15.000	A+	70994800


LED Candles & Lusters

Classic filament led candles and lusters - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Classic LEDLuster D 5-40W P45 E14 827 CL	40	5	470	94.00	●	80	2700	15.000	A+	70990000
2 Classic LEDLuster D 5-40W P45 E27 827 CL	40	5	470	94.00	●	80	2700	15.000	A+	70992400
3 Classic LEDCandle DT6-40W E14 CRI90 B35 CL	40	6	470	78.00	●	90	-	15.000	A+	64628800
4 Classic LEDCandle DT6-40W E14 CRI90 BA35 CL	40	6	470	78.00	●	90	-	15.000	A+	64634900
5 Classic LEDLuster DT6-40W E27 CRI90 P45 CL	40	6	470	78.00	●	90	-	15.000	A+	64642400
6 Classic LEDCandle ND 6.5-60W B35 E14 827 CL	60	6.5	806	124.00	⊗	80	2700	15.000	A++	64912800
7 Classic LEDCandle ND 6.5-60W B35 E14 827 FR	60	6.5	806	124.00	⊗	80	2700	15.000	A++	64922700
8 Classic LEDLuster ND 6.5-60W P45 E14 827 CL	60	6.5	806	124.00	⊗	80	2700	15.000	A++	64916600


Classic filament led candles and lusters - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Classic LEDLuster ND 6.5-60W P45 E14 827 FR	60	6.5	806	124.00	⊗	80	2700	15.000	A++	64928900
2 Classic LEDLuster ND 6.5-60W P45 E27 827 CL	60	6.5	806	124.00	⊗	80	2700	15.000	A++	64920300
3 Classic LEDLuster ND 6.5-60W P45 E27 827 FR	60	6.5	806	124.00	⊗	80	2700	15.000	A++	64934000

LED Candles & Lusters


Classic frosted led candles and lusters



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Classic LEDCandle ND 2.2-25W B35 E14 FR	25	2.2	250	113.00	✗	80	2700	15.000	A++	70637400
2 Classic LEDCandle ND 2.2-25W BA35 E14 FR	25	2.2	250	113.00	✗	80	2700	15.000	A++	70649700
3 Classic LEDLuster ND 2.2-25W P45 E14 FR	25	2.2	250	113.00	✗	80	2700	15.000	A++	70641100
4 Classic LEDLuster ND 2.2-25W P45 E27 FR	25	2.2	250	113.00	✗	80	2700	15.000	A++	70645900
1 Classic LEDCandle ND 4.3-40W E14 827 B35 FR	40	4.3	470	109.00	✗	80	2700	15.000	A++	70639800
3 Classic LEDLuster ND 4.3-40W E14 827 P45 FR	40	4.3	470	109.00	✗	80	2700	15.000	A++	70643500
4 Classic LEDLuster ND 4.3-40W E27 827 P45 FR	40	4.3	470	109.00	✗	80	2700	15.000	A++	70647300


LED Candles & Lusters

Master led candles and lusters



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 MASTER LEDcandle DT 4-25W B22 B38 CL	25	4	250	62.00	●	80	-	15.000	A+	70065500
2 MASTER LEDcandle DT 4-25W E14 B38 CL	25	4	250	65	●	80	-	25.000	A+	45368100
3 MASTER LEDcandle DT 4-25W E14 BA38 CL	25	4	250	65	●	80	-	25.000	A+	45376600
4 MASTER LEDlustre DT 4-25W E14 P48 CL	25	4	250	65	●	80	-	25.000	A+	45378000
5 MASTER LEDlustre DT 4-25W E27 P48 CL	25	4	250	65	●	80	-	25.000	A+	45380300
6 MASTER LEDcandle DT 6-40W B15 B38 CL	40	6	470	78.00	●	80	-	25.000	A+	55601600
1 MASTER LEDcandle DT 6-40W B22 B38 CL	40	6	470	75	●	80	-	25.000	A+	45362900
2 MASTER LEDcandle DT 6-40W E14 B38 CL	40	6	470	75	●	80	-	25.000	A+	45350600
3 MASTER LEDcandle DT 6-40W E14 BA38 CL	40	6	470	75	●	80	-	25.000	A+	45354400
7 MASTER LEDcandle DT 6-40W E27 B38 CL	40	6	470	75	●	80	-	25.000	A+	47479200
8 MASTER LEDlustre DT 6-40W B22 P48 CL	40	6	470	75	●	80	-	25.000	A+	47477800
4 MASTER LEDlustre DT 6-40W E14 P48 CL	40	6	470	75	●	80	-	25.000	A+	45358200
5 MASTER LEDlustre DT 6-40W E27 P48 CL	40	6	470	75	●	80	-	25.000	A+	45360500
2 MASTER LEDcandle DT 8-60W B40 E14 827 CL	60	8	806	100.00	●	80	-	25.000	A+	55599600


Master led candles and lusters - continued



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
MASTER LEDlustre DT 8-60W P50 E14 827 CL	60	8	806	100.00	●	80	-	25.000	A+	58067700


LED Candles & Lusters

Corepro led candles and lusters



Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
1 Corepro Candle ND 4-25W E14 827 B35 CL	25	4	250	62.50	✗	80	2700	15.000	A+	50757500
2 CorePro LEDcandle ND 4-25W E14 827 B35 FR	25	4	250	62.50	✗	80	2700	15.000	A+	78701300
1 Corepro candle ND 5.5-40W E14 827 B35 CL	40	5.5	470	85.45	✗	80	2700	15.000	A+	45479400
3 CorePro LEDcandle ND 5.5-40W E14 865 B35 FR	40	5.5	520	94.55	✗	80	6500	15.000	A+	74681300
4 CorePro LEDcandle ND 7-60W E14 827 B38 FR	60	7	806	115.00	✗	80	2700	15.000	A++	70299400
4 CorePro LEDcandle ND 7-60W E14 840 B38 FR	60	7	830	118.00	✗	80	4000	15.000	A++	70305200
4 CorePro LEDcandle ND 7-60W E14 865 B38 FR	60	7	830	118.57	✗	80	6500	15.000	A++	74685100

Candle led





Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
LED 25W T25 E14 WW FR ND SRT4	25	3.2	250	78.13	160	✗	80	2700	15.000	A+	70313700

LED Candles & Lusters

Standard led candles & lusters



 = Dimmable
 = Non-Dimmable

 10 PACK
 E14

Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W			K	Hrs.		
LED candle/luster CorePro candle ND 5.5-40W E14 827 B35 FR	40	5.5	470	85.45		80	2700	15.000	A+	76238600

Philips LEDtube

The right LEDtube every time



Industry leading LED range of fluorescent tube replacements

- Best in class lumen performance
- Best compatibility
- Easy installation

For general applications, Universal is the tube of choice.

For more demanding applications: use our Selector tool.

Find the **right** solution in our range using the **Selector tool** productfinder.lighting.philips.com



MASTER Value LEDtube Universal T8

- Universal compatibility – compatible with all kinds of driver technologies (EM ballast, HF ballasts and direct mains)
- Glass platform – uniform light (large beam angle 240D – suitable for many applications)
- Ultra high lumen package – up to 3700 lumen
- InstantFit technology – for largest HF ballast compatibility, safety and ease and speed of installation

CorePro LEDtube T8 Universal

- Works on every driver technology (EM/HF/Mains)
- Up to 2700 lumen output
- 1 year typical payback time for 24/7 operation*
- Up to 3x longer lifetime*

MASTER LEDtube T5

- 50,000 hours lifetime
- Up to 155 lumen/Watt
- Up to 5600 lumen output

MASTER LEDtube T8 sensor

- Integrated motion sensor
- Automatic dimming based on movement
- No extra sensors or wiring needed
- Up to 70% energy saving*

CorePro LED PL-C, PL-L, PL-S & LED Circular


- Simple retrofit for fluorescent PL-C and PL-L lamps
- 30,000 hours life time
- Up to 60% energy saving*

*Compared to fluorescent lamps

LED Tubes

MASTER LEDtube EM/Mains T8

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 MASTER LEDtube 600mm HO 8W830 T8	8	1000	125.00	160	✗	83	3000	60.000	A++	69747400
1 MASTER LEDtube 600mm HO 8W840 T8	8	1050	131.00	160	✗	83	4000	60.000	A++	69749800
1 MASTER LEDtube 600mm HO 8W865 T8	8	1050	131.00	160	✗	83	6500	60.000	A++	69751100
2 MASTER LEDtube 900mm 8.5W833 T8 FOOD	8.5	750	88.00	160	✗	83	3300	50.000	A+	76391900
1 MASTER LEDtube 1200mm 12W833 T8 FOOD	12	1000	83.00	160	✗	83	3300	50.000	A+	76393300
1 MASTER LEDtube 900mm HO 12W 840 T8	12	1575	131.00	160	✗	83	4000	50.000	A++	68708600
1 MASTER LEDtube 900mm HO 12W 865 T8	12	1575	131.00	160	✗	83	6500	50.000	A++	68710900
3 MASTER LEDtube 1200mm HO 12.5W 830 T8	12.5	2000	160.00	160	✗	83	3000	60.000	A++	59235600
3 MASTER LEDtube 1200mm HO 12.5W 840 T8	12.5	2100	168.00	160	✗	83	4000	60.000	A++	59237000
3 MASTER LEDtube 1200mm HO 12.5W 865 T8	12.5	2100	168.00	160	✗	83	6500	60.000	A++	59239400
4 MASTER LEDtube 1200mm UE 14.5W 840 T8	14.5	2500	172.00	160	✗	83	4000	70.000	A++	73150500
4 MASTER LEDtube 1200mm UE 14.5W 865 T8	14.5	2500	172.00	160	✗	83	6500	70.000	A++	73152900
5 MASTER LEDtube 1200mm UO 15.5W 830 T8	15.5	2300	148.00	160	✗	83	3000	60.000	A++	64721600
5 MASTER LEDtube 1200mm UO 15.5W 840 T8	15.5	2500	161.00	160	✗	83	4000	60.000	A++	64723000
5 MASTER LEDtube 1200mm UO 15.5W 865 T8	15.5	2500	161.00	160	✗	83	6500	60.000	A++	64725400
6 MASTER LEDtube 1050mm 16W 830 T8	16	2300	143.00	160	✗	80	3000	50.000	A++	72855000
3 MASTER LEDtube 1050mm 16W 840 T8	16	2500	156.00	160	✗	83	4000	50.000	A++	61602100
5 MASTER LEDtube 1200mm UO 16W 830 T8	16	2300	143.00	160	✗	83	3000	50.000	A++	68736900
5 MASTER LEDtube 1200mm UO 16W 840 T8	16	2500	156.00	160	✗	83	4000	50.000	A++	68738300
5 MASTER LEDtube 1200mm UO 16W 865 T8	16	2500	156.00	160	✗	83	6500	50.000	A++	68740600
7 MASTER LEDtube Sensor 1200mm HO 16.5W840 T8	16.5	2100	127.00	240	●	83	4000	50.000	A++	80602900
7 MASTER LEDtube Sensor 1200mm HO 16.5W865 T8	16.5	2100	127.00	240	●	83	6500	50.000	A++	80604300
3 MASTER LEDtube 1500mm HO 18.2W 830 T8	18.2	2900	159.00	160	✗	83	3000	60.000	A++	59241700
3 MASTER LEDtube 1500mm HO 18.2W 840 T8	18.2	3100	170.00	160	✗	83	4000	60.000	A++	59243100
3 MASTER LEDtube 1500mm HO 18.2W 865 T8	18.2	3100	170.00	160	✗	83	6500	60.000	A++	59245500
2 MASTER LEDtube 1500mm 20W833 T8 FOOD	20	1680	84.00	160	✗	83	3300	50.000	A+	76395700
4 MASTER LEDtube 1500mm UE 21.5W 840 T8	21.5	3700	172.00	160	✗	83	4000	70.000	A++	73154300
4 MASTER LEDtube 1500mm UE 21.5W 865 T8	21.5	3700	172.00	160	✗	83	6500	70.000	A++	73156700
5 MASTER LEDtube 1500mm UO 23W 830 T8	23	3400	147.00	160	✗	83	3000	60.000	A++	64727800
5 MASTER LEDtube 1500mm UO 23W 840 T8	23	3700	160.00	160	✗	83	4000	60.000	A++	64729200
5 MASTER LEDtube 1500mm UO 23W 865 T8	23	3700	160.00	160	✗	83	6500	60.000	A++	64731500
5 MASTER LEDtube 1500mm UO 24W 830 T8	24	3400	141.00	160	✗	83	3000	50.000	A++	68742000
5 MASTER LEDtube 1500mm UO 24W 840 T8	24	3700	154.00	160	✗	83	4000	50.000	A++	68744400
5 MASTER LEDtube 1500mm UO 24W 865 T8	24	3700	154.00	160	✗	83	6500	50.000	A++	68746800
7 MASTER LEDtube Sensor 1500mm HO 24W840 T8	24	3100	129.00	240	●	83	4000	50.000	A++	80606700



LED Tubes

MASTER LEDtube EM/Mains T8 - Continued

www.philips.com/ledtube

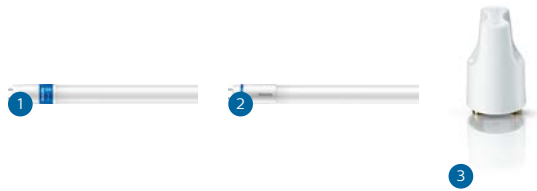

● = Dimmable
 ⊗ = Non-Dimmable
 10/40 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 MASTER LEDtube Sensor 1500mm HO 24W865 T8	24	3100	129.00	240	●	83	6500	50.000	A++	80608100
2 MASTER LEDtube 1800mm 25W 840 T8 ROT	25	3700	148.00	160	⊗	83	4000	50.000	A++	48037300
3 MASTER LEDtube Starter EMP										72928000
3 MASTER LEDtube Starter EMP GenII OP										81965400

Master Value LEDtube T8

www.philips.com/ledtube




● = Dimmable
 ⊗ = Non-Dimmable
 10 PACK
 G13

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 MASTER LEDtube VLE 600mm HO 8W 830 T8	8	1000	125.00	240	⊗	83	3000	50.000	A++	64679000
1 MASTER LEDtube VLE 600mm HO 8W 840 T8	8	1050	131.00	240	⊗	83	4000	50.000	A++	64681300
1 MASTER LEDtube VLE 600mm HO 8W 865 T8	8	1050	131.00	240	⊗	83	6500	50.000	A++	64683700
2 MASTER LEDtube VLE 1200mm HO 14W 830 T8	14	2000	142.00	240	⊗	83	3000	50.000	A++	64685100
2 MASTER LEDtube VLE 1200mm HO 14W 840 T8	14	2100	150.00	240	⊗	83	4000	50.000	A++	64687500
2 MASTER LEDtube VLE 1200mm HO 14W 865 T8	14	2100	150.00	240	⊗	83	6500	50.000	A++	64689900
2 MASTER LEDtube VLE 1200mm UO 16W 830 T8	16	2300	143.00	240	⊗	83	3000	50.000	A++	64697400
2 MASTER LEDtube VLE 1200mm UO 16W 840 T8	16	2500	156.00	240	⊗	83	4000	50.000	A++	64699800
2 MASTER LEDtube VLE 1200mm UO 16W 865 T8	16	2500	156.00	240	⊗	83	6500	50.000	A++	64701800
3 MASTER LEDtube VLE 1500mm HO 20.5W 830 T8	20.5	2900	141.00	240	⊗	83	3000	50.000	A++	64691200
3 MASTER LEDtube VLE 1500mm HO 20.5W 840 T8	20.5	3100	151.00	240	⊗	83	4000	50.000	A++	64693600
3 MASTER LEDtube VLE 1500mm HO 20.5W 865 T8	20.5	3100	151.00	240	⊗	83	6500	50.000	A++	64695000
3 MASTER LEDtube VLE 1500mm UO 24W 830 T8	24	3400	141.00	240	⊗	83	3000	50.000	A++	64703200
3 MASTER LEDtube VLE 1500mm UO 24W 840 T8	24	3700	154.00	240	⊗	83	4000	50.000	A++	64705600
3 MASTER LEDtube VLE 1500mm UO 24W 865 T8	24	3700	154.00	240	⊗	83	6500	50.000	A++	64707000

LED Tubes

Corepro ledtube em/mains t8

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
CorePro LEDtube 600mm 8W840	8	800	100.00	240	✗	80	4000	30.000	A+	71103300
CorePro LEDtube 600mm 8W865	8	800	100.00	240	✗	80	6500	30.000	A+	71105700
CorePro LEDtube 1200mm 14.5W840	14.5	1600	110.00	240	✗	80	4000	30.000	A+	71107100
CorePro LEDtube 1200mm 14.5W865	14.5	1600	110.00	240	✗	80	6500	30.000	A+	71109500
CorePro LEDtube 1200mm HO 18W 840 T8	18	2000	111.00	240	✗	80	4000	30.000	A+	80613500
CorePro LEDtube 1200mm HO 18W 865 T8	18	2000	111.00	240	✗	80	6500	30.000	A+	80611100
CorePro LEDtube 1500mm 20W 840	20	2200	110.00	240	✗	80	4000	30.000	A+	71091300
CorePro LEDtube 1500mm 20W 865	20	2200	110.00	240	✗	80	6500	30.000	A+	71095100
CorePro LEDtube 1500mm HO 24W 840 T8	24	2700	112.00	240	✗	80	4000	30.000	A+	80617300
CorePro LEDtube 1500mm HO 24W 865 T8	24	2700	112.00	240	✗	80	6500	30.000	A+	80615900

LED Tubes

Master ledtube instantfit hf t8

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 MASTER LEDtube HF 600mm HO 8W830 T8	8	1000	125.00	160	✘	83	3000	60.000	A+	74353900
1 MASTER LEDtube HF 600mm HO 8W840 T8	8	1050	131.00	160	✘	83	4000	60.000	A+	74355300
1 MASTER LEDtube HF 600mm HO 8W865 T8	8	1050	131.00	160	✘	83	6500	60.000	A+	74367600
2 MASTER LEDtube HF 1200mm HO 14W830 T8	14	2000	142.00	160	✘	83	3000	60.000	A+	68752900
2 MASTER LEDtube HF 1200mm HO 14W840 T8	14	2100	150.00	160	✘	83	4000	60.000	A++	68748200
2 MASTER LEDtube HF 1200mm HO 14W865 T8	14	2100	150.00	160	✘	83	6500	60.000	A++	68750500
2 MASTER LEDtube HF 1200mm UO 16W830 T8	16	2350	146.00	160	✘	83	3000	60.000	A+	68800700
2 MASTER LEDtube HF 1200mm UO 16W840 T8	16	2500	156.00	160	✘	83	4000	60.000	A++	68796300
2 MASTER LEDtube HF 1200mm UO 16W865 T8	16	2500	156.00	160	✘	83	6500	60.000	A++	68798700
3 MASTER LEDtube HF 1200mm 16.5W833 T8 FOOD	16.5	960	58.18	160	✘	83	3300	50.000	B	56616900
4 MASTER LEDtube HF 1050mm UO 17W840 T8	17	2600	152.00	160	✘	82	4000	50.000	A++	81028600
2 MASTER LEDtube HF 1500mm HO 20W830 T8	20	2900	145.00	160	✘	83	3000	60.000	A+	68758100
2 MASTER LEDtube HF 1500mm HO 20W840 T8	20	3100	155.00	160	✘	83	4000	60.000	A++	68754300
2 MASTER LEDtube HF 1500mm HO 20W865 T8	20	3100	155.00	160	✘	83	6500	60.000	A++	68756700
2 MASTER LEDtube HF 1500mm UO 24W830 T8	24	3500	145.00	160	✘	83	3000	60.000	A++	68806900
2 MASTER LEDtube HF 1500mm UO 24W840 T8	24	3700	154.00	160	✘	83	4000	60.000	A++	68802100
2 MASTER LEDtube HF 1500mm UO 24W865 T8	24	3700	154.00	160	✘	83	6500	60.000	A++	68804500

LED Tubes

Master ledtube universal t8



www.philips.com/ledtube



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 MAS LEDtube VLE UN 1200mm UO 16W830 T8	16	2300	143.00	240	✗	83	3000	50.000	A++	73917100
1 MAS LEDtube VLE UN 1200mm UO 16W840 T8	16	2500	156.00	240	✗	83	4000	50.000	A++	73919500
1 MAS LEDtube VLE UN 1200mm UO 16W865 T8	16	2500	156.00	240	✗	83	6500	50.000	A++	73921800
2 Master LEDtube Universal 1200mm UO 16W830 T8	16	2300	143.00	160	✗	83	3000	60.000	A++	72853600
2 Master LEDtube Universal 1200mm UO 16W840 T8	16	2500	156.00	160	✗	83	4000	60.000	A++	70537700
2 Master LEDtube Universal 1200mm UO 16W865 T8	16	2500	156.00	160	✗	83	6500	60.000	A++	70539100
1 MAS LEDtube VLE UN 1500mm UO 24W830 T8	24	3400	141.00	240	✗	83	3000	50.000	A++	73923200
1 MAS LEDtube VLE UN 1500mm UO 24W840 T8	24	3700	154.00	240	✗	83	4000	50.000	A++	73925600
1 MAS LEDtube VLE UN 1500mm UO 24W865 T8	24	3700	154.00	240	✗	83	6500	50.000	A++	73927000
2 Master LEDtube Universal 1500mm UO 24W830 T8	24	3400	141.00	160	✗	83	3000	60.000	A++	72851200
2 Master LEDtube Universal 1500mm UO 24W840 T8	24	3700	154.00	160	✗	83	4000	60.000	A++	70533900
2 Master LEDtube Universal 1500mm UO 24W865 T8	24	3700	154.00	160	✗	83	6500	60.000	A++	70535300

Corepro led tube universal t8

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
NEW CorePro LEDtube UN 600mm HO 8W830 T8	8	850	106.00	240	✗	83	3000	30.000	A+	78277100
NEW CorePro LEDtube UN 600mm HO 8W840 T8	8	900	112.00	240	✗	83	4000	30.000	A+	78279500
NEW CorePro LEDtube UN 600mm HO 8W865 T8	8	900	112.00	240	✗	83	6500	30.000	A+	78281800
CorePro LEDtube UN 1200mm HO 18W830 T8	18	1850	102.00	240	✗	80	3000	30.000	A+	80166600
CorePro LEDtube UN 1200mm HO 18W840 T8	18	2000	111.00	240	✗	80	4000	30.000	A+	80168000
CorePro LEDtube UN 1200mm HO 18W865 T8	18	2000	111.00	240	✗	80	6500	30.000	A+	80170300
CorePro LEDtube UN 1500mm HO 23W830 T8	23	2500	108.00	240	✗	80	3000	30.000	A+	80172700
CorePro LEDtube UN 1500mm HO 23W840 T8	23	2700	117.00	240	✗	80	4000	30.000	A+	80174100
CorePro LEDtube UN 1500mm HO 23W865 T8	23	2700	117.00	240	✗	80	6500	30.000	A+	80176500



LED Tubes

Master ledtube instantfit hf t5

www.philips.com/ledtube



	Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	lm	lm/W	°			K	Hrs.		
1	Master LEDtube HF 600mm HE 8W 830 T5	8	1000	125.00	200	✗	83	3000	50.000	A+	74323200
1	Master LEDtube HF 600mm HE 8W 840 T5	8	1050	131.00	200	✗	83	4000	50.000	A+	74325600
1	Master LEDtube HF 600mm HE 8W 865 T5	8	1050	131.00	200	✗	83	6500	50.000	A+	74327000
1	Master LEDtube HF 1200mm HE 16.5W 830 T5	16.5	2300	139.00	200	✗	83	3000	50.000	A+	74329400
1	Master LEDtube HF 1200mm HE 16.5W 840 T5	16.5	2500	151.00	200	✗	83	4000	50.000	A++	74331700
1	Master LEDtube HF 1200mm HE 16.5W 865 T5	16.5	2500	151.00	200	✗	83	6500	50.000	A++	74333100
1	Master LEDtube HF 1500mm HE 20W 830 T5	20	2800	140.00	200	✗	83	3000	50.000	A+	74335500
1	Master LEDtube HF 1500mm HE 20W 840 T5	20	3000	150.00	200	✗	83	4000	50.000	A++	74337900
1	Master LEDtube HF 1500mm HE 20W 865 T5	20	3000	150.00	200	✗	83	6500	50.000	A++	74339300
NEW	2 Master LEDtube HF 1200mm HO 26W 830 T5 OE	26	3700	142.00	200	●	80	3000	60.000	A+	74951400
NEW	2 Master LEDtube HF 1200mm HO 26W 840 T5 OE	26	3900	150.00	200	●	80	4000	60.000	A++	74953800
NEW	2 Master LEDtube HF 1200mm HO 26W 865 T5 OE	26	3900	150.00	200	●	80	6500	60.000	A++	74955200
NEW	2 Master LEDtube HF 1500mm HO 26W 830 T5 OE	26	3700	142.00	200	●	80	3000	60.000	A+	74957600
NEW	2 Master LEDtube HF 1500mm HO 26W 840 T5 OE	26	3900	150.00	200	●	80	4000	60.000	A++	74959000
NEW	2 Master LEDtube HF 1500mm HO 26W 865 T5 OE	26	3900	150.00	200	●	80	6500	60.000	A++	74961300
3	Master LEDtube HF 1500mm UO 36W 830 T5	36	5200	144.00	160	✗	83	3000	50.000	A++	70599500
3	Master LEDtube HF 1500mm UO 36W 840 T5	36	5600	155.00	160	✗	83	4000	50.000	A++	70603900
3	Master LEDtube HF 1500mm UO 36W 865 T5	36	5600	155.00	160	✗	83	6500	50.000	A++	70605300

OE: Office Enabled LED tube light with the following benefits:

- True Retrofit due to High Compatibility
- Dimmable (1-10V and Dali Ballast)
- Compatible with Multi- Watt ballasts
- Supports UGR 19 applications due to Glass Design with wider beam angle


[Please visit the website for the compatibility list of dimmable and non-dimmable ballasts.](#)



LED Tubes

Master ledtube mains t5


www.philips.com/ledtube



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
MASTER LEDtube 1200mm HO 26W 830 T5	26	3600	138.00	200	✗	80	3000	50.000	A++	81921000
MASTER LEDtube 1200mm HO 26W 840 T5	26	3900	150.00	200	✗	80	4000	50.000	A++	81923400
MASTER LEDtube 1200mm HO 26W 865 T5	26	3900	150.00	200	✗	80	6500	50.000	A++	81925800
MASTER LEDtube 1500mm HO 26W 830 T5	26	3600	138.00	200	✗	80	3000	50.000	A++	81929600
MASTER LEDtube 1500mm HO 26W 840 T5	26	3900	150.00	200	✗	80	4000	50.000	A++	81931900
MASTER LEDtube 1500mm HO 26W 865 T5	26	3900	150.00	200	✗	80	6500	50.000	A++	81933300

LEDtube Mains T5

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
NEW MAS LEDtube 600mm HE 8W 830 T5	8	1000	125.00	200	✗	80	3000	50.000	A++	78343300
NEW MAS LEDtube 600mm HE 8W 840 T5	8	1050	131.00	200	✗	80	4000	50.000	A++	78345700
NEW MAS LEDtube 600mm HE 8W 865 T5	8	1050	131.00	200	✗	80	6500	50.000	A++	78347100
NEW MAS LEDtube 1200mm HE 16.5W 830 T5	16.5	2300	139.00	200	✗	80	3000	50.000	A++	78349500
NEW MAS LEDtube 1200mm HE 16.5W 840 T5	16.5	2500	151.00	200	✗	80	4000	50.000	A++	78351800
NEW MAS LEDtube 1200mm HE 16.5W 865 T5	16.5	2500	151.00	200	✗	80	6500	50.000	A++	78353200
NEW MAS LEDtube 1500mm HE 20W 830 T5	20	2800	140.00	200	✗	80	3000	50.000	A++	78355600
NEW MAS LEDtube 1500mm HE 20W 840 T5	20	3000	150.00	200	✗	80	4000	50.000	A++	78357000
NEW MAS LEDtube 1500mm HE 20W 865 T5	20	3000	150.00	200	✗	80	6500	50.000	A++	78359400

LED Tubes

Corepro led pls


www.philips.com/ledtube



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
CorePro LED PLS 5W 830 2P G23	5	520	104.00	120	✗	82	3000	30.000	A+	59666800
CorePro LED PLS 5W 840 2P G23	5	550	110.00	120	✗	82	4000	30.000	A+	59668200

Corepro led pll

www.philips.com/ledtube



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 CorePro LED PLL HF 16.5W 830 4P 2G11	16.5	2000	121.00	160	✗	83	3000	30.000	A+	73966200
1 CorePro LED PLL HF 16.5W 840 4P 2G11	16.5	2100	127.00	160	✗	83	4000	30.000	A+	73974700
1 CorePro LED PLL HF 16.5W 865 4P 2G11	16.5	2100	127.00	160	✗	83	6500	30.000	A+	73976100
2 CorePro LED PLL HF 24W 830 4P 2G11	24	3200	133.00	160	✗	83	3000	30.000	A+	82839700
2 CorePro LED PLL HF 24W 840 4P 2G11	24	3400	141.00	160	✗	83	4000	30.000	A+	82841000
2 CorePro LED PLL HF 24W 865 4P 2G11	24	3400	141.00	160	✗	83	6500	30.000	A+	82843400

LED Tubes

Corepro ledtube circular

www.philips.com/ledtube



● = Dimmable
 ⊗ = Non-Dimmable

20 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
CorePro LED Circular 20W 840 G10q	20	2100	105.00	120	⊗	80	4000	30.000	A+	66042000
CorePro LED Circular 20W 865 G10q	20	2100	105.00	120	⊗	80	6500	30.000	A+	66044400

Other ledtube

www.philips.com/ledtube



● = Dimmable
 ⊗ = Non-Dimmable

4 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
① LED 2.2W 300mm S14D WW ND 1CT/4	2.2	250	113.00	140	⊗	80	2700	30.000	A++	26362800
② LED 2.2W 300mm S14S WW ND 1CT/4	2.2	250	113.00	140	⊗	80	2700	30.000	A++	26356700
③ LED 3W 300mm S14D WW ND 1CT/4	3	250	83.33	140	⊗	83	2700	15.000	A+	58605100
④ LED 4.5W 310mm S19 WW ND 1CT/4	4.5	480	106.00	175	⊗	80	2700	30.000	A++	26360400

LED PL-lamps

Corepro led plc 2p


www.philips.com/ledlamps



Product Type	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 CorePro LED PLC 6.5W 830 2P G24d-2	6.5	650	92.31	120	✗	83	3000	30.000	A+	54127200
1 CorePro LED PLC 6.5W 840 2P G24d-2	6.5	700	92.31	120	✗	83	4000	30.000	A+	54129600
2 CorePro LED PLC 8.5W 830 2P G24d-3	8.5	950	105.88	120	✗	83	3000	30.000	A+	54123400
2 CorePro LED PLC 8.5W 840 2P G24d-3	8.5	1000	105.88	120	✗	83	4000	30.000	A+	54125800

Corepro led plc 4p

www.philips.com/ledlamps



Product Type	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 CorePro LED PLC 6.5W 830 4P G24q-2	6.5	650	92.31	120	✗	83	3000	30.000	A+	54119700
1 CorePro LED PLC 6.5W 840 4P G24q-2	6.5	700	92.31	120	✗	83	4000	30.000	A+	54121000
2 CorePro LED PLC 9W 830 4P G24q-3	9	950	100.00	120	✗	83	3000	30.000	A+	54115900
2 CorePro LED PLC 9W 840 4P G24q-3	9	1000	100.00	120	✗	83	4000	30.000	A+	54117300

LED PL-lamps

Corepro led plc

www.philips.com/ledlamps



Product Type	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	lm	lm/W	°			K	Hrs.		
1 CorePro LED PLC 4.5W 830 2P G24d-1	4.5	475	105.00	120	✗	83	3000	30.000	A++	70659600
2 CorePro LED PLC 4.5W 830 4P G24q-1	4.5	475	105.56	120	✗	83	3000	30.000	A+	70663300
1 CorePro LED PLC 4.5W 840 2P G24d-1	4.5	500	111.00	120	✗	83	4000	30.000	A++	70661900
2 CorePro LED PLC 4.5W 840 4P G24q-1	4.5	500	111.11	120	✗	83	4000	30.000	A+	70665700

Philips TrueForce Highbay LED universal

Easy plug and play installation



Philips TrueForce Highbay LED universal

- No need to change the fixture
- Fast payback - <1 years
- Easy adoption - great electrical compatibility, it works with both the existing gear and mains voltage

More features at a glance



Energy saving of 65% vs existing conventional systems



Universal - great electrical compatibility, it works with both the existing gear and mains voltage



Reliable lifetime up to 50,000 hours

LED compared with a conventional solution

HPL 250W	LED 95W
HPI 250W	LED 95W
SON 250W	LED 95W
HPL 400W	LED 140W
HPI 400W	LED 140W
SON 400W	LED 140W



Philips TrueForce Highbay LED universal

- Sustainability - low energy consumption
- Enhance comfort, safety and productivity
- Optically efficient, emits light towards usage direction
- Pleasant white light and CRI80 for higher safety and better productivity
- Easy Plug & Play installation



NEW

Contents

Interact
Ready

CoreLine

Ledinaire

LED Lamps

LED Bulbs

LED Candles
& Lusters

LED Tubes

LED
PL-lamps


TrueForce



TrueForce LED

TrueForce LED Industrial and Retail (Highbay – MH)

www.philips.com/trueforce-led-lamps



	Product Type	Traditional		LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	W	W	lm	lm/W	°			K	Hrs.		
NEW	TrueForce LED HPI UN 95W E40 840 NB	250	95	13.000	136.00	60		✗	80	4000	50.000	A+	75367200
NEW	TrueForce LED HPI UN 95W E40 840 WB	250	95	13.000	136.00	120		✗	80	4000	50.000	A++	75369600
NEW	TrueForce LED HPI UN 140W E40 840 NB	400	140	20.000	142.00	60		✗	80	4000	50.000	A+	75371900
NEW	TrueForce LED HPI UN 140W E40 840 WB	400	140	20.000	142.00	120		✗	80	4000	50.000	A++	75373300

Trueforce CorePro LED HPL

www.philips.com/trueforce-led-lamps




	Product Type	Traditional		LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	W	W	lm	lm/W	°			K	Hrs.		
1	TForce Core LED HPL 13W E27 830 FR	50	13	2000	153.00	300		✗	80	3000	25.000	A++	75025100
1	TForce Core LED HPL 13W E27 840 FR	50	13	2000	153.00	300		✗	80	4000	25.000	A++	75027500
1	TForce Core LED HPL 18W E27 830 FR	80	18	3000	166.00	300		✗	80	3000	25.000	A++	75029900
1	TForce Core LED HPL 18W E27 840 FR	80	18	3000	166.00	300		✗	80	4000	25.000	A++	75031200
2	TForce Core LED HPL 26W E27 830 FR	125	26	4000	153.00	300		✗	80	3000	25.000	A++	75033600
2	TForce Core LED HPL 26W E27 840 FR	125	26	4000	153.00	300		✗	80	4000	25.000	A++	75035000

TrueForce LED

Trueforce core led industrial and retail (highbay – hpi/son/hpl)

www.philips.com/trueforce-led-lamps



	Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	W	lm	lm/W	°			K	Hrs.		
NEW	1 TrueForce Core HB MV ND 20W E27 830 G3	40	20	2600	130.00	150	✗	80	3000	15.000	A++	78101900
NEW	1 TrueForce Core HB MV ND 20W E27 840 G3	40	20	2700	135.00	150	✗	80	4000	15.000	A++	78103300
NEW	2 TrueForce Core HB MV ND 30W E27 830 G3	55	30	3700	123.00	180	✗	80	3000	15.000	A+	78095100
NEW	2 TrueForce Core HB MV ND 30W E27 840 G3	55	30	4000	133.00	180	✗	80	4000	15.000	A++	78097500
NEW	3 TrueForce Core HB MV ND 35W E27 830 G3	70	35	4800	137.00	180	✗	80	3000	15.000	A++	78105700
NEW	3 TrueForce Core HB MV ND 35W E27 840 G3	70	35	5000	142.00	180	✗	80	4000	15.000	A++	78107100

Trueforce led public (road – son)

www.philips.com/trueforce-led-lamps



	Product Type	Traditional	LED	Lumen Output	Efficacy	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
		W	W	lm	lm/W			K	Hrs.		
	1 TrueForce LED Road 112-68W E40 730		68	11.200	164.00	✗	70	3000	50.000	A++	63908200
	1 TrueForce LED Road 120-68W E40 740		68	12.000	176.00	✗	70	4000	50.000	A++	63910500
	2 TrueForce LED Road 40-25W E27 730	50	25	4000	160.00	✗	70	3000	50.000	A++	63251900
	2 TrueForce LED Road 42-25W E27 740	50	25	4200	168.00	✗	70	4000	50.000	A++	63253300
	3 TrueForce LED Road 55-35W E27 730	70	35	5500	157.00	✗	70	3000	50.000	A++	81115300
	3 TrueForce LED Road 60-35W E27 740	70	35	6000	171.00	✗	70	4000	50.000	A++	81117700
	4 TrueForce LED Road 84-55W E40 730	100	55	8400	152.00	✗	70	3000	50.000	A++	63904400
	4 TrueForce LED Road 90-55W E40 740	100	55	9000	163.00	✗	70	4000	50.000	A++	63906800

TrueForce LED

Trueforce led public (road/area – sox)

www.philips.com/trueforce-led-lamps



Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
TrueForce LED SOX D 25-19W B22 740 FR	35	19	2500	131.00	230	●	70	4000	50.000	A+	78201900
TrueForce LED SOX D 40-31W B22d 740 FR	36	31	4000	129.00	230	●	70	4000	50.000	A+	69938600

Trueforce led public (urban/road – hpl/son)

www.philips.com/trueforce-led-lamps



Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	EEL	EOC code
	W	W	lm	lm/W	°			K	Hrs.		
1 TrueForce LED HPL ND 28-21W E27 830	80	21	2850	135.00	360	✘	80	3000	50.000	A++	63814600
1 TrueForce LED HPL ND 30-21W E27 840	80	21	3000	142.00	360	✘	80	4000	50.000	A++	63816000
1 TrueForce LED HPL ND 38-28W E27 830	125	28	3800	135.00	360	✘	80	3000	50.000	A++	63818400
1 TrueForce LED HPL ND 40-28W E27 840	125	28	4000	142.00	360	✘	80	4000	50.000	A++	63820700
2 TrueForce LED HPL ND 57-42W E27 830	125	42	5700	135.00	360	✘	80	3000	50.000	A++	63822100
2 TrueForce LED HPL ND 60-42W E27 840	125	42	6000	142.00	360	✘	80	4000	50.000	A++	63824500
3 TrueForce LED HPL ND 57-42W E40 830	200	42	5700	135.00	360	✘	80	3000	50.000	A++	63826900
3 TrueForce LED HPL ND 60-42W E40 840	200	42	6000	142.00	360	✘	80	4000	50.000	A++	63828300

All you need to know, right at your finger tips

We know that installation is about finding the right solutions.

Visit our webpage created especially for installers and find:

- All latest product information
- Selector tools to help you select the right product for your customers
- Installation videos
- Training

Visit: www.philips.com/installer



© 2020 Signify Holding. All rights reserved. Signify reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

<https://www.lighting.philips.com/main/support/purchase/installer>

<https://www.lighting.philips.com/main/home>

