

PROFESSIONALS PREFER POWERWELD

**QUALITY
WELDING,
SAFETY AND
INDUSTRIAL
SUPPLIES**

POWERWELD®
QUALITY WELDING, INDUSTRIAL & SAFETY PRODUCTS SINCE 1983

TABLE OF CONTENTS

DESCRIPTION	PAGE
GAS WELDING PRODUCTS	
Oxy-Acetylene Outfits.....	3-5
Regulators and Flowmeters.....	6-7
Welding & Cutting Torches.....	8
Cutting, Welding & Heating Tips.....	9
Pressure Gauges, Balloon Fillers.....	10
Hose Single, Twin, Argon, Air.....	11
ARC WELDING PRODUCTS	
Electrode Holders & Ground Clamps.....	12-13
Cable Lugs, Chipping Hammers.....	14
Cable Connectors.....	15
Gouging Torches, Carbons.....	16
Welding Cable.....	17
WELDING MACHINES	
Mig Welders, Inverter Stick and Plasma Cutter.....	18-19
FILLER METAL PRODUCTS	
Tungsten Electrodes.....	20
ER70S-6 Mild Steel Wire & TIG Rods.....	21
Flux Cored Wire.....	22
Mild Steel & Low Hydrogen Electrodes.....	23
Stainless Steel, MIG / TIG Wire, Electrodes.....	24
Aluminum Alloys.....	25
Copper Based Alloys.....	26
SAFETY PRODUCTS	
Auto Darkening Helmets, Economy Helmets.....	27-28
Welding & Cover Goggles.....	29
Filter & Cover Plates.....	30
Magnifiers, Auto Cartridges.....	31
Visors.....	32
Gold Filter Plates, Head Gear, Auto Darkening Lens, Mechanics Gloves.....	33
Welding Gloves, Work Gloves, Drivers Gloves.....	34
Welding Curtains, Welding Blankets.....	35
Leather Clothing, FR Jackets, Welding Jackets.....	36
CHEMICAL PRODUCTS	
Anti-Spatter, Nozzle Dip, Lube Pads, Coolant, NDT.....	37
MISCELLANEOUS	
Cylinder Carts.....	38
MIG Welder Carts.....	39
Fillet Gauges.....	40
C & F Clamps, Digital Thermometers.....	41
Hose Reels.....	42
Weed Burner, Helmet Bag, Pincers, Soapstone, Hose Repair Kit, Welder's Kit.....	43
Butane Torch, Gas Flow Tester, Gas Saver, Piezo Lighter.....	44
Cable Hitch, Nozzle Reamer, Battery Clamps, Circle Burner, Tungsten Holder, Cylinder Wrenches, MIG & TIG Torch & Arc Holders.....	45
Magnets, Extension Cords.....	46
Spool Adaptor, Pliers, Welding Table, TIG Feeder, TIG Accessory Kits, TIG Cable Cover, Tungsten Sharpening Tool.....	47
Cylinder Caps, Tip Cleaners, Cable Cutter, Wire Brushes, Files.....	48
Pipe Stands, Pipe Wedges.....	49
Locking Pliers.....	50
Grinding & Cutting Wheels, Stringer Bead Wheels.....	51

OXY-ACETYLENE OUTFITS

METALMASTER™

PROFESSIONAL HEAVY DUTY
WELDING AND CUTTING OUTFITS

TWO YEAR WARRANTY

MM-V & MM-H
VICTOR® STYLE
HARRIS® STYLE

Cuts up to 3/4" or 8" with optional cutting tips.
Welds up to 1/2" - 3" with optional welding tips.
Heavy duty combination torch, regulator set and accessories housed in a quality stainless steel and metal carrying case for convenient storage.



VICTOR® STYLE OUTFIT

Outfit Model	Torch Handle	Cutting Attach	Regulators		Cutting Tips	Welding Tips	Heating Tips	Welding Hose	Capacity	
			Oxy	Acet					Welding Up to	Cutting Up to
MM-V	PW315	PW2460	PWORMD	PWARMD	1-1-101	1-W	-	15 FT	3"	8"

HARRIS® STYLE OUTFIT

Outfit Model	Torch Handle	Cutting Attach	Regulators		Cutting Tips	Welding Tips	Heating Tips	Welding Hose	Capacity	
			Oxy	Acet					Welding Up to	Cutting Up to
MM-H	HC231	HC232	PWORMD	PWARMD	6290-1	23A90-1	-	15 FT	1/2"	5"

CONSISTS OF



HARRIS® is a registered trademark of The Lincoln Electric Company. VICTOR® is a registered trademark of Esab Welding and Cutting Products. Powerweld is in no way affiliated with these original equipment manufacturers.

OXY-ACETYLENE OUTFITS

METALMASTER™

PROFESSIONAL MEDIUM DUTY WELDING AND CUTTING OUTFIT



OXY-ACET KIT	
MODEL	STYLE
PWVKITMD	VICTOR®

CAPACITY

Cutting up to 6" (150mm)
Welding up to 3/8" (9mm) steel

FEATURES


Brass & stainless steel construction
torch handle with two stainless steel
needle valves for fast accurate flame
adjustment.
O-ring seals.
Forged and extruded brass for durability.
External torch mounted reverse flow
check valves.
Complete accessory package, hose,
lighter & goggles.

APPLICATIONS

Precise welding, brazing, soldering,
hard facing, heat/treating and priming,
straightening, deseaming and scarfing,
gouging, flame cleaning, rivet washing
and cutting.

CONSISTS OF

- PWORMD Oxygen Regulator
- PWARMMD Acetylene Regulator
- PW100 Welding Torch
- PW1350 Cutting Attachment
- 3-101 Cutting Tip Size #0
- W-1 Welding Tip Size #0
- CV20R/CV21L Check Valve Set
- PW316-12 Twin Welding Hose
- R1165 Welding Goggles
- 3001 Flint Lighter



OXY-ACETYLENE OUTFITS

TOTE-A-TORCH KIT



Contains all the equipment you need for cutting, welding and brazing anywhere in a rugged plastic carrying case.

Cuts up to 6" (150mm) and welds up to 3/8" (9mm)

9/16"-18 "B" Connections



TOTE-A-TORCH KIT	
MODEL	STYLE
PTK	W/O CYLINDERS

TOTE-A-TORCH KIT	
MODEL	STYLE
PTK-C	OX-20 OXY CYL / AC-10 ACET CYL

TORCH HANDLE	CUTTING ATTACHMENT	CUTTING TIP	WELDING TIP	SINGLE STAGE OXYGEN REGULATOR	SINGLE STAGE ACETYLENE REGULATOR	CHECK VALVE	ACCESSORIES
PW100 	PW1350 	0-3-101	0-W-1	3130X 	313AC 	CV20R CV21L	GOGGLES, STRIKER, 12.5' TWIN HOSE, & CARRYING CASE

CONSISTS OF

- 3130X Oxygen Regulator
- 313AC Acetylene Regulator
- PW100 Welding Torch
- PW1350 Cutting Attachment
- 3-101 Cutting Tip Size #0
- W-1 Welding Tip Size #0
- CV20R/CV21L Check Valve Set
- PW316-12 Twin Welding Hose
- R1165 Welding Goggles
- 3001 Flint Lighter
- PTK-T Carry Tote



3130X


313AC



PW100



PW1350



PW316-12



3001



R1165



0-3-101



CV20R
CV21L



0-W-1



PTK-T

OXYGEN & ACETYLENE REGULATORS

LIGHT DUTY



- 313OX Oxygen Rear Entry**
- Maximum inlet pressure 3000 PSI
 - Delivery pressure 5-125 PSI
 - 2" Gauges
 - CGA-540 inlet connection
 - 9/16" - 18RH (M) outlet connection



- 313AC Acetylene Rear Entry**
- Maximum inlet pressure 400 PSI
 - Delivery pressure 2-15 PSI
 - 2" Gauges
 - CGA-200 inlet connection
 - 9/16" - 18LH (M) outlet connection

MEDIUM DUTY



- PWORMD Oxygen**
- Maximum inlet pressure 3000 PSI
 - Delivery pressure 5-125 PSI
 - 2.5" gauges
 - CGA-540 inlet connection
 - 9/16" - 18RH (M) outlet connection



- PWARMD Acetylene**
- Maximum inlet pressure 400 PSI
 - Delivery pressure 2-15 PSI
 - 2.5" Gauges
 - CGA-510 inlet connection
 - 9/16" - 18LH (M) outlet connection



- OR25 Oxygen**
- Maximum inlet pressure 3000 PSI
 - Delivery pressure 5-125 PSI
 - 2.5" gauges
 - CGA-540 inlet connection
 - 9/16" - 18RH (M) outlet connection



- AR25 Acetylene**
- Maximum inlet pressure 400 PSI
 - Delivery pressure 2-15 PSI
 - 2.5" Gauges
 - CGA-510 inlet connection
 - 9/16" - 18LH (M) outlet connection



- OR-VM Oxygen**
- Maximum inlet pressure 3000 PSI.
 - Delivery pressure 5-125 PSI
 - 2" gauges
 - CGA-540 inlet connection
 - 9/16" - 18RH (M) outlet connection



- AR-VM Acetylene**
- Maximum inlet pressure 400 PSI
 - Delivery pressure 2-15 PSI
 - 2" Gauges
 - CGA-510 inlet connection
 - 9/16" - 18LH (M) outlet connection



- PR-VM Propane**
- Maximum inlet pressure 400 PSI
 - Delivery pressure 2-40 PSI
 - 2" Gauges
 - CGA-510 inlet connection
 - 9/16" - 18LH (M) outlet connection



- PWPRMD Propane**
- Maximum inlet pressure 400 PSI
 - Delivery pressure 2-40 PSI
 - 2.5" Gauges
 - CGA-510 inlet connection
 - 9/16" - 18LH (M) outlet connection

HEAVY DUTY



- OR400 Oxygen**
- Maximum inlet pressure 3000 PSI
 - Delivery pressure 5-125 PSI
 - 2.5" Gauges
 - CGA-540 inlet connection
 - 9/16" - 18RH (M) outlet connection



- AR410 Acetylene**
- Maximum inlet pressure 400 PSI
 - Delivery pressure 2-15 PSI
 - 2.5" Gauges
 - CGA-510 inlet connection
 - 9/16" - 18LH (M) outlet connection

FLOWMETERS & SPECIALTY REGULATORS

FLOWMETERS



100FL-AR60H Argon

- Maximum inlet pressure 3000 PSI
- Outlet pressure preset 50 PSI
- 1.5" - 4000 PSI gauge
- 0-60 SCFH
- CGA-580 Inlet connection
- 5/8" - 18RH(F) outlet connection
- c/w 10' Argon single hose.



PW195FM Inert Gas

- Maximum inlet pressure 50 PSI
- Flowmeter 0-60 SCFH
- 5/8" - 18RH(F) outlet connection
- 1/4" NPT (M) inlet connection.



101A Argon

- Maximum inlet pressure 3000 PSI
- Outlet pressure preset 50 PSI
- 2"- 4000 PSI Gauge
- 0-60 Flowmeter (SCFH)
- CGA-580 inlet connection
- 5/8" - 18RH (F) outlet connection



101C Carbon Dioxide

- Maximum inlet pressure 3000 PSI
- Outlet pressure preset 50 PSI
- 2"- 4000 PSI Gauge
- 0-60 Flowmeter (SCFH)
- CGA-320 inlet connection
- 5/8" - 18RH (F) outlet connection



R14 Argon

- Maximum inlet pressure 3000 PSI
- Outlet flow 0 - 30 SCFH
- 2"- 4000 PSI Gauge
- CGA-580 inlet connection
- 5/8" - 18RH (F) outlet connection



R15 Carbon Dioxide

- Maximum inlet pressure 3000 PSI
- Outlet flow 0 - 30 SCFH
- 2"- 4000 PSI Gauge
- CGA-320 inlet connection
- 5/8" - 18RH (F) outlet connection



PWAGFG Argon

- Maximum inlet pressure 3000 PSI
- Outlet flow 0 - 30 SCFH
- 2"- 4000 PSI Gauge
- CGA-580 inlet connection
- 5/8" - 18RH (F) outlet connection



PW196AR Argon

- Maximum inlet pressure 3000 PSI
- Outlet pressure preset 50 PSI
- 2"- 4000 PSI Gauge
- Dual 0-60 Flowmeters (SCFH)
- CGA-580 inlet connection
- 5/8" - 18RH (F) outlet connection

SPECIALTY REGULATORS



WT-304-210M Nitrogen

- High Pressure Regulator
- 2" gauges
- Delivery pressure range 200 - 3000 PSI
- 9/16" - 18RH (M) outlet connection
- CGA-580 Inlet connection



PW195AR-680 Argon

- Maximum inlet pressure 5500 PSI
- Outlet pressure preset at 50 PSI
- 2"- 6000 PSI Gauge
- 0-60 Flowmeter (SCFH)
- CGA-680 inlet connection
- 5/8" - 18RH (F) outlet connection

COMBINATION TORCHES



MODEL	STYLE	DESCRIPTION
PW100	VICTOR® 100	MEDIUM DUTY WELDING TORCH
PW1350	VICTOR® 1350	MEDIUM DUTY CUTTING ATTACHMENT
PW315	VICTOR® 315	HEAVY DUTY WELDING TORCH
PW2460	VICTOR® 2460	HEAVY DUTY CUTTING ATTACHMENT
HC231	HARRIS® 63-2	HEAVY DUTY WELDING TORCH
HC232	HARRIS® 73-2	HEAVY DUTY CUTTING ATTACHMENT

CUTTING TORCHES



MODEL	STYLE	DESCRIPTION
PW62-3E	HARRIS®	CUTTING TORCH 18" ACET 90D
PW62-3E-180	HARRIS®	CUTTING TORCH 18" ACET 180D
PW62-3E-36	HARRIS®	CUTTING TORCH 36" ACET 90D
PW62-3E-36-180	HARRIS®	CUTTING TORCH 36" ACET 180D
PW62-3E-36-70	HARRIS®	CUTTING TORCH 36" ACET 70D
PW62-3E-48	HARRIS®	CUTTING TORCH 48" ACET 90D
PW62-3E-48-180	HARRIS®	CUTTING TORCH 48" ACET 180D
PW62-3E-48-70	HARRIS®	CUTTING TORCH 48" ACET 70D
PW62-3E-70	HARRIS®	CUTTING TORCH 18" ACET 70D
PW62-3F	HARRIS®	CUTTING TORCH 18" FG 90D
PW62-3F-180	HARRIS®	CUTTING TORCH 18" FG 180D
PW62-3F-36	HARRIS®	CUTTING TORCH 36" FG 90D
PW62-3F-36-180	HARRIS®	CUTTING TORCH 36" FG 180D
PW62-3F-36-70	HARRIS®	CUTTING TORCH 36" FG 70D
PW62-3F-48	HARRIS®	CUTTING TORCH 48" FG 90D
PW62-3F-48-180	HARRIS®	CUTTING TORCH 48" FG 180D
PW62-3F-48-70	HARRIS®	CUTTING TORCH 48" FG 70D
PW62-3F-70	HARRIS®	CUTTING TORCH 18" FG 70D
PW1600	VICTOR®	CUTTING TORCH 21" VICTOR STYLE
PW1600-36	VICTOR®	CUTTING TORCH 36" VICTOR STYLE
PW1600-48	VICTOR®	CUTTING TORCH 48" VICTOR STYLE
PW1600-70	VICTOR®	CUTTING TORCH 21" 70 DEGREE
PW419	AIRCO®	CUTTING TORCH 19" AIRCO STYLE

HARRIS® is a registered trademark of The Lincoln Electric Company. VICTOR® is a registered trademark of Esab Welding and Cutting Products. Powerweld is in no way affiliated with these original equipment manufacturers.

CUTTING TIPS



VICTOR® STYLE		
MODEL	SIZES	FUEL GAS
1-101	000 - 8	Acetylene
3-101	000 - 8	Acetylene
GPN	000 - 8	Propane/Nat Gas
3GPN	000 - 6	Propane/Nat Gas
GPM	000 - 6	Mapp Gas



HARRIS® STYLE		
MODEL	SIZES	FUEL GAS
6290	000 - 6	Acetylene
629VVC	000 - 6	Propane/Nat Gas
6290NX	5/0 - 6	Propane/Nat Gas
6290NFF	000 - 6	Propane/Nat Gas



AIRCO® / LIQUID AIR® STYLE		
MODEL	SIZES	FUEL GAS
144 / 802	00 - 8	Acetylene
164 / 803	00 - 8	Acetylene
261	00-6	Propane/Nat Gas
AFS	72-38	Mapp Gas

PowerWeld tips are precision machined from high quality copper alloys for durability. The gas passages for single piece acetylene tips are accurately swage-forged and shaped on polished mandrels for smooth, efficient gas flow. Two piece tips for alternate fuel gases feature an internal spline configuration that is of the latest design, offering the optimum in cutting performance. All tips are 100% flame tested.



PUROX® STYLE		
MODEL	SIZES	FUEL GAS
4202	2-13	Acetylene
4213L	3-10	Propane



SMITH® STYLE		
MODEL	SIZES	FUEL GAS
MC-12	00 - 5	Acetylene
SC-12	00 - 6	Acetylene
SC-50	00 - 6	Propane/Nat Gas

WELDING & HEATING TIPS



VICTOR® STYLE	
MODEL	SIZES
000-W	W Series Size #000
00-W	W Series Size #00
0-W	W Series Size #0
1-W	W Series Size #1
2-W	W Series Size #2
3-W	W Series Size #3
4-W	W Series Size #4
5-W	W Series Size #5
6-W	W Series Size #6



HARRIS® STYLE	
MODEL	SIZES
23A90-00	Welding Tip Size #00
23A90-0	Welding Tip Size #0
23A90-1	Welding Tip Size #1
23A90-2	Welding Tip Size #2
23A90-3	Welding Tip Size #3
23A90-4	Welding Tip Size #4
23A90-5	Welding Tip Size #5
23A90-6	Welding Tip Size #6



VICTOR® STYLE	
MODEL	SIZES
000-W-1	W-1 Series Size #000
00-W-1	W-1 Series Size #00
0-W-1	W-1 Series Size #0
1-W-1	W-1 Series Size #1
2-W-1	W-1 Series Size #2
3-W-1	W-1 Series Size #3
4-W-1	W-1 Series Size #4
5-W-1	W-1 Series Size #5
6-W-1	W-1 Series Size #6



VICTOR® STYLE	
MODEL	SIZES
4-MFA	Heating Tip MFA Size #4
6-MFA	Heating Tip MFA Size #6
8-MFA	Heating Tip MFA Size #8
10-MFA	Heating Tip MFA Size #10
12-MFA	Heating Tip MFA Size #12
2-MFA-1	Heating Tip MFA-1 Size #2
4-MFA-1	Heating Tip MFA-1 Size #4
6-MFA-1	Heating Tip MFA-1 Size #6
8-MFA-1	Heating Tip MFA-1 Size #8



HARRIS® STYLE	
MODEL	SIZES
2290-1H	Heating Head Size #1-LPG
2290-2H	Heating Head Size #2-LPG
2290-3H	Heating Head Size #3-LPG
2290-4H	Heating Head Size #4-LPG
2290-5H	Heating Head Size #5-LPG

HARRIS® is a registered trademark of The Lincoln Electric Company. VICTOR® and PUROX® are registered trademarks of Esab Welding and Cutting Products. SMITH® is a registered trademark of ITW Welding. Powerweld is in no way affiliated with these original equipment manufacturers.

REPLACEMENT GAUGES



- Premium quality replacement gauges are the industry standard.
- Polished drawn brass with one-piece impact resistant polycarbonate posilock lens.
- For use with compressed gas regulators, these gauges are an excellent choice for original equipment and replacement applications.
- Gauges are UL listed.



DESCRIPTION			
SIZE	PSI	PART # 1/4" NPT	PART # 1/8" NPT
2 1/2"	30	A30	-
	60	A60	-
	100	A100	-
	200	A200	-
	400	A400	-
2"	30	B30	B30-8
	60	B60	B60-8
	100	B100	B100-8
	200	B200	B200-8
	400	B400	B400-8
	600	B600	B600-8
	4000	B4000	B4000-8
	30 CFH	-	R-CFH
1 1/2"	30	-	C30
	CONTENTS	-	CCG
	60	-	C60
	100	-	C100
	200	-	C200
	400	-	C400
	4000	-	C4000
1 1/2"	COVER	LEX15	Lexan Gauge Cover
2"	COVER	LEX2	Lexan Gauge Cover
2 1/2"	COVER	LEX25	Lexan Gauge Cover

PACKAGING: 10 per carton

BALLOON FILLERS

Deluxe Balloon Inflator GD92

Rugged all brass body, "Piston Type" mechanism, drilled and tapped for tie hook and string cutter. Body contains an additional 1/4" NPT port to accommodate a second filler valve if desired. Plastic hand tight CGA 580 inlet connection with sintered bronze inlet filter. 1-1/2" rear entry cylinder contents gauge. Rubber tilt valve.



BALLOON INFLATOR	
MODEL	STYLE
GD92	DELUXE



BALLOON INFLATOR	
MODEL	STYLE
GD95	MYLAR



BALLOON INFLATOR	
MODEL	STYLE
GD93	ECONOMY



BALLOON INFLATOR	
MODEL	STYLE
GD232	TILT VALVE

Balloon Inflator Economy GD93

Features straight through construction, rugged brass body, "Piston Type" mechanism. Hand tight CGA 580 inlet connection with sintered bronze inlet filter. Rubber tilt valve.

Balloon Inflator Mylar GD95

GD95 is suitable for filling standard latex and auto-fill mylar balloons. Rugged all brass body and "Piston-Type" mechanism. Drilled and tapped for a tie hook and a ribbon cutter. Automatic shut-off mylar filler to prevent over filling and bursting of expensive mylar balloon. Large plastic hand tight CGA 580 inlet connection with sintered bronze inlet filter. 1-1/2" rear entry color-coded cylinder contents gauge.

TWIN & SINGLE HOSE

TWIN WELDING HOSE GRADES R & T



SIZE ID	LENGTH	DESCRIPTION	GRADE R ITEM #	GRADE T ITEM #
3/16"	600' Reel	Twin Oxygen/Fuel Hose (Reels)	316TR	316TT
1/4"	600' Reel	Twin Oxygen/Fuel Hose (Reels)	14TR	14TT
5/16"	600' Reel	Twin Oxygen/Fuel Hose (Reels)	516TR	516TT
3/8"	600' Reel	Twin Oxygen/Fuel Hose (Reels)	38TT	

Green hose for Oxygen
Red hose for Acetylene
 Heat resistant EPDM tube and cover. 2 spiral polyester yarn reinforcement, more flexible than braid reinforced hose, easier to coil and handle. Conforms to RMA/CGA specifications. Working pressure 200 PSI, 1.38 Mpa

TWIN WELDING HOSE GRADES R & T



DESCRIPTION	LENGTH	GRADE R ITEM #	GRADE T ITEM #
3/16" Twin Welding Hose Assemblies	12.5'	PW316-12	
3/16" Twin Welding Hose Assemblies	25'	PW316-25	
3/16" Twin Welding Hose Assemblies	50'	PW316-50	
3/16" Twin Welding Hose Assemblies	100'	PW316-100	
1/4" Twin Welding Hose Assemblies	12.5'	PW14-12	
1/4" Twin Welding Hose Assemblies	25'	PW14-25	PW14-25T
1/4" Twin Welding Hose Assemblies	50'	PW14-50	PW14-50T
1/4" Twin Welding Hose Assemblies	100'	PW14-100	PW14-100T
5/16" Twin Welding Hose Assemblies	25'	PW516-25	PW516-25T
5/16" Twin Welding Hose Assemblies	50'	PW516-50	PW516-50T
5/16" Twin Welding Hose Assemblies	100'	PW516-100	PW516-100T
3/8" Twin Welding Hose Assemblies	25'		PW38-25T
3/8" Twin Welding Hose Assemblies	50'		PW38-50T
3/8" Twin Welding Hose Assemblies	100'		PW38-100T

SINGLE ACETYLENE HOSE ASSEMBLY



SINGLE HOSE GRADE R



SIZE ID	LENGTH	DESCRIPTION	ITEM # OXYGEN	ITEM # ACETYLENE
3/16"	800' Reel	Single line hose	316OX	316AC
1/4"	800' Reel	Single line hose	14OX	14AC
5/16"	600' Reel	Single line hose	516OX	516AC
3/8"	600' Reel	Single line hose	38OX	38AC

ITEM #	DESCRIPTION
AH12A	3/16"X12' A-A
AH12B	3/16"X12' B-B
AH25A	3/16"X25' A-A

GREEN GP/OXYGEN HOSE



SIZE ID	LENGTH	O.D. (in.)	WORKING PRESSURE	ITEM #
1/2"	600' Reel	15/16"	300	12OX

SINGLE ARGON HOSE



ITEM #	DESCRIPTION
PW-AH6	1/4" x 6' black inert hose assembly
PW-AH10	1/4" x 10' black inert hose assembly
PW-AH25	1/4" x 25' black inert hose assembly
PW-AH50	1/4" x 50' black inert hose assembly
PW-AH100	1/4" x 100' black inert hose assembly
PW-AHBULK	1/4" black inert hose bulk 800' reel

SINGLE AIR HOSE



ITEM #	DESCRIPTION
PW38A25R	25' Rubber Air Hose
PW38A50R	50' Rubber Air Hose
PW38A100R	100' Rubber Air Hose

Pre-assembled 1/4" I.D. inert hose assemblies for MIG and TIG applications. 5/8"-18 RH male connections at each end. Maximum working pressure - 200 PSI. Available from stock in five popular lengths.

ELECTRODE HOLDERS

SHORTSTUB TYPE



- Lightweight - easy to use
- Better maneuverability - great for tight places
- Excellent for vertical welding
- Grips the electrode nearer to the end
- Allows use of 20% more of the electrode

BERNARD® STYLE	
MODEL	AMPS
4B	400
6B	600



REPLACEMENT HEADS	
MODEL	AMPS
RK-4	400
RK-6	600

JAW TYPE

- Made from a high copper alloy for maximum conductivity and strength
- Long top and bottom tip insulators are fibreglass to withstand intense heat and impact
- Suitable for heavy duty applications
- Oval-point screw cable connections on all models

TWECO® STYLE	
MODEL	AMPS
A532	200
A316	250
A732	300
A14	350



LENCO® STYLE	
MODEL	AMPS
RAF-200	200
RAF-250	250
RAF-300	300
RAF-350	350
RAF-500	500



GROUND CLAMPS



ALERCO® STYLE	
MODEL	AMPS
AGC-200	200
AGC-300	300
AGC-500	500

- Manufactured from heavy-duty nickel-plated steel with forged brass conductors and braided copper strap
- Heavy-duty spring provide positive strength at jaws
- Cable is easy to install with built-in cable connector and oval point screw

TWECO® STYLE	
MODEL	AMPS
EL-200	200
EL-300	300
EL-500	500



- Manufactured from hot dip galvanized steel with forged brass conductors.
- Heavy-duty springs provide positive strength at jaws
- Braided copper strap



LENCO® STYLE	
MODEL	AMPS
GR-200	200
GR-300	300
GR-500	500

- Manufactured from high copper alloy assures excellent current carrying ability
- Large contact area
- Serrated upper and lower jaws
- Mechanical oval-point screw cable connection



JACKSON® STYLE	
MODEL	AMPS
GC-2	200
GC-3	300
GC-5	500


- Double lock clamps have forged copper alloy conductors
- High clamping pressure and long finger-grip levered handles for easy jaw opening

TWECO® STYLE	
MODEL	AMPS
GCT-200	200
GCT-300	300
GCT-500	500



- Manufactured from 98% copper alloy with forged brass conductors
- Heavy-duty fully insulated springs provide positive strength at jaws

GROUND CLAMPS



- Heavy duty screw type ground clamp
- Jaws are adjusted by screw lever
- Rubber insulated cable connector

SCREW TYPE	
MODEL	AMPS
GCC-600	600



- Design for MIG welding process
- Powerful bite and swivel pad
- Full 2" opening with a copper coated steel pressure screw
- Cable attaches with two oval-point screws and comes with connector insulator

"C" CLAMP TYPE	
MODEL	AMPS
ECWG60C	600



- Manufactured from nickel-plated steel with forged brass conductors
- Large contact area with strong gripping power
- Insulated to prevent annealing
- Easy installation or removal

ROTARY MAGNETIC	
MODEL	AMPS
ECM50R	500



- Manufactured from nickel-plated steel
- Large copper contact shunt
- High amperage capacity
- Handle for easy removal

ROTARY MAGNETIC	
MODEL	AMPS
ECM80H	800



- Manufactured from nickel-plated steel with forged brass conductors
- Large contact area with strong gripping power
- Insulated to prevent annealing
- Easy installation or removal
- Swivel connector for welding cable

ROTARY MAGNETIC	
MODEL	AMPS
ECM60R	600



ECR800-2



ECR1000-2

- Heavy duty forged brass construction
- Two cable connectivity for efficient grounding connection
- Outer face revolves with full swivel action
- Strong tension spring to ensure maximum connection
- Easy installation or removal

ROTARY "C" CLAMP	
MODEL	AMPS
ECR800-2	800
ECR1000-2	1000



ECR600L

- Solid Brass construction
- 600 amp capacity
- Smooth rotation
- 3 angle body positions


ROTATING CLAMP	
MODEL	AMPS
ECR600L	600

CABLE LUGS & SPLICERS



HAMMER ON LUG	
PART #	CABLE SIZE
RL11	SIZE 3/0 TO 4/0
RL22	SIZE 1/0 TO 2/0
RL33	SIZE 4 TO 1

- Manufactured from heavy wall cast copper alloy, annealed for maximum conductivity
- Fast, easy installation - just slide in cable and strike it with hammer for durable connection



HAMMER SPLICER	
PART #	CABLE SIZE
RS11	SIZE 3/0 TO 4/0
RS22	SIZE 1/0 TO 2/0
RS33	SIZE 4 TO 1



- Manufactured from heavy wall cast copper alloy, annealed for maximum conductivity
- Long length and flared ends make installation fast and easy



Mechanical cable splicers incorporate hex-screws for solid connection and an insulated cover for safety

MODEL	CABLE SIZE
CS-610	#4-1/0
CS-2040	2/0-4/0

SOLDER SPLICER	
PART #	CABLE SIZE
RS3040	SIZE 3/0 TO 4/0
RS1020	SIZE 1/0 TO 2/0
RS12	SIZE 4 TO 1

SOLDER LUG	
PART #	CABLE SIZE
RL3040	SIZE 3/0 TO 4/0
RL1020	SIZE 1/0 TO 2/0
RL12	SIZE 4 TO 1



- Easy to use crimping tool
- Takes any size of solder type lug
- Simply use a hammer to do the job
- Good permanent connection
- Spring return

MODEL	STYLE
RL-CRIMP	UNIVERSAL

CHIPPING HAMMERS

SPRING HANDLE STEEL SHAFT

- Similar to Lenco® LHC-1
- Similar to Atlas HCP
- Wire spring handle
- Drop forged heat treated head
- Welded-on head - Cannot come loose

SPRING HANDLE STEEL SHAFT

- Most popular model
- Similar to Lenco® LH-1
- Similar to Atlas H
- Wire spring handle
- Drop forged heat treated head
- Welded-on head - Cannot come loose



CHIPPING HAMMER	
MODEL	STYLE
RLHC-1	POINT/CROSS CHISEL

CHIPPING HAMMER	
MODEL	STYLE
RLH-1	POINT/CHISEL



WOOD HANDLE

- Similar to Lenco® LWHH
- Similar to Atlas WH-20
- Similar to Atlas WH-30
- Drop forged heat treated heads attached to handle with steel and wood wedges

CHIPPING HAMMER	
MODEL	STYLE
RLHWH	POINT/CHISEL
RLHWH-30	POINT/CROSS CHISEL

WOOD HANDLE STEEL SHAFT

- Similar to Lenco® LHW-1
- Similar to Atlas J
- This model has the wood handle preferred by many welders
- Drop forged heat treated head
- Welded-on head - Cannot come loose

CHIPPING HAMMER	
MODEL	STYLE
RLHW-1	POINT/CHISEL



CABLE CONNECTORS

Designed to efficiently conduct the current through a detachable type connector. Brass bodies are precision machined. Cam action design allows lock in with a twist and pulls the two halves together tightly. Connector covers are resistant to heat, cold, abrasion, ozone, oils & solvents. Tapered ends lock out moisture, oil and dirt. Connector covers are specially compounded to be flame retardant.

LENCO® STYLE

PART #	DESCRIPTION	SUITABLE FOR CABLE SIZES	PKG
LC40	Complete Connector	#1 - 4/0	50 / CS
LC40M	Male Half	#1 - 4/0	100 / CS
LC40F	Female Half	#1 - 4/0	100 / CS
LC40HD	Heavy Duty Connector	#1/0 - 4/0	50 / CS
LC10	Complete Connector	#4 - #1	50 / CS
LC10M	Male Half	#4 - #1	100 / CS
LC10F	Female Half	#4 - #1	100 / CS
LS40	Black Sleeve only	N/A	50 / CS
LS40B	Blue Sleeve only	N/A	50 / CS
LS40R	Red Sleeve only	N/A	50 / CS
LS40Y	Yellow Sleeve only	N/A	50 / CS
LC1040M	Whip Connector	#4 - #1	100 / CS



- Positive lock-tight action
- Brass bodies are precision machined from heavy specially shaped brass extrusion
- Cam action design of male half connector pulls the two halves tightly together
- Compatible with Lenco® and other popular style connectors

DINSE® STYLE

PART #	DESCRIPTION	SUITABLE FOR CABLE SIZES	PKG
CCD1025	Complete Connector	#4 - #2	50 / CS
CCD1025-M	Male Half	#4 - #2	100 / CS
CCD1025-F	Female Half	#4 - #2	100 / CS
CCD3550	Complete Connector	#2 - 1/0	50 / CS
CCD3550-M	Male Half	#2 - 1/0	100 / CS
CCD3550-F	Female Half	#2 - 1/0	100 / CS
CCD5070	Complete Connector	2/0 - 4/0	50 / CS
CCD5070-M	Male Half	2/0 - 4/0	100 / CS
CCD5070-F	Female Half	2/0 - 4/0	100 / CS



- Popular Dinse® Style connector
- Positive lock-tight action
- Brass parts are precision machined from heavy specially shaped brass extrusion
- Cam action design of male half connector pulls the two halves tightly together

TWECO® STYLE

PART #	DESCRIPTION	SUITABLE FOR CABLE SIZES	PKG
1MBP	Complete Connector	#4 - #1	50 / CS
2MBP	Complete Connector	1/0 - 2/0	50 / CS
2MBP-M	Male Half	1/0 - 2/0	100 / CS
2MBP-F	Female Half	1/0 - 2/0	100 / CS
4MBP	Complete Connector	3/0 - 4/0	50 / CS



- Positive lock-tight action
- Brass parts are precision machined from heavy specially shaped brass extrusion
- Cam action design of male half connector pulls the two halves tightly together
- Compatible with Tweco® and other popular style connectors

TERMINAL CONNECTIONS

PART #	DESCRIPTION	SUITABLE FOR CONNECTOR	PKG
TE-1AF	45° Terminal	LC10	50 / CS
TE-2AF	45° Terminal	LC40	50 / CS
TE-20F	180° Terminal	LC40	50 / CS
TE-A-3595	45° Dinse	CCD3550	50 / CS
DA-5095	Adaptor - Dinse Male, LC40F		



- Positive lock-tight action
- Brass parts are precision machined from heavy specially shaped brass extrusion
- Terminal connectors replace cable lugs for fixture to machines allowing for quick disconnect of cables

GOUGING TORCH

For gouging, cutting, beveling, piercing and flushing metal. The Gouging Torch is designed to remove any kind of metal by the "Air Carbon-Arc" process which is more economical than older methods such as burning, chipping and grinding.



RK4000 GOUGING TORCH		
MODEL	AMPERAGE	CABLE ASS'Y
RK4000	1000 AMPS	7' SWIVEL CABLE


POINTED & FLAT GOUGING CARBONS

Used for gouging out defective welds and cutting non-ferrous metals. Consistent copper coating insulates against side burn through, offers improved conductivity. Electrodes are 12" in length.



COPPER COATED DC POINTED GOUGING CARBONS			
Item #	Packaging	Size (Inches)	Size (MM)
DC18	100 per box	1/8" X 12"	3.2mm X 305mm
DC532	50 per box	5/32" X 12"	4.0mm X 305mm
DC316	50 per box	3/16" X 12"	4.8mm X 305mm
DC14	50 per box	1/4" X 12"	6.4mm X 305mm
DC516	50 per box	5/16" X 12"	7.9mm X 305mm
DC38	50 per box	3/8" X 12"	9.5mm X 305mm
DC12	50 per box	1/2" X 12"	12.7mm X 305mm

Carton Packaging: 1/8" Diameter - 500 per Carton - All other sizes - 250 per Carton



COPPER COATED DC FLAT GOUGING CARBONS			
Item #	Packaging	Size (Inches)	Size (MM)
DCF38532	50 per box	3/8"X5/32" X 12"	9.5mm X 4.0mm X 305mm
DCF58316	50 per box	5/8"X3/16" X 12"	15.9mm X 4.8mm X 305mm

JOINTED GOUGING CARBONS

- Eliminates stub loss and provides continuous electrode feed especially for semi-automatic torches
- Machined at each end to provide male and female fit up
- Used for gouging out defective welds and cutting non-ferrous metals
- Consistent copper coating insulates against side burn through, offers improved conductivity
- Electrodes are 17" in length



COPPER COATED DC JOINTED GOUGING CARBONS			
Item #	Packaging	Size (Inches)	Size (MM)
DCJ-38	50 per box	3/8" X 17"	9.5mm X 440mm
DCJ-12	50 per box	1/2" X 17"	12.7mm X 440mm
DCJ-58	25 per box	5/8" X 17"	15.9mm X 440mm
DCJ-34	25 per box	3/4" X 17"	19.1mm X 440mm

WELDING CABLE



Convenient Cut Length Cable in Boxes

PowerWeld carries inventory of the most popular welding and primary cable sizes in convenient pre-cut lengths of 50' and 100'. These lengths are attractively boxed and ready to go right off the shelf for clean and trouble free cable sales.

Flex-a-Prene® 30 AWG 600 volt all-weather grade welding cable is rated at -50°C to +105°C giving it outstanding cold weather flexibility. Made with a special jacketing compound, this standard stock welding cable gives you high flexibility without sacrificing weather resistance. **Flex-a-Prene®** welding cable is the first to meet **SAE J1127**, a standard that requires a minimum amount of copper per gauge. To meet this standard, the cable must also pass extensive tests against flame, heat, and cold. These conditions are similar to what welders experience on a daily basis.

Specification Data

AWG SIZE	STRANDING	NOM. INSULATION THICKNESS (INCHES)	NOM. O.D. INCHES	APPROX. POUNDS PER 1000 FEET
6	259 X 30	.060	.320	128
4	364 X 30	.060	.348	162
2	624 X 30	.060	.420	260
1	780 X 30	.080	.503	328
1/0	988 X 30	.080	.533	400
2/0	1235 X 30	.080	.586	490
3/0	1539 X 30	.080	.625	596
4/0	2014 X 30	.080	.720	800

Part #	Size	Description
4-50	50 ft #4	Welding Cable
4-100	100 ft #4	Welding Cable
2-50	50 ft #2	Welding Cable
2-100	100 ft #2	Welding Cable
1-50	50 ft #1	Welding Cable
1-100	100 ft #1	Welding Cable
1/0-50	50 ft #1/0	Welding Cable
1/0-100	100 ft #1/0	Welding Cable
2/0-50	50 ft #2/0	Welding Cable
2/0-100	100 ft #2/0	Welding Cable
3/0-50	50 ft #3/0	Welding Cable
3/0-100	100 ft #3/0	Welding Cable
4/0-50	50 ft #4/0	Welding Cable
4/0-100	100 ft #4/0	Welding Cable
10/3-100	100 ft #10/3	Power Cable
10/4-100	100 ft #10/4	Power Cable

WHIP CABLE ASSEMBLIES

Whip cable is highly flexible with annealed 36 (.005) gauge bare copper conductor, insulated with an orange EPDM jacket and paper separator. Operating temperatures range from -50°C to +105°C (-58°F to +221°F). Rated to 600 volts. Meets or exceeds ASTM B-172.

10 feet #2 cable with 4B holder and male connector

WHIP CABLE ASS'Y	
MODEL	STYLE
2-WA	10 FEET #2

10 feet #1 cable with 4B holder and male connector

WHIP CABLE ASS'Y	
MODEL	STYLE
1-WA	10 FEET #1



MIG FLUX CORED WELDER

GAS / NO GAS



COMES COMPLETE WITH:

- Gun and cable assembly
- 6 ft (1.8 m) work cable with clamp
- Argon Flowmeter with hose
- Sample spool of .030 in (0.8 mm) self shielding flux cored wire.
- Spare contact tips
- 6 ft (1.8 m) Power cord with plug.
- Instruction Manual

Dimensions: 18" (470mm) x 9.4" (240mm) x 12.0" (305mm)

Net Weight: 59 lb (27 kg)

Warranty: Two Years



Description: **MM-180E** wire feed welder is designed for maintenance and sheet metal fabrication. The welder consists of a single-phase power transformer, stabilizer, rectifier, and a unique built-in control/feeder. You can weld sheet metal from 24 gauge up to 1/4" thick with a single pass. You can weld thicker steel with bevelling and multiple pass techniques. Tweco® style nozzles and contact tips.

Welder Specifications

Primary (input) Volts:	230 Vac
Primary (input) Amps:	25
Phase:	Single
Frequency:	60HZ
Secondary (output) Volts:	21.3
Secondary (CSA output) Amps:	145
Open Circuit Voltage (Max):	35 Vdc
Duty Cycle Rating:	15%

**230V/25-180 Amps
Welds up to 6.0 mm**

MIG WELDER

MODEL	STYLE
MM-180E	230V

INVERTER WELDERS

INVERTER STICK WELDER

CARiARC 90

90 Amp-20% Duty Cycle
120VAC 1 Phase 60Hz
Weight 4.5kg (10lbs)
TWO YEAR WARRANTY



TIG OPTION



AWP17V-12-2D TIG Torch
 100FL Flowmeter
 PWAK-2 Parts Kit

CARiARC 90A	
Power Supply (V)	1 ph - 120V - 60HZ
No-Load Voltage (V)	75V
Output Range (A)	20 - 90A
Duty Cycle (%)	20%
Suggested Electrode	E6013, E7014, E7018, E6011
Electrode Diameter (inch)	1/16", 5/64", 3/32"
Length x Width x Height	300mm-120mm-240mm (12"-5"-9")
Welder Weight Kg (lbs)	4.5 kg (9.9 lbs)
Model	CA-90A

CARiARC 90A comes complete with lead cable and electrode holder, ground cable with clamp, shoulder strap and sample electrodes all contained in a sturdy BMC carry case for convenience and portability.

TIG ACCESSORIES

MODEL	STYLE
CA-TIG	ACCESSORIES

INVERTER PLASMA CUTTER

HC40PLUS

40 Amp-35% Duty Cycle
230VAC 1 Phase 60Hz
Weight 9 kg (21lbs)
TWO YEAR WARRANTY



HC40PLUS PLASMA CUTTER	
Power Supply (V)	1 ph - 230V - 60HZ
No-Load Voltage (V)	340V
Output Range (A)	15 - 40A
Duty Cycle (%)	35% @ 40A
Air Pressure	4.5 CFM @ 60 PSI
Power Switch	250 Volts AC 30 Amps
Length x Width x Height	17.7" x 6.7" x 9.0"
Welder Weight (lbs)	9 kg (21 lbs)
Torch Length	5.5m (18.5')
Model	HC-40PLUS

PLASMA PARTS

	PWPR0110 Electrode (Pkg 3)
	PWPE0106 Gas Diffuser(Pkg 2)
	PWPC0116 Outer Cover Cutting Nozzle (PKG 1)
	PWPD011608 Cutting Nozzle 0.8mm (Pkg 3)

HC40PLUS is an IGBT inverter plasma cutter with thermal overload protection, a Trafimet® torch and a built-in gas regulator. This easy to use plasma cutter has the power to cut up to 3/8" materials and a pilot arc that makes cutting expanded metal possible. This machine requires single phase 230 Volt (220V-240V), 60 Hz input power.

TUNGSTEN ELECTRODES



PowerWeld offers eight types of tungsten electrode to cover every TIG welding application. Electrodes are 7" (175mm) in length and packaged 10 rods per box. All tungstens have color coded tips for easy identification, and meet AWS A5.12 specifications. Electrodes are supplied with a smooth, round, bright centerless ground finish.

Type	Dia in. (mm)	Part #	Voltage	Composition	Materials Welded
Pure (EWP)					
Unalloyed tungsten electrodes. Provide good stability when used with alternating current, either balanced wave or continuously high frequency stabilized. Maintain a clean, balled end which is preferred for aluminum and magnesium welding.	0.040(1.0) 1/16(1.6) 3/32(2.4) 1/8(3.2) 5/32(4.0)	PUR040 PUR116 PUR332 PUR18 PUR532	AC	99.5% Tungsten 0.5% Other	Aluminum Magnesium
2% Thoriated (EWTh-2)					
Thoria alloy increases electrode life. Higher electron emissions result in better arc starting and arc stability. Maintains a sharp point. Resistance to tungsten contamination of the weld.	0.040(1.0) 1/16(1.6) 3/32(2.4) 1/8(3.2) 5/32(4.0)	2PC040 2PC116 2PC332 2PC18 2PC532	DC	97.3% Tungsten 1.7%-2.2% Thorium 0.5% Other	Carbon Steel Stainless Steel Nickel Alloy Titanium Copper
Zirconiated (EWZr-1)					
Preferred electrode for applications where tungsten contamination of the weld must be minimized. Performs well with alternating current as it retains a balled end during welding.	0.040(1.0) 1/16(1.6) 3/32(2.4) 1/8(3.2) 5/32(4.0)	ZIR040 ZIR116 ZIR332 ZIR18 ZIR532	AC	98.6% Tungsten 0.7%-0.9% Zirconium 0.5% Other	Aluminum Magnesium
2% Ceriated (EWCe-2)					
Provides easy arc starting, improved arc stability and reduced rate of vaporization or burn-off. Operates well with alternating current or direct current, either polarity.	0.040(1.0) 1/16(1.6) 3/32(2.4) 1/8(3.2) 5/32(4.0)	CER040 CER116 CER332 CER18 CER532	DC AC Inverters	97.3% Tungsten 1.8%-2.2% Cerium 0.5% Other	Carbon Steel Stainless Steel Nickel Alloy Titanium Aluminum
1% Lanthanated (EWLa-1)					
Provides easy arc starting, improved arc stability and reduced rate of vaporization or burn-off. Operates well with alternating current or direct current, either polarity.	0.040(1.0) 1/16(1.6) 3/32(2.4) 1/8(3.2) 5/32(4.0)	RE040 RE116 RE332 RE18 RE532	DC AC Inverters	98.3% Tungsten 0.8-1.2% Lanthanum 0.5% Other	Carbon Steel Stainless Steel Nickel Alloy Titanium Aluminum
1.5% Lanthanated (EWLa-1.5)					
Provides easy arc starting, improved arc stability and significantly reduced tip erosion rate. Operates well with alternating current or direct current, either polarity.	0.040(1.0) 1/16(1.6) 3/32(2.4) 1/8(3.2) 5/32(4.0)	LAN15040 LAN15116 LAN15332 LAN1518 LAN15532	DC AC Inverters	97.8% Tungsten 1.3%-1.7% Lanthanum 0.5% Other	Carbon Steel Stainless Steel Nickel Alloy Titanium Aluminum
2% Lanthanated (EWLa-2)					
Provides easy arc starting, improved arc stability and significantly reduced tip erosion rate. Operates well with alternating current or direct current, either polarity.	0.040(1.0) 1/16(1.6) 3/32(2.4) 1/8(3.2) 5/32(4.0)	LAN20040 LAN20116 LAN20332 LAN2018 LAN20532	DC AC Inverters	97.3% Tungsten 1.8%-2.2% Lanthanum 0.5% Other	Carbon Steel Stainless Steel Nickel Alloy Titanium Aluminum
Tri-Mix (EWG)					
Tri-Mix tungsten electrode (AWS classification EWG) combines three non-radioactive rare earth materials (La ₂ O ₃ , Y ₂ O ₃ , CeO ₂) into one tungsten. Extensive testing has resulted in the development of an optimum composition blend for a high performing tungsten electrode. Performance features include: Easy arc starting and re-ignition, high arc pressure, very good arc stability, excellent endurance. Suitable for carbon steel, stainless steel, copper and aluminum. AC or DC applications.	0.040(1.0) 1/16(1.6) 3/32(2.4) 1/8(3.2) 5/32(4.0)	TM040 TM116 TM332 TM18 TM532	DC AC Inverters	Tungsten Lanthanum Cerium Yttrium	Carbon Steel Stainless Steel Nickel Alloy Titanium Aluminum

MILD STEEL WIRE & COPPER FREE WIRE

Certified by CWB to CSA W48-Class ER49S-6



Specifications

AWS A5.18 Class ER70S-6

Description

S6 contains high levels of manganese and silicon for stronger deoxidizing power where stringent cleaning procedures are not possible. This wire has been designed to provide X-ray quality porosity-free welds and the highest tensile strength (as welded) of the plain carbon steel wires. The high silicon content increases the fluidity of the weld pool, creating a smoother bead appearance and resulting in minimal post-weld grinding. S6 is excellent where poor fit-ups or rusty and oily plates may be used.

Applications

Construction work, tanks, truck bodies, farm implements, pipes, steel castings or forgings, shaft build-ups and general shop fabrications.



DIAMETER	SPOOL SIZES					PACKAGING
	1KG (2.2LB)	5KG (11LB)	15KG (33LB)	20KG (44LB)	250KG (550LB)	
0.6mm (.023")	S6061	S6065	S60615			1kg spools are packaged 18 spools per master carton
0.8mm (.030")	S6081	S6085		S60820		
0.9mm (.035")	S6091	S6095		S60920	S609250	20kg spools are packaged 60 spools (1200kg) per pallet
1.2mm (.045")	S6121	S6125		S61220	S612250	
						250 kg drums are packaged 2 drums (500kg) per pallet

Powerweld ER70S-6 Copper Free Welding Wire provides superior welding performance with increased productivity and a healthier work environment. Features include:



- Smooth and stable feeding without liner clogging
- Excellent arc ignition
- Minimal post-weld cleanup
- Low spatter level
- Low fume emission
- Increased performance at higher amperages

PWS60920CF .035" (0.9mm) x 44lb (20kg)

PWS61220CF .045" (1.2mm) x 44lb (20kg)

MILD STEEL TIG RODS

RG45

RG45116 ROD RG45 1/16" X 36"
 RG4518 ROD RG45 1/8" X 36"
 RG45316 ROD RG45 3/16" X 36"
 RG45332 ROD RG45 3/32" X 36"

RG60

RG60116 ROD RG60 1/16" X 36"
 RG6018 ROD RG60 1/8" X 36"
 RG60316 ROD RG60 3/16" X 36"
 RG60332 ROD RG60 3/32" X 36"
 RG60532 ROD RG60 5/32" X 36"

ER70S-2

Certified by CWB



S2035 ROD E70S2 .035" X 36"
 S2045 ROD E70S2 .045" X 36"
 S2116 ROD E70S2 1/16" X 36"
 S218 ROD E70S2 1/8" X 36"
 S2316 ROD E70S2 3/16" X 36"
 S2332 ROD E70S2 3/32" X 36"
 S2532 ROD E70S2 5/32" X 36"

ER70S-3

S3116 ROD ER70S3 1/16" X 36"
 S318 ROD ER70S3 1/8" X 36"
 S3332 ROD ER70S3 3/32" X 36"

ER80S-D2

80SD2045 ROD ER80S-D2 .045" X 36"
 80SD2116 ROD ER80S-D2 1/16" X 36"
 80SD218 ROD ER80S-D2 1/8" X 36"
 80SD2332 ROD ER80S-D2 3/32" X 36"

ER80S-B2

ERSB2-045 ROD ER80S-B2 .045" X 36"
 ERSB2-116 ROD ER80S-B2 1/16" X 36"
 ERSB2-18 ROD ER80S-B2 1/8" X 36"
 ERSB2-332 ROD ER80S-B2 3/32" X 36"

ER90S-B3

ERSB3-116 ROD ER90S-B3 1/16" X 36"
 ERSB3-18 ROD ER90S-B3 1/8" X 36"
 ERSB3-332 ROD ER90S-B3 3/32" X 36"

ER70S-6

S6035 ROD ER70S6 .035" X 36"
 S6045 ROD ER70S6 .045" X 36"
 S6116 ROD ER70S6 1/16" X 36"
 S618 ROD ER70S6 1/8" X 36"
 S6332 ROD ER70S6 3/32" X 36"



PACKAGING: 10# (4.5kg) Tubes, 50# (22.7kg) per carton

FLUX CORED WIRE

E71T-GS ALL POSITION

SELF-SHIELDING - GASLESS

Features

- No Shielding Gas Needed
- Single Pass Welding of Thin Gauge Galvanized Steel
- Excellent for Outdoor Use
- Smooth Arc – Minimal Spatter
- DC- Straight Polarity
- Works Well In Wind


Description

PowerWeld gasless wire E71T-GS is an all-position, self-shielded flux-cored wire designed for single pass fillet and lap welding on galvanized or carbon steel as thin as 20 gauge, without burn-through. Gasless wire E71T-GS is commonly used on small portable 110 volt welding machines, offering smooth arc action with very little spatter. Travel speed is fast, penetration is good and slag removal is easy.

Applications

PowerWeld gasless wire E71T-GS is most popular for the home workshop welder because it works so well on 110 volt machines and can be used on thin gauge steel. Gasless wire E71T-GS is used quite extensively in automobile body shops for door or body repairs and it is also used for sheet metal duct work on lap and butt joints.

NOTE: As with all self-shielded wires, **PowerWeld** gasless wire E71T-GS does contain fluoride compounds, which require more attention to ventilation when being used to weld galvanized steel. The zinc oxide formed during welding should not be inhaled as it can cause metal fume fever. When welding indoors or in an enclosed area, be sure that the ventilation is adequate.

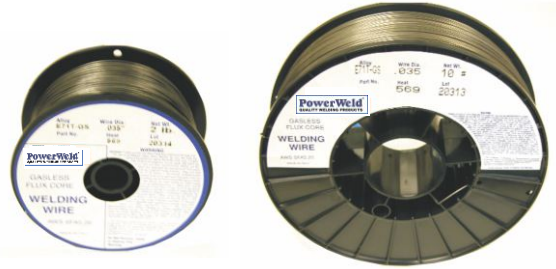

Item Number	TYPE E71T-GS Diameter / Package
FC0302	.030 Dia. X 2# Spool
FC03010	.030 Dia. X 10# Spool
FC03033	.030 Dia. X 33# Spool
FC0352	.035 Dia. X 2# Spool
FC03510	.035 Dia. X 10# Spool
FC03533	.035 Dia. X 33# Spool
FC0452	.045 Dia. X 2# Spool
FC04510	.045 Dia. X 10# Spool
FC04533	.045 Dia. X 33# Spool


PACKAGING: Spools individually boxed

E71T-1C/1M ALL POSITION

PowerWeld E71T-1C/1M is a rutile type flux cored wire designed for general purpose all position welding with 100% CO₂ or a 80% Argon – 20% CO₂ mixture shielding gas. Features excellent welding performance and higher welding efficiency than traditional welding wires with it's smooth arc characteristics, while producing low spatter and low fume emissions. Used for single and multiple pass welding of mild steel and 490 Mpa (70,000 psi) grade high tensile steel. Applications include structural steel fabrication, pressure vessels, bridges, machinery etc.

- Classification: E71T-1C/1M per AWS A5.20, ASME SFA5.20
 Approvals: CWB to CSA W48-01, E491T-1-H4, E491T-1M-H4
 ABS 3YSAH5
 LR 3YSH5
 DNV III YMS(H5)
 BV SA3YMH5


Item Number	TYPE E71T-1C/1M Diameter / Package
PW711215	.045" Dia. (1.2mm) X 33# (15kg) Spool
PW711615	1/16" Dia. (1.6mm) X 33# (15kg) Spool

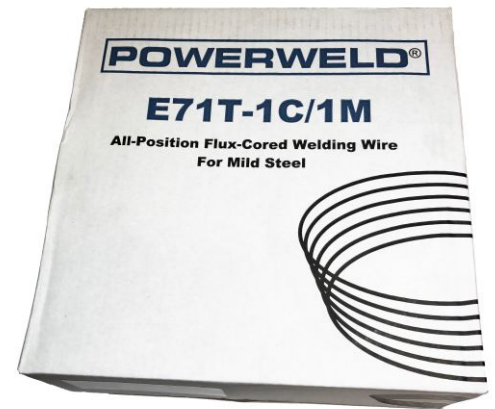

- Available Diameters: .045" Dia. (1.2mm), 1/16" Dia. (1.6mm)
 Spool Size: 33 lb (15 kg)
 Pallet Quantity: 72 spools - 2376 lb (1080 kg)
 Welding Current: DC + reverse polarity - electrode positive

MILD STEEL ELECTRODES

PowerWeld 6013



PowerWeld 6013 is a high titania coated electrode. This electrode provides good wetting and shallow penetration for thin sheet metal applications (using smaller diameter electrodes), but with sufficient penetration for welding medium gauge steel. PowerWeld 6013 is an all-purpose electrode that provides a soft steady arc which is easily regenerated, easy slag control for vertical-down welding, low spatter and a beautiful bead appearance. PowerWeld 6013 electrodes may be used in any position with AC or DC (straight or reverse polarity).

Applications

PowerWeld 6013 is commonly used for automobile bodies, truck frames and bodies, ornamental iron, metal furniture, farm implementations, machinery guards, storage tanks, or wherever appearance is important or desirable.

PowerWeld 7014



PowerWeld 7014 is an iron power, rutile type electrode providing high deposition rates and fast travel speed. This electrode provides a stable arc, flat smooth bead appearance and easy slag removability. PowerWeld 7014 is used for all position, single-pass and multi-layer welding applications. AC or DC (straight or reverse polarity) may be used.

Applications

Typical applications include: ship structures, bridges, structural steel for buildings, sheet metal, ornamental iron, auto bodies and fenders, machine parts, storage tanks, etc.

LOW HYDROGEN ELECTRODES

PowerWeld 7018



PowerWeld 7018 is a low-hydrogen electrode for use in all positions on low, medium and high-carbon steels. 70,000 PSI tensile strength. Ideal for out of position welding and tacking. Runs on AC or DCEP (reverse) polarity. Features a steady arc with low spatter and medium penetration, providing X-ray quality weld deposits.

Applications

PowerWeld 7018 is typically used for heavy machinery fabrication, pressure vessels, field and shop welding of bridges and structural steels, cast steels and shipbuilding, or most ASTM specifications on medium carbon and low alloy steels.

PowerWeld 7018AC is a low-hydrogen electrode for use in all positions on low, medium and high-carbons steels. 70,000 PSI tensile strength. Ideal for out of position welding and tacking. Runs on AC or DCEP (reverse) polarity. Specially formulated to operate with small 208/230 volt AC welders.

PowerWeld 7018AC

Applications

Typical applications include general fabrication, tack and skip welds, and for welding thin sections of steel.

ALLOY	PART NUMBER	DIAMETER		LENGTH	
		MM	INCHES	MM	INCHES
E6013 AWS A5.1 CWB TO CSA W48 E4313	PW601320	2.0	5/64	300	12
	PW601325	2.5	3/32	350	14
	PW601332	3.2	1/8	350	14
	PW601340	4.0	5/32	350	14
E7014 AWS A5.1	PW701425	2.5	3/32	350	14
	PW701432	3.2	1/8	350	14
E7018 AWS A5.1 CWB TO CSA W48 E4918-1-H8	PW701825	2.5	3/32	350	14
	PW701832	3.2	1/8	350	14
	PW701840	4.0	5/32	350	14
E7018AC AWS A5.1	PW7018AC25	2.5	3/32	350	14
	PW7018AC32	3.2	1/8	350	14

PACKAGING: 2KG (4.4 lbs) Plastic Boxes - 20kg (44 lbs) per Master Case

STAINLESS MIG WIRE

308L - PowerWeld 308L is used for TIG and MIG welding of unstabilized steels such as types 301, 302, 304, 305, 308. The average carbon content of 0.02% produces a weld deposit with good resistance against intergranular corrosion caused by carbide precipitation. This filler metal is the most popular grade among stainless steels, used for general purpose applications.

309L - PowerWeld 309L is used for the welding of similar alloys in wrought or cast form. It is mostly used for welding dissimilar materials such as mild steel to stainless steel, as well as for a barrier layer in stainless overlays. It has low carbon content of less than 0.03% reduces the possibility of intergranular corrosion. For some applications, welding of straight chromium steels.

316L - PowerWeld 316L is used to weld wrought and cast forms of similar composition, as well as low carbon molybdenum-bearing austenitic alloys. The lower ferrite level of this normal composition reduces the rate of corrosion in certain media and is suitable for use at cryogenic temperatures. The presence of molybdenum increases its creep resistance at elevated temperatures.

All grades meet specification ASME SFA5.9 and are certified by CWB to AWS A5.9

Size	Amperage	Voltage
.023"	35 - 70	21 - 26
.030"	50 - 100	24 - 28
.035"	160 - 210	26 - 29
.045"	180 - 250	28 - 32

Suggested Welding Parameters for Stainless Steel Welding

MIG Welding: DCEP

Shielding Gas: 98% Argon + 2% Oxygen
Gas Flow: 30 to 50 CFH



**CERTIFIED BY
CANADIAN
WELDING
BUREAU**

Diameter	Spool Size	308L	309L	316L
.024" (0.6mm)	2# (0.9kg) spool	308L02402	309L02402	316L02402
	10# (4.5kg) spool	308L02410	309L02410	316L02410
	33# (15kg) spool	308L02433	309L02433	316L02433
.030" (0.8mm)	2# (0.9kg) spool	308L03002	309L03002	316L03002
	10# (4.5kg) spool	308L03010	309L03010	316L03010
	33# (15kg) spool	308L03033	309L03033	316L03033
.035" (0.9mm)	2# (0.9kg) spool	308L03502	309L03502	316L03502
	10# (4.5kg) spool	308L03510	309L03510	316L03510
	33# (15kg) spool	308L03533	309L03533	316L03533
.045" (1.2mm)	2# (0.9kg) spool	308L04502	309L04502	316L04502
	10# (4.5kg) spool	308L04510	309L04510	316L04510
	33# (15kg) spool	308L04533	309L04533	316L04533

PACKAGING: 2 kg (4.4 lbs) boxes, 20 kg (44 lbs) per carton

STAINLESS TIG WIRE

TIG Welding: DCEN

Shielding Gas: 100% Argon
Gas Flow: 30 to 40 CFH



**CERTIFIED BY
CANADIAN
WELDING
BUREAU**

Size	Amperage	Voltage
.035"	60 - 90	12 - 15
.045"	80 - 110	13 - 16
1/16"	90 - 130	14 - 18
3/32"	120 - 175	15 - 20
1/8"	150 - 220	15 - 20

Diameter	308L	309L	316L
.035" (0.9mm)	ER308L-035	ER309L-035	ER316L-035
.045" (1.2mm)	ER308L-045	ER309L-045	ER316L-045
1/16" (1.6mm)	ER308L-116	ER309L-116	ER316L-116
3/32" (2.4mm)	ER308L-332	ER309L-332	ER316L-332
1/8" (3.2mm)	ER308L-18	ER309L-18	ER316L-18

Each TIG rod is stamped with grade for identification.

PACKAGING: 10 pound (4.5kg) tubes

STAINLESS ELECTRODES



**CERTIFIED BY
CANADIAN
WELDING
BUREAU**



PRODUCT DESCRIPTION	DIAMETER / SIZE	ITEM #
E308L-18 STAINLESS STEEL ELECTRODE AWS A5.4 ASME SFA5.4 CLASS E308L-16 AC/DC	3/32 - 2.5mm X 300mm	PW308L25
	1/8 - 3.2mm X 350mm	PW308L32
	5/32 - 4.0mm X 350mm	PW308L40
E309L-18 STAINLESS STEEL ELECTRODE AWS A5.4 ASME SFA5.4 CLASS E309L-16 AC/DC	3/32 - 2.5mm X 300mm	PW309L25
	1/8 - 3.2mm X 350mm	PW309L32
	5/32 - 4.0mm X 350mm	PW309L40
E316L-18 STAINLESS STEEL ELECTRODE AWS A5.4 ASME SFA5.4 CLASS E316L-16 AC/DC	3/32 - 2.5mm X 300mm	PW316L25
	1/8 - 3.2mm X 350mm	PW316L32
	5/32 - 4.0mm X 350mm	PW316L40

PACKAGING: 2 kg (4.4 lbs) boxes, 20 kg (44 lbs) per carton

ALUMINUM ALLOYS

Precision made on the latest equipment from materials of the finest quality. **PowerWeld** spooled aluminum wire is triple degreased to provide the highest degree for cleanliness and luster. The **PowerWeld** "shaved finish" produces absolute uniformity in diameter along with excellent surface smoothness so as to guarantee uninterrupted feeding in automatic and semi-automatic operations.

Rigid quality controls in every stage of manufacture and packaging assure maximum welding and brazing efficiency and trouble free welding results. Unique cleaning methods remove all traces for oxides, lubricants and acids. Special packaging maintains absolute cleanliness and prevents contamination.

With state of the art, proprietary processes and advanced testing capabilities, **PowerWeld** is recognized for our quality aluminum welding products.

ALUMINUM MIG WIRE



SHAVED - TRIPLE DEGREASED PRECISION LEVEL LAYER WOUND

404303001	WIRE MIG .030 X 1# SPOOL
404303005	WIRE MIG .030 X 5# SPOOL
404303013	WIRE MIG .030 X 13# SPOOL
404303016	WIRE MIG .030 X 16# SPOOL
404303501	WIRE MIG .035 X 1# SPOOL
404303505	WIRE MIG .035 X 5# SPOOL
404303516	WIRE MIG .035 X 16# SPOOL
404304501	WIRE MIG .045 X 1# SPOOL
404304516	WIRE MIG .045 X 16# SPOOL
404311616	WIRE MIG 1/16" X 16# SPOOL

535603001	WIRE MIG .030 X 1# SPOOL
535603005	WIRE MIG .030 X 5# SPOOL
535603016	WIRE MIG .030 X 16# SPOOL
535603501	WIRE MIG .035 X 1# SPOOL
535603505	WIRE MIG .035 X 5# SPOOL
535603516	WIRE MIG .035 X 16# SPOOL
535604501	WIRE MIG .045 X 1# SPOOL
535604516	WIRE MIG .045 X 16# SPOOL
535611616	WIRE MIG 1/16" X 16# SPOOL

555404501	WIRE MIG .045 X 1# SPOOL
555404520	WIRE MIG .045 X 20# SPOOL

ALUMINUM TIG WIRE



ER4043-116	WIRE TIG ALUMINUM 1/16" X 36"
ER4043-18	WIRE TIG ALUMINUM 1/8" X 36"
ER4043-332	WIRE TIG ALUMINUM 3/32" X 36"
ER4043-532	WIRE TIG ALUMINUM 5/32" X 36"

ER5356-116	WIRE TIG ALUMINUM 1/16" X 36"
ER5356-18	WIRE TIG ALUMINUM 1/8" X 36"
ER5356-332	WIRE TIG ALUMINUM 3/32" X 36"
ER5356-532	WIRE TIG ALUMINUM 5/32" X 36"

PACKAGING: 10# (4.5kg) Tubes 50# (22.7kg) Cartons

COPPER BASED ALLOYS

FLUX COATED BRONZE

AWS A5.8 RBCuZn-C

FC18	ROD FLUX COATED BRONZE 1/8" X 36"
FC316	ROD FLUX COATED BRONZE 3/16" X 36"
FC332	ROD FLUX COATED BRONZE 3/32" X 36"

PACKAGING: 10# (4.5kg) Tubes 50# (22.7kg) Carton



SILICON BRONZE

AWS A5.7 ERCuSi-A

SB025-10	WIRE SILICON BRONZE .025 X 10#
SB025-2	WIRE SILICON BRONZE .025 X 2#
SB030-10	WIRE SILICON BRONZE .030 X 10#
SB030-2	WIRE SILICON BRONZE .030 X 2#
SB030-30	WIRE SILICON BRONZE .030 X 30#
SB035-10	WIRE SILICON BRONZE .035 X 10#
SB035-2	WIRE SILICON BRONZE .035 X 2#
SB035-30	WIRE SILICON BRONZE .035 X 30#
SB035-500	WIRE SILICON BRONZE .035 X 500#
SB045-10	WIRE SILICON BRONZE .045 X 10#
SB045-2	WIRE SILICON BRONZE .045 X 2#
SB045-30	WIRE SILICON BRONZE .045 X 30#

SB116	ROD SILICON BRONZE 1/16" X 36"
SB18	ROD SILICON BRONZE 1/8" X 36"
SB332	ROD SILICON BRONZE 3/32" X 36"

ROD PACKAGING: 10# (4.5kg) Tubes 50# (22.7kg) Carton



BARE BRONZE

AWS A5.8 RBCuZn-C

BB116	ROD BARE BRONZE 1/16" X 36"
BB14	ROD BARE BRONZE 1/4" X 36"
BB18	ROD BARE BRONZE 1/8" X 36"
BB316	ROD BARE BRONZE 3/16" X 36"
BB332	ROD BARE BRONZE 3/32" X 36"
BB532	ROD BARE BRONZE 5/32" X 36"

PACKAGING: 10# (4.5kg) Tubes 50# (22.7kg) Carton



DEOXIDIZED COPPER

AWS A5.7 ERCu

DEOX035-2	DE-OX COPPER WIRE .035" X 2#
DEOX035-30	DE-OX COPPER WIRE .035" X 30#
DEOX045-2	DE-OX COPPER WIRE .045" X 2#
DEOX045-30	DE-OX COPPER WIRE .045" X 30#

DEOX116	DE-OX COPPER TIG ROD 1/16" X 36"
DEOX18	DE-OX COPPER TIG ROD 1/8" X 36"
DEOX332	DE-OX COPPER TIG ROD 3/32" X 36"

ROD PACKAGING: 10# (4.5kg) Tubes 50# (22.7kg) Carton



AUTO DARKENING HELMETS

PROFESSIONAL SERIES



MODEL	STYLE
PWH98551	CARBON FIBRE BLACK



MODEL	STYLE
PWH98552	CARBON FIBRE BLUE



MODEL	STYLE
PWH98553	CARBON FIBRE RED



MODEL	STYLE
PWH98554	SILVER FLAME

Viewing Area :
98mm x 55mm (3.86" x 2.17")

Auto-Darkening Filter Welding Helmet
Solar Powered - Fully Automatic Power on / off
Conforms to ANSI Z87.1-2003 and Colts CSA Z94.3-07

Variable Shade Infinitely Adjustable 9 – 13
Switching Speed 0.000033 Seconds
Weld / Grind Mode Select Function
Adjustable Sensitivity
Adjustable Delay – Dark to Clear
IR/UV Protection – up to shade DIN 16 at all times
Magnifyer lens holder
Multi-Adjust Headgear for Welder Comfort
Light Weight – 480 g (16.9 oz) - 2 Year Warranty



MODEL	STYLE
PWH9855G1	SKULL FLAME IN CLAMSHELL PKG

MODEL	STYLE
PWH9855G2	BLACK ART IN CLAMSHELL PKG



MODEL	STYLE
PWH9855G7	ROBOT IN CLAMSHELL PKG



MODEL	STYLE
PWH9855G3	KLOWN IN CLAMSHELL PKG



MODEL	STYLE
PWH9855G4	SKULL CHAIN IN CLAMSHELL PKG



MODEL	STYLE
PWH9855G5	RED EAGLE IN CLAMSHELL PKG



MODEL	STYLE
PWH9855G6	CANADIAN IN CLAMSHELL PKG

MODEL	REPLACEMENT PARTS
PWHL1	OUTER LENS FOR ALL PWH HELMETS
PWHL2	INNER LENS FOR PWH9843 HELMETS
PWHL3	INNER LENS FOR PWH9855 HELMETS
PWHL4	INNER LENS FOR PWH9000 HELMETS
PWH187	SLOTTED HARD HAT ADAPTER SET
PWHHG	REPLACEMENT HEADGEAR PWH9843/9855
PWH188	HARD HAT ADAPTER FOR PWH9000 SERIES
PWHHG9000	HEADGEAR PWH9000 SERIES



MODEL	STYLE
PWH9843	BLACK

DELUXE SERIES

Same features as Professional Models
but with a smaller viewing area.

Viewing Area :
98mm x 43mm
(3.86" x 1.69")

EXPERT SERIES AUTO DARKENING HELMETS



MODEL	STYLE
PWH9000	BLACK

MODEL	STYLE
PWH9000G8	STEEL PLATE

MODEL	STYLE
PWH9000G9	REAL CAMO

MODEL	STYLE
PWH9000G3	RACE CAR

- Viewing Area: 3.94" X 2.56" (100mm X 65mm)
- Best in Class Optical Clarity 1/1/1/1
- Dual Adjustable Shade Ranges: 4-8 / 9-13
- Grind / Weld Modes
- 4 Independent Sensors
- Internal Controls
- Adjustable Sensitivity
- Adjustable Delay

- Lightweight - 460g (16.2 oz)
- Switching Speed 1/30,000 sec.
- Suitable for Low Amp TIG Applications Down to 5 Amps
- Standard Cover Plate 4-1/2" X 5-1/4" (114.5mm X 133.35mm)
- Suitable for Full Respirator
- Mag Lens Compatible
- Ultimate Comfort Headgear

ECONOMY WELDING HELMETS



ANSI Z87.1-1989
Approved



Excellent impact
resistant
polypropylene



Complete with
headgear & lenses -
individually boxed



MODEL	STYLE
WH754	FIXED FRONT

Model WH754 Fixed Front
Style 5½" X 4¼"
c/w adjustable head gear,
clear & shade 11 lenses.

MODEL	STYLE
WH750	FLIP FRONT

Model WH750 Flip Front
Style 2" X 4¼"
c/w adjustable head gear,
clear & shade 11 lenses.

MODEL	STYLE
WH752	WIDE VISION FLIP FRONT

Model WH752 Flip Front
Style 5½" X 4¼"
c/w adjustable head gear,
clear & shade 11 lenses.

MODEL	STYLE
WH622	HAND SHIELD

Model WH622 Fixed Front
Style Hand Shield 2" X 4¼"
c/w internal handle, clear &
shade 11 lenses.

WELDING & COVER GOGGLES

PowerWeld goggles feature soft comfortable sides, adjustable headband straps and air vents to reduce fogging. Provide protection from impact and IR/UV in flame cutting and brazing applications. All models meet or exceed ANSI Z87.1 standards.

WELDING GOGGLES



CUP GOGGLE 50 MM	
MODEL	LENSES
R600	SHADE #5 (50 MM)



COVER GOGGLE 2 X 4 1/4"	
MODEL	LENSES
R950	SHADE #5 (2 X 4 1/4")



FLIP FRONT GOGGLE 50 MM	
MODEL	LENSES
R850	SHADE #5 (50 MM)

COVER GOGGLES



GRINDING GOGGLE CLEAR	
MODEL	LENSES
R1140	POLYCARBONATE



COVER GOGGLE SHADE 5	
MODEL	LENSES
R1165	SHADE #5



FLIP FRONT GOGGLE 2 X 4 1/4"	
MODEL	LENSES
R900	SHADE #5 (2 X 4 1/4")



COVER GOGGLE 50 MM	
MODEL	LENSES
R800	SHADE #5 (50 MM)

RGS STRAPS

MODEL	DESCRIPTION
RGS	REPLACEMENT STRAPS FOR ALL GOGGLES C/W CLIPS

SWEATBANDS

MODEL

DESCRIPTION



PW3100V



PW3200V

Our innovative sweatband design has made wearing a helmet more comfortable, no matter what time of year it is. The pad has been field tested in a variety of industries and is proven to reduce "helmet head", to improve grip, and to provide maximum perspiration absorption. Made of 100% fleecy cotton and flame retardant, this product features an air cushioned inner layer made of thousands of small cells to hold excessive perspiration and a hook & loop fasteners to fit all major brands of suspender (hard hats) or non-suspender (welding and face shields) type headgear. **2 per package**

BACK HAND PADS




BACK HAND PADS

MODEL	DESCRIPTION
PWBHP01	Double Layer Protection
PWBHP02	Triple Layer Protection

FILTER & COVER PLATES

FILTER PLATES



- Provides ultimate protection from ultraviolet and infrared rays during the welding process
- Precision ground and edged to allow a proper and safe fit
- Optically correct and precisely shaded hardened glass
- ANSI Z87.1

	PART NO	SIZE	DESCRIPTION
FILTERS	MP2H	2 X 4 1/4"	HARDENED GLASS FILTER SHADES 4-14 (50 PER BOX), EACH
	MP4H	4 1/2 X 5 1/4"	HARDENED GLASS FILTER SHADES 4-14 (25 PER BOX), EACH
	MP2PC	2 X 4 1/4"	POLYCARBONATE FILTER SHADES 8-12 (100 PER BOX), EACH
	MP4PC	4 1/2 X 5 1/4"	POLYCARBONATE FILTER SHADES 8-12 (50 PER BOX), EACH
	ML5H	50 mm	HARDENED GLASS FILTER SHADES 4-6 (50 PER BOX), PAIR

COVER LENS



	PART NO	SIZE	DESCRIPTION
POLYCARBONATE	PP1	2 X 4 1/4"	SAFETY PLATE .060 - 100% POLYCARBONATE ANSI STAMPED - LENS IMPRINTED
	PP2	2 X 4 1/4"	COVER PLATE .060 - 100% POLYCARBONATE
	PP4	4 1/2 X 5 1/4"	COVER PLATE .060 - 100% POLYCARBONATE
	PL5	50 MM	COVER PLATE .060 - 100% POLYCARBONATE

2 X 4 1/4" & 50 MM 100 / BOX 500 / CASE 4 1/2 X 5 1/4" 25 / BOX 500 / CASE



	PART NO	SIZE	DESCRIPTION
CR-39	PP2CR	2 X 4 1/4"	COVER PLATE .060 CR-39
	PP4CR	4 1/2 X 5 1/4"	COVER PLATE .060 CR-39

2 X 4 1/4" 100 / BOX 500 / CASE 4 1/2 X 5 1/4" 50 / BOX 200 / CASE

	PART NO	SIZE	DESCRIPTION
GLASS	GP2	2 X 4 1/4"	GLASS COVER PLATE, BULK PACKED (100 PER BOX)
	GP4	4 1/2 X 5 1/4"	GLASS COVER PLATE, BULK PACKED (100 PER BOX), EACH
	GL5	2 X 4 1/4"	GLASS COVER PLATE, BULK PACKED (100 PER BOX), PAIR

2 X 4 1/4" & 50 MM 100 / BOX 500 / CASE 4 1/2 X 5 1/4" 50 / BOX 400 / CASE

MAGNIFIERS & AUTO CARTRIDGES

MAGNIFIER - POLYCARBONATE


PART NO.	DESCRIPTION
MAG-75	Magnifier Plate Focol Power 0.75
MAG-100	Magnifier Plate Focol Power 1.00
MAG-125	Magnifier Plate Focol Power 1.25
MAG-150	Magnifier Plate Focol Power 1.50
MAG-175	Magnifier Plate Focol Power 1.75
MAG-200	Magnifier Plate Focol Power 2.00
MAG-225	Magnifier Plate Focol Power 2.25
MAG-250	Magnifier Plate Focol Power 2.50
MAG-300	Magnifier Plate Focol Power 3.00



MAGNIFIER LENS SELECTOR CHART

AGE	FOCOL POWER
Up to 41	Focol Power 0.75
41 - 44	Focol Power 1.00
44 - 47	Focol Power 1.25
47 - 50	Focol Power 1.50
50 - 52	Focol Power 1.75
52 - 56	Focol Power 2.00
56 - 60	Focol Power 2.25
60 - over	Focol Power 2.50

MAGNIFIER - GLASS

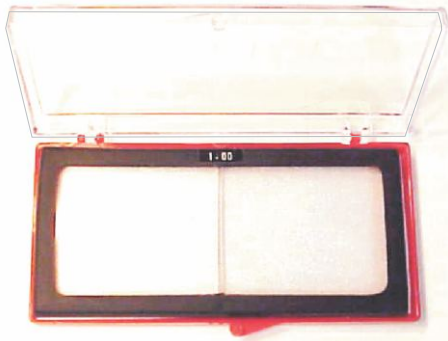

PART NO.	DESCRIPTION
M75	Magnifier Glass Plate 0.75 Focol Power- 2X4 1/4
M100	Magnifier Glass Plate 1.00 Focol Power- 2X4 1/4
M125	Magnifier Glass Plate 1.25 Focol Power- 2X4 1/4
M150	Magnifier Glass Plate 1.50 Focol Power- 2X4 1/4
M175	Magnifier Glass Plate 1.75 Focol Power- 2X4 1/4
M200	Magnifier Glass Plate 2.00 Focol Power- 2X4 1/4
M225	Magnifier Glass Plate 2.25 Focol Power- 2X4 1/4
M250	Magnifier Glass Plate 2.50 Focol Power- 2X4 1/4
M300	Magnifier Glass Plate 3.00 Focol Power- 2X4 1/4
M350	Magnifier Glass Plate 3.50 Focol Power- 2X4 1/4

AUTO DARKENING CARTRIDGES



Solar powered cartridges fit most standard 2" X 4 1/4" helmets or 4 1/2" X 5 1/4" helmets

- 2 arc sensors for reliable performance
- Dark state shade #10 or #11
- Light state shade #3
- Lens thickness 1/5" (5.0mm)
- Switching speed 0.5ms



MODEL	STYLE
XG-HP10	2" X 4 1/4" Shade #10

MODEL	STYLE
XG-HP11	2" X 4 1/4" Shade #11

MODEL	STYLE
XG-511	4 1/2" X 5 1/4" Shade #11

REPLACEMENT VISORS

All visors meet ANSI Z87.1 specifications

UNIVERSAL STYLE



804UCL



804BCL



814ULG



814BLG



824UDG



824BDG



844UCL



844BCL



854ULG



854BLG



864UDG



864BDG

PART #	DESCRIPTION	SIZE
804UCL	Clear Unbound	8" x 12"
804BCL	Clear W/alum Band	8" x 12"
814ULG	Light Green Unbound	8" x 12"
814BLG	Light Green W/alum Band	8" x 12"
824UDG	Dark Green Unbound	8" x 12"
824BDG	Dark Green W/alum Band	8" x 12"
844UCL	Clear Unbound	9" x 15.5"
844BCL	Clear W/alum Band	9" x 15.5"
854ULG	Light Green Unbound	9" x 15.5"
854BLG	Light Green W/alum Band	9" x 15.5"
864UDG	Dark Green Unbound	9" x 15.5"
864BDG	Dark Green W/alum Band	9" x 15.5"

FIBRE METAL® STYLE



4118C



4118DG



4178C



4178G



4199C



4199G



4199-05

PART #	DESCRIPTION	SIZE
4118C	Clear Visor	8" x 11"
4118DG	Green Visor	8" x 11"
4178C	Clear Visor	8" x 16.5"
4178G	Green Visor	8" x 16.5"
4199C	Clear Visor	9-3/4" x 19"
4199G	Green Visor	9-3/4" x 19"
4199-05	Green Visor Shade #5	9-3/4" x 19"

MECHANICS GLOVES

PowerWeld chooses the highest quality of premium top grain cowhide, goatskin, pigskin and deerskin for our mechanics gloves. PowerWeld gloves are stitched with Kevlar® thread for added strength.

PIGSKIN



MODEL	STYLE
PW2660M	MEDIUM
PW2660L	LARGE
PW2660XL	X-LARGE

GOATSKIN



MODEL	STYLE
PW2670M	MEDIUM
PW2670L	LARGE
PW2670XL	X-LARGE

COWHIDE



MODEL	STYLE
PW2680L	LARGE
PW2680XL	X-LARGE

DEERSKIN



MODEL	STYLE
PW2690L	LARGE
PW2690XL	X-LARGE

FACESHIELD HEADGEAR

AUTO DARKENING LENS



- 02-0270-00 OUTER LENS AP/APC/APCV (5/PKG)
- 02-0280-00 INNER LENS AP/APC/APCV (5/PKG)
- 04-0270-00 OUTER LENS FOR 9000 SERIES SPEEDGLAS (10/PKG)
- 04-0280-00 INNER LENS FOR 9000X AND XF SERIES SPEEDGLAS (5/PKG)
- 04-0290-00 INNER LENS FOR 9000F AND V SERIES SPEEDGLAS (5/PKG)

- KP2897-1 LENS INSIDE LINCOLN® VIKING 5PK
- KP2898-1 LENS OUTER LINCOLN® VIKING 5PK
- KP2913-1 LENS OUTER LINCOLN® VIKING 5PK
- KP2931-1 LENS INSIDE LINCOLN® VIKING 5PK
- KP3043-1 LENS OUTER LINCOLN® VIKING 5PK
- KP3044-1 LENS INSIDE LINCOLN® VIKING 5PK

- M216-326 FRONT COVER LENS FOR MILLER® ELITE (5/PKG)
- M216-327 INSIDE COVER LENS FOR MILLER® ELITE (5/PKG)
- M231-410 INSIDE COVER LENS FOR MILLER® PRO-HOBBY (5/PKG)
- M231-411 FRONT COVER LENS FOR MILLER® PRO-HOBBY (5/PKG)
- M231-921 FRONT COVER LENS FOR MILLER® PROFROMANCE (5/PKG)
- M770-237 LENS INSIDE MILLER® XLI (5/PKG)
- M770-240 LENS FRONT MILLER® XLI (5/PKG)
- M770-241 LENS INSIDE MILLER® XLIX (5/PKG)



Headgear with ratchet adjustment

MODEL	STYLE
H700	HEADGEAR

GOLD FILTER PLATES

GOLD-COATED POLYCARBONATE & GLASS FILTER PLATES



PART NO.	DESCRIPTION
MP2GO	2 x 4 1/4" Polycarbonate Plates Shades 9-12 Gold Coated, 50/box
MP4GO	4 1/2 x 5 1/4" Polycarbonate Plates Shades 9-12 Gold Coated, 25/box
MP2GG	2 x 4 1/4" Glass Plates Shades 9-12 Gold Coated, 100/box
MP4GG	4 1/2 x 5 1/4" Glass Plates Shades 9-12 Gold Coated, 50/box

WELDING & WORK GLOVES

WELDING GLOVE

Features

- Pearl shoulder split cowhide.
- 14" length.
- Cotton lined for comfort.
- Weltd fingers protect cotton stitching.
- Lock stitched with cotton thread.

MODEL	STYLE
PW1001	WELDING



WELDING GLOVE

Features

- Durable blue shoulder split cowhide.
- 14" length.
- Insulated with cotton/foam lining for added heat protection.
- Reinforced thumb.
- Weltd fingers protect stitching.
- Lock stitched with Kevlar® thread for added strength.

MODEL	STYLE
PW1002	WELDING



WELDING GLOVE

Features:

- Durable premium black/red side split cowhide
- 14" length
- Insulated with cotton/foam lining
- Reinforced thumb
- Weltd fingers protect stitching
- Lock stitched with Kevlar® thread for added strength

MODEL	STYLE
PW1003	WELDING



MIG / TIG GLOVE

Features:

- Top grain pigskin leather.
- Great in wet and oily conditions.
- Clute cut seams on top of glove for seamless palm area.
- 4" cuff for added protection.
- Thumb strap reinforcement.
- Straight thumb.
- Lock stitched with Kevlar® thread for added strength.

MODEL	SIZE
PW2001M	MEDIUM
PW2001L	LARGE



MIG / TIG GLOVE

Features:

- Top grain pearl goatskin leather enhances feel and durability.
- 4" cuff.
- Wing thumb.
- Lock stitched with Kevlar® thread for added strength.

MODEL	SIZE
PW2002M	MEDIUM
PW2002L	LARGE



MIG / TIG GLOVE

Features:

- Lightweight pearl deerskin split leather enhances dexterity.
- Unlined for maximum feel.
- 4" cuff.
- Straight thumb for best gun grip.
- Lock stitched with Kevlar® thread for added strength.

MODEL	SIZE
PW2003M	MEDIUM
PW2003L	LARGE



WORK GLOVES

Features:

- Economy/Industrial grade shoulder split
- Patch palm & knuckle strap.
- Canvas back
- Gunn cut with 2 1/2" safety starched cuff.
- Lock stitched for added strength.

MODEL	STYLE
PW3001	ECONOMY
PW3002	INDUSTRIAL



DRIVERS GLOVES



MODEL	SIZE
PW1414M	MEDIUM
PW1414L	LARGE
PW1414XL	EXTRA LARGE

MIG PREMIUM GLOVE


Features

- Soft goatskin with top grainsplit cowhide
- Reinforced palm
- Cowhide back with elastic
- Seamless index finger
- Lined for comfort
- Lock stitched with Kevlar® thread for added strength

MODEL	SIZE
PW4000L	LARGE
PW4000XL	EXTRA LARGE



WELDING CURTAINS & FRAMES

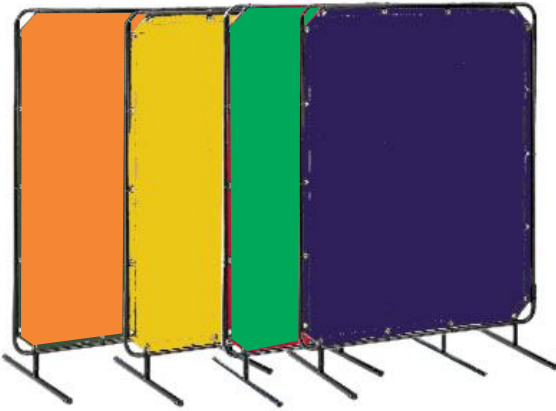

MODEL	DESCRIPTION
PWFR66	Frame 6' x 6'
PWFR68	Frame 6' x 8'
PWRC66GR	Green Curtain 6' x 6'
PWRC66BL	Blue Curtain 6' x 6'
PWRC66OR	Orange Curtain 6' x 6'
PWRC66YE	Yellow Curtain 6' x 6'
PWRC68GR	Green Curtain 6' x 8'
PWRC68BL	Blue Curtain 6' x 8'
PWRC68OR	Orange Curtain 6' x 8'
PWRC68YE	Yellow Curtain 6' x 8'

PowerWeld offers a range of curtains designed to protect casual passers-by from harmful radiation in industrial working environments. Arcs and sparks generated from welding and grinding are harmful to the naked eye. PowerWeld 14 mil transparent vinyl welding curtains allow those outside of the workspace protection during periods of short-term visibility, dispersing the light generated by the arc while allowing light back into the workspace. All curtains meet CE EN1598-2011, ensuring acceptable transparency, reflectance, IRUV protection and flame resistance. Curtain panels and frames are sold separately.

WELDING BLANKETS



MEDIUM DUTY

MODEL	SIZE
PW24B66	6' X 6'
PW24B68	6' X 8'
PW24B810	8' X 10'
PW24B1010	10' X 10'
PW24B4050	40"w X 50 Yard Roll
PW24B6050	60"w X 50 Yard Roll

Features:

- 24oz acrylic coated gold fiberglass
- Grommets on 18" (45mm) centers on all sides
- 1000°F (550°C) service temperature
- Kevlar® stitched hems



HEAVY DUTY

MODEL	SIZE
PW18SIB66	6' X 6'
PW18SIB68	6' X 8'

- 18oz Bronze Silica
- Grommets on 18" (45mm) centers on all sides
- 1800°F (900°) service temperature
- Kevlar® stitched hems

LIGHT DUTY

MODEL	SIZE
PW17B6050	60"w X 50 Yard Roll

Features:

- 17oz Red Silicon coated fiberglass
- 1000°F (550°C) service temperature
- Oil and water resistant



LIGHT DUTY

MODEL	SIZE
PW18B66UC	6' X 6'
PW18B68UC	6' X 8'
PW18B810UC	8' X 10'
PW18B4050UC	40"w X 50 Yard Roll
PW18B6050UC	60"w X 50 Yard Roll

Features:

- 18oz heat treated tan fiberglass - uncoated
- Grommets on 18" (45mm) centers on all sides
- 1000°F (550°C) service temperature
- Kevlar® stitched hems

LEATHER CLOTHING

PowerWeld leather clothing is made from split cowhide for maximum durability and heavy duty protection. Designed to allow complete body movement and freedom while welding. All seams are sewn with Kevlar® thread which is double locked stitched to minimize seam burnout.

PowerWeld leather welding jackets incorporate many additional features including:

- Heat and electrical insulated snaps.
- Inside pockets for extra use.
- Roll up collar with hook & loop closure.
- Welled shoulder seams.
- FR sateen lined collar/upper sleeves/shoulder provides comfortable skin contact and absorbs sweat.
- Reinforced double leather front snap panel.
- All stress points are rivetted.
- Adjustable snap cuffs.



PW3280S-4XL

PART NO.	DESCRIPTION
PW3280S-4XL	Leather Jacket 30" Small - 4XL
PW9230S-4XL	Combo Jacket Small to 4XLarge
PW4236	Bib Apron 24" X 36"
PW4242	Bib Apron 24" X 42"
PW3221M-3XL	Cape Sleeves M-3XL
PW9096	Combination Sleeves 19"
PW3120	Bib Apron for Cape Sleeves 20"
PW5200-23	Sleeves 23" Length (pair)
PW525	Leather Rod Pouch
PW527	Leather Spats 7" w/Velcro closure



PW9230S-4XL



PW4236
PW4242



PW3221M-3XL



PW9096



PW3120



PW5200-23



PW525



PW527

FR WELDERS JACKETS

PowerWeld FR cotton welding jackets provide protection during welding while offering lightweight comfort. 9oz material is treated for flame resistance to standard ASTM 6413/ D6413M-12. Powerweld 30" length jackets feature rugged 5 snap front closures, adjustable cuffs, a generous internal pocket, plus a convenient sleeve pocket for scribes, markers or small tools.

Sateen weave material provides comfortable movement. Machine washable, they retain their flame resistance for up to 50 home washes. Full range of sizes available in both traditional green, as well as high visibility orange.

POWERWELD 9OZ FR COTTON JACKETS

Green PART NO.

- PWGFRJS
- PWGFRJM
- PWGFRJL
- PWGFRJXL
- PWGFRJXXL
- PWGFRJXXXL
- PWGFRJXXXXL



Orange PART NO.

- PWOFRJS
- PWOFRJM
- PWOFRJL
- PWOFRJXL
- PWOFRJXXL
- PWOFRJXXXL
- PWOFRJXXXXL



CHEMICALS

ANTI-SPATTER



MODEL	SIZE
1620-16	473 ml/16oz

Anti-Spatter Nozzle Shield

For Mig gun nozzle and welding surfaces quick dry formula, to save time and reduce cost.

- Reduces spatter build-up on MIG nozzles.
- Prevents spatter adhesion on surface.
- Reduces clean up time.
- Heat-resistant to withstand high temperature use.
- Non-flammable.
- Paint compatible.
- Contains no silicones.
- Contains no fluorocarbons.
- Uses CO2 propellant.
- Private label program available.
- Available in 16 and 24 oz. aerosols.

DYE PENETRANTS



MODEL	DESCRIPTION	SIZE
PW1500	Aerosol Cleaner	16 oz
PW2500	Aerosol Developer	16 oz
PW3000	Aerosol Penetrant	16 oz

NOZZLE DIP

Nozzle Dip

Economical formula to protect both manual and automatic MIG gun nozzles and MIG gun tips.

- Safe.
- Non-toxic.
- Contains no silicones.
- Non-flammable.
- Odorless.
- Contains no hydrocarbon solvents.
- 16 oz. unbreakable container.
- Private label program available.



MODEL	SIZE
108-16	454 grams/16oz

PowerWeld Dye Penetrant Inspection chemicals provide a simple and cost effective method for the detection of surface flaws, cracks and defects. This three step process is applicable for use on materials of steel, stainless steel, aluminum, copper, cast iron and brass. Defects are clearly visible as shown by a red dye without the requirement of additional equipment. Meets military, nuclear, ASME and ASTM specifications.

COOLANT

Coolant For Plasma, MIG & TIG Machines

An ethylene glycol based formulation for use in radiator circulator and re-circulator systems. Used for cooling Plasma, MIG, TIG and resistance welding systems, as well as general industrial cooling applications. Temperature range: 19°F, 6°F and -60°F



MODEL	RANGE	SIZE
COOL1	19°F / -7°C	1 GAL/3.78L
COOL2	6°F / -14°C	1 GAL/3.78L
COOL3	-60°F / -52°C	1 GAL/3.78L
COOL1-55	19°F / -7°C	55 GAL/205L

PACKAGED 4 GALLONS / CASE

LUBE PADS

Wire Lube Pads

Keeps MIG, sub-arc, and flux core cable conduits producing for up to 3 months without down time for cleaning.

Eliminates erratic wire feed caused by dust, particles, and flashing being trapped inside conduit lines.

Increase wire surface feedability.

Wire lube pad lowers the coefficient of friction in conduits approximately 60% and increases life of wire feed units.

Pre-treatment of wire lube pads so they will not dry out or evaporate.

Contains no solvents, abrasives, carbon, sulfur, nitrogen, moly disulfide or silicones.

Non-toxic, non-flammable.

Economical and easy to use.

Available in recloseable plastic boxes, 4 or 6 pads to a box with one clip and Econo-Pak of 25 pads with clip.

Wire lube pads can be certified for nuclear welding.

Flexibility to use pad on both sides and on any axis.

Private label program available.



MODEL	# OF PADS
LUBE4	4
LUBE6	6
LUBE25	25

CYLINDER CARTS



CYT-6SH
6" rubber wheels
41" H x 22" W
Holds 40 cu. ft. (B)
acetylene and 40 -80
cu. ft. oxygen
Side by side

MODEL	CYLINDERS
CYT-6SH	SMALL



CYT-8CH
8" rubber wheels
41" H x 26" W
Holds 75-145 cu. ft.
acetylene and 120-244
cu. ft. oxygen
Side by side

MODEL	CYLINDERS
CYT-8CH	MEDIUM



EASY TO SHIP
EASY TO STOCK
EASY TO ASSEMBLE

Boxed cylinder carts make sense.
Easy to ship and easy to stock.



CYT-81CH-1
8" rubber wheels
44" H x 12" W
Holds 80-330 cu. ft.
high pressure cylinder

MODEL	CYLINDERS
CYT-81CH-1	SINGLE



CYT-14CH
14" rubber wheels
44.5" H x 31.5" W
Holds 145-250 cu. ft.
acetylene and 244-330 cu.
ft. oxygen

MODEL	CYLINDERS
CYT-14CH	LARGE



CYT-8CH-1
8" rubber wheels
41" H x 26" W
Holds 75-145 cu. ft.
acetylene and 120-244
cu. ft. oxygen
Tandem - front to back

MODEL	CYLINDERS
CYT-8CH-1	MEDIUM

MIG WELDER CARTS



MODEL	STYLE
CCMIG-DELUXE	DELUXE



EASY TO SHIP
EASY TO STOCK
EASY TO ASSEMBLE

Boxed MIG carts make sense.
Easy to ship and easy to stock.

Gas cylinder platform designed to handle up to 6.5" diameter cylinders
 The large drawer is 18.9" X 11.9" X 5.5" and designed for tools, angle grinder or drill, the small drawer is 18.9" X 11.9" X 3.2" and designed for contact tips, nozzles, and other smaller items. The drawer slides are ball bearing for easy movement.
 Dual side hooks for holding cables, helmets, MIG gun etc.
 6" X 1.15" rear wheels and 2.5" X 1" front casters for ease of movement
 Top shelf dimensions: 21" x 12.75"
 Dimensions- Assembled- 38.6" x 18.5" x 30"
 Weight: 52 lbs
 Load: 150 lbs capacity

2 Shelf MIG Welder Cart with Folding Handle and Cylinder Rack



Features:

- Folding front handle to reduce footprint and open area to machine controls
- Front swivel wheels for easy movement
- Side cable wraps keep lead and ground tidy
- Bottom shelf for accessories
- Cylinder rack with safety chain holds up to 7-1/2" diameter - 80 lb cylinders
- Black power coat finish for durability
- Fits New Millermatic® 141 and 190 model machines

Top Shelf Dimensions: 12.5" W x 22.5" L
 Overall Cart Dimensions: 18.5" W x 26.5" H
 Weight Capacity: 110 lbs

MODEL	STYLE
CCMIG-2	BLACK



MODEL	STYLE
CCMIG	BLUE

CCMIG Industrial MIG Cart Dimensions:

Heavy Duty Steel Construction
 Top Shelf: 17 3/4" L x 11 1/4" W
 Middle Shelf: 15 1/4" L x 11 1/4" W
 Bottom Shelf: 17 3/8" L x 11 1/4" W
 Cylinder Shelf: 10 1/2" L x 11 1/4" W
 Cylinder shelf holds from small to larger industrial cylinders
 Rear Wheels: 6" x 1 1/4"
 Front Swivel Wheels: 2 1/4" x 7/8"
 Holds your small MIG welder, gas cylinder plus plenty of room for tools and accessories.
 Front handle for easy movement
 MIG gun and ground lead holders on sides
 Cylinder holding chains
 Height: 24 3/4"
 Easy to assemble.




MODEL	STYLE
CCMIG-B	BLACK

FILLET WELD GAUGES

PowerWeld fillet weld gauges are precision inspection tools designed to ensure quality and accuracy. Several models to choose from cover many applications.

Features include:

- Precision gauge
- Constructed of rust proof 22 gauge type 304 steel.
- Die blanked to eliminate sharp edges - adds to accuracy.
- Permanently etched lettering for long life and abrasion resistance.




- Angle of preparation, 0° to 60°.
- Excess weld metal (capping size).
- Depth of undercut.
- Depth of pitting.
- Fillet weld throat size.
- Fillet weld length.
- Misalignment (high-low).

MODEL	STYLE
MG-8	BRIDGE CAM




MODEL	STYLE
MG-5M	PIT DEPTH

- Check undercut
- Check pit depth
- Check porosity




MODEL	STYLE
MG-11	FILLET

- The fillet weld gauge allows fast, accurate measurement of eleven (11) fillet weld sizes: 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8", 3/4", 7/8", and 1", and their metric equivalents, to determine weld sizes, either concave or convex.
- Each gauge blade is made of 1-1/4 "x 4" stainless steel to resist rust and bending.
- Blades are deburred to remove rough edges.
- All sizes and numerals are engraved into the surface for easier reading.



MODEL	STYLE
WG-06HILO	HI LO

- Slim design.
- Changes from standard to metric - simply remove gauge body, turn scales over and replace body.
- Measurements read in standard on one side & metric on opposite side.
- Measures internal alignment of pipe after fit-up/alignment, and cuts radiographic rejects.
- Measures internal misalignment of pipe before and after tacking.
- Measures bevel on end preparation.
- This handy devise even measures scribe lines, socket welds, crown height of welds & fillet weld size.



MODEL	STYLE
DSG-01	DIGITAL

- Accurate readings instantly.
- Easy to read digital display.
- Zero setting at any position.
- Metric / Imperial system conversion any position.
- The digital welding gauge is equipped with an output port.
- Data can be input into a computer or a printer via special connecting cable.

Resolution: 0.01mm/0.0005"

Range: 0-12.7mm

Error: +/- 0.03mm +/- 0.001"

Operating Power: One silver oxide battery SR44, 1.55V (Included)

Working Temperature: 0°C to +40°C


Humidity: <80%

Storage Temperature: -10°C to +60°C



MODEL	STYLE
WG-07SFG	SKEW-T

- For checking angle of vertical member.
- For checking weld acute side.
- For checking weld obtuse side.



MODEL	STYLE
MG-6	AUTOMATIC

- Check reinforcement
- Check the throat of fillet weld
- Determine the leg size of the fillet weld

MISCELLANEOUS

C CLAMPS



MODEL	SIZE	THROAT DEPTH
402	2"	2.25"
404	4"	3.25"
406	6"	4.00"
408	8"	5.00"
410	10"	6.00"
412	12"	6.50"

Features: Rugged, heavy duty drop forged steel frame. Steel spindles are tough-hardened. New design frame for maximum strength. Lacquered finish. Steel swivel pads adjust freely to bear evenly on clamped part. Precision cut, single lead Acme thread for smooth operation. Steel spindles are copper plated for spatter protection. Never needs greasing; dry lubricated for smooth operation. Extra throat depth.

F CLAMPS



MODEL	SIZE (")	SIZE (mm)
F-1200-8	8"	200mm
F-1200-10	10"	250mm
F-1200-12	12"	300mm
F-1200-16	16"	400mm
F-1200-20	20"	500mm
F-1200-24	24"	600mm

Features: 1200kg (2600lb) capacity. Tempered steel sliding arm. Drop forged, electro-galvanized. Rail, fixed jaws and pressure plate heat-formed in one piece from cold drawn profiled steel, optimized for high static stress loadings. Heat treated, high carbon Acme threaded screw is tempered and quenched to give you greater loading capacity and longer service life. Spatter resistant. Throat depth 5½" (140mm)

THERMOMETERS



Measuring Range: -30°C to 260°C
 Measuring Range: -22°F to 500°F
 Built in laser pointer
 Field of View: 8:1
 Fast sampling time: less than 1 second
 Automatic selection range and resolution
 Backlit display
 °C/°F switchable
 Auto data-hold
 Auto power off 8 seconds
 Complete with 9V battery and carry pouch
 One year warranty
 Dimensions: 131mm x 96mm x 35mm
 Weight: 130g

MODEL	STYLE
DT-810	COMPACT

Wide measuring range -50°C to 500°C
 -58°F to 932°F

Built in laser pointer
 Super large 3 ½ Digit (1999 counts) multifunction LCD
 Backlit display
 °C/°F switchable
 Overload indication and beeper
 Fast sampling time
 Auto data-hold and power off
 Fixed emissivity (0.95) covers 90% of surface applications.
 Narrow 8:1 field of view
 Automatic selection range and resolution
 Complete with 9V battery & carry pouch
 One year warranty
 Dimensions: 159x79x57.2mm
 Weight: 190g



MODEL	STYLE
DT-8812	DELUXE

RETRACTABLE HOSE REELS

HEAVY DUTY MANUAL TWIN WELDING HOSE REEL



MHR100

Spring Tension Brake keeps the reel from "free spinning" after you've stopped pulling out the hose.
 3' PowerWeld 1/4" Grade 'T' connector hose included
 Hose assembly not included
 Heavy-duty steel frame construction
 Corrosion resistant powder coating
 Solid brass swivel
 Mounts on any flat surface
 Working Pressure: 300PSI
 Hose capacity 1/4" - 100'
 Weight 13 lbs
Hose not included

MODEL	STYLE
MHR100	MANUAL / TWIN

HEAVY DUTY AUTO RETRACTABLE TWIN WELDING HOSE REELS C/W HOSE



RHR50

Includes PowerWeld 1/4" X 50' Grade 'T' Hose for use with all fuel gases.
 Industrial grade steel reel
 Leak proof double O-ring seals
 Four direction non-sag rollers
 Multiple mounting positions
 Whip and hose stop
 Working Pressure: 300PSI
 Reel diameter 17"
 Reel width 4-1/2"
 Overall height 19-1/4"
 Weight 39 lbs
Hose included

MODEL	STYLE
RHR50	RETRACTABLE - 50'



RHR100

Includes PowerWeld 1/4" X 100' Grade 'T' Hose for use with all fuel gases.
 Industrial grade steel reel
 Leak proof double O-ring seals
 Four direction non-sag rollers
 Multiple mounting positions
 Whip and hose stop
 Working Pressure: 300PSI
 Reel diameter 19.5"
 Reel width 5-1/2"
 Overall height 23"
 Weight 61 lbs
Hose included

MODEL	STYLE
RHR100	RETRACTABLE - 100'

HEAVY DUTY AUTO RETRACTABLE AIR HOSE REELS C/W HOSE



AHR3850

Auto Retractable Heavy-duty steel frame construction
 Corrosion resistant powder coating
 Spring tension brake, solid brass swivel
 Four direction non-sag rollers
 Whip and hose stop
 Mounts on flat surface - ceiling, wall, floor
 Includes: 3 feet connector pigtail hose with standard 1/4" NPTM fittings
 Working Pressure: 300PSI
 Reel Diameter: 17"
 Reel Width: 4-1/2"
 Height: 19-1/4"
 Hose Length Capacity (FT): 3/8" x 50'
 Weight 40 lbs
Hose included

MODEL	STYLE
AHR3850	RETRACTABLE-AIR

MISCELLANEOUS

WEED BURNER



MODEL	STYLE
PW-500PT	PROPANE

Torch operates on a standard propane tank-no regulator needed. Burn weeds, repair asphalt, peels paint, melts ice and thaws pipe.
Comes with 10' neoprene hose, flow control P.O.L. fitting on/off valve, striker - 500,000 BTU rating.

HELMET BAG



MODEL	STYLE
PWHB	BAG

PowerWeld heavy duty helmet & gear bag
Store helmet, gloves, and other tools in a safe place.
Drawstring closure & shoulder carrying strap.

HOSE CLAMP PINCERS



Portable and lightweight, used for pinching and removing ear clamps.

MODEL	STYLE
PW1098	CRIMP PLIERS

SOAPSTONE CRAYONS



MODEL	STYLE
FS1	FLAT ROUND
RS1	ROUND

White #1 select soapstone
144 pieces per box
12 boxes per case

HOSE REPAIR KIT



Special B-size kit for 3/16" & 1/4" ID hoses. Offers 12 different items most commonly used for hose repair.
Comes complete with PW1098 pincers, and circle clamps.

MODEL	SIZE
PW-82	3/16", 1/4"

WELDER'S KIT



MODEL	STYLE
WEKIT	KIT

Welding Helmet & Gear Bag filled with:

- Auto Darkening Helmet Variable Shade 9 - 13
- Welders Gloves
- Chipping Hammer
- Positioning Magnet
- Welding Cup Goggles
- Standard Tip Cleaner
- Single Flint Lighter
- Clear Safety Spectacles
- Wire Scratch Brush
- Soapstone and Holder
- MIG Welders Pliers

MISCELLANEOUS

BUTANE TORCH



BUTANE TORCH	
MODEL	STYLE
PW2020	BUTANE GAS



PowerWeld Butane Gas Micro Torch PW2020
 Electronic instant ignition system
 Adjustable flame
 Refillable butane fuel
 Max attainable temperature 2370°F
 Safety ignition lock

SOLDERING HEAD	
MODEL	STYLE
SH11	BUTANE GAS



HOT REFLECTOR	
MODEL	STYLE
SA51	BUTANE GAS

HOT BLOWER HEAD	
MODEL	STYLE
SH51	BUTANE GAS



GAS FLOW TESTER



Shield Gas Flow Tester.
 This easy to use device will take the guesswork out of optimizing your welds, and save on shield gas cost. The unit measures Argon and CO2 Flow Rates up to 25 LPM (52 CFH)
 Measures in Liters Per Minute.

MODEL	STYLE
PWGFT	GAS FLOW TESTER

GAS SAVER	
MODEL	STYLE
GS-150	ACET OR LPG



Saves time and reduces gas cost

LIGHTER

Lightnin Bug Striker

MODEL	STYLE
PW08-100	PIEZO STRIKER



MISCELLANEOUS

CABLE HITCH



MODEL	STYLE
CH-240	CABLE HITCH

Cable Hitch allows you to support heavy long lengths of welding cable by hanging it on its handy hook assembly. Comes with a non-slip locking assembly.

NOZZLE REAMER



MODEL	STYLE
REAMER	MANUAL

- Cleans hot MIG nozzles on the torch
- Self adjusting to fit all sizes
- Expanding spring steel cleaning blades

BATTERY CLAMPS



MODEL	STYLE
BCR-600	RED
BCB-600	BLACK

Heavy duty 600 amp battery clamps with red handles for positive and black handles for negative



CIRCLE BURNER



MODEL	STYLE
I-69-6	UNIVERSAL

Comes with tip holders to fit most popular cutting torch models.

TUNGSTEN HOLDER



Chuck keeps positive on tungsten while sharpening

MODEL	STYLE
CSH	ACCESSORIES

CYLINDER WRENCHES



MODEL	STYLE
5	B & MC

B & MC Tank Key Double Ended



MODEL	STYLE
1013	10 WAY

- 10-Way Cylinder Wrench
- For regulators, torches and cylinders
 - Drop-forged
 - Special alloy steel



MODEL	STYLE
20T	PROPANE

Propane Key



MODEL	STYLE
250T	POL

POL Acetylene Cylinder Key

TORCH HOLDERS



TIG torch holder with magnetic base

MODEL	STYLE
MI-TTS-M	TIG



Electrode holder with magnetic base

MODEL	STYLE
MI-EHS-M	ARC




MIG torch holder with magnetic base

MODEL	STYLE
MI-MTS-M	MIG

MISCELLANEOUS

MAGNETS

- Multi-purpose holders for assembly and positioning. Adheres to most metal objects
- Ideal for welding, soldering, assembly and pipe installation



Positioning magnet
Small 25# capacity

MODEL	SIZE
M061	SMALL



Positioning magnet
Medium 50# capacity

MODEL	SIZE
M062	MEDIUM



Positioning magnet
Large 75# capacity

MODEL	SIZE
M063	LARGE

HEAVY DUTY EXTENSION CORDS

Super flex extension cord - Super flexible, type SJTW outdoor cord. Lightweight-stays flexible to -67°F. 3 conductor grounded cord 15 Amps, 125V. Resistant to abrasions, oil, grease & chemicals. UL & ULC listed. Features power indicator in female receptacle to show that the power is on. Available in 25ft, 50 ft and 100 ft lengths. Three high-visibility colours to choose from.



MODEL	TYPE
EC25-YE	YELLOW JACKET 25' (8/CASE)
EC50-YE	YELLOW JACKET 50' (6/CASE)
EC100-YE	YELLOW JACKET 100' (4/CASE)



MODEL	TYPE
EC25-BL	BLUE JACKET 25 (8/CASE)
EC50-BL	BLUE JACKET 50' (6/CASE)
EC100-BL	BLUE JACKET 100' (4/CASE)



MODEL	TYPE
EC25-OR	ORANGE JACKET 25' (8/CASE)
EC50-OR	ORANGE JACKET 50' (6/CASE)
EC100-OR	ORANGE JACKET 100' (4/CASE)



MODEL	TYPE
EC50TT-YE	YELLOW JACKET 50' (6/CASE) TRIPLE TAP
EC100TT-YE	YELLOW JACKET 100' (4/CASE) TRIPLE TAP

8/3 TYPE STW 250V

Welder Power Cable Extension



NEMA 6-50 plug & receptacle
25' & 50' water resistant assembly
8/3 Type STW 40A-250V
Safety lighted ends



MODEL	TYPE
PCE-25	SAFETY LIGHTED 25' (4/CASE)
PCE-50	SAFETY LIGHTED 50' (2/CASE)

MISCELLANEOUS

SPOOL ADAPTOR



Universal 4" - 1 & 2 lb Spool Adaptor

The universal welding wire spool adaptor quickly adapts most wire feeders and integrated MIG machines to use 4" (1 & 2 lb) spools without removing or altering the spindle assembly.

MODEL	TYPE
SA-1	UNIVERSAL

WELDING TABLE

- Welding workbench can be used anywhere - home, shop or in the field
- Folds up easily for storage or transportation
- Large work area of galvanized welded mesh 24" X 40" (61cm X 101cm)
- Work height of 36" (914cm)
- Heavy duty construction - 600lb (272kg) weight capacity



Welder's Bench Applications

Welding, pipe work, painters, machine shops, auto service shipping & receiving, assembly work, cut off & mitre saws.

WELDER'S PLIERS



Welders Multi-Use Tool

- Eight-way pliers
- Nickel plated finish
- Ideally suited for removal of hot spatter from nozzle ends

MODEL	STYLE
YS-50	MIG PLIERS
YS-H	PLIERS HOLSTER



Pliers Holster

TIG CABLE COVER



Nylon covers with zippered closure 3" and 4" widths

3m (10') Cable Cover 6.7m (22') Cable Cover

MODEL	STYLE	MODEL	STYLE
WC-3-10	3" X 10' (3m)	WC-3-22	3" X 22' (6.7m)
WC-4-10	4" X 10' (3m)	WC-4-22	4" X 22' (6.7m)

TIG ACCESSORY KITS



TIG Accessory Kits

Contain a selection of components plus Ceriated tungsten electrodes to prepare your TIG torch for immediate welding. Select kits are available for the most popular series of TIG torches on the market.

MODEL	TORCH SERIES	TUNGSTEN DIA
PWAK-1	9	.040", 1/16"
PWAK-2	17	.040", 1/16", 3/32"
PWAK-3	18, 26	1/16", 3/32", 1/8"
PWAK-4	20	1/16", 3/32", 1/8"

TUNGSTEN SHARPENER



The Stilo Tig is an Auto-Rotator that is very fast, easy and practical to use. Made of hardened steel and anodized aluminium. The Stilo Tig is produced in two models; one for electrodes 1/16" & 3/32" (1.6mm & 2.4mm) and 1/8" & 5/32" (3.2mm & 4.0mm)

MODEL	CAPACITY
STILO-1624	1/16" & 3/32" (1.6mm & 2.4mm)
STILO-3240	1/8" & 5/32" (3.2mm & 4.0mm)

TIG FINGER FEEDER



Feeds TIG filler rod comfortably. Hold the feeder like a pen or pencil. Insert the TIG filler wire from the rear of the unit – not from the front. With the feeder comfortable in your hand, advance the wire by rolling the rubber wheel with the tip of your index finger. Suitable for TIG wire diameters 0.8mm (.030") to 3.2mm (1/8").

MODEL	STYLE
PW1550	TIG FINGER FEEDER

MISCELLANEOUS

CYLINDER CAPS



Cylinder caps for high pressure and acetylene. All cylinder caps are zinc plated to prevent rusting.

MODEL	STYLE
318-11	HIGH PRESSURE
312-11	ACETYLENE

TIP CLEANER



Use to wipe and polish the critical orifice wall of cutting tips For heavy-duty use Includes 13 stainless steel reamers and file. Comes in an aluminum case. Cleans drill sizes from 49 to 77

MODEL	STYLE
TC-1	TIP CLEANER

CABLE CUTTER



Cable Cutter, Shear Cut, Overall Length 9-1/4 In., Handle Design Dipped, Features High Leverage Design for Superior Cutting Ability, Designed with a Shear-Type Jaw for Cutting Aluminum and Soft Copper (Not for Use on Steel or ACSR type Cables), Cuts up to 100-Pair Cables, Made of Chrome Vanadium Steel

MODEL	STYLE
PW52	CABLE CUTTER

WIRE BRUSHES



85047



85045



85050



85055



85053



85051



85048

TIP DRILL KIT



MODEL	DESCRIPTION
PWTDK	TIP DRILL KIT

BASTARD FILE



MODEL	STYLE
PWHRB14	BASTARD FILE

Rounded on one side, flat on the other. Ideal for rounding out holes, files can be used on concave, convex, and flat surfaces. Rapidly removes material but leaves a smooth finish. 14" in length - Double cut on both sides.

MODEL	DESCRIPTION
85047	CURVED HANDLE S.S. 3X19" ROWS
85045	CURVED HANDLE C.S. 3X19" ROWS
85051	SHOE HANDLE C.S. 4X16" ROWS
85053	SHOE HANDLE S.S. 4X16" ROWS
85055	TOOTHBRUSH S.S. 3X7" ROWS
85050	CURVED HANDLE S.S. 4X19" ROWS
85048	CURVED HANDLE C.S. 4X19" ROWS

C.S. = Carbon Steel S.S. = Stainless Steel

MISCELLANEOUS

PIPE STANDS

HEAVY DUTY LARGE PIPE STANDS



- Standard Features
- Low Position Height: 32" (810 mm)
 - Max Position Height: 52" (1320 mm)
 - Footprint Width: 33.5" (850 mm)
 - Weight: 29 lbs (13.2 kg)
 - Pipe Diameter Capacity: up to 24" (600 mm)

PWLPS-RH
(with Roller Head)



- Standard Features
- Low Position Height: 32" (810 mm)
 - Max Position Height: 52" (1320 mm)
 - Footprint Width: 33.5" (850 mm)
 - Weight: 29 lbs (13.2 kg)
 - Pipe Diameter Capacity: up to 24" (600 mm)

PWLPS
(with V-Head)

HEAVY DUTY MEDIUM PIPE STAND



- Standard Features
- Low Position Height: 26" (660 mm)
 - Max Position Height: 36" (910 mm)
 - Footprint Width: 27" (685 mm)
 - Weight: 25 lbs (11.3 kg)
 - Pipe Diameter Capacity: up to 24" (600 mm)

PWMP (with V-Head)
PWMP-RH (with Roller Head)

HEAVY DUTY ROLLER HEAD

- Standard Features
- Load Capacity: 3500 lbs (1385 kg)
 - Pipe Diameter Capacity: 2" to 24" (50 mm to 600 mm)




PW24RH

MODEL	DESCRIPTION
PWLPS	HEAVY DUTY LARGE W/ V HEAD
PWLPS-RH	HEAVY DUTY LARGE W/ ROLLER HEAD
PWMP	HEAVY DUTY MEDIUM W/V HEAD
PWMP-RH	HEAVY DUTY MEDIUM W/ ROLLER HEAD
PW24RH	HD ROLLER HEAD
PW24VH	V HEAD

PowerWeld heavy duty pipe stands are packed with features to provide safety and ruggedness on any jobsite. A wide base footprint keeps the stand stable under load. The reinforced vee-head prevents bending and is rated at 4000 lbs (1815 kg) capacity. High visibility orange for safety. Stands fold up for easy storage or transportation. T-handle to secure head in place plus safety pin. Carry handle for convenience. Safety ratio 3:1

PIPE WEDGES

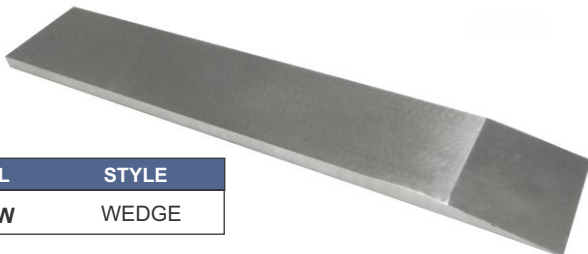

MODEL	STYLE
PWLWP	WEDGE



MODEL	STYLE
PWSPW	WEDGE

PowerWeld Pipe - Spacing Wedges are manufactured of high strength heat treated carbon steel. Use for creating precise weld gap during fit-up. Available in two sizes they accommodate small to large diameter pipe.

- Large pipe wedge 1-1/2" X 8" X 1/4" (38mm x 200mm x 6mm)
- Small pipe wedge 3/4" X 3-1/2" X 1/4" (19mm x 90mm x 6mm)

LOCKING PLIERS

PowerWeld locking pliers and c-clamps are made from nickel plated chrome vanadium steel for toughness and durability. Smooth turning screw adjustment provides maximum pressure and grip. C-clamp models are available with standard or swivel pad tips. Trigger release design for quick removal.



Locking Plier 6"
Long Nose w/Cutter
PW6LN



Locking Plier 7"
w/Curved Jaw/Cutter
PW7WR




Locking Plier 10"
w/Curved Jaw/Cutter
PW10WR



Locking C Clamp 6"
6" STD
PW6R



Locking C Clamp 6"
w/Swivel Pads
PW6SP

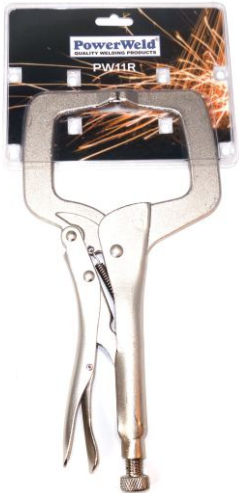

Locking C Clamp 11" STD
PW11R




Locking C Clamp 11"
w/Swivel Pads
PW11SP



Locking C Clamp 18" STD
PW18R



Locking C Clamp 18"
w/Swivel Pads
PW18SP

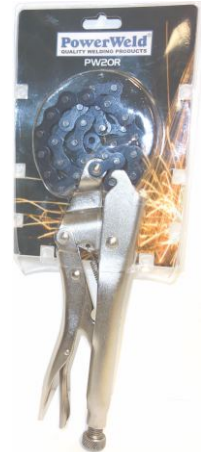

Locking Chain
Clamp
PW20R

GRINDING & CUTTING WHEELS

DEPRESSED CENTER

TYPE 27 FOR STEEL

RX116.00.25	A24R	4 1/2" X 1/4" X 7/8"
RX126.00.25	A24R	5" X 1/4" X 7/8"
RX176.00.25	A24R	7" X 1/4" X 7/8"
RX230.00.25	A24R	9" X 1/4" X 7/8"
RX113.00.25	A30S	4 1/2" X 1/8" X 7/8"
RX123.00.25	A30S	5" X 1/8" X 7/8"
RX173.00.25	A30S	7" X 1/8" X 7/8"

RX116.00.25H	A24R	4 1/2" X 1/4" X 5/8-11"
RX176.00.25H	A24R	7" X 1/4" X 5/8-11"
RX236.00.25H	A24R	9" X 1/4" X 5/8-11"
RX113.00.25H	A30S	4 1/2" X 1/8" X 5/8-11"
RX173.00.25H	A30S	7" X 1/8" X 5/8-11"
RX233.00.25H	A30S	9" X 1/8" X 5/8-11"



FLAP WHEELS

TYPE 27 FOR STEEL & STAINLESS STEEL

RX115.040Z	Type 27	4-1/2" x 7/8"	40 Grit
RX115.060Z	Type 27	4-1/2" x 7/8"	60 Grit
RX115.080Z	Type 27	4-1/2" x 7/8"	80 Grit
RX125.040Z	Type 27	5" x 7/8"	40 Grit
RX125.060Z	Type 27	5" x 7/8"	60 Grit
RX125.080Z	Type 27	5" x 7/8"	80 Grit
RX180.040Z	Type 27	7" x 7/8"	40 Grit
RX180.060Z	Type 27	7" x 7/8"	60 Grit
RX180.080Z	Type 27	7" x 7/8"	80 Grit



FAST CUT WHEELS

TYPE 1 FOR STEEL & STAINLESS STEEL

RX115.10.25	20A60R	4 1/2" X .045" X 7/8"
RX125.10.25	20A60R	5" X .045" X 7/8"
RX150.10.25	20A60R	6" X .045" X 7/8"



CUT OFF WHEELS

TYPE 1 FOR STEEL

RX230.20.25	A46R	9" X 5/64" X 7/8"
RX303.03.25	A24S	12" X 1/8" X 1"
RX354.28.25	A36S	14" X 1/8" X 1"



STRINGER BEAD WHEELS



MODEL	STYLE
PWSB458	STRINGER BEAD 4" X 5/8-11
PWSB458SS	STRINGER BEAD 4" X 5/8-11 STAINLESS STEEL

MODEL	STYLE
PWSB558	STRINGER BEAD 5" X 5/8-11
PWSB558SS	STRINGER BEAD 5" X 5/8-11 STAINLESS STEEL

MODEL	STYLE
PWSB658	STRINGER BEAD 6" X 5/8-11
PWSB658SS	STRINGER BEAD 6" X 5/8-11 STAINLESS STEEL

MODEL	STYLE
PWSB6558	STRINGER BEAD 6-1/2" X 5/8-11

PowerWeld stringer bead wheel brushes provide aggressive cleaning and fast material removal. Suitable for root and hot pass welds. Narrow face for confined and hard to reach areas. .020 diameter Carbon Steel Wire or 304 Stainless Steel.



PROFESSIONALS PREFER POWERWELD

**QUALITY
WELDING,
SAFETY AND
INDUSTRIAL
SUPPLIES**

PowerWeld products are available from:

CATALOG # 1018