

Reducing Aerodynamic Drag and Fuel Consumption

Fred Browand
Aerospace and Mechanical Engineering
Viterbi School of Engineering
University of Southern California

for

Global Climate and Energy Project
Workshop on Advanced Transportation
October 10-11, Stanford University



Advanced Transportation Workshop
October 10–11, 2005
Frances C. Arrillaga Alumni Center
STANFORD UNIVERSITY



Reducing Aerodynamic Drag and Fuel Consumption

Year 2002 statistics for combination trucks (tractor-trailers)
on nation's highways *

2.2 million trucks registered

138.6 billion miles on nation's highways, 3-4% increase/yr

26.5 billion gallons diesel fuel consumed, 4-5% increase/yr

5.2 mpg, or 19.1 gallons/100 miles

~ 2.47 million barrels/day **

~ 12-13% of total US petroleum usage (19.7×10^6 bbls/day)


* from DOT, FHA, Highway Statistics, 2002, and
US DOT *Transportation Energy Data Book Edition 24.*

** $26.5 / (365 \times .7 \times 42)$

Reducing Aerodynamic Drag and Fuel Consumption


Contributions to power consumption from drag and rolling resistance for a typical class-8 tractor trailer

Power required to overcome aerodynamic drag is the greater contribution at highway speeds

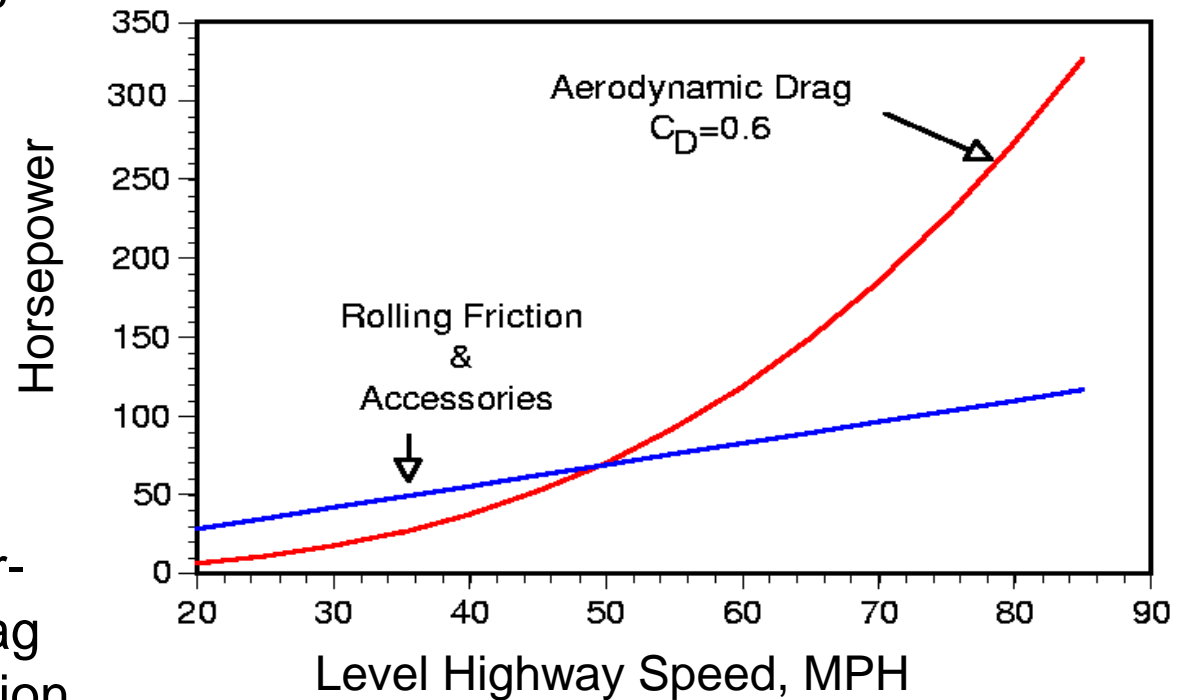

Reducing Aerodynamic Drag and Fuel Consumption

Most of the drag (90%, or more) results from pressure differences

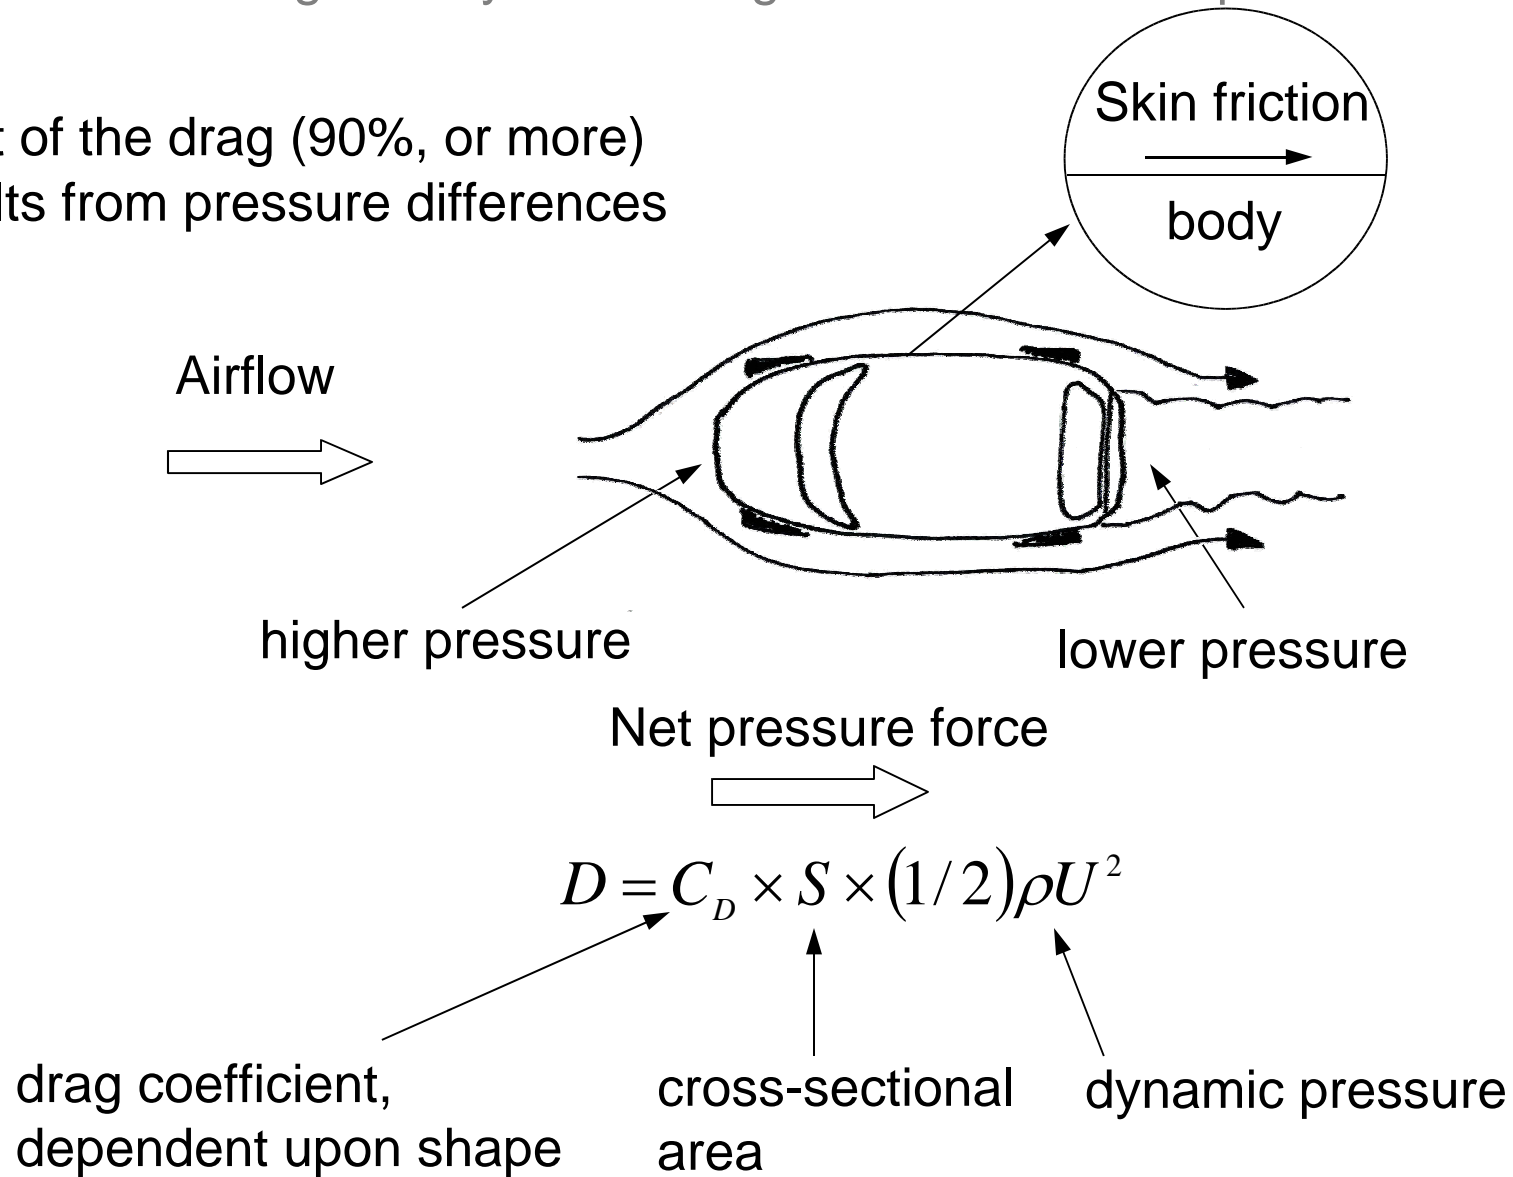

$$D = C_D \times S \times (1/2) \rho U^2$$

drag coefficient,
dependent upon shape

cross-sectional
area

dynamic pressure

Reducing Aerodynamic Drag and Fuel Consumption

Relationship between changes in drag
and changes in fuel consumption

$$Power = D \times U + RR \times U + AuxP$$

$$Fuel\ Consumption \equiv FC = (bsfc) \times Power$$

property of the driving cycle
 $\eta \approx 0.5-0.7$ for a car or truck
at highway speeds

$$\frac{\Delta FC}{FC} = \frac{\Delta P}{P} = \eta \times \left(\frac{\Delta C_D}{C_D} + \frac{\Delta S}{S} + \frac{3\Delta U}{U} \right)$$

Make changes in shape
to improve aerodynamics

make the car/truck
cross-section smaller

reduce highway
speeds—very
effective!

Reducing Aerodynamic Drag and Fuel Consumption

Improved fuel economy from close-following

Reducing Aerodynamic Drag and Fuel Consumption


At large spacing, close-following results in drag saving (fuel saving) for the trail vehicle...



...because the trail vehicle experiences a diminished dynamic pressure in the wake. The two vehicles collectively have less drag than the two in isolation. This can be regarded as a decrease in drag coefficient. It is well understood.

Reducing Aerodynamic Drag and Fuel Consumption

At sufficiently close spacing—less than one vehicle length in the case of a car, or one vehicle height in the case of a truck—the interaction is stronger.

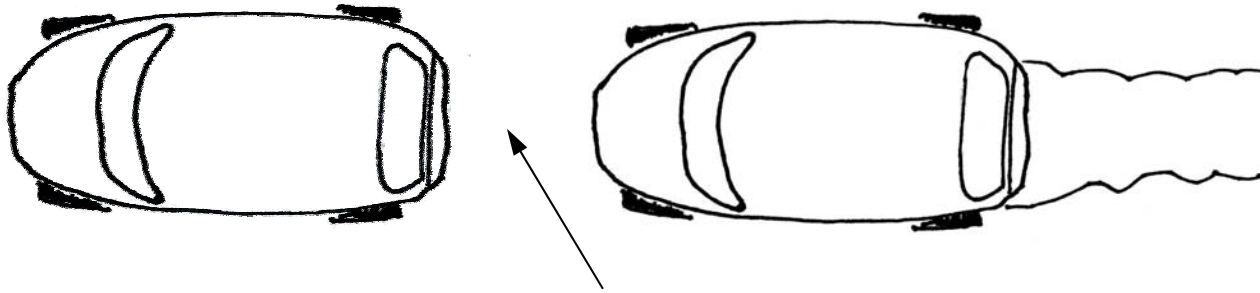

Pressure is higher in the “cavity” than would be experienced by a vehicle in isolation.


The drag of each vehicle is less than the corresponding drag in isolation. Both vehicles save fuel in the “strong interaction” regime.

Reducing Aerodynamic Drag and Fuel Consumption

Wind tunnel tests



Two van-shaped vehicles, drag ratio versus spacing

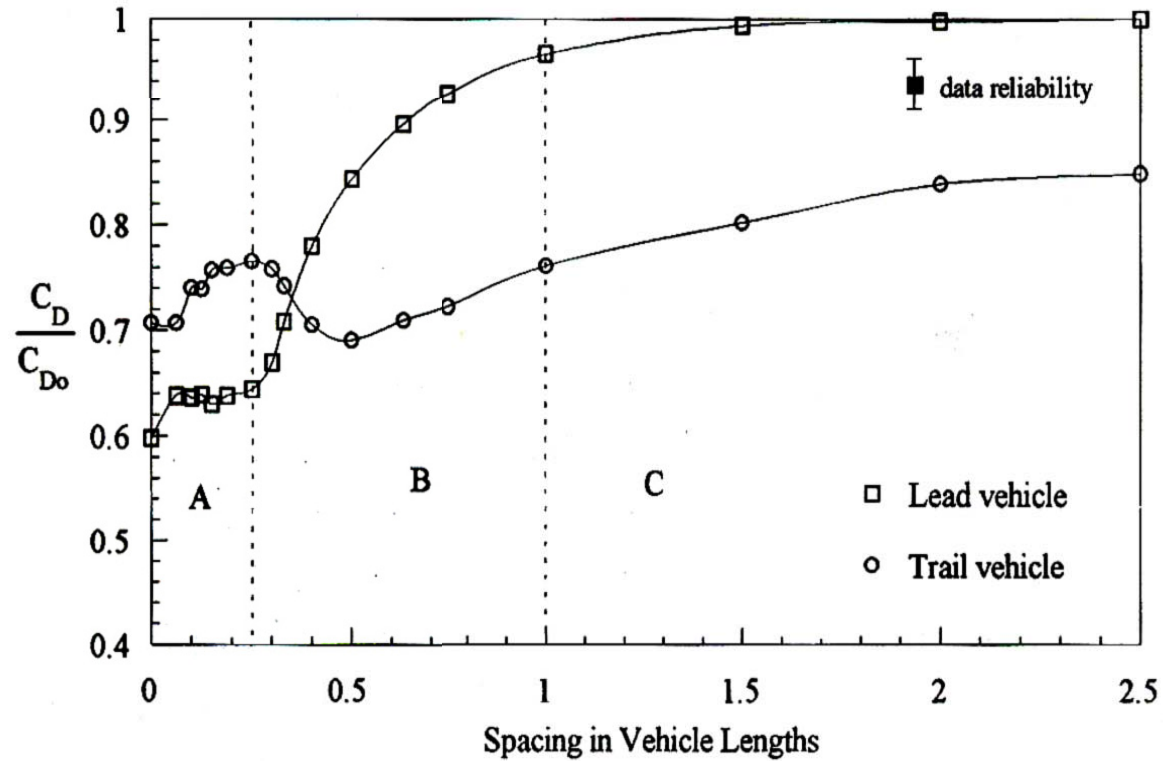

Reducing Aerodynamic Drag and Fuel Consumption


Measuring fuel consumption directly using instantaneous outputs from engine map. Three Buick LeSabres under computer control, traveling in HOV lanes I-15, San Diego. PATH Program, UC Berkeley, California DOT



Reducing Aerodynamic Drag and Fuel Consumption


Results from test.

Average fuel consumption saving for three-vehicles at 0.8 car length spacing is $\approx 6-7\%$.

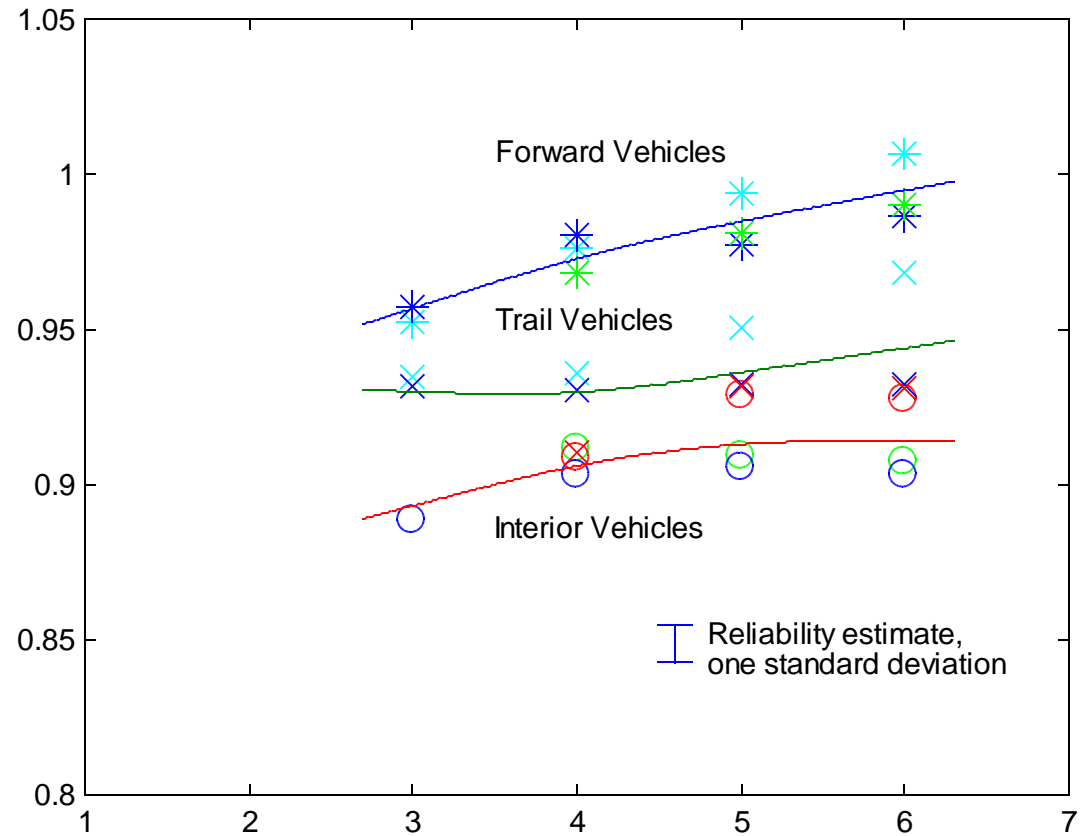


Reducing Aerodynamic Drag and Fuel Consumption

The site at Crows Landing

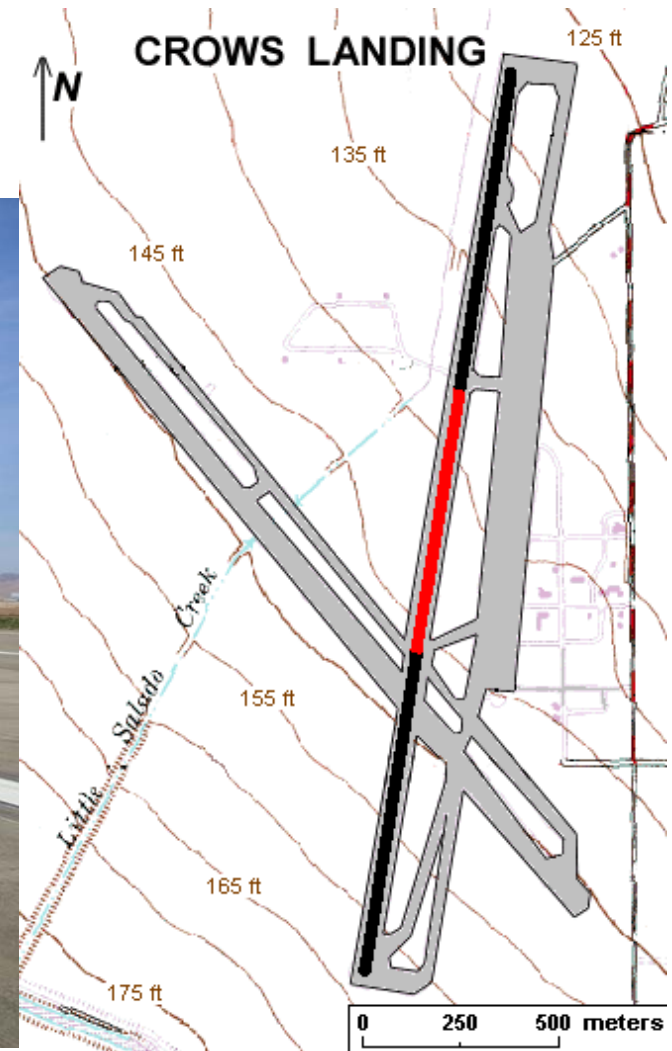

Reducing Aerodynamic Drag and Fuel Consumption

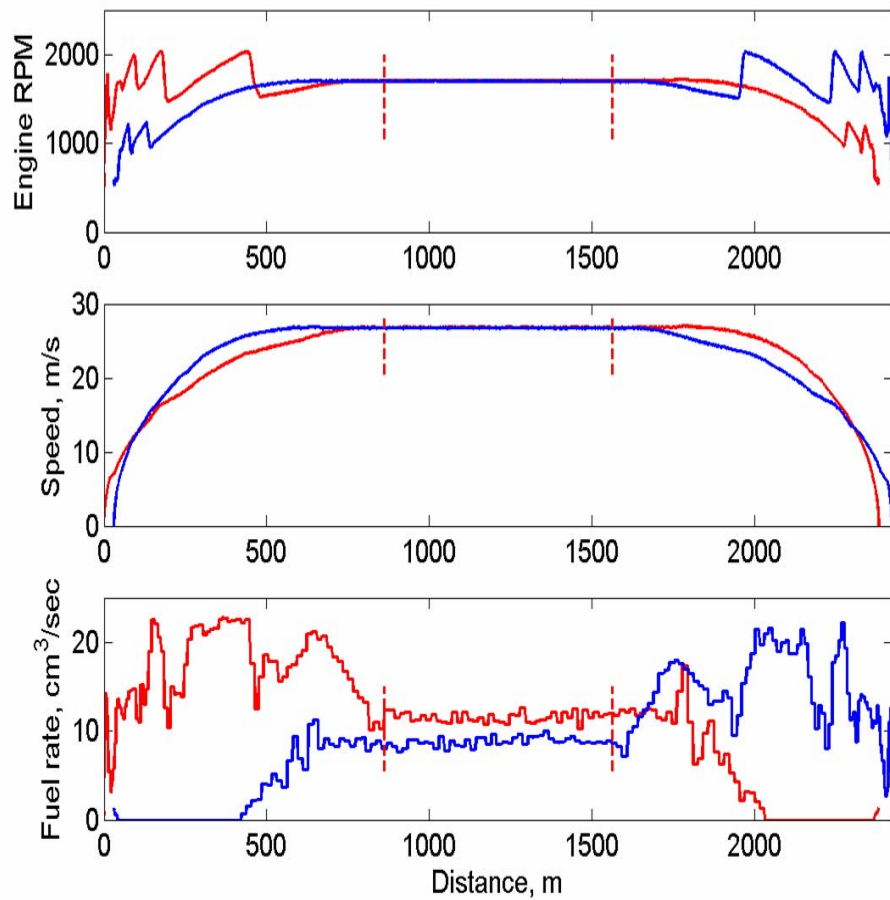

Single truck: southbound (red)
northbound (blue)




Two century-class Freightliner trucks under computer control at 4-meter spacing.



Reducing Aerodynamic Drag and Fuel Consumption

Two class-8 trucks
close-following

3.2 liters/100 km
→
1.36 gal/100 mi

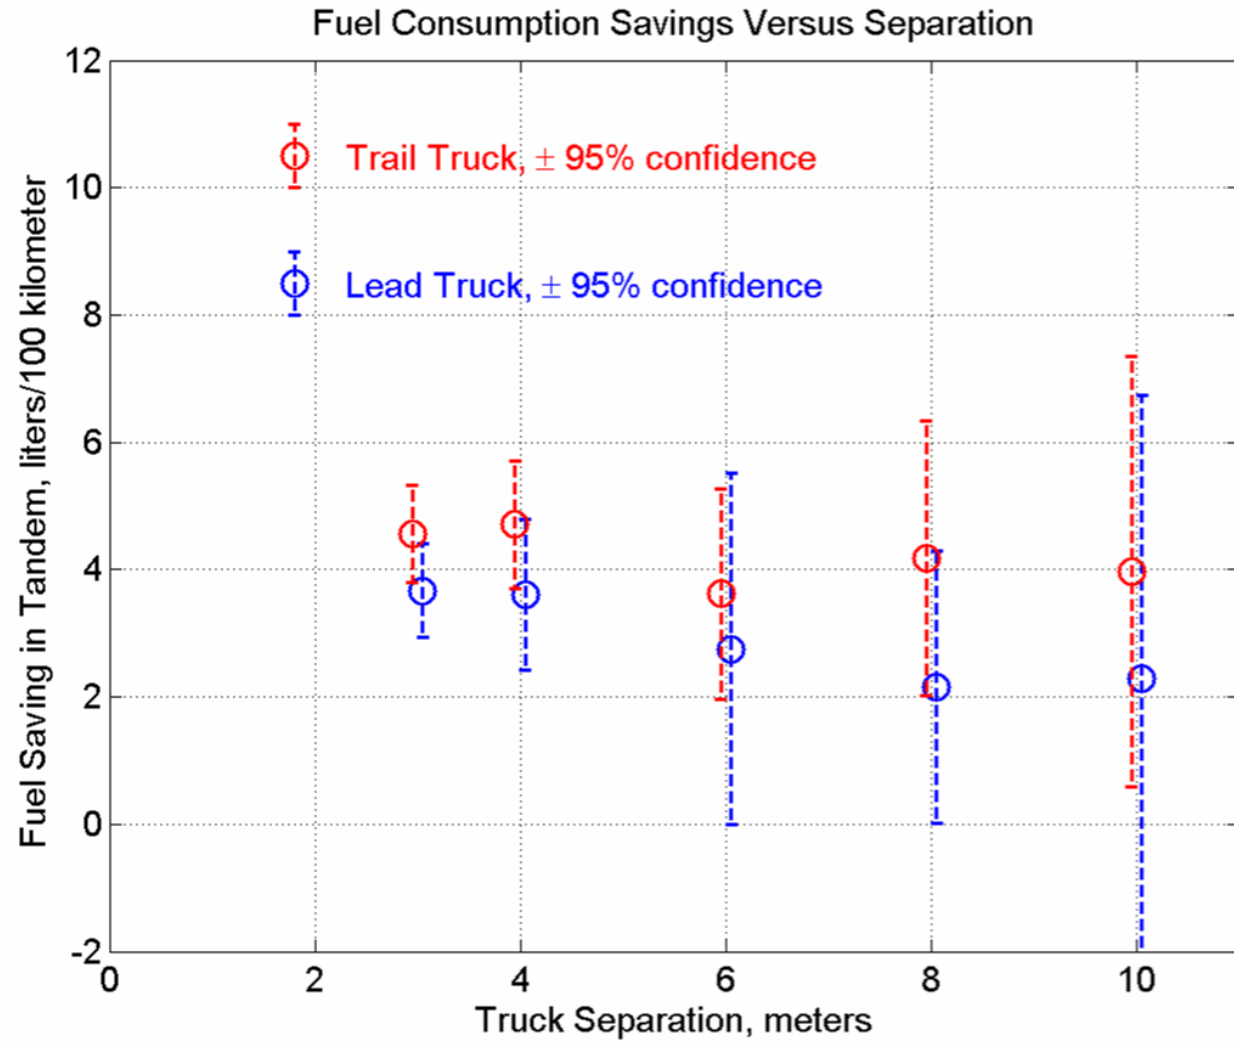

Reducing Aerodynamic Drag and Fuel Consumption

Improved fuel economy from other shape changes

*The DOE effort to reduce truck aerodynamic drag**

The DOE Energy Efficiency and Renewable Energy, Office of FreedomCAR & Vehicle Technologies, supports a collaborative effort of 9 organizations: LLNL, SNL, ANL, NASA Ames, USC, Caltech, UTC, Auburn, GTRI

*see, for example, *The Aerodynamics of Heavy Vehicles: Trucks, Buses, and Trains*, eds., R. McCallen, F. Browand, J. Ross, *Lecture Notes in Applied and Computational Mechanics*, Springer-Verlag, 2004

Reducing Aerodynamic Drag and Fuel Consumption

Early 1990's

No aero shield

Huge radiator

Many corners

Protruding lamps,
tanks, pipes, etc.



Reducing Aerodynamic Drag and Fuel Consumption

Model year 2000

Built-in aero shield

Small radiator

Rounded corners

Recessed lamps,
tanks, etc.



Reducing Aerodynamic Drag and Fuel Consumption

Areas of possible improvement



Gap

cab extenders
splitter plate

Wheels & underbody

skirts
underbody wedge

Trailer base

boat-tail plates
flaps


Reducing Aerodynamic Drag and Fuel Consumption

Wheels & underbody

Skirts:

Wind tunnel model, full scale
conditions, $Re = 5 \times 10^6$


$$\Delta C_D \approx 0.05$$

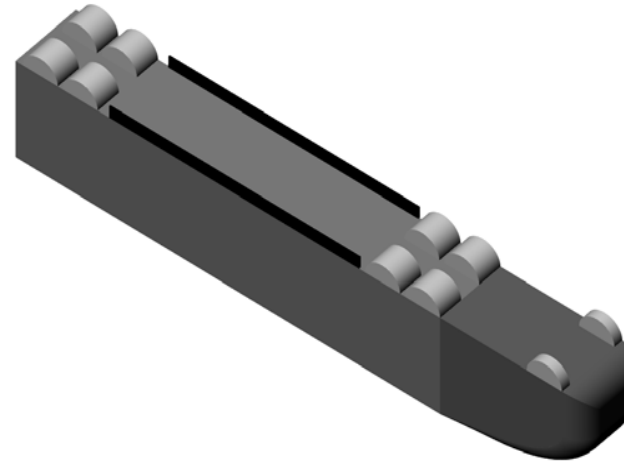

Wedge:

Wind tunnel model, $Re = 3 \times 10^5$

$$\Delta C_D \approx 0.01$$

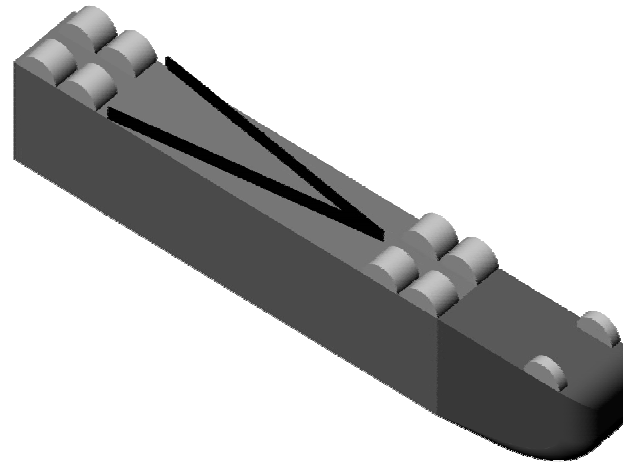

DOE's Effort to Reduce Truck Aerodynamic Drag through Joint Experiments and Computations Leading to Intelligent Design, R. McCallen et al., *Proc. of the 2005 SAE Commercial Vehicle Engineering Conference*, Chicago, Illinois, Nov. 1-3, 2005


Reducing Aerodynamic Drag and Fuel Consumption

Trailer base

Base flaps:

Wind tunnel model, full scale
conditions, $Re = 5 \times 10^6$

$$\Delta C_D \approx 0.08$$

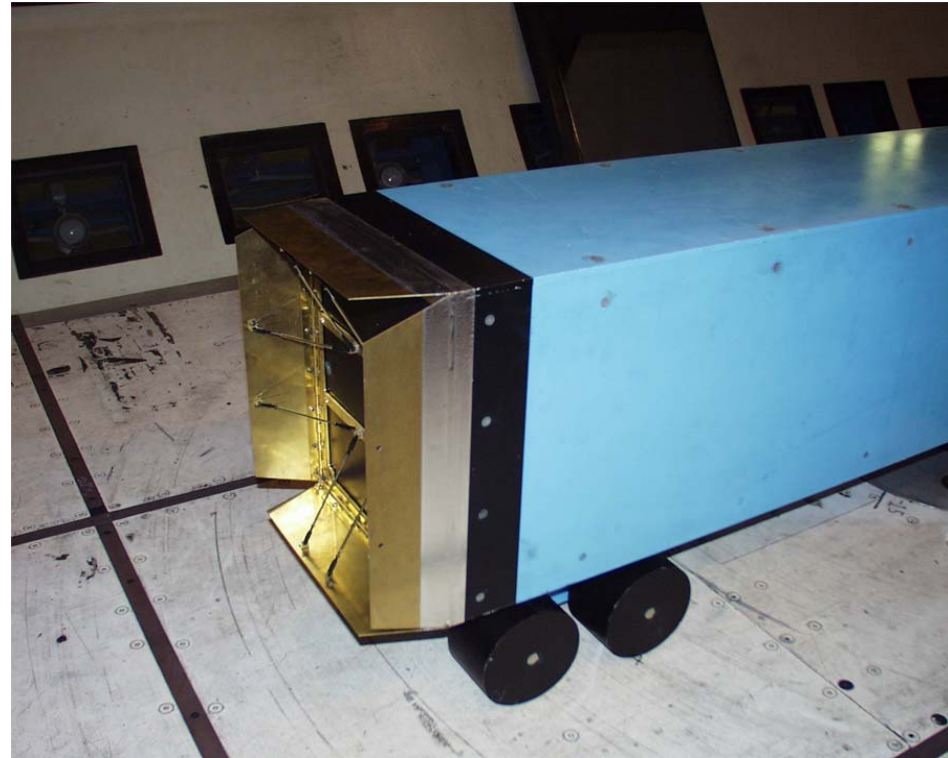

DOE's Effort to Reduce Truck Aerodynamic Drag through Joint Experiments and Computations Leading to Intelligent Design, R. McCallen et al., *Proc. of the 2005 SAE Commercial Vehicle Engineering Conference*, Chicago, Illinois, Nov. 1-3, 2005



Reducing Aerodynamic Drag and Fuel Consumption

Gap

Cab extenders or trailer splitter plate

RANS computation $Re = 3 \times 10^5$

$$\Delta C_D \approx 0.01 - 0.03$$

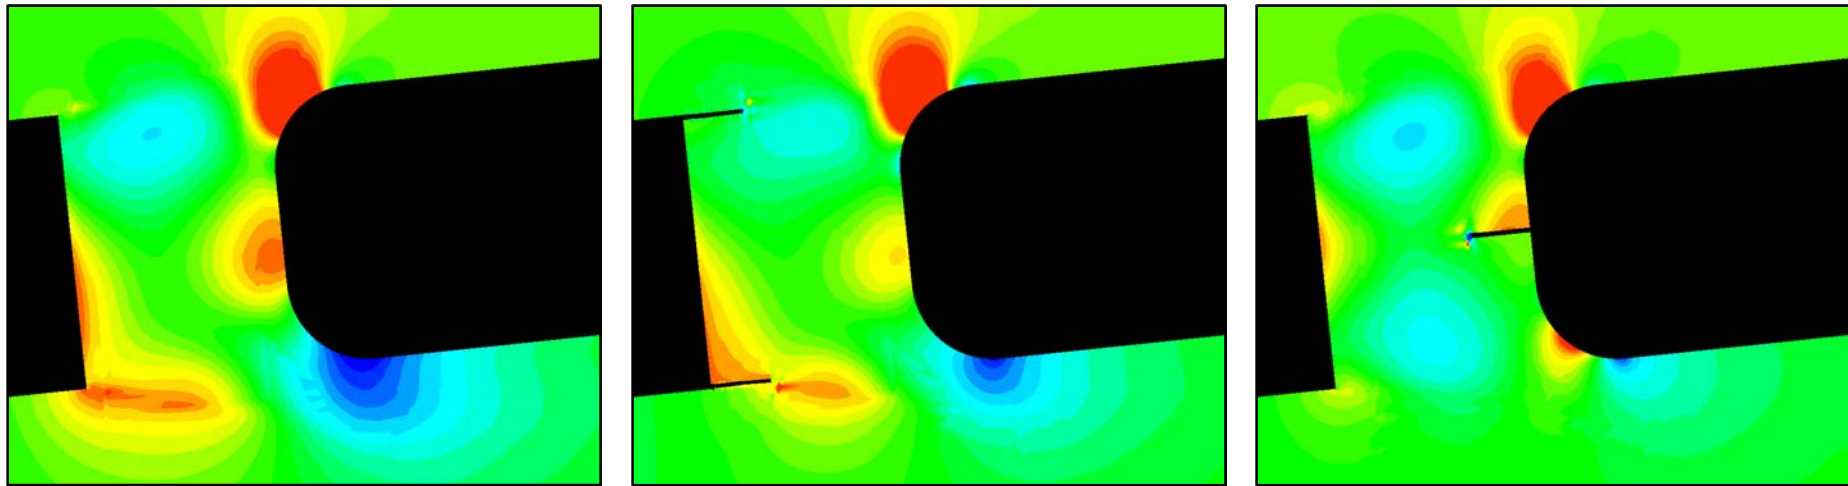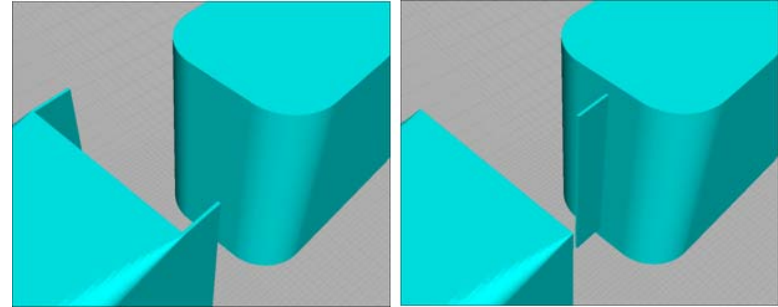

Computational Simulation of Tractor-Trailer Gap Flow with Drag-Reducing Aerodynamic Devices, P. Castellucci & K. Salari, *Proc. Of the 2005 SAE Commercial Vehicle Engineering Conference*, Chicago, Illinois, Nov. 1-3, 2005

Reducing Aerodynamic Drag and Fuel Consumption

The summary of improvements

Reducing Aerodynamic Drag and Fuel Consumption

Add-ons:

Base flaps, skirts, gap control, $\Delta C_D \approx 0.13-0.15$

For $C_D \approx 0.6$, $\Delta C_D/C_D \approx 0.22$, implies $\Delta FC/FC \approx 11\%$

Close-following:

Field tests demonstrate $\Delta FC \approx 1.36$ gal/100 mi

$\Delta FC/FC \approx 7\%$

Add-ons *plus* close following may not be additive gains!

Probably a portion is, $\Delta FC/FC \approx 15\%$

If fully implemented, would result in reduction in current usage of 0.37 Mbbls/d = 135 Mbbls/yr, and a reduction of 60 Mtonnes CO₂ released.

Reducing Aerodynamic Drag and Fuel Consumption

Hastening the adoption of improvements

Reducing Aerodynamic Drag and Fuel Consumption

Incentives for adoption of add-ons by trucking companies

$$\text{Incentive} = \frac{\text{Cost of fuel saved (250,000 mi)}}{\text{Capital Cost of add-on}}$$

For base-flaps & skirts

CC = \$1800

Incentive $\approx 2.5 \times (\$ \text{ per gal diesel})$

At \$3.00 /gal, the saving would be 7.5 \times cost of add on, or \$13,500

For base flaps, skirts & close-follow

CC = \$4800

Incentive $\approx 1.5 \times (\$ \text{ per gal diesel})$

At \$3.00 /gal, the saving would be 4.5 \times cost of add on, or \$21,600


Reducing Aerodynamic Drag and Fuel Consumption

Encourage research in CFD

National Labs have the computing capabilities

Universities have expertise in new code development

University support particularly needed

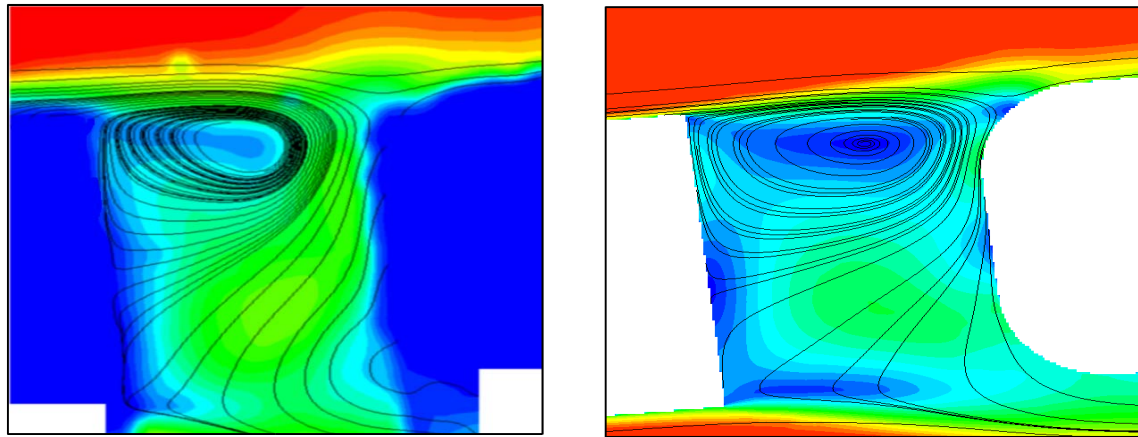

Computational Simulation of Tractor-Trailer Gap Flow with Drag-Reducing Aerodynamic Devices, P. Castellucci & K. Salari, *Proc. Of the 2005 SAE Commercial Vehicle Engineering Conference*, Chicago, Illinois, Nov. 1-3, 2005

Reducing Aerodynamic Drag and Fuel Consumption

Encourage field test experiments

Trucking companies are besieged with ideas for fuel saving add-ons

Type II SAE sanctioned tests take place, but usually results are not made public

Close-following geometries have not been explored systematically

Need field tests under controlled conditions (such as Crows Landing) to isolate the most promising technology

