

Remington®

DEFENSE

REMINGTON ARMS CO., LLC
Defense Products

870 Remington Drive
P.O. Box 700
Madison, NC 27025-0700
Phone: 336-548-8899
Fax: 336-548-7800

www.remingtondefense.com

Remington®

DEFENSE



Ammunition represented in this catalog is produced by Remington Arms Co., Inc., at an ISO9001:2000 Registered Facility located in Lonoke, Arkansas. Remington longarms are manufactured to the highest quality and performance standards, providing reliability, safety, performance, durability, and long service life.

©2011 Remington Arms Company, LLC
RM2125

XM2010 SNIPER WEAPON SYSTEM

Systematically eliminating all variables. The M24 is based on the legendary Model 700™ and 40-X™ rifles. Its unmatched accuracy and reliability have made it the standard in long-range tactical situations, with over 15,000 sold since 1988, and our Sniper Weapon Systems make outfitting your operation as efficient and as simple as possible. From the basic M24 Sniper System – the standard for the U.S. Army since 1988 – to the advanced XM2010 configuration, we include the world-famous rifle and all the premium, service-proven components you need. Remington® was awarded the U.S. XM2010 Army Enhanced Sniper Rifle (ESR) contract in September 2010 to reconfigure up to 3,600 M24 Sniper Weapon Systems after a full and open competition.



XM2010 Sniper Weapon System
Order # 86442



FOLDING STOCK » Folded Remington® Arms Chassis System captures the bolt handle securely for airborne operations.



M24 SNIPER WEAPON SYSTEM » 24" 7.62 cold-hammer-forged 5R Rifling 416 stainless steel barrel
• 1:11.25 twist • Composite aramid fiber-reinforced stock with aluminum bedding block • 5 round internal magazine • Leupold® Mark 4 M3 10x day optic • Steel rings and 2-piece base • Target-style iron sights • Deployment kit and hard case

XM2010 SNIPER WEAPON SYSTEMS

Designed as an upgrade to the venerable M24 SWS, the XM2010 comes configured with the Remington® Arms Chassis System (RACS). The XM2010 gives the sniper greater capability, lethality and flexibility offered by the 300 Winchester Magnum round, a detachable box magazine, a Leupold® variable powered optic, full rail systems for mounting of ancillary equipment and signature reduction in the form of an AAC TITAN QD suppressor.



M24 Sniper Weapon System
(Order #25679)



The M24 Sniper Weapon System comes complete with everything you could want in a Hardigg® hard case – Leupold® Mark 4 M3 day optic, OK Weber competition iron sights, deployment kit which includes spare parts and tools, cleaning kit, scope hard case, weapon soft case and system hard case. Includes bipod, sling and user manual.



www.remingtondefense.com

MODULAR SNIPER RIFLE (MSR®)

A new level of surgical precision. Designed for operators, by operators. The Remington® Modular Sniper Rifle (MSR®) combines lethal accuracy at 1500 meters with a user-adjustable folding stock, free-float handguard, and the potential to change barrel lengths and calibers within minutes at the user level from 338 Lapua Magnum to 338 Norma Magnum to 300 Winchester Magnum to 7.62mm NATO. This patent-pending system addresses long- and medium-range needs of the modern battlefield in one package designed to meet multiple emerging U.S. Armed Forces requirements. The MSR is mission-adaptable with just a change of a bolt face, barrel and magazine, and features lightweight, efficient design and optimal material selection for performance and corrosion resistance – this system truly never has to leave the battlefield.



FOLDING STOCK » Bolt capture when folded prevents bolt loss during transport



ACCESSORIES » Tested with all military approved sights, lights, night vision devices and suppressors to ensure shock mitigation and zero retention
• Removable rail pieces ensure the right accessories can be attached in the right places

FOLDING STOCK » The right-folding stock features a bi-directional locking mechanism to minimize the overall system profile • Length of pull is user-adjustable
• Cheekpiece is adjustable for height and fore/aft position • Height of butt-plate is vertically adjustable

ACTION » TriNyte™ coated components are impervious to corrosion • Receiver features titanium alloy with steel-on-steel lock-up in the barrel extension • Ambidextrous bolt release

FIRE CONTROL » The MSR® uses the same combat-proven M24 SWS trigger enhanced with the latest anti-corrosion resistant coatings and with user adjustment feature removed. The trigger is set at a pull weight of 3 to 5 lbs. +/- 8 oz.



PRIMARY RAIL » Monolithic, MIL-STD 1913 rail available in 20, 30, and 40 MOA options, allowing a variety of day/night optics to be mounted on the same plane • Integral recoil lug distributes the load from the rail and scope evenly • Optics mounting platform is compatible with HORUS reticle equipped optics, ballistic software, PDA interfaces, night vision devices and thermal imaging devices

REMOVABLE HANDGUARD » Octagonal free-float tube design allows for eight planes of accessory rail mounting • Each accessory rail features integral recoil lugs to optimally distribute accessory loads during recoil • MSR features multiple sling attachment points, ventilation for rapid cooling, a unique cable management system, and a flat bottom for increased stability while firing

SUPPRESSOR » Customer specified suppressor and muzzle brake (AAC Titan™ recommended – eliminates 98% of muzzle flash, reduces recoil by 60%, 24.25 ounces, 9.5" long – extends 8.8" past the muzzle, 136-137 Db, POI shift <1MOA)



GRIP » Any AR-style grip can be accommodated

MAGAZINE » 5, 7, and 10 round Teflon™ coated center feed single to double stack magazines for positive feeding • Removable insert to allow greater than standard overall cartridge lengths • Magazines are available in 338 Lapua Magnum (5 round and 10 round), 338 Norma Magnum (5 round and 10 round), 300 Winchester Magnum (7 round), and 7.62mm NATO (10 round)




BARREL » Available in 20", 22", 24" and 27" • Match grade, fluted to minimize weight and optimize heat dissipation without compromising stiffness


FIELD BALLISTICS COMPARISONS

- ◆ 338 Lapua Mag. – 300 OTM@2750 (27 in. barrel)
- ◆ 338 Lapua Mag. – 300 OTM@2600 (20 in. barrel)
- ◆ 338 Lapua Mag. – 250 OTM@2900 (27 in. barrel)
- ◆ 338 Lapua Mag. – 250 OTM@2700 (20 in. barrel)
- ◆ 300 Win. Mag. – 190 SMK@3000 (27 in. barrel)
- ◆ 300 Win. Mag. – 190 SMK@2750 (20 in. barrel)
- ◆ 7.62mm NATO – 175 SMK@2650 (27 in. barrel)
- ◆ 7.62mm NATO – 175 SMK@2575 (20 in. barrel)

ENERGY COMPARISON

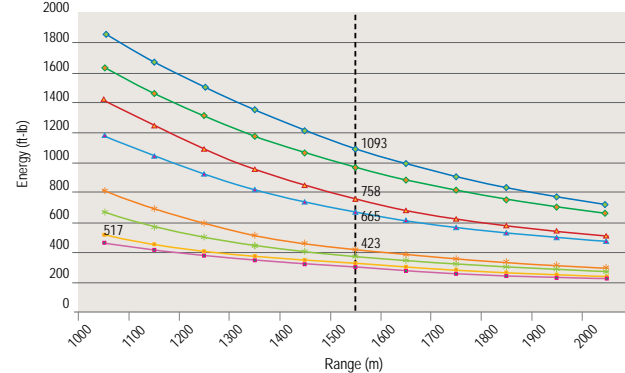

VELOCITY COMPARISON

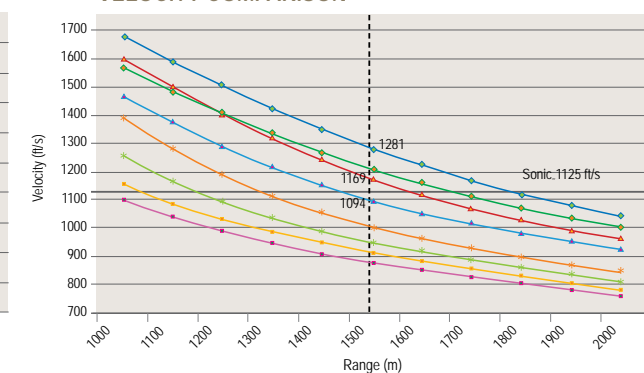

CALIBER » Caliber is convertible in minutes at the operator level from 338 Lapua Magnum to 338 Norma Magnum to 300 Winchester Magnum to 7.62mm NATO (with a magazine block for training or field expedient use) • Other magnum calibers available upon request

- 338 Lapua Magnum
- 300 Winchester Magnum
- 7.62mm NATO



MSR™ Full System

- .338 LM 27" Barrel
- .300 WM 24" Barrel
- 7.62mm 20" Barrel
- Leupold® MKIV ER/T 6.5-20x50
- AAC® TITAN-QD™ Suppressor
- QD Bipod
- Hard Case w/ Custom Soft Case Insert
- Deployment Tool and Cleaning Kit

(Order #86280)



www.remingtondefense.com

R700™ BOLT-ACTION RIFLES

No window too narrow. When lives are at stake, precision at the moment of opportunity is everything. Precisely why Remington® rifles are the No. 1 choice in the line of duty. The world-renowned accuracy of our R700™ rifles will make you the master of any long-range tactical situation. When the safety of others rests in your hands, one of these should, too.



R700™ LTR™
TACTICAL WEAPON SYSTEM
(Order #25635)
(308 Win. caliber)



R700™

For those who can accept nothing less than perfection, there is no other choice • The R700™ is the epitome of shot-to-shot consistency and field-proven reliability • It features a receiver machined from ordnance-grade steel flawlessly bedded in your stock • Choose a heavy-contour, 26" barrel or the agile 20" fluted barrel (LTR™ only) • Both are free-floated • All rifles feature a tough, non-glare, Parkerized finish for concealment



R700™ LTR™
Light Tactical Rifle
(Order #25739)
(308 Win. caliber)

R700™ AND MODEL R700™ LTR™
TWS (TACTICAL WEAPON SYSTEMS) »
Complete packages include:

- Leupold® 3.5-10x LRT with range finding reticle
- Badger Ordnance® 30mm steel rings
- Badger Ordnance® steel one-piece Picatinny base
- Butler Creek® flip-up lens covers
- Harris® 1A2 bipod
- Uncle Mike's® 1" Quick-Adjust™ sling with swivels
- Pelican® hard case

R700™ LTR™ (LIGHT TACTICAL RIFLE) » Legendary R700™ action • Receiver machined from ordnance-grade steel • Drilled and tapped for scope mounts • Three overlapping rings of solid steel (bolt face, barrel and receiver) • Heavy, free-floating 26" barrel (20" fluted barrel on LTR™) • Composite stock features with aircraft-grade aluminum bedding block • Non-reflective finish • Sling swivel studs • Magazine with hinged floor plate • Chambered in 223 Remington, 7mm Remington Mag., 308 Win., 300 Win. Mag. and 300 Remington Ultra Mag. • LTR™ chambered in 223 Remington, 308 Win., and 300 Remington SA Ultra Mag.

R700™ USR™ (URBAN SNIPER RIFLE) » The USR™ is designed for the modern day operator who needs advanced capabilities to perform his mission • The USR™ is the pinnacle of R700™ tactical rifle development • It begins with the superb R700™ LTR™, then adds essential tactical components such as a detachable box magazine, MARS rail, variable power optics, adjustable stock, muzzle brake, optional sound suppressor and bipod



R700™ USR™
Shown with optional suppressor
and Harris® bipod
(Order #86450)
(308 Win. caliber/rifle only)

R700™ LTR™ action and barrel • Fully adjustable, aramid fiber-reinforced stock with aluminum bedding block • Leupold® 3.5-10x Mark 4 M3 LR/T day scope • MOA Modular Accessory Rail System with side Picatinny rails • Badger Ordnance® steel 30mm high rings • Configured for use with a sound suppressor and optional Harris® bipod • Available as a rifle only or full kit



www.remingtondefense.com

REMINGTON ACCESSORY CHASSIS SYSTEM (RACS) – AVAILABLE TO ACCOMMODATE REMINGTON® LONG AND SHORT 700 ACTIONS

The patent-pending Remington® Accessory Chassis System (RACS) incorporates state-of-the-art operator-defined attributes such as a free-float tubular design and a fully featured front handguard section. Operator-selectable auxiliary rail section pieces in various lengths can be attached to any of the seven remaining facets of the octagonal handguard, which allows the operator to apply clip-on in-line night vision systems in addition to other ancillary systems such as lasers, bipods and other accessories. The folding RACS buttstock provides the operator with a wide variety of adjustments to allow setting the system to suit the shooter and the operating conditions.



THE MOST VERSATILE CHASSIS IN THE WORLD...
...FIELDIED BY THE BEST SHOOTERS IN THE WORLD.

From the MSR® to the XM2010 to the individual unit upgrades of legacy short-action and long-action R700™ systems, the RACS is the primary choice of professional shooters worldwide.



Rapid operator adjustments of chassis system to customize the system to the user:

- Adjustable height cheekpiece with fore and aft positional adjustment
- Adjustable position recoil pad
- Adjustable length of pull stock

Folding stock

20 MOA monolithic top rail ensures adequate elevation adjustment for ranges beyond 1500m while also permitting the installation of ancillary electro-optics

Cable routing guides capture wires associated with electro-optics

Remington® Accessory Chassis System, Long Action (RACS-LA)

Recessed sling attachment points

Removable rail pieces and longer overall length free-float tube allows the user to minimize or maximize rails to configure the system to the mission

Cut-out to capture the bolt handle while folded

Accommodates any AR-type grip



Folding stock captures the bolt handle when folded with positive locking mechanism

SPECIFICATIONS

	Long Action	Short Action
Weight	6.1 lbs.	
Overall Length		
Min LOP	36.4"	
Max LOP	39.2"	
Overall Length Folded	28.25"	
Order Number	86448	86489



NEW! RACS-LW BUTTSTOCK

All of the RACS adaptability in an ultra-lightweight package.

- » Fully adjustable for length of pull, shoulder weld, comb height and cast.
- » Quick, silent adjustments throughout the full range of travel.
- » Tool-free adjustment locking levers.
- » Multiple flush-cup sling swivel receivers.
- » Removable accessory rail sections to accept additional sling mounting points or monopod.
- » Available on any Remington® Accessory Chassis System.



www.remingtondefense.com

ADAPTIVE COMBAT RIFLE (ACR®)

One rifle. Many missions. The revolutionary, fully-modular Remington® Adaptive Combat Rifle (ACR®). The ACR® was initially conceived to provide today's warfighter an American-made, reliable, accurate and mission-configurable rifle. Three American companies – MagPul® Industries Corp., Bushmaster® and Remington® – shared this common vision, and after multiple iterations of torturous testing only the strongest materials, components and concepts survived. The ACR® can change calibers from 5.56mm to 6.8mm to .300 AAC Blackout™ in minutes at the user level by changing the bolt head, barrel and magazine. The ACR® can also change barrels, stocks and accessories to go from a close-quarters battle platform to a designated marksman platform. Add a superbly reliable gas piston operating system, controllable full-auto fire capability, a non-reciprocating bolt handle, a monolithic free-floating rail system and intuitive, ambidextrous controls, and you have a platform that is a natural fit for any operator and gives him all the options he needs. Made in the USA for government sales by the oldest name in firearms and ammunition – Remington® delivers again.



ACR-C » 8.25" Barrel, Folding Collapsible Stock, 19.5" Folded OAL
PDW concealability in an accurate, controllable gas-piston platform designed specifically to meet the unique needs of dynamic entry and discreet protection teams.

CARBINES

STOCK » Removable 6-position positive-stop adjustable stock with a length of pull from 11"-14"
• Positive detent allows firing when stock is fully folded • Half-inch rise in adjustable cheekpiece
• Rubber butt-pad • Right-side folding and precision stocks also available.

CONFIGURATION SHOWN » 14.5" 5.56mm barrel with collapsible stock, Magpul® MBUS® and AAC® Blackout® Flash Hider

OPERATING SYSTEM » Adjustable, piston-driven gas system supported by hardened internal bearing rails

FLASH HIDER / SUPPRESSOR » Optimized with AAC suppressor (17.1 ounces, 6.625" long – extends 5.1" past the muzzle • 132-136 Db w/ M855 ball, repeatable POI shift) and Blackout flash hider

BARREL » Lightweight Torque Wrench or Tool-less quick change barrel system. Available in 8.25", 10.5", 14.5" and 16.5"

RAIL » Free-floating MIL-STD-1913 monolithic rail

STOCK POSITION OPTIONS »

Folded

Standard Position – 11"

Fully extended – 14"

BOLT ASSEMBLY » Multi-cal bolt assembly quickly and easily changes from 5.56 NATO to 6.8mm to .300 AAC BLACKOUT™ • Forward-mounted charging handle can be switched within seconds from left to right side of the upper receiver and is non-reciprocating during firing

LOWER RECEIVER » Ultra-Lightweight Magnesium Alloy Lower Receiver

MAGAZINE » Accepts all M16 series magazines to include MagPul® PMAG®

OPTIONAL FOLDING CHARGING HANDLE » The positively latching, forward-folding, ambidextrous, non-reciprocating charging handle reduces the side profile while providing additional clearance for electro optics

AMBIDEXTROUS FEATURES » Ambidextrous magazine release, safety mechanism, selector lever, bolt release/hold open and charging handle

FULLY MODULAR DESIGN » All major components are configurable to user preference • Barrel, stock and bolt are all interchangeable in less than two minutes



5-side handguard with removable rail pieces

Tri-rail handguard

7000 Series aluminum receiver

Multi-cal. bolt carrier

10.5" (E) barrel

14.5" barrel

16.5" (M) barrel



SPECIFICATIONS - ACR® 14.5" w/ Collapsible Stock

Weight	7 lbs.
Overall Length	
Min LOP	36.4"
Max LOP	39.2"
Accuracy	Sub 2 MOA
Reliability	7,500 MRBEFF
Durability	All Parts - 2x M4 FAT Requirements

ENDURANCE TESTING » Multiple grueling endurance tests confirmed MIL-STD environmental, barrel life, accuracy and reliability to at least 2x current U.S. Army standards for the M4 Carbine



www.remingtondefense.com

R5™ REMINGTON® GAS PISTON CARBINE

Built to address perceived shortfalls of currently fielded NATO systems, the R5™ is an upgrade solution to extend the lifecycle of the M-16 family for decades to come. Currently chambered in 5.56mm NATO with a hammer-forged, Melonite-converted barrel for extended life, the R5™ is a monolithic upper receiver capable of dropping in on M-4/M-16 series lower receivers without modification. Built around a supremely reliable gas piston operating system, the user can fire suppressed and unsuppressed without a regulator and realize significant durability, reliability and maintainability advantages over gas impingement offerings. The handguard offers patent-pending features common to the Remington Defense family of firearms, including cable routing guides, removable rail pieces and 45-degree offsets. The entire package is topped off by an AAC BLACKOUT™ flash hider to virtually eliminate visual signature, day or night.



BARREL CHANGE » Barrel is easily mounted via a barrel nut plate that attaches to the upper receiver via torque hex screws



AMBIDEXTROUS CHARGING HANDLE »

CAN INTEGRATE WITH ANY EXISTING M4 MILSPEC LOWER »

BARREL » Available in 10.5" and 14.5" medium or heavy profile • Single tool change in less than five minutes

MOUNTING SURFACE » Free-float tube design allows for eight planes of accessory rail mounting • Features ventilation for rapid cooling, a unique cable management system and removable rail sections

MONOLITHIC UPPER » Single piece forged 7075 aerospace-grade aluminum

RAIL SYSTEM » Available in five different configurations:

- Four Position
- Three Position
- Two Position
- One Position
- One Position Low Profile

CONFIGURATION SHOWN » 14.5" 5.56mm barrel

10.5" (E) BARREL ASSEMBLY

14.5" BARREL ASSEMBLY

FULLY MODULAR DESIGN » The R5™ is a mission-configurable system capable of barrel change from 10.5" to 14.5" in less than five minutes with user level tools

- The gas system is accessed in less than a minute without tools for ease of maintenance.



Robby Johnson - 2010 3-Gun Nation Shoot-Off Champion shooting Remington® R5™ in competition.



GAS PISTON SYSTEM » The R5™ is a nonregulated gas piston system capable of suppressed and unsuppressed fire without a gas setting change and cleans easily from the front without tools • Optimized for use with the AAC RGP-SD



www.remingtondefense.com

NEW! R4™ RIFLES AND CARBINES

The M16-type family of rifles and carbines has more than 40 years of field-proven reliability and versatility, and Remington® has more than 195 years experience providing unmatched quality and value in firearms. With the introduction of the R4™ and R16™ 5.56mm and R10™ and R11™ 7.62mm platforms; more than 5,000 different components and accessories, and a fully integrated line of Advanced Armament Corp. flash hiders, muzzle breaks and suppressors, operators now have more options than ever before. Whether the mission demands the compact portability of a personal defense weapon in 5.56mm or 9mm, the long-range power and precision of a 7.62mm semi-automatic sniper rifle, or anything in between, Remington® offers a solution that you can count on to perform every time.



THE REMINGTON® DIFFERENCE

A good barrel is the cornerstone of any rifle and no other company in the world knows more about building accurate, durable rifle barrels than Remington®. Our legacy of crafting competition winning, battle changing barrels dates back to our origins in upstate New York in 1816. Every Remington® semi-automatic rifle barrel is manufactured in house on our state of the art cold hammer forging machines - the same ones that produce the venerable M24 sniper rifle barrel. Producing our own barrels gives us 100% control over quality and allows us to offer unmatched variety to suit any requirement, ranging from stainless steel to chrome-lined or FNC surface converted 4140 carbon steel.



5.56 MM PLATFORMS

The 5.56x45mm NATO has proven to be one of the most effective cartridges on the battlefield since its parent round, the .223 Remington®, was standardized by the U.S. Military in 1963. Offering a near perfect balance of light recoil, mid-range accuracy, and high magazine capacities, the 5.56mm delivers high-velocity energy, fast follow-up shots and controllable full-auto and burst fire.

THE R4™ » A military grade M4 type carbine with a 14.5" barrel and a BLACKOUT™ flash hider. Capable of being configured with a full suite of accessories available in the marketplace to customer specifications in volume.

7.62 MM PLATFORMS

Remington® offers a full line of rifles, carbines, and precision long range weapons in 7.62x51 mm. For applications that require more energy or more range than a 5.56 mm can deliver, Remington® 7.62 mm rifles and carbines combine that power with the ease of use, modular versatility and proven reliability of the platform. Available in configurations ranging from basic compact carbines to turn-key long range sniper systems.



- R4-C™**
- » 5.56 mm
 - » 7" Chrome Lined Barrel
 - » SEMI-AUTO/FULL-AUTO / BURST
 - » 6 Position Telestock
 - » Optics Ready



- R4-E™**
- » 5.56 mm
 - » 11.5" Chrome Lined Barrel
 - » SEMI-AUTO / FULL-AUTO / BURST
 - » 6 Position Tele-stock
 - » Optics Ready



- R4-M™**
- » 5.56 mm
 - » 20" Chrome Lined Barrel
 - » SEMI-AUTO / FULL-AUTO / BURST
 - » Match Sights Available



- R10™**
- » 7.62 mm
 - » 16" Chrome Lined Barrel
 - » SEMI-AUTO
 - » 6 Position Telestock
 - » Optics Ready



- R10-M™**
- » 7.62 mm
 - » 18" Barrel
 - » SEMI-AUTO
 - » Adjustable Stock
 - » Complete System



- R11™ RSASS™**
- » 7.62 mm
 - » 16" or 18" Barrel
 - » SEMI-AUTO
 - » Adjustable Stock
 - » Complete System



www.remingtondefense.com


NEW! REMINGTON® R12™ AUTO-LOADING SHOTGUN

The Remington® R12™ Autoloading Tactical Shotgun ushers in a new era in combat shotguns, from America's oldest gun maker. The R12's™ self adjusting, short-stroke, dual piston gas operating system provides unmatched versatility and maximum reliability with minimal maintenance. The ability to fire all standard 12-ga. 2 ¾", 3" and 3 ½" loads ensures that the R12™ is always ready for any job- from ballistic breaching to security to wildlife management. Best of all, the unique operating system and revolutionary SuperCell™ recoil pad combine to produce a 12-ga. shotgun that fires magnum loads with almost 20% less recoil than a 20-ga pump. Options including rifle, bead or ghost-ring sights, 14.5" or 18" hammer-forged barrels, user-configurable forend mounted accessory rails, and a full system of accessories, mean that there is an R12™ to meet any need. The R12™ combines the legendary reliability, rugged durability, and cutting-edge technology that only Remington® can deliver.



SOFTER SHOOTING

The R12's™ Versa-Port™ twin piston gas system, SuperCell™ recoil pad, and adjustable length of pull stock work together to produce the softest-shooting semi-auto shotgun available. Now, any operator can fire even the heaviest duty loads without discomfort, fire more rounds in training, and get back on their target for quicker follow-up shots. With the ability to interchangeably fire light practice and magnum duty loads, the R12™ takes the compromise out of choosing the right ammunition for getting maximum performance out of your shotgun.

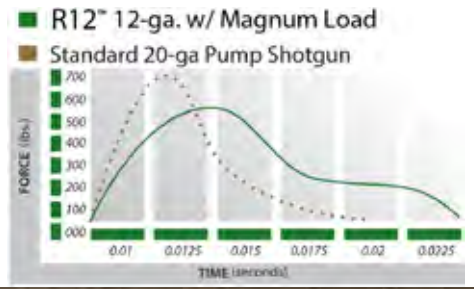

SUPERCELL™ RECOIL PAD AND CHEEKPIECE » Revolutionary polymer matrix of millions of SuperCells™ spreads recoil out over a longer impulse, reducing felt recoil and discomfort from shooting heavy loads.



OVERSIZE REVERSIBLE SAFETY BUTTON » Oversized button features red safety indicator band and positive audible/tactile detent. Can easily be swapped for right or left-hand operation in minutes.

CORROSION RESISTANT FINISH » Hard coat black anodizing on the receiver, black Cerakote™ on the barrel, and chrome and nickel-Teflon™ internal components protect the R12™ in even the harshest environments.

USER-CONFIGURABLE ACCESSORY RAILS » Located at the 3, 6, and 9 o'clock positions. Allows the operator to install rails in the appropriate location to accommodate their own unique combination of accessories, while leaving extra rails off to keep the weapon's profile smooth and snag-free.

COLD HAMMER-FORGED BARRELS » Cold hammer forged from AISI 4140 steel. The 11-12™ barrel has the same properties that give the Model 870™ its legendary toughness.




Remington® R12™
14.5" Barrel, SFIV-S, Low-Profile Rifle Sights



VERSATILE RELIABILITY

The Versa-Port™ gas system automatically regulates the gas system pressure based on the length of the shell being fired allowing 2 ¾", 3" and 3 ½" shells to be loaded and fired interchangeably. Torture tested with dozens of different loads from various manufacturers, the twin self-cleaning pistons are proven reliable through hundreds of rounds without cleaning.

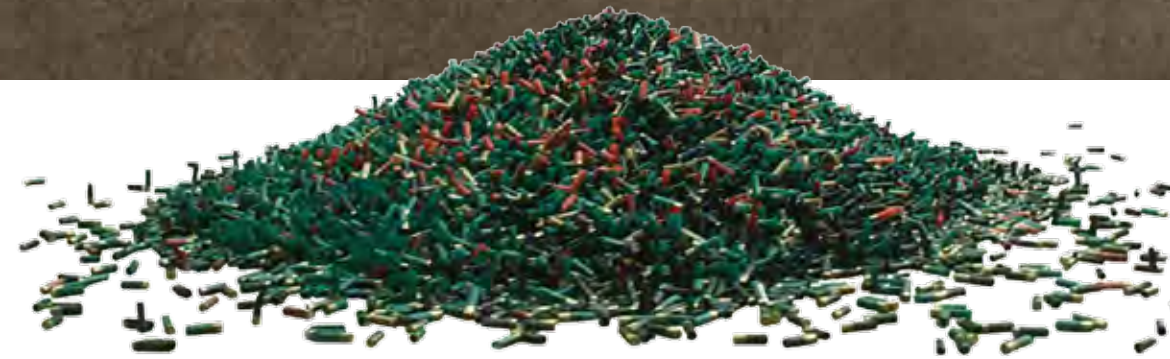

THE REMINGTON® R12™ CYCLES EVERYTHING

Length and Capacity	
18 in.	14.5 in.
6+1	5+1

Stocks		
Synthetic w/ LOP Kit	SFIV Pistol Grip 14" LOP	SFIV-S Pistol Grip 13" LOP

Sights			
Fixed Bead	Adjustable Rifle	Ghost Ring	Ghost Ring w/ Tritium

Chokes			
Fixed CYL	Fixed IC	Fixed MOD	Pro-Bore™ System



www.remingtondefense.com

R870™ MCS™ SHOTGUN SYSTEM

Honing the leading edge. The ability to adapt to the constantly evolving urban battlefield has become a necessary trait of all government agencies. The 870™ Modular Combat System (MCS™) was built with this fact in mind. Our focus remains on building the most solid and dependable tactical weapons available today.



R870™ MODULAR COMBAT SYSTEM (MCS™) » Multiple specialized tactical shotguns in one, the R870™ Modular Combat System (MCS™) is the ultimate choice for virtually any close-range scenario • Modifications are made rapidly without tools thanks to the REM™ LOC Quick-Change Stock System, truly a revolutionary design for professionals who need to adapt on the fly

MULTIPLE SHOTGUNS IN ONE

- MCS™ Full System
- 18" Rifle Sight Barrel w/ Choke Tubes
 - 14" Bead Sight Barrel w/ Choke Tubes
 - 10" Breaching Barrel
 - QD Pistol Grip
 - QD Buttstock
 - Nylon System Case
 - Tactical Sling
 - Side-Saddle Shell Holder
- (Order #24973)



R870™ BREACHER

The R870 Breacher System is designed to meet the needs of today's modern tactical entry personnel. Based on the durable Model 870, it is designed to fire any 12 gauge 2 3/4" and 3" load, including standard shotshell, buckshot and breaching rounds. This complete system includes a Parkerized finish, 11.5" barrel and a stand-off with rebar grooves. For efficient transition between loads, a Velcro side saddle is provided, as well as a retention holster and button sling attachment.



SHOTGUN RETENTION DEVICE »

Designed for use with any Remington® tactical shotgun, this device secures your weapon on a belt, body armor and a variety of hard surfaces using a degree of friction that can be adjusted to suit your needs • It's completely ambidextrous and constructed of rugged Kydex for reliability

Breaching shotgun with 10" barrel with cylinder choke, pistol grip only, and 4 shell capacity • Close-Quarter Combat (CQB) shotgun with 14" barrel and choke tubes, pistol grip stock, and 6 shell capacity • Shotgun with 18" barrel and choke tubes, pistol grip stock, and 7-shell capacity • Accessory rail for optics • V-Tac MK1 sling included • Comes with cleaning rod (also acts as a magazine spring guide when assembling) • Two detachable shell carriers



LED light in white or red for illuminating ballistic breach site




Alternate attachment system (optional)




www.remingtondefense.com

R870™ PUMP-ACTION SHOTGUNS

The nation's leading defender. For a half century, the Remington® 870™ has been the pump shotgun of choice for government agencies. With over 10 million produced to date, it remains the standard by which all pump actions are measured. Its dual, non-binding action bars deliver ultra-smooth, reliable cycling. Standing the test of time, extreme conditions and duty. The ultimate pump shotgun, the 870.™

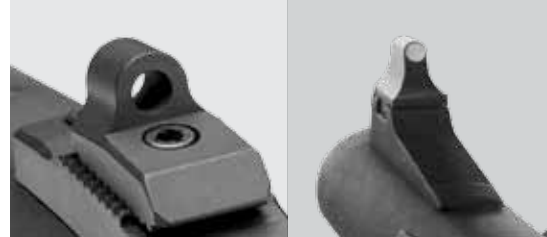

Wilson Combat Ghost Ring rear sight and XS front sight post

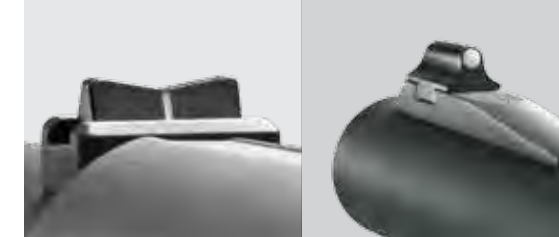

Low-profile rifle sights

NO ONE OFFERS SO MUCH VERSATILITY. Your Remington® R870™ can be custom-matched to any tactical situation thanks to our incredible array of stocks, magazines, sighting and accessory options. Add magazine capacity, adjust your stock's length of pull, reduce felt recoil, add a flashlight – there's more, and they're all to maximize your effectiveness in the field.



R870™ with Rifle sights and SpeedFeed® standard stock (Order #24417)

FEATURES

Non-binding twin action bars provide smoothest, surest pump operation • Receiver milled from solid block of steel • 3" chambers accept all 2 3/4" and 3" 12 gauge shells • Steel-lined, grooved fore-end for a stronger grip • Breech block locks into barrel extension for strength and consistent head space • Balanced sear and inertia firing pin prevents discharge unless action is closed and trigger pulled • Flexitab™ feeding system prevents a misfeed from jamming the shotgun • Cross-bolt safety • Sling swivel studs • Optional engraved insignia and property marks available

Receivers machined from a solid, 8-lb. block of ordnance-grade steel define ruggedness.

Magazine Extension Kits

Twin Action Bars

- **RECEIVERS** – drilled and tapped for optional MCS Picatinny rail
- **SPEEDFEED® STOCKS** – standard & pistol grip, with and without shell wells, 13" & 14" LOP, less-lethal orange, green or black
- **ADVANCED TECHNOLOGY STOCKS** – top and side folding, tactical 6-position collapsible
- **BUTLER CREEK® STOCKS** – side folding stock
- **KNOXX® STOCKS** – SpecOps™ NRS™ recoil-reducing/telescoping, CompStock™ recoil-reducing, and BreachersGrip™ (pistol grip only)
- **FORE-ENDS** – SpeedFeed™ and Surefire® tactical light
- **SIGHTS*** – Wilson Combat® Ghost Ring/XS™ front bead sights & low-profile rifle sights (tritium available)
- **MAGAZINE EXTENSIONS** – Remington® 2 and 3 shot & Wilson Combat® 1 shot
- **SLINGS** – Tactical or Standard

*Sights subject to availability.

R870™ »

14" barrel with modified choke reduces the overall length for an ideal entry shotgun • Parkerized finish • Multiple sight options available • Less-lethal application shotgun available with blaze orange synthetic SpeedFeed® stock and fore-end • Magazine extension available • 18" barrel with cylinder choke



R870™ 14" barrel, low profile sights, pistol grip and Parkerized finish (Order #24453)



R870™ 14" barrel, rifle sights, Parkerized finish and tactical light fore-end (Order #27579)

R870™ with Wilson Combat®/XS™ Sight System, Ghost Ring sights, Knox® SpecOps™ stock and Parkerized finish (Order #24591)



R870™ »

18" or 20" barrels • SpeedFeed® IV stock version with two magazine tubes holds 4 shells • SpeedFeed® synthetic solid stock and fore-end duplicates the weight and dimensions of factory wood stocks • Parkerized finish • Multiple sight options available • 2 shot extension available on some standard models • Cylinder, improved cylinder or modified choke



www.remingtondefense.com

PREMIER® RIFLE AMMUNITION

Duty and training rifle ammunition. Remington® produces a full line of duty and special application ammunition with superb MOA accuracy, consistent point-of-aim/point-of-impact, unbeatable reliability and superior terminal ballistics. Every cartridge combines the highest-quality brass and bullets with specially blended powders. When lives depend on your first shot, you can trust Remington Premier® rifle ammunition.



REMINGTON® PREMIER® ACCUTIP »

Precision-engineered deformation-resistant polymer tip provides match type accuracy, positive feed and function reliability, and maximum ballistic coefficient • Effectively reduces the chance of over-penetration and ricochet while maximizing the energy transfer • Available in 223 Remington, 7mm Remington Mag., 308 Win., 30-06 Sprg., 300 Win. Mag. and others • Made in the USA

REMINGTON® PREMIER® CORE-LOKT® ULTRA BONDED® »

Lead core metallurgically adheres to a progressively tapered jacket, specifically designed to control expansion • Combines maximum penetration, controlled 1.8x expansion, and 95% original weight retention • Bullet maintains maximum integrity and stays on target through tough barriers • Available in 223 Remington, 308 Win., 7mm Remington Mag., 300 Win. Mag., 300 Remington Mag., 30-06 Sprg., 300 Remington SA Ultra Mag. and others • Made in the USA



REMINGTON® PREMIER® SCIROCCO BONDED® »

Most advanced polymer-tipped, boat-tailed bullet available • Sleek bullet profile produces remarkably flat trajectories • Precise jacket concentricity produces superb accuracy • Progressively tapered, heavy-based, pure copper jacket is bonded to the lead core to retain over 75% of its weight at all velocities • Available in 7mm Remington Mag., 308 Win., 30-06 Sprg., 300 Win. Mag., 300 Remington Ultra Mag. and others • Made in the USA



REMINGTON® PREMIER® MATCH »

Loaded with Sierra® MatchKing® boat-tail bullets, high-grade primers, and specially blended powders for consistent velocity and exceptional accuracy • Available in 308 Win. – 168 and 175 gr., 223 Remington – 69 and 77 gr., and 6.8mm Remington SPC – 115 gr. • Other Premier Match loads are available in 223 Remington – 62 gr. HP Match and 338 Lapua Magnum – 250 gr. Scenar Match

223 Rem

308 Match

338 Lapua



NEW! .300 AAC BLACKOUT™ »

The .300 AAC BLACKOUT™ (7.62x35mm) was designed specifically to meet the needs of U.S. Special Forces to deliver lethal energy, quietly, from suppressed carbines and precision rifles. From 0 to 300 meters, supersonic .300 AAC BLACKOUT™ offers approximately 27-35% more energy from a 9 inch barrel than 5.56mm M855 when shot from a 10 inch barrel with much less powder and resulting muzzle blast. Also available is a high-mass subsonic load for quieter use with a sound suppressor which provides 115% more energy than an MP5-SD at the muzzle and 165% more at 200 meters.

Remington® Defense offers a range of rifles including the R4™ carbine and R700™ ready to meet the needs of any operator looking for the ultimate in quiet, lethal precision.

AVAILABLE LOADS

ORDER #	DESCRIPTION
21509	220 gr. OTM - Subsonic
21503	125 gr. OTM - Supersonic
21504	125 gr. CTFB - Supersonic
23148	Primed Brass

Remington
DEFENSE

www.remingtondefense.com

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET) HANDGUN DUTY AMMUNITION



Terminal performance that cuts three ways. Golden Saber®, the ultimate in street-proven handgun rounds. Our three key design features come together on-target for rapid, controlled expansion; deep penetration; max weight retention and exceptional accuracy. Its unique hollow-point design delivers a previously unattainable level of terminal performance.



JACKET NOSE CUT » Forms a folded spiral pattern that curls one edge of each jacket petal inward, completely cutting through the lead core into the hollow point • This causes early cavity failure and starts controlled expansion, while still conserving energy for superior penetration • This design ensures positive expansion even at lower velocities

HIGH-PERFORMANCE BRASS JACKET » Made entirely of thicker and stiffer cartridge brass instead of standard copper gilding metal • Jacket petals open rapidly to form shoulders that support the mushrooming core, which creates an aggressive frontal area (at least 1.6 times the bullet diameter) over a longer distance in the wound cavity

DRIVING BAND™ » Located at the bullet's rear, the Driving Band is the larger base diameter behind the front section of bore diameter • This configuration mechanically locks core to jacket to prevent core/jacket separation and reduces rifling contact friction for optimum muzzle velocity • Also, the reduced front diameter allows the bullet to align precisely in the bore before the band engages the rifling to produce true match-grade accuracy and higher velocity conservation

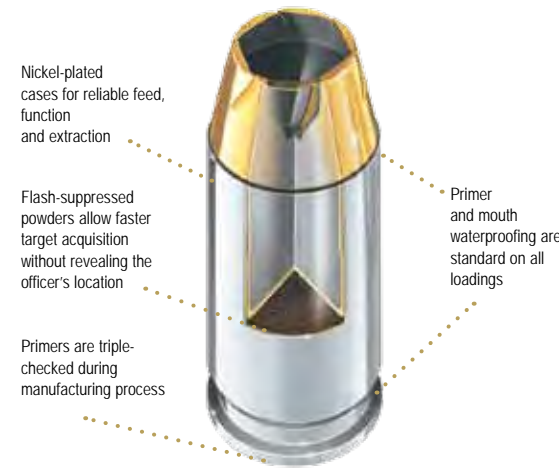

Nickel-plated cases for reliable feed, function and extraction

Flash-suppressed powders allow faster target acquisition without revealing the officer's location

Primers are triple-checked during manufacturing process

Primer and mouth waterproofing are standard on all loadings



GOLDEN SABER® BONDED » All the revolutionary features that make Golden Saber® rounds the leading edge in tactical handgun rounds, along with the unmatched barrier-penetration performance of our special bonded-bullet design.

The standard for barrier-penetration performance • Through exclusive Remington® process, lead core hot-bonded to brass jacket • Exceptional weight retention – up to 97% through auto glass • Reduced bullet nose diameter for precise bore alignment and match-grade accuracy • Requires less energy to initiate expansion • Jacket stiffness and wall thickness optimized to eliminate over-expansion, thus maximizing penetration • Available in 357 SIG, 9mm Luger, 40 S&W and 45 Auto • Made in the USA


GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET) » Industry-exclusive Driving Band™ • Jacket made entirely of cartridge brass • Nickel-plated cases for more reliable feeding • Waterproofed primers and case mouths provide max integrity in all weather conditions • Virtually 100% weight retention • Precise hollow-point cavity design maximizes penetration by minimizing lead core deformation • Flash-suppressed powders allow faster low-light target reacquisition • Reduced bullet nose diameter for precise bore alignment and match-grade accuracy • Optimum barrier penetration and expansion through a full range of accepted barrier tests • Available in 380 Auto, 9mm Luger, 38 Special, 357 Mag., 40 S&W and 45 Auto • Made in the USA



This series of photos shows the totally controlled and extremely uniform expansion of Golden Saber® HPJ bullets.

PUNCHES THROUGH BARRIERS AND DELIVERS SUPERIOR TERMINAL PERFORMANCE BEYOND.

Sequence of high-speed photography showing the superior performance of Golden Saber® HPJ Bonded™ through auto glass. Shot was set up to mimic one taken from the left front quarter of a vehicle. FRAME 1: 230-gr., 45 caliber Golden Saber® Bonded™ bullet impacts typical windshield glass. FRAMES 2-4: Bullet passes through windshield. FRAME 5: Emerges from the glass intact. Jacket and core held together through ASI ¼-inch laminated safety glass.

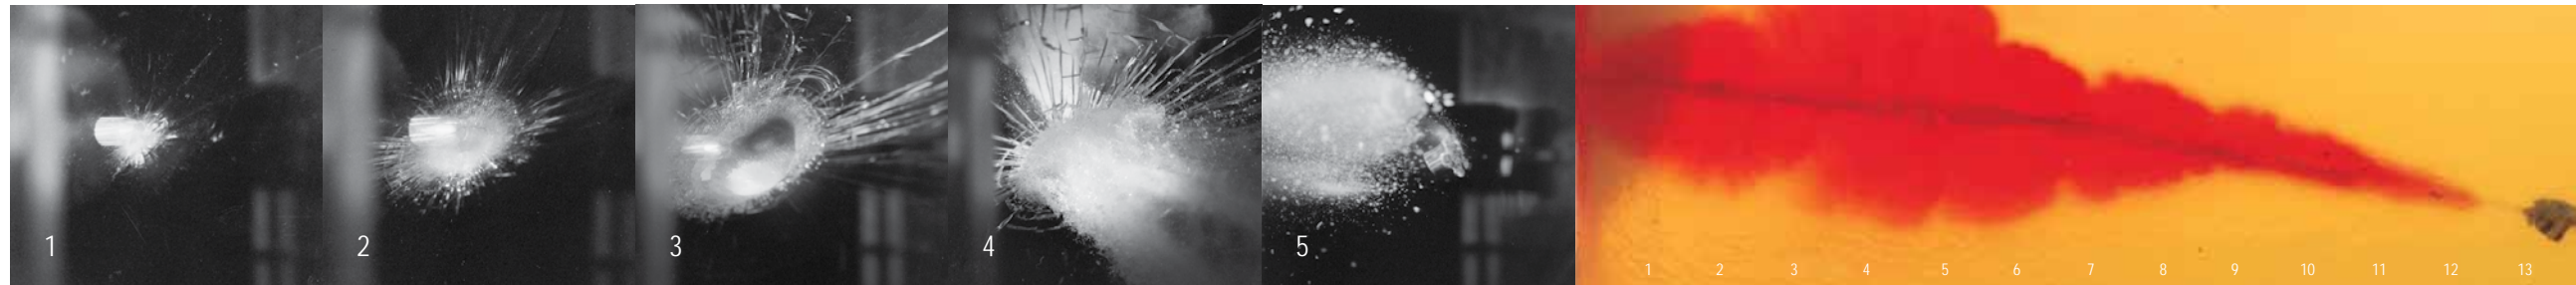

A block of gelatin placed 10" beyond the auto-glass setup to catch the bullet. Even after smashing through safety glass, the 45-cal. Golden Saber® Bonded™ still delivers a large-volume stretch cavity with over 12" of penetration.



PISTOL & REVOLVER DUTY AMMUNITION

All cartridges assembled from premium components • Meticulous quality control to ensure reliability • Available in a wide variety of calibers, bullet types and loads to meet your requirements



www.remingtondefense.com

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET) HANDGUN BARRIER TEST RESULTS

GOLDEN SABER® BONDED™

HEAVY CLOTHING @ 10 FEET



9MM LUGER
 » Weight: 147-gr.
 » Penetration: 16.9"
 » Expansion: .58" (1.6x)
 » Weight Retention: 100%



40 S&W
 » Weight: 180-gr.
 » Penetration: 14.4"
 » Expansion: .67" (1.7x)
 » Weight Retention: 100%



45 AUTO
 » Weight 230-gr.
 » Penetration: 16.1"
 » Expansion: .71" (1.6x)
 » Weight Retention: 100%

AUTO GLASS @ 10 FEET



9MM LUGER
 » Weight: 147-gr.
 » Penetration: 12.1"
 » Expansion: .55" (1.6x)
 » Weight Retention: 92%



40 S&W
 » Weight: 180-gr.
 » Penetration: 11.2"
 » Expansion: .62" (1.6x)
 » Weight Retention: 97%



45 AUTO
 » Weight 230-gr.
 » Penetration: 12.5"
 » Expansion: .63" (1.4x)
 » Weight Retention: 96%

WALLBOARD @ 10 FEET



9MM LUGER (Wallboard)
 » Weight: 147-gr.
 » Penetration: 13.8"
 » Expansion: .60" (1.7x)
 » Weight Retention: 100%

STEEL @ 10 FEET



9MM LUGER (Steel)
 » Weight: 147-gr.
 » Penetration: 21.4"
 » Expansion: .42" (1.2x)
 » Weight Retention: 100%

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET)

HEAVY CLOTHING @ 10 FEET



357 MAGNUM
 » Weight: 125-gr.
 » Penetration: 15.7"
 » Expansion: .59" (1.7x)
 » Weight Retention: 100%



9MM LUGER
 » Weight: 124-gr.
 » Penetration: 11.9"
 » Expansion: .62" (1.8x)
 » Weight Retention: 99.9%



40 S&W
 » Weight: 180-gr.
 » Penetration: 13.0"
 » Expansion: .68" (1.7x)
 » Weight Retention: 99.9%




45 AUTO
 » Weight 230-gr.
 » Penetration: 18.8"
 » Expansion: .73" (1.6x)
 » Weight Retention: 99.8%

HEAVY CLOTHING @ 20 YARDS



9MM LUGER
 » Weight: 147-gr.
 » Penetration: 13.2"
 » Expansion: .66" (1.9x)
 » Weight Retention: 100%

WALLBOARD @ 10 FEET



45 AUTO
 » Weight 230-gr.
 » Penetration: 15.3"
 » Expansion: .72" (1.6x)
 » Weight Retention: 99.7%

STEEL @ 10 FEET



40 S&W
 » Weight 180-gr.
 » Penetration: 16.3"
 » Expansion: .51" (1.3x)
 » Weight Retention: 99.7%

BALLISTIC PERFORMANCE 40 S&W 165-GR. GOLDEN SABER® HPJ MUZZLE FLASH COMPARISON



All Golden Saber® powders are treated with a chemical flash suppressant that retards flame propagation. This minimizes night blindness for the shooter while helping to conceal location.

GOLDEN SABER® BONDED

9mm Luger	Index Number – GSB9MMD	RAMAC – 29351
Primer	1 ½	
Load	9mm Luger +P	
Bullet Weight/Style	124-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1180 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	384 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.3 inches Expansion: .54 inch dia. (1.7x) Weight Retention: 90%	

9mm Luger	Index Number – GSB9MMC	RAMAC – 29353
Primer	1 ½	
Load	Standard	
Bullet Weight/Style	147-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	990 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	320 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.3 inches Expansion: .54 inch dia. (1.7x) Weight Retention: 90%	

357 Sig	Index Number – GSB357SB	RAMAC – 29408
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	125-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1350 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	506 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 12.3 inches Expansion: .58 inch dia. (1.6x) Weight Retention: 82%	

40 S&W	Index Number – GSB40SWA	RAMAC – 29366
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	165-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1150 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	485 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.4 inches Expansion: .71 inch dia. (1.8x) Weight Retention: 92%	

40 S&W	Index Number – GSB40SWB	RAMAC – 29436
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	180-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1015 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	412 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97%	

45 AUTO	Index Number – GSB45APB	RAMAC – 29416
Primer	2 ½	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	875 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	391 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96%	

45 AUTO	Index Number – GSB45APA	RAMAC – 29414
Primer	2 ½	
Load	Standard	
Bullet Weight/Style	185-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1015 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	534 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 12.1 inches Expansion: .65 inch dia. (1.4x) Weight Retention: 94%	

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET)

9mm Luger	Index Number – GS9MMC	RAMAC – 29422
Primer	1 ½	
Load	Standard	
Bullet Weight/Style	147-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	990 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	320 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 12.8 inches Expansion: .66 inch dia. (1.8x) Weight Retention: 100%	

9mm Luger +P	Index Number – GS9MMD	RAMAC – 29424
Primer	5 ½	
Load	+P	
Bullet Weight/Style	124-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1180 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	384 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.3 inches Expansion: .54 inch dia. (1.5x) Weight Retention: 99.9%	

40 S&W	Index Number – GS40SWA	RAMAC – 29440
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	165-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1150 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	485 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.3 inches Expansion: .54 inch dia. (1.5x) Weight Retention: 100%	

40 S&W	Index Number – GS40SWB	RAMAC – 29442
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	180-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1015 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	412 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 12.3 inches Expansion: .68 inch dia. (1.7x) Weight Retention: 99.9%	

45 AUTO	Index Number – GS45APA	RAMAC – 29444
Primer	2 ½	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1015 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	423 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.8 inches Expansion: .60 inch dia. (1.3x) Weight Retention: 100%	

45 AUTO	Index Number – GS45APB	RAMAC – 29448
Primer	2 ½	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	875 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	391 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 15.0 inches Expansion: .71 inch dia. (1.6x) Weight Retention: 100%	


En-gauge and immobilize. For close-range tactical scenarios, Remington® 12 gauge ammunition is a clean sweep. Our selection of street-proven slugs and buckshot has been perfected over decades in the field. We match the finest components with rigid standards for quality control to create the only shotgun loads worthy of a trip down a Remington® tactical shotgun barrel.

SLUGS 12 GAUGE DUTY SHELLS



12 gauge slugs are available in full power and reduced recoil for duty and training conditions. While the Slugger® Rifled Slugs remain the industry standard, the Reduced Recoil Rifled Slugs generate 45% less recoil than a standard 1-oz. rifled slug. In the field or on the course, Remington® provides the perfect slugs for any shotgun duty use.

REDUCED RECOIL RIFLED SLUGS » Specifically engineered to improve a shooter's capabilities with a shotgun • Generate 45% less recoil than a standard 1-oz. rifled slug • Helps during training and encourages shotgun duty use • Point-of-Impact is identical to a standard 1-oz. slug out to 50 yards and only 1 ½" lower at 100-yards • High-density polymer alignment disk under the slug's base produces enhanced accuracy • Waterproof primer for maximum reliability



Reduced Recoil Slug
12 ga., 2 ¾", 1-oz. slug,
10 shots, 25 yards,
I.C. Choke,
1,200 FPS




FRANGIBLE SABOT SLUGS » Reliable lead-free and heavy-metal-free primer • Lead-free slugs produce instant, complete breakup when impacting steel targets and steel backstops • Optimized powder blends for efficient utilization with minimum unburned residue • Accuracy performance nearly equivalent to conventional loads • Slug 40fragment splash-back virtually eliminated



SLUGGER® RIFLED SLUGS » Larger slug diameter for better gas sealing • High-density polymer disk under the slug produces a perfectly aligned exit from the muzzle for dramatically enhanced accuracy



Full Velocity Slugger
12 ga., 2 ¾", 1-oz. slug,
10 shots, 25 yards,
I.C. Choke,
1,560 FPS



COLOR CODE YOUR LOADS » Remington® slug hulls are now offered in optional Peters blue for rapid differentiation from buckshot loads • All buckshot hulls remain in standard "Remington Green" • With this Remington feature, personnel can easily distinguish between slugs and buckshot loads



TACTICAL BUCKSHOT 12 GAUGE DUTY SHELLS

TAC 8° 00-BUCKSHOT »

A full load 8-pellet 00-Buck that boasts a highly concentrated ½" to ¾" per yard pattern spread • Pattern controlled by utilizing 00-buck with 3% antimony lead and a precisely loaded special shot cup • Waterproof primer and mouth for maximum reliability under harsh environmental conditions



1 ROUND OF TAC 8
fired at 15 yards, I.C. Choke

5 ROUNDS OF TAC 8
fired at 15 yards, I.C. Choke



FRANGIBLE BUCKSHOT » Reliable lead-free and heavy-metal-free primer • Lead-free pellets produce instant, complete breakup when impacting steel targets and steel backstops • Optimized powder blends for efficient utilization with minimum unburned residue • Pattern performance nearly equivalent to conventional loads • Shotcup and buffering protect shot for enhanced patterns • Pellet fragment splash-back virtually eliminated



REDUCED-RECOIL 00-BUCKSHOT » Made specifically for duty and training applications that encourage shotgun usage • Our 8- or 9-pellet Reduced-Recoil 00-Buckshot produces lower felt recoil by 40% for better follow-up shots • Enhanced with Power Piston® shot cup, polymer buffering, and hardened 3% antimony lead pellets contributing to outstanding patterns



BUCKSHOT » Available in standard and magnum loadings and 5 buckshot sizes: 000, 00, 0, 1 and 4 • Provides reliability, consistency and stopping power • Our 9-pellet 00-Express LE Buckshot created a new standard of pattern performance with the addition of our one-piece compression section Power Piston® wad column, polymer buffering and hard lead pellets • This combination produces patterns 25% tighter than previous buckshot offerings



TB12 BREACHING ROUND

TB12

TB12 is a mission-specific shotgun ballistic breaching round used to defeat a variety of urban structures to include exterior and interior doors. TB12 provides a dramatic reduction in collateral damage to non-combatants as well as operators through the use of a frangible material that delivers maximum energy to the breach point yet turns to a near harmless powder upon impact. TB12 is a cost-effective training and operational breaching round allowing operators to "train as they fight." The frangible property of TB12 delivers near-threat lethality in addition to being a superb breaching round, ensuring that the breacher remains operational regardless of the weapon system being used.



REMINGTON® CENTERFIRE RIFLE CARTRIDGE

(Packed 20 rounds per box, 10 boxes per case, 200 rounds per case)

ZERO INDICATES YARDAGE AT WHICH RIFLE WAS SIGHTED IN.
Bullet does not rise more than 1" above line of sight from muzzle to sighting-in range.

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft.lbs.)			SHORT-RANGE TRAJECTORY					Ballistic Coefficient	
						Muzzle	100 yds.	200 yds.	Muzzle	100 yds.	200 yds.	50 yds.	100 yds.	150 yds.	200 yds.	250 yds.		300 yds.
223 Remington	PRA223RB	29184	7 ½	50	AccuTip, Boat Tail	3410	2989	2605	1291	992	753	-0.1	0.4	ZERO	-1.5	-4.4	-8.7	0.242
	PRA223RC	29192	7 ½	55	AccuTip, Boat Tail	3240	2854	2500	1282	995	763	0.2	0.6	ZERO	-1.8	-5.1	-9.9	0.255
	R223R1	28399	7 ½	55	PSP	3240	2747	2304	1282	921	648	0.0	0.6	ZERO	-2.0	-5.6	-11.2	0.197
	R223R2	29047	7 ½	55	HP, Power-Lokt	3240	2773	2352	1282	939	675	0.0	0.6	ZERO	-1.9	-5.4	-10.7	0.209
	R223R3	28401	7 ½	55	Metal Case	3240	2759	2326	1282	929	660	0.0	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	R223R6	22106	7 ½	62	HP (Match)	3025	2572	2162	1260	911	643	0.2	0.7	ZERO	-2.3	-6.5	-12.9	0.205
6.8mm Remington SPC	RM223R1	27680	7 ½	69	BTHP (Match)	3000	2720	2457	1379	1133	925	0.1	0.6	ZERO	-1.9	-5.3	-10.3	0.336
	RM223R3	27686	7 ½	77	BTHP (Match)	2800	2551	2314	1340	1112	916	0.3	0.8	ZERO	-2.3	-6.2	-11.8	0.375
	R68R1	29146	9 ½	115	OT (Match)	2625	2373	2135	1759	1437	1163	0.4	1.0	ZERO	-2.7	-7.3	-14.1	0.344
	RM68R1	27676	9 ½	115	BTHP (Match)	2625	2365	2119	1759	1428	1147	0.5	1.0	ZERO	-2.7	-7.4	-14.3	0.333
	PRC68R4	29128	9 ½	115	Core-Lokt Ultra Bonded	2625	2332	2058	1759	1389	1082	0.5	1.0	ZERO	-2.8	-7.8	-15.0	0.295
	30-30 Win.	R3030A	21397	9 ½	55	SP, Accelerator	3400	2693	2085	1412	886	531	0.0	0.6	ZERO	-2.2	-6.2	-13.2
	R30301	27818	9 ½	150	SP, Core-Lokt	2390	1973	1605	1902	1296	858	0.2	ZERO	-2.4	-7.6	-16.1	0.193	
	R30302	27820	9 ½	170	SP, Core-Lokt	2200	1895	1619	1827	1355	989	0.3	ZERO	-2.7	-8.3	-17.1	0.254	
	R30303	21395	9 ½	170	HP, Core-Lokt	2200	1895	1619	1827	1355	989	0.3	ZERO	-2.7	-8.3	-17.1	0.254	
30 Carbine	R30CAR	28322	6 ½	110	SP	1990	1567	1236	967	600	373	0.6	ZERO	-4.2	-12.9	-27.2	0.166	
300 Remington Ultra Mag.	PR300UM5	27950	9 ½	150	Swift Scirocco Bonded	3450	3208	2980	3964	3427	2956	0.0	0.3	ZERO	-1.2	-3.4	-6.7	0.435
	PR300UM3	27936	9 ½	180	Swift Scirocco Bonded	3250	3048	2856	4221	3714	3260	0.0	0.4	ZERO	-1.4	-3.9	-7.5	0.500
	PR300UM4	27948	9 ½	180	SP, Core-Lokt Ultra	3250	2988	2742	4221	3568	3003	0.0	0.4	ZERO	-1.5	-4.2	-8.1	0.382
300 Remington SA Ultra Mag.	PR300SM1	27952	9 ½ M	150	PSP, Core-Lokt Ultra	3200	2901	2622	3410	2803	2290	0.1	0.5	ZERO	-1.6	-4.6	-8.9	0.330
	PR300SM2	27954	9 ½ M	165	SP, Core-Lokt Ultra	3075	2792	2527	3464	2856	2339	0.1	0.6	ZERO	-1.8	-5.0	-9.7	0.339
300 Win. Mag.	R300W1	29495	9 ½ M	150	PSP, Core-Lokt	3290	2950	2634	3605	2897	2311	0.0	0.5	ZERO	-1.6	-4.4	-8.7	0.294
	PRC300WA	29034	9 ½ M	150	Core-Lokt Ultra Bonded	3290	2967	2666	3605	2931	2366	-0.1	0.5	ZERO	-1.6	-4.3	-8.5	0.310
	PRSC300WB	29330	9 ½ M	180	Swift Scirocco Bonded	2960	2274	2595	3501	3075	2692	0.1	0.6	ZERO	-1.8	-4.9	-9.4	0.507
	PRC300WC	29032	9 ½ M	180	Core-Lokt Ultra Bonded	2960	2774	2505	3501	2971	2508	0.1	0.6	ZERO	-1.9	-5.2	-10.0	0.402
	PRA300WC	29212	9 ½ M	180	AccuTip, Boat Tail	2960	2764	2577	3501	3053	2653	0.1	0.6	ZERO	-1.8	-4.9	-9.5	0.481
	R300W2	29497	9 ½ M	180	PSP, Core-Lokt	2960	2715	2482	3501	2945	2463	0.1	0.6	ZERO	-1.9	-5.3	-10.2	0.383
338 Lapua Magnum	RM300W7	27684	9 ½ M	190	BTHP (Match)	2900	2725	2557	3547	3133	2758	0.1	0.6	ZERO	-1.9	-5.1	-9.8	0.533
	RM338LMR1	27944	9 ½ M	250	Scenar	2960	2820	2683	4863	4412	3996	0.3	0.6	ZERO	-1.7	-4.7	-8.9	0.675

Bullet Style Descriptions: OT=Open Tip / BTHP=Boat Tail Hollow Point / HP=Hollow Point / PSP=Pointed Soft Point / SP=Soft Point

UMC® CENTERFIRE RIFLE CARTRIDGE

(Packed 20 rounds per box, 10 boxes per case, 200 rounds per case)

ZERO INDICATES YARDAGE AT WHICH RIFLE WAS SIGHTED IN.
Bullet does not rise more than 1" above line of sight from muzzle to sighting-in range.

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft.lbs.)			SHORT-RANGE TRAJECTORY					Ballistic Coefficient	
						Muzzle	100 yds.	200 yds.	Muzzle	100 yds.	200 yds.	50 yds.	100 yds.	150 yds.	200 yds.	250 yds.		300 yds.
223 Remington	L223R7	23748	7 ½	45	Jacketed Hollow Point	3550	2953	2430	1259	871	590	-0.1	0.4	ZERO	-1.7	-4.8	-9.7	0.173
	L223R8	23812	7 ½	50	Jacketed Hollow Point	3425	2899	2430	1302	933	655	-0.1	0.5	ZERO	-1.7	-4.9	-9.9	0.192
	L223R3	23711	7 ½	55	Metal Case	3240	2759	2326	1282	929	660	0.0	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	L223R3L ¹	23894	7 ½	55	Metal Case	3240	2993	2759	1282	1094	930	-0.1	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	L223R9	23815	7 ½	62	Closed Tip Flat Base	3100	2734	2396	1323	1029	790	0.1	0.6	ZERO	-1.9	-5.4	-10.6	0.260
308 Win.	L308W4	23715	9 ½	150	Metal Case	2820	2533	2263	2648	2137	1705	-0.1	ZERO	-1.2	-3.9	-8.4	-14.7	0.314
6.8mm Remington SPC	L68R2	24035	9 ½	115	MC	2625	2329	2053	1759	1385	1076	0.5	1.0	ZERO	-2.9	-7.8	-15.1	0.292
	L762391	23709	7 ½	123	Metal Case	2365	2060	1780	1527	1159	865	0.1	ZERO	-2.2	-6.8	-14.1	-24.5	0.266

¹ Linked in 100 Round Belt, 5 Belts Per Case, 500 Rounds Per Case.

REMINGTON® PISTOL AND REVOLVER DUTY AMMUNITION (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft.lbs.)			MID-RANGE TRAJECTORY (incht)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
32 S&W	R32SW	22204	1 ½	88	Lead	680	645	610	90	81	73	0.6	2.5
32 S&W Long	R32SWL	22208	1 ½	98	Lead	705	670	635	115	98	88	0.6	2.3
32 (7.65mm) Auto	R32AP	22212	1 ½	71	Metal Case	905	855	810	129	115	97	0.4	1.4
357 Mag. ¹	R357M7	22228	5 ½	110	Semi-Jacketed Hollow Point	1295	1094	975	410	292	232	0.2	0.8
	R357M1	22216	5 ½	125	Semi-Jacketed Hollow Point	1450	1240	1090	583	427	330	0.1	0.6
	R357M2	22218	5 ½	158	Semi-Jacketed Hollow Point	1235	1104	1015	535	428	361	0.2	0.8
	R357M3	22220	5 ½	158	Soft Point	1235	1104	1015	535	428	361	0.2	0.8
	R357M5	22224	5 ½	158	Semi-Wadcutter	1235	1104	1015	535	428	361	0.2	0.8
	RH357MA	29466	5 ½	165	Jacketed Hollow Point Core-Lokt	1290	1237	1189	610	561	518	0.2	0.7
9mm Luger	R357M10	22234	5 ½	180	Semi-Jacketed Hollow Point	1145	1053	985	524	443	388	0.2	0.9
	R9MM1	28285	1 ½	115	Jacketed Hollow Point	1155	1047	971	341	280	241	0.9	3.9
	R9MM3	28290	1 ½	115	Metal Case	1135	1041	973	329	277	242	0.9	4.0
	R9MM6	28289	1 ½	115	Jacketed Hollow Point (+P) ²	1250	1113	1019	399	316	265	0.2	0.8
	RB9MM6	28324	1 ½	115	Jacketed Hollow Point, Bonded (+P) ²	1250	1175	1113	399	353	316	0.2	0.8
	R9MM2	22240	1 ½	124	Metal Case	1110	1030	971	339	292	259	0.2	0.9
380 Auto	R9MM8	28299	1 ½	147	Jacketed Hollow Point (Subsonic)	990	941	900	320	289	264	0.3	1.1
	R380A1	22246	1 ½	88	Jacketed Hollow Point	990	920	868	191	165	146	0.3	1.2
	R380AP	22252	1 ½	95	Metal Case	955	865	785	190	160	130	0.3	1.4
38 S&W	R38SW	22276	1 ½	146	Lead Round Nose	685	650	620	150	135	125	0.6	2.5
38 Special ¹	R38S10	22298	1 ½	110	Semi-Jacketed Hollow Point (+P) ²	995	926	871	242	210	185	0.3	1.2
	R38S16	22310	1 ½	110	Semi-Jacketed Hollow Point	950	890	840	220	194	172	0.3	1.3
	R38S2	22282	1 ½	125	Semi-Jacketed Hollow Point (+P) ²	945	898	858	248	224	204	0.3	1.3
	R38S3	22284	1 ½	148	Targetmaster® Lead WC Match	710	634	566	166	132	105	0.6	2.4
	R38S5	22288	1 ½	158	Lead Round Nose	755	723	692	200	183	168	0.5	2.1
	R38S14	22304	1 ½	158	Semi-Wadcutter (+P) ²	890	855	823	278	257	238	0.3	1.4
357 SIG	R38S6	22290	1 ½	158	Semi-Wadcutter	755	723	692	200	183	168	0.5	2.1
	R38S12	22300	1 ½	158	Lead Hollow Point (+P) ²	890	855	823	278	257	238	0.3	1.4
	R38S14	22304	1 ½	158	Semi-Wadcutter (+P) ²	890	855	823	278	257	238	0.3	1.4
	R38S16	22290	1 ½	158	Semi-Wadcutter	755	723	692	200	183	168	0.5	2.1
	R38S12	22300	1 ½	158	Lead Hollow Point (+P) ²	890							

GOLDEN SABER® BONDED HPJ (HIGH-PERFORMANCE JACKET) (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft.lbs.)			MID-RANGE TRAJECTORY (inch)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
357 SIG	GSB357SB	29408	5 ½	125	Brass-Jacketed Hollow Point, Bonded	1350	1245	1157	506	430	372	0.2	0.7
9mm Luger (+P) ¹	GSB9MMD	29351	1 ½	124	Brass-Jacketed Hollow Point, Bonded (+P) ²	1180	1131	1089	384	352	327	0.2	0.8
	GSB9MMC	29353	1 ½	147	Brass-Jacketed Hollow Point, Bonded	990	965	941	320	304	289	0.3	1.1
40 S&W	GSB40SWA	29366	5 ½	165	Brass-Jacketed Hollow Point, Bonded	1150	1089	1040	484	435	396	0.2	0.9
	GSB40SWB	29368	5 ½	180	Brass-Jacketed Hollow Point, Bonded	1015	986	960	412	388	368	0.3	1.1
45 Auto	GSB45APA	29414	2 ½	185	Brass-Jacketed Hollow Point, Bonded	1015	981	951	423	395	371	0.3	1.1
	GSB45APB	29378	2 ½	230	Brass-Jacketed Hollow Point, Bonded	875	853	833	391	372	354	0.4	1.5

¹ Ammunition with "+P" or "+P+" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET) (Packed 25 rounds per box, 20 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft.lbs.)			MID-RANGE TRAJECTORY (inch)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
357 Mag. ¹	GS357MA	29400	5 ½	125	Brass-Jacketed Hollow Point	1220	1152	1095	413	368	333	0.2	0.8
9mm Luger	GS9MMB	29420	1 ½	124	Brass-Jacketed Hollow Point	1125	1074	1031	349	317	293	0.2	0.9
	GS9MMD	29424	1 ½	124	Brass-Jacketed Hollow Point (+P) ¹	1180	1131	1089	383	352	326	0.2	0.8
380 Auto	GS9MMC	29422	1 ½	147	Brass-Jacketed Hollow Point	990	965	941	320	304	289	0.3	1.1
	GS380B	29410	1 ½	102	Brass-Jacketed Hollow Point	940	920	901	200	192	184	0.3	1.4
38 Special ¹	GS385B	29432	1 ½	125	Brass-Jacketed Hollow Point (+P) ²	975	950	929	264	250	238	0.3	1.3
40 S&W	GS40SWA	29440	5 ½	165	Brass-Jacketed Hollow Point	1150	1089	1040	485	435	396	0.2	0.9
	GS40SWB	29442	5 ½	180	Brass-Jacketed Hollow Point	1015	986	960	412	388	368	0.3	1.1
45 Auto	GS45AP	29444	2 ½	185	Brass-Jacketed Hollow Point	1015	981	951	423	395	371	0.3	1.1
	GS45APB	29448	2 ½	230	Brass-Jacketed Hollow Point	875	853	833	391	372	355	0.4	1.5
	GS45APC	29450	2 ½	185	Brass-Jacketed Hollow Point (+P) ²	1140	1086	1041	534	484	445	0.2	0.9

¹ Note: These ballistics reflect vented barrel. ² Ammunition with "+P" or "+P+" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

REMINGTON® DUTY SLUG SHELLS

Loads	Index IDI No.	Ramac No.	Gauge	Shell Length (in.)	Velocity (ft/sec)	Number of Pellets	Slug Weight	Rounds per Box	Boxes per Case	Rounds per Case
Sluggers ¹ Rifled Slug	SP12RS	20300	12	2 ¾	1560	—	1 oz. Rifled Slug	5	50	250
	SP12RSB(Blue Hull)	20279	12	2 ¾	1560	—	1 oz. Rifled Slug	5	50	250
	S12SRS	20302	12	2 ¾	1680	—	1 oz. Rifled Slug	5	50	250
	S12MRS	20270	12	3	1760	—	1 oz. Rifled Slug	5	50	250
Reduced Recoil Rifled Slug	RR12RSB(Blue Hull) ¹	20285	12	2 ¾	1200	—	1 oz. Rifled Slug	5	50	250

¹ May not function in all types of autoloading shotguns.

REMINGTON® DUTY BUCKSHOT SHELLS

Loads	Index IDI No.	Ramac No.	Gauge	Shell Length (in.)	Dram Equiv.	Velocity (ft/sec)	Number of Pellets	Slug Weight	Rounds per Box	Boxes per Case	Rounds per Case
Reduced Recoil Buckshot	RR12BK00	20643	12	2 ¾	3	1200	9	00 Buck	25	10	250
	RR12BB00	20645	12	3	2 ¾	1200	8	00 Buck	25	10	250
Buckshot	12B000	20406	12	2 ¾	3 ¾	1325	8	000 Buck	5	50	250
	12B00	20620	12	2 ¾	3 ¾	1325	9	00 Buck	5	50	250
	12B0	20622	12	2 ¾	3 ¾	1275	12	0 Buck	5	50	250
	12B1	20624	12	2 ¾	3 ¾	1250	16	1 Buck	5	50	250
	12B4	20626	12	2 ¾	3 ¾	1325	27	4 Buck	5	50	250
	Law Enforcement Buckshot	SPL1200	20812	12	2 ¾	3 ¾	1325	9	00 Buck	25	10
Magnum Buckshot	12SB00	20632	12	2 ¾	4	1290	12	00 Buck	5	50	250
	12HB000	20408	12	3	4	1225	10	000 Buck	5	50	250
	12HB00	20636	12	3	4	1225	15	00 Buck	5	50	250
	12HB4	20640	12	3	4	1225	41	4 Buck	5	50	250
TAC ² 8 Buckshot	12BT800	20662	12	2 ¾	3 ¾	1325	8	00 Buck	5	50	250

UMC® CENTERFIRE PISTOL & REVOLVER AMMUNITION (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft.lbs.)			MID-RANGE TRAJECTORY (in.)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
25 Auto Pistol (6.35mm)	L25AP	23716	1 ½	50	Metal Case	760	733	707	64	60	56	0.5	2.0
32 Auto (7.65mm)	L32AP	23704	1 ½	71	Metal Case	905	879	854	129	122	115	0.4	1.7
357 Magnum ¹	L357M12	23738	5 ½	125	Jacketed Soft Point	1450	1338	1240	583	497	427	0.1	0.6
	L9MM1	23752	1 ½	115	Jacketed Hollow Point	1155	1095	1046	341	306	280	0.2	0.9
9mm Luger	L9MM3	23728	1 ½	115	Metal Case	1135	1084	1041	329	300	277	0.2	0.9
	L9MM2	23718	1 ½	124	Metal Case	1100	1067	1030	339	314	292	0.2	1.0
	L9MM9	23732	1 ½	147	Metal Case	990	965	941	320	304	289	0.3	1.1
380 Auto	L380AP	23720	1 ½	95	Metal Case	955	904	860	192	172	156	0.3	1.3
38 Super Auto	L38SUP	23722	1 ½	130	Metal Case	1215	1152	1099	426	383	348	0.2	0.8
38 Special ¹ (+P) ²	L38S2	23754	1 ½	125	Semi-Jacketed Hollow Point (+P) ²	945	921	898	248	235	224	0.3	1.3
38 Special	L38S5	23724	1 ½	158	Lead Round Nose	755	739	723	200	191	183	0.5	2.1
	L38S11	23730	1 ½	130	Metal Case	800	787	775	185	179	173	0.3	1.7
10mm Auto	L10MM6	23706	2 ½	180	Metal Case	1150	1103	1063	528	486	451	0.2	0.9
357 SIG	L357S1	23734	5 ½	125	Metal Case	1350	1238	1146	506	425	365	0.2	0.7
	L357S2	23692	5 ½	125	Jacketed Hollow Point	1350	1245	1157	506	430	372	0.2	0.7
40 S&W	L40SW2	23694	5 ½	180	Jacketed Hollow Point	1015	986	960	412	388	368	0.3	1.1
	L40SW3	23742	5 ½	180	Metal Case	985	959	935	388	367	350	0.3	1.2
	L40SW4	23746	5 ½	165	Metal Case	1150	1089	1040	484	435	396	0.2	0.9
44 Remington Magnum ¹	L44MG7	23744	2 ½	180	Jacketed Soft Point	1610	1482	1366	1036	878	745	0.1	0.5
45 Auto	L45AP1	23818	2 ½	185	Metal Case	1015	981	951	423	395	371	0.3	1.1
	L45AP4	23726	2 ½	230	Metal Case	835	817	800	356	341	326	0.4	1.6
	L45AP7	23696	2 ½	230	Jacketed Hollow Point	835	817	800	356	341	326	0.4	1.6
45 GAP	L45GAP4	23691	2 ½	230	Metal Case	880	860	841	395	378	361	0.4	1.5

¹ Note: These ballistics reflect vented barrel. ² Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

REMINGTON® TARGET SHOTSHELLS

Loads	Index IDI No.	Ramac No.	Gauge	Shell Length (in.)	Dram Equiv.	Velocity (ft/sec)	Ounces of Shot	Shot Size	Rounds per Box	Boxes per Case	Rounds per Case
Target Loads	STS12L7	20110	12	2 ¾	2 3/4	1145	1 1/8	7 ½	25	10	250
	STS12L8	20112	12	2 ¾	2 3/4	1145	1 1/8	8	25	10	250
	STS12L85	20114	12	2 ¾	2 3/4	1145	1 1/8	8 ½	25	10	250
	STS12L9	20116	12	2 ¾	2 3/4	1145	1 1/8	9	25	10	250
	STS12LH7	20250	12	2 ¾	3	1200	1 1/8	7 ½	25	10	250
	STS12LH8	20252	12	2 ¾	3	1200	1 1/8	8	25	10	250

REMINGTON® RIMFIRE AMMUNITION (Packed 50 rounds per box, 100 boxes per case, 5000 rounds per case)

Product	Index IDI No.	Ramac No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft.lbs.)			MID-RANGE TRAJECTORY (in.)		
					Muzzle	50 yds.	100 yds.	Muzzle	50 yds.	100 yds.	50 yds.	100 yds.	150 yds.
Subsonic (Long Rifle)	SUB22HP	21140	38	Hollow Point	1050	965	901	93	79	69	0.3	0.0	-7.7
	SUB22HP ^{1,2}	21141	38	Hollow Point	1050	965	901	93	79	69	0.3	0.0	-7.7
Target, Standard Velocity (Long Rifle)	6122	21022	40	Round Nose	1150	1048	976	117	98	85	0.2	0.0	-6.4
	6100 ²	21284	40	Round Nose	1150	1048	976	117	98	85	0.2	0.0	-6.4
Thunderbolt, Hi-Speed (Long Rifle)	TB-22A	21238	40	Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
Cyclone, Hi-Speed (Long Rifle)	CY-22HP	21222	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
Golden Bullet, High Velocity (Long Rifle)	1522	21006	40	Plated, Lead Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
	1500 ²	21276	40	Plated, Lead Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
	1622	21008	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
	1600 ²	21278	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
	1622C ³	21250	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
Golden Bullet, High Velocity (Short)	1022	21000	29	Round Nose	1095	982	9						

GUN CARE



REM® OIL »

Cleans dirt and grime from exposed metal surfaces while displacing non-visible moisture from metal pores



REM® ACTION & SHOTGUN CLEANER »


Cleans trigger groups, gas ports, choke tube threading, receivers, chambers, barrels and magazine tubes



BRITE BORE™ SOLVENT »

Dissolves carbon and powder fouling, removes copper, lead and plastic deposits

FIREARM ACCESSORIES

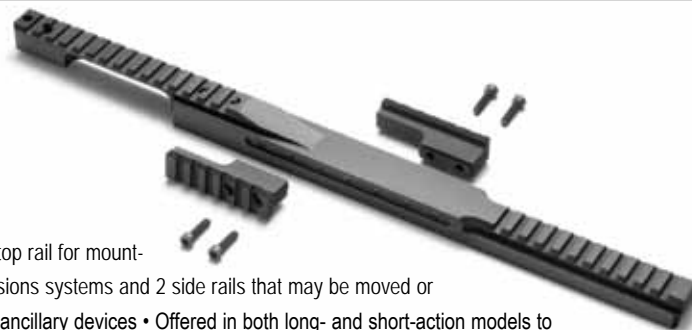

MARS (MODULAR ACCESSORY RAIL SYSTEM) »

3-piece system that features a top rail for mounting the day optic and application of clip-on in-line night visions systems and 2 side rails that may be moved or removed as necessary to accommodate the mission and ancillary devices • Offered in both long- and short-action models to include degreed models • Comes complete with mounting screws, a Torx® wrench and instructions for mounting • May be used with any Remington 700™ based system such as the M24, 700P™ and 700P™ LTR



EXTRA BARRELS »

Original factory barrels with bead or rifle sights • Multiple choke constrictions

• Durable factory finishes

MODEL 870™ & MODEL 11-87™ STOCK/FORE-END »

Available in black synthetic



MODEL 870 MAGAZINE EXTENSION KIT »

Available in: 20" Parkerized (3 shot)

• 18" Parkerized (2 shot) • 14" Parkerized

(1 shot) • 20" Blued (3 shot) •

18" Blued (2 shot)



NEW! REMINGTON® ACCESSORY HANDGUARD (RAHG) »

The Remington® Defense signature handguard that brought new levels of versatility to the MSR®, ACR®, R5™ and R11™ is now available in long (for 14"+ barrels) and short (for 10" barrels) lengths to fit a wide range of 5.56 and 7.62mm carbines. Each Remington® Accessory Handguard comes complete with all necessary mounting hardware, an assortment of accessory rails sections that can be positioned on any of 7 planes, integral flush-cup sling swivel receivers, and EO accessory cable routing guides.



MSR® MAGAZINES »

5, 7, and 10 round Teflon®-coated center feed single to double stack magazines for positive feeding • Removable insert to allow greater than standard overall cartridge lengths • Magazines are available in 338 Lapua Magnum (5 round and 10 round), 338 Norma Magnum (5 round and 10 round), 300 Winchester Magnum (7 round), and 7.62mm NATO (10 round)



REMINGTON ARMORER'S SCHOOL

Our mission is to train personnel to repair and maintain the Remington® firearms used by operators, with courses limited to government personnel only. Our instructors have years of combined experience, and courses are presented at requested locations in the US and internationally. In-depth training includes:

- Disassembly and reassembly
- Troubleshooting
- Factory authorized modifications
- Inspection
- Service and repair

For more information, visit www.remingtondefense.com or give us a call at (800) 243-9700.



300, ADL, Accelerator, BDL, Bandit, Bore, BriteBore, Bronze Point, BuckHammer, Bullet, CBEE 22, CDL, Classic, Conquest, Copper-Lokt, Copper Solid, Core-Lokt, Custom Carry, Cyclone, D-Series, Deer Hunter, Disintegrator, DriLube, Driving Band, Duplex, Echo, Elite Hunter, ETA, EtronX, Excursion, Express, Express-Steel, EZ, F.A.S.T., Fast Action Soft Touch, Fieldmaster, Figure 8, Fireball, Flentab, G3, Gamemaster, Genesis, Green Color, Golden, Golden Saber, Grizzly, Gun Club, Hi-Speed, Ideal, KleanBore, Lead-Lokt, LV SF, M24, M24A2, M24A3, MAX Gobbler, M-Series, Managed-Recoil, Marine Magnum, MCS Picatinny, Model Five, Model Seven, Model 105 CTI, Model 11-87, Model 11-87P, Model 32, Model 332, Model 365, Model 40-X, Model 40-XB, Model 40-XBBR, Model 40-XC, Model 40-XR, Model 40-XRBR, Model 40-XS, Model 412, Model 504, Model 504-T, Model 552, Model 572, Model 597, Model 673, Model 700, Model 700P, Model 700P-USA, Model 710, Model 750, Model 770, Model 798, Model 799, Model 830, Model 870, Model 870 MCS, Model 870P, Model 870P MAX, Model 1100, Model 7400, Model 7400, Model 7615, Model 7615P, Model SP-10, Nitro 27, Nitro CLP, Nitro Mag, Nitro Turkey, Nitro-Steel, Parker, Paters, Pheasant, Power-Lokt, Power Piston, Premier, ProBore, Quick-Lok, R, R-P, R3 and R3 logo, Rangemaster, Ready, ReahWood, Rem, Rem Dri 35, Rem DriLube, RemCloth, RemGrip, Rem-Line, Rem-Lite, Rem-Tech, Remington, Remington Fieldmaster, Remington Law Enforcement, Remington Loadless, Remington Racing, Remington Shooting School and Remington Shooting School logo, Remington Targetmaster, Remington Ultra, Rustless, S.A.S.S., Sendero, ShurShot, Slugger, SP, SPR, SPR18, SPR100, SPR210, SPR22, SPR220, SPR310, SPR310S, SPR453, SPR94, SPS, SP-T, SPS-T, Speedmaster, Sportsman, STS, Subsonic, Super Magnum, SWIFT-LOKT, TAC 8, Tango, Targetmaster, Thundershot, TorchCam, TriNyte, Ultra Bonded, Ultra Mag, UMC, Unibody, Viper, VLS, Vortex and Vortex Edge, VS, VSF, VS SF, Weathermaster, WetProof, Wingmaster, Wingmaster HD, Woodsmaster, XCR Extreme, X-Mark Pro, XR-100, Yellow Jacket and Zulu are trademarks of RA Brands, L.L.C., Madison, NC 27025. Badger Ordnance is a trademark of Badger Ordnance. Palusol is a trademark of BASF. V-Tac is a trademark of Blackhawk Products Group. Briley is a trademark of Briley Manufacturing. Bushnell and Sharpshooter are trademarks of Bushnell. Delrin, Kevlar, Teflon and Tyvek are trademarks of DuPont. Sierra Match King is a trademark of Sierra Bullet Co. Swift, A-Frame and Scirocco are trademarks of Swift Bullet Co. Break-Up, Brush, Duck Blind, Mossy Oak, New Break-Up and Obsession are trademarks of Haas Outdoors, Inc. Hardigg is a trademark of Hardigg Industries, Inc. V-Max is a trademark of Hornady Manufacturing Company. Hogue is a trademark of Hogue, Inc. Advantage, Advantage Max-4, Advantage Timber, AP, APG, HD and Realtree are trademarks of Jordan Outdoor Enterprises, Ltd. BreachersGrip, CompStock Recoil Reducer and SpecOps are trademarks of Knox Industries, LLC. Leupold is a trademark of Leupold & Stevens, Inc. McMillian is a trademark of McBros Rifle Co. Butler Creek and Uncle Mike's are trademarks of Michaels of Oregon Co. Lapua is a trademark of Nammo Lap XS Sight Systems, Inc. HViz is a trademark of North Pass, Ltd. Pelican is a trademark of Pelican Products, Inc. Kraton is a trademark of Shell. Sako is a trademark of Sako, Ltd., Shilen is a trademark of Shilen, Inc., Speedfeed is a trademark of Speedfeed, Inc. LimbSaver is a trademark of Steven Sims, Inc. TRUGLO is a trademark of Truglo, Inc. Skyline, Excel and Fall Flight are trademarks of Skyline Cover, LLC. Turner AWS is a trademark of Turner Saddlery. Weaver is a trademark of Weaver Outdoor Optics. Williams and Fire Sights are trademarks of Williams Gun Sight Co.

Weights, stock dimensions, checking pattern and wood grain may vary according to the individual firearm. Remington reserves the right to change or modify its products without notice. Pricing may vary by model, specification, color, size and availability. Follow the safety rules printed in firearms instruction books and on ammunition boxes. If you do not have an instruction book for your Remington firearm, write to Remington Arms Company, Inc., Military, Law Enforcement, Technologies and Federal Agency Sales Divisions, 870 Remington Drive, PO Box 700, Madison, NC 27025, for a free copy or visit our website at www.remington.com/manuals. Please specify the model and serial number. The firearms herein have been photographed with their actions closed to properly showcase their features. In actual practice, any firearm not in use must be left with ammunition removed, action open and safety on. Consumer Information, Arms Service, Parts and Repairs and Custom Shop: (800) 243-9700. Visit us on the web at: www.remingtondefense.com.

OUR MISSION.

Remington® is committed to the men and women serving our country in roles of distinction within the Military, Federal Agency, and Law Enforcement communities. Our mission is to provide seamless, time-sensitive support to government entities seeking our products and to develop new products that meet the needs of these customers as requirements change. We will do this by fielding a professionally trained and supported staff who are technical experts in our products and in the small arms marketplace, well educated in how to get you what you need through government acquisition processes, and responsive to your needs and desires.



www.remingtondefense.com