

**RETAIL Price List - Valid From April 2019**

Emotiva is a US AV design specialist founded on the desire to offer audiophile performance, excellent features and user-friendly ergonomics at prices significantly below those of comparable products. Emotiva has used its considerable experience in designing for other brands to identify and remove manufacturing inefficiencies while applying its innovative expertise to include the latest feature sets and optimise AV performance. The result is more from your favourite music and films for less: an unbeatable blend of amazing audio, video and price.

Flagship Processor	Retail Ex VAT	Retail Inc VAT
<b>RMC-1</b>	£ 4,582.50	£ 5,499.00

**RMC-1**  
 Flagship AV processor that supports full 4K UHD video, with high speed video switching, in addition to the latest Dolby Atmos and DTS-X object-oriented surround sound formats. The RMC-1 includes 16 fully balanced channels, an all-analogue preamplifier section, precision 32-bit AD/DA conversion, and an advanced 4K UHD video management system. Eight HDMI inputs and dual HDMI outputs support 2.0b and HDCP 2.2, ensuring theatre-like video quality from all 4K UHD HDR10 sources and equipment.

Dolby Atmos & DTS-X

All 16 channels are fully differential balanced and include Dirac Live 192Khz processing (7.3.6)

AKM AK5572 Verita™ 32 bit 768k A/D; AKM AK4490 Verita™ 32 bit 768k main zone D/As running in fully balanced mono mode

Twin Analog Devices Sharc™ dual-core, 450 MHz DSP engines handle all audio decoding and post processing

Fully independent crossover settings for fronts, centre, surrounds, backs, and subs

3 x LFE Subwoofer outputs

18 Gbps video bandwidth with bit-perfect signal switching on all HDMI inputs and outputs

Supports formats up to 4k UHD 50/60Hz 4.4.4 with HDR.

Full HDCP 2.2 support on all inputs and main output

ARC and CEC support on primary output

Custom designed, full graphical 256x64 OLED blue display 5.5" display width, fully dimmable



Assembled in the USA  
 with Globally Sourced Components

**RETAIL Price List - Valid From April 2019**

X Series - Preamps	Retail Ex VAT	Retail Inc VAT
<p><b>XSP-1 Gen2 Balanced Preamplifier</b> Great performance and cosmetic match for XPA1 G2 monoblocks. <b>All-analogue, fully balanced, differential signal path with vanishingly low noise and distortion.</b> 2 sets of balanced inputs, 4 sets of unbalanced inputs, one set of balanced main outputs, and one set of unbalanced main outputs. Support for both stereo subwoofers and a summed mono subwoofer. Audiophile quality, load invariant, high current headphone amplifier with independent level control and memory. High performance phono preamp that supports both moving magnet and moving coil cartridges, with user-configurable cartridge loading for moving coil cartridges. Full analogue bass management with independent, individually configurable, Linkwitz-Riley 12 dB/octave high-pass and low-pass filters for the mains and subs. Gold plated, solid brass machined RCA connectors and gold plated XLR connectors. Trigger Input and Output. IR input and output. Dimensions (W x H x D mm): 432 x 152 x 419 (includes feet and terminals).</p>	£ 1,182.50	£ 1,419.00
<p><b>XPS-1</b> <b>Compact High-performance Phono Preamp</b> Precise equalization to the standard RIAA curve (within +/- 0.25 dB). Support for both Moving Magnet (MM) and Moving Coil (MC) cartridges. User selectable termination impedance for Moving Coil cartridges. Gold plated solid brass input connectors, output connectors, and ground terminal.</p>	£ 182.50	£ 219.00



Assembled in the USA  
with Globally Sourced Components



## RETAIL Price List - Valid From April 2019

X Series - Power Amps	Retail Ex VAT	Retail Inc VAT
<p><b>XPA-1 Gen2</b>  <b>Monoblock power amp</b>                      Fully discrete, fully balanced, Differential Reference™ design.                      Power output (0.1% THD): 1,000W RMS @ 4 Ω; 600W RMS @ 8 Ω.                      Switchable Class A and Class A/B operating modes.                      Balanced and unbalanced inputs.                      Trigger input and output.                      Machined, gold plated, unbalanced RCA input.                      Heavy duty, gold plated, clear jacketed audiophile speaker binding posts.                      Dimensions (W x H x D mm): 432 x 197 x 483.</p>	£ 1,207.50	£ 1,449.00
<p><b>XPA GEN3</b>  <b>Fully Modular Amplifier Platform</b>                      A fully modular using independent, fully discrete, dual differential, high current, short signal path Class A/B amplifier modules.                      Wideband, low distortion amplifier design.                      Optimised Soft-Switch Class H™ power supply topology.                      Heavy steel 4RU chassis with milled aluminum faceplate.                      Gold plated five-way speaker binding posts with clear shields.                      Solid machined gold-plated RCA input connectors.                      Choice of balanced or unbalanced inputs.                      Remote trigger input and output.                      Power Per Channel: All Channels Driven; THD &lt;0.1%; into 8 Ω.                      Dimensions (W x H x D mm): 432 x 203 x 483 (including feet); 432 x 178 x 483 (without feet).</p>		
<p><b>Two channel:</b> 300W RMS per channel</p>	£ 999.17	£ 1,199.00
<p><b>Three channel:</b> 275W RMS per channel</p>	£ 1,182.50	£ 1,419.00
<p><b>Four channel:</b> 260W RMS per channel</p>	£ 1,374.17	£ 1,649.00
<p><b>Five channel:</b> 250W RMS per channel</p>	£ 1,582.50	£ 1,899.00
<p><b>Six channel:</b> 225W RMS per channel</p>	£ 1,832.50	£ 2,199.00
<p><b>Seven channel:</b> 200W RMS per channel</p>	£ 1,957.50	£ 2,349.00



Assembled in the USA  
with Globally Sourced Components



Assembled in the USA  
with Globally Sourced Components

### RETAIL Price List - Valid From April 2019

#### X Series - Power Amps

##### XPA-9 Gen 3

##### Nine Channel Power Amplifier

The XPA-9 Gen3 is a nine-channel version of Emotiva's latest generation of modular audiophile power amplifiers. It features five 300W single channel amplifier modules and two 65W two channel amplifier modules for a total of five channels at 300W/channel and four channels at 65W / channel. Ideal for driving 7.1.2 or 5.1.4 systems, or a 7.1 / 7.2 system that includes a pair of smaller speakers in a second zone.

Optimised Soft-Switch Class H™ power supply topology.

Switched Mode Power Supply (SMPS).

Fully modular construction.

Heavy steel 4RU chassis with milled aluminium faceplate.

Gold plated five-way speaker binding posts with clear shields.

Choice of balanced or unbalanced inputs.

Remote trigger input and output.

Designed, Assembled, and Tested in the U.S.A.

Five year warranty.

Dimensions (W x H x D mm unboxed, incl feet): 432 x 203 x 483.

Weight (unboxed): 24 kg.



Assembled in the USA  
with Globally Sourced Components

Retail  
Ex VAT

£ 1,958.00

Retail  
Inc VAT

£ 2,349.00

##### XPA-11 Gen 3

##### Eleven Channel Power Amplifier

The XPA-11 Gen3 is an eleven-channel version of Emotiva's latest generation of modular audiophile power amplifiers. It features three 300W single channel amplifier modules and four 65W two channel amplifier modules for a total of three channels at 300W / channel and eight channels at 65W/channel. Ideal for driving 7.1.4 or 5.1.6 systems or 7.1 / 7.2 channel system that includes two pairs of smaller speakers in other zones.

All other features as **XPA-9 Gen 3** (above).

##### 300W Blade power module

Independent, fully discrete, dual differential, high current, short signal path Class A/B amplifier modules for the XPA Gen3 Amplifiers. Also contains wiring harnesses for all included modules.

£ 1,958.00


£ 2,349.00



Assembled in the USA  
with Globally Sourced Components

£ 249.17

£ £299.00

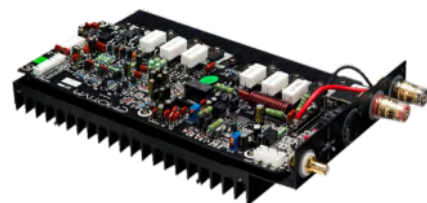

Assembled in the USA  
with Globally Sourced Components

## RETAIL Price List - Valid From April 2019

### XPA Gen3 Differential Reference™ Amps

The XPA-DR amplifier modules use a differential input stage with a cross-linked current source driving a balanced voltage amplification stage and a complementary, fully discrete output stage. A pair of these modules are dedicated to each channel to deliver a wide bandwidth, low distortion performance from high-resolution sources, driving even difficult loudspeakers with absolute authority and control.

Audiophile, fully differential, low distortion amplifier design.

Optimised soft-switch Class H™ power supply topology.

Switched Mode Power Supply (SMPS).

Heavy steel 4RU chassis with milled aluminium faceplate.

Full five-year warranty.

Dimensions (W x H x D mm): 432 x 203 x 483.

Unboxed weight: 16.1 kg.



Retail  
Ex VAT

Retail  
Inc VAT

£ 1,332.50

£ 1,599.00

#### XPA Gen3 DR-1

#### Monoblock Amplifier

650W RMS @ 8 Ω

1000W RMS @ 4 Ω

Less than 0.1% THD



Assembled in the USA  
with Globally Sourced Components

#### XPA Gen3 DR-2

#### 2 Channel Amplifier

550W RMS @ 8 Ω

800W RMS @ 4 Ω

Less than 0.1% THD

£ 1,582.50

£ 1,899.00



Assembled in the USA  
with Globally Sourced Components

#### XPA Gen3 DR-3

#### 3 Channel Amplifier

450W RMS @ 8 Ω

600W RMS @ 4 Ω

Less than 0.1% THD



£ 1,791.67

£ 2,150.00



Assembled in the USA  
with Globally Sourced Components

## RETAIL Price List - Valid From April 2019

Monoblock Power Amp	Retail Ex VAT	Retail Inc VAT
<p><b>Stealth PA1</b></p> <p><b>High performance balanced Class-D 1U monoblock power amplifier.</b></p> <p>140W (RMS) into 8 Ω or 300W (RMS) into 4 Ω                      ICEpower 300ASC amplifier module                      Single XLR input                      Bandwidth: 20 Hz - 20 kHz                      S/N ratio: 91dB (referenced to 1W A-weighted)                      Dimensions (H x W x D mm): 45 x 216 x 229                      Weight: 1.4 Kg                      Designed, assembled, and tested in the USA.</p>	<p>£ 274.17</p>	<p>£ 329.00</p>
		
Phono Preamp	Retail Ex VAT	Retail Inc VAT
<p><b>SP-1 MC/MM</b></p> <p><b>High-performance phono preamplifier and passive relay-controlled analogue input selector.</b></p> <p>High-Quality Phono Preamp: high quality precision phono preamp supports both moving magnet and moving coil cartridges.</p> <p>Flexible High-Performance Audio Switching: provides three line level unbalanced analogue inputs and one precision MC/MM phono input</p> <p>Precision switching relays add virtually no noise or distortion to the line level inputs</p> <p>Front panel input selector buttons with blue halo illumination.</p>	<p>£ 332.50</p>	<p>£ 399.00</p>
		

### RETAIL Price List - Valid From April 2019

BasX - Preamps	Retail Ex VAT	Retail Inc VAT
<p><b>BasX MC-700</b> <b>Surround Sound Processor</b></p> <p>Exceptional video quality - with fast error-free switching for up to six HDMI input sources, three of which support full 4k UHD HDR video - with HDMI 2.0 and HDCP 2.2.</p> <p>Superb sound quality - delivered by advanced 32-bit dual core DSPs and highly optimised analog audio circuitry.</p> <p>Support for all popular surround sound formats - including Dolby Digital, Dolby TrueHD, Dolby Pro Logic IIx, DTS, DTS HD Master Audio, DTS Neo:6, and S/PDIF and multi-channel PCM digital audio.</p> <p>A high-quality headphone amp.</p> <p>Convenient control options - including a full function infrared remote control, front panel menu navigation buttons, and a real front panel Volume knob.</p> <p>Advanced Emo-Q™ automatic multi-channel room correction (a calibrated measurement microphone with internal buffer amplifier is included).</p> <p>Flexible quadruple bass management.</p> <p>Powerful manual equalization controls - Eleven user-programmable fully parametric equalizers per channel.</p> <p>Optional Bluetooth 3.0 module port – includes support for full CD quality audio from mobile devices with apt-X™.</p> <p>Balanced and unbalanced subwoofer outputs.</p> <p>Dimensions (W x H x D mm): 432 x 48 x 330 (without connectors).</p>	£ 665.83	£ 799.00
<p><b>BasX TA-100</b> <b>Audiophile Quality Stereo Integrated Amplifier / Tuner</b></p> <p>50W per channel @ 8 Ω (90W per channel @ 4 Ω).</p> <p>Sensitive FM tuner - features 50 station presets and a Mono mode to help make even weak stations listenable.</p> <p>A full complement of analogue inputs - including two line level inputs, and a high quality phono input that supports both moving coil and moving magnet cartridges.</p> <p>A full complement of digital inputs - including one 24 / 96k USB input, 24 / 192 coax and optical S/PDIF inputs, and an optional Bluetooth receiver.</p> <p>Audiophile quality, fully complementary, all discrete Class A/B amplifier.</p> <p>Precision digital conversion - All digital inputs routed through the legendary Analog Devices AD1955 24 / 192 DAC.</p> <p>VFD display - 3 dimmable levels.</p> <p>Intelligent headphone level control.</p> <p>Full function remote control.</p> <p>Headphone output.</p> <p>Line level main stereo outputs.</p> <p>Subwoofer outputs.</p> <p>Heavy duty five-way binding post speaker outputs.</p> <p>Dimensions (W x H x D mm): 423 x 67 x 317 (without connectors).</p>	£ 457.50	£ 549.00



### RETAIL Price List - Valid From April 2019

#### BasX - Preamps

##### BasX PT-100

##### High Performance Stereo Preamp / Tuner

Sensitive FM tuner - features 50 station presets and a Mono mode to help make even weak stations listenable.

Full complement of analogue inputs - including two line level inputs, and a high quality phono input that supports both moving coil and moving magnet cartridges.

Full complement of digital inputs - including one 24 / 96k USB input, 24 / 192 coax and optical S/PDIF inputs, and an optional Bluetooth receiver.

Precision digital conversion - All digital inputs routed through the legendary Analog Devices AD1955 24/192 DAC.

Bass and Treble controls.

VFD display - dimmable levels.

Intelligent headphone level control.

Full function remote control.

Headphone output.

Subwoofer outputs.

Heavy steel 2RU chassis with milled aluminium face plate.

Dimensions (W x H x D mm): 423 x 67 x 317 (without connectors).

Retail  
Ex VAT

£ 357.50

Retail  
Inc VAT

£ 429.00



#### BasX - Amplifiers

##### BasX A-100

##### Compact Stereo Integrated Amplifier

50W per channel @ 8 Ω (80W per channel @ 4 Ω).

Classic style headphone output.

Direct output option for low-efficiency planar headphones.

Remote trigger input and output.

Front panel volume control.

Heavy duty power supply with massive toroidal transformer.

Compact size.

Loop output - facilitate chaining additional amplifiers or other devices.

Full sized five-way binding posts - easy to attach thick wires, lugs, or banana plugs.

Dimensions (W x H x D mm): 216 x 79 x 381 (including feet, binding posts, and volume knob).

Retail  
Ex VAT

£ 274.17

Retail  
Inc VAT

£ 329.00





### RETAIL Price List - Valid From April 2019

#### BasX - Amplifiers

##### BasX A-150

##### Two Channel Power Amplifier

75W per channel @ 8 ohms (150W per channel @ 4 ohms).

Class A/B output stage.

Wide band with low noise design.

Heavy duty linear power supply.

Heavy steel 2RU chassis with milled aluminum faceplate.

Heavy duty insulated five-way speaker binding posts.

Remote trigger input and output.

Dimensions (W x H x D mm): 432 x 79 x 343 (without connectors).

Retail  
Ex VAT

£ 332.50

Retail  
Inc VAT

£ 399.00



##### BasX A-300

##### Two Channel Power Amplifier

150W per channel @ 8 Ω (300W per channel @ 4 Ω).

Great sounding Class A/B output stage.

Wide band with low noise design.

Heavy duty linear power supply.

Heavy steel 2RU chassis with milled aluminum faceplate.

Heavy duty insulated five-way speaker binding posts.

Remote trigger input and output.

Dimensions (W x H x D mm): 432 x 102 x 394 (without connectors).

£ 440.83

£ 529.00



##### BasX A-500

##### Five Channel Power Amplifier

110W per channel @ 8 Ω (190W per channel @ 4 Ω) two channels driven.

80W RMS per channel; 20 Hz - 20 kHz; THD < 0.1%;

into 8 ohms all channels driven.

Great sounding Class A/B output stage.

Wide band with low noise design.

Heavy duty linear power supply.

Heavy steel 2RU chassis with milled aluminium face.

Heavy duty insulated five-way speaker binding posts.

Remote trigger input and output.

Dimensions (W x H x D mm): 432 x 102 x 394 (without connectors).

£ 540.83

£ 649.00



## RETAIL Price List - Valid From April 2019

### BasX - Amplifiers

#### BasX A-700

##### Seven Channel Power Amplifier

110W per channel @ 8 Ω (210W per channel @ 4 Ω).

two channels driven.

80W per channel @ 8 Ω all channels driven.

Great sounding Class A/B output stage.

Heavy duty linear power supply.

Heavy steel 2RU chassis with milled aluminum faceplate.

Heavy duty insulated five-way speaker binding posts.

Remote trigger input and output.

Dimensions (W x H x D mm): 432 x 102 x 394 (without connectors).

Retail  
Ex VAT

£ 640.83

Retail  
Inc VAT

£ 769.00



#### BasX A-800

##### Eight Channel Multi-Zone Power Amplifier

50W per channel @ 8 Ω (80W per channel @ 4 Ω)

two channels driven.

35W per channel @ 8 Ω (50W per channel @ 4 Ω)

all channels driven.

Great sounding Class A/B output stage.

Heavy duty linear power supply.

Eight fully independent amplifier channels.

Bridgeable outputs - each pair of amplifier channels can be independently configured to act as two separate channels, or bridged into a single higher-powered channel.

Flexible input options - allow each pair of channels on the BasX A-800 to receive its input signal from its own independent input, or from the stereo bus input.

Automatic power switching - lets you configure the BasX A-800 for manual operation, or to be turned on by a trigger input, or when it senses an audio signal on any of its inputs.

Heavy steel 2RU chassis with milled aluminum face plate.

Heavy duty insulated five-way speaker binding posts.

Dimensions (W x H x D mm): 432 x 102 x 406 (including feet)  
432 x 89 x 406 (without feet).

£ 582.50

£ 699.00



### RETAIL Price List - Valid From April 2019

#### BasX - Amplifiers

##### BasX A5175

##### Five Channel Class A/B Power Amplifier

Combine the BasX A-5175 with a surround sound pre/pro as the heart of a great home theatre system, or use it to upgrade the amplifier section of your AVR.

Power Output (two channels driven).

175W RMS per channel; 20 Hz - 20 kHz; THD < 0.1%; into 8Ω.

250W RMS per channel; 20 Hz - 20 kHz; THD < 0.1%; into 4Ω.

Power Output (all channels driven).

125W RMS per channel; 20 Hz - 20 kHz; THD < 0.1%; into 8Ω.

THD+N < 0.07%.

S/N ratio 115 dB at full power.

Class A/B output stage.

Heavy duty linear power supply.

Heavy steel 3RU chassis with milled aluminium faceplate.

Heavy duty insulated five-way speaker binding posts.

Remote trigger input and output.

Three-year warranty.

Dimensions (W x H x D mm unboxed, including feet):

432 x 152 x 419.

Weight (unboxed): 16.5 kg.

Retail  
Ex VAT

£ 833.00

Retail  
Inc VAT

£ 1,000.00



#### BasX - CD Player / Transport

##### BasX CD-100

##### Precision CD Player and Transport

Toslink optical and Coax electrical S/PDIF digital outputs.

Great sounding analogue output.

Advanced power supply technology.

Support for standard CD audio formats.

High-reliability tray loading mechanism.

High visibility blue alphanumeric VFD status display.

Reinforced steel chassis.

Full function remote control.

Dimensions (W x H x D mm): 432 x 89 x 330.

Retail  
Ex VAT

£ 332.50

Retail  
Inc VAT

£ 399.00



### RETAIL Price List - Valid From April 2019

#### BasX Speakers - SPECIAL ORDER

##### BasX SAT (pair)

##### Two-way Speaker

1" low resonance coated silk dome tweeter with neodymium rare-earth magnet structure and ferro-fluid cooling.

4" long throw mid-woofer with mineral filled polypropylene cone and rubber surround.

Cabinet type: Rear ported.

Efficiency: 87 dB (2.83V/1m).

Power handling: 50W (continuous) / 100W (peak).

Nominal impedance: 4 Ω.

Frequency response: 80 Hz - 25 kHz (+/- 3 dB).

Dimensions (H x W x D mm): 267 x 146 x 175 (including grill).

Weight: 2.6 Kg.

(Includes black cloth-covered Magnetic Grille.)

Retail  
Ex VAT

£ 582.50

Retail  
Inc VAT

£ 699.00



##### BasX LCR (each)

##### Two-way Speaker

1" low resonance coated silk dome tweeter with neodymium rare-earth magnet structure and ferro-fluid cooling.

Dual 4" long throw mid-woofers with mineral filled polypropylene cones and rubber surrounds.

Cabinet type: Rear ported (dual ports).

Efficiency: 87 dB (2.83V/1m).

Power handling: 100W (continuous) / 200W (peak).

Nominal impedance: 8 Ω.

Frequency response: 80 Hz - 25 kHz (+/- 3 dB).

Dimensions (H x W x D mm): 146 x 419 x 175 (including grill).

Weight: 4.4 Kg.

(Includes black cloth-covered Magnetic Grille.)

£ 582.50

£ 699.00



##### BasX S8 (each)

##### Subwoofer

8" long throw low-frequency bass driver, with injection moulded mineral filled polypropylene cone.

Enclosure loading: Tuned cabinet with flared rear port.

Heavy, acoustically inert, MDF cabinet with integral rubber feet and tough attractive black vinyl exterior finish.

Amplifier type: High efficiency Class D.

Amplifier power: 150W (RMS).

Frequency response: 28 Hz - 200 Hz (+0/-3 dB).

Inputs: LFE or summed left and right; unbalanced.

Controls: Crossover, Phase, Volume.

Dimensions (H x W x D mm): 422 (463 with feet) x 270 x 321.



Weight: 9.6 Kg.

£ 582.50

£ 699.00



### RETAIL Price List - Valid From April 2019

Electronics - CD Player / Transport	Retail Ex VAT	Retail Inc VAT
<p><b>ERC-3</b>  <b>Balanced CD Player / Transport</b></p> <p>Complete disc solution: plays all Red Book stereo audio CDs, HDCDs, MP3 CDs, and the Red Book layer of hybrid SACDs.</p> <p>Analog Devices AD1955 high-performance DAC with multiple isolated and well-filtered linear power supplies for analogue and digital circuitry.</p> <p>Balanced and unbalanced analogue outputs.</p> <p>Toslink optical, coax, and AES/EBU outputs.</p> <p>High-quality construction throughout.</p> <p>Standard trigger input and output.</p> <p>Dimensions (W x D x H mm): 432 x 356 x 102.</p>	<p>£ 540.83</p>	<p>£ 649.00</p>
		
Electronics - DACs	Retail Ex VAT	Retail Inc VAT
<p><b>Big Ego</b>  <b>USB DAC</b></p> <p>USB Interface (input): Asynchronous, USB Audio Class 1 and 2</p> <p>Outputs: Headphone (analogue; variable); Line (analogue; fixed); Toslink (digital).</p> <p>Format: PCM digital audio.</p> <p>Direct coupled audio path.</p> <p>All Audio File Formats Supported.</p> <p>Digital Filter Options: Symmetrical ; Asymmetrical Low; Asymmetrical High.</p> <p>Headphone Blend Mode: Switchable.</p> <p>Sample Rates Supported:</p> <p>Apple computers: 44.1k, 48k, 88k, 96k, 176k, 192k, 352k, 384k (no drivers required).</p> <p>Windows computers: 44.1k, 48k, 88k, 96k, 176k, 192k, 352k, 384k (with free drivers).</p> <p>Windows computers: 44.1k, 48k, 88k, 96k (driverless).</p> <p>Bit Depths Supported: 16 bits, 24 bits, 32 bits.</p> <p>Frequency Response:</p> <p>8 Hz to 20 kHz (+0 / -0.3 dB); 44.1k and 48k sample rates.</p> <p>8 Hz to 40 kHz (+0 / -1.5 dB); 88.2k and 96k sample rates.</p> <p>8 Hz to 60 kHz (+0 / -3 dB); 176k and 192k sample rates.</p> <p>Signal to Noise Ratio: &gt; 106 dB (A-weighted; headphone output); &gt; 113 dB (A-weighted; line output).</p> <p>Total Harmonic Distortion + Noise: &lt; 0.006% (headphone output); &lt; 0.004% (line output).</p> <p>Dimensions (H x W x D mm): 135 x 51 x 16.</p>	<p>£ 224.17</p>	<p>£ 269.00</p>
		

## RETAIL Price List - Valid From April 2019

Airmotiv Speakers - SPECIAL ORDER	Retail Ex VAT	Retail Inc VAT
<p><b>Airmotiv T2 (pair)</b>  <b>Three-way rear-ported floor standing tower loudspeaker</b>                      High frequency driver: 25 × 32 mm Airmotiv folded ribbon tweeter.                      Midrange driver: 5.25" woven fibre cone.                      Low frequency drivers: 8" woven fibre cones (2).                      Efficiency: 91 dB (2.83V / 1m).                      Power handling: 200W (continuous) / 400W (peak).                      Nominal impedance: 4 Ω.                      Frequency response: 35 Hz - 28 kHz (+/-3 dB).                      Dual speaker terminals for bi-amping or bi-wiring.                      Dimensions (H x W x D mm): 1,068 x 272 x 311.                      Weight: 25.8 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 1,000.00	£ 1,200.00
<p><b>Airmotiv T1 (pair)</b>  <b>Three-way rear-ported floor standing tower loudspeaker</b>                      High frequency driver: 25 × 32 mm Airmotiv folded ribbon tweeter.                      Midrange driver: 5.25" woven fibre cone.                      Low frequency drivers: 6" woven fibre cones (2).                      Efficiency: 88 dB (2.83V/1m).                      Power handling: 150W (continuous) / 300W (peak).                      Nominal impedance: 4 Ω.                      Frequency response: 37 Hz - 28 kHz (+/-3 dB).                      Dual speaker terminals for bi-amping or bi-wiring.                      Dimensions (H x W x D mm): 956 x 213 x 295.                      Weight: 18.2 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 707.50	£ 849.00
<p><b>Airmotiv B1 (pair)</b>  <b>Two-way rear-ported bookshelf or stand mounted monitor loudspeaker</b>                      High frequency driver: 25 × 32 mm Airmotiv folded ribbon tweeter.                      Low frequency driver: 5.25" woven fibre cone with SBR surround.                      Efficiency: 86 dB (2.83V/1m).                      Power handling: 70W (continuous) / 150W (peak).                      Nominal impedance: 8 Ω.                      Frequency response: 48 Hz - 28 kHz (+/-3 dB).                      Dimensions (H x W x D mm): 273 x 181 x 210.                      Weight: 4 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 290.83	£ 349.00



## RETAIL Price List - Valid From April 2019

Airmotiv Speakers - SPECIAL ORDER	Retail Ex VAT	Retail Inc VAT
<p><b>Airmotiv C2 (each)</b>  <b>Three-way rear-ported centre-channel loudspeaker</b>                      High frequency driver: 25 × 32 mm Airmotiv folded ribbon tweeter.                      Midrange drivers: 3" woven fibre cones (2).                      Low frequency drivers: 6.5" woven fibre cones (2).                      Efficiency: 92 dB (2.83V/1m).                      Power handling: 150W (continuous) / 300W (peak).                      Nominal impedance: 4 Ω.                      Frequency response: 45 Hz - 28 kHz (+/-3 dB).                      Dual speaker terminals for bi-amping or bi-wiring.                      Dimensions (H x W x D mm): 219 x 811 x 267.                      Weight: 16.4 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 365.83	£ 439.00
<p><b>Airmotiv C1 (each)</b>  <b>Three-way sealed box centre-channel loudspeaker</b>                      High frequency driver: 25 × 32 mm Airmotiv folded ribbon tweeter.                      Midrange drivers: 3" woven fibre cone.                      Low frequency drivers: 5.25" woven fibre cones (2).                      Efficiency: 89 dB (2.83V/1m).                      Power handling: 120W (continuous) / 250W (peak).                      Nominal impedance: 4 Ω.                      Frequency response: 50 Hz - 28 kHz (+/-3 dB).                      Dual speaker terminals for bi-amping or bi-wiring.                      Dimensions (H x W x D mm): 213 x 521 x 210.                      Weight: 8.4 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 249.17	£ 299.00
<p><b>Airmotiv E2 (pair)</b>  <b>Two-way wall-mounted. Front-ported bipole/dipole surround sound speaker</b>                      Dual high-frequency drivers with switchable phase on each allow the Airmotiv E2 to be used in four different configurations: bipole, inverted bipole, and forward and rearward oriented dipoles                      High frequency driver: 25 × 32 mm Airmotiv folded ribbon tweeters (2).                      Low/mid frequency driver: 5.25" woven fibre cone.                      Efficiency: 87 dB (2.83V/1m).                      Power handling: 70W (continuous) / 150W (peak).                      Nominal impedance: 8 Ω.                      Frequency response: 65 Hz - 28 kHz (+/-3 dB).                      Dual speaker terminals for bi-amping or bi-wiring.                      Dual switches allow each tweeter to be individually inverted or non-inverted.                      Dimensions (H x W x D mm): 259 x 383 x 141.                      Weight: 5.1 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 449.17	£ 539.00



### RETAIL Price List - Valid From April 2019

Airmotiv Speakers - SPECIAL ORDER	Retail Ex VAT	Retail Inc VAT
<p><b>Airmotiv E1 (pair)</b>  <b>Two-way front-ported slim-line wall-mounted surround sound speaker</b>                      High frequency driver: 25 x 32 mm Airmotiv folded ribbon tweeter.                      Low/mid frequency driver: 4" woven fibre cone.                      Efficiency: 85 dB (2.83V/1m).                      Power handling: 60W (continuous) / 120W (peak).                      Nominal impedance: 8 Ω.                      Frequency response: 65 Hz - 28 kHz (+/-3 dB).                      Dimensions (H x W x D mm): 330 x 159 x 102.                      Weight: 3.1 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 274.17	£ 329.00
<p><b>Airmotiv S10 (each)</b>  <b>Subwoofer</b>                      10" heavy-duty downward firing active low frequency driver.                      10" front firing passive radiator.                      Audiophile quality Class A/B amplifier with toroidal transformer.                      Amplifier power: 350W (RMS).                      Inputs: Single XLR balanced input; summed left and right RCA unbalanced inputs.                      Controls: Crossover, Phase, Volume, LF Boost.                      Frequency response: 26 Hz - 200 Hz (+/-3dB).                      Cabinet: heavily braced acoustically inert HDF cabinet with removable sculpted fabric-covered grill and black lacquer front bezel                      Enclosure Loading: Tuned passive radiator.                      Dimensions (H x W x D mm): 410 x 356 x 403.                      Weight: 23.6 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 582.50	£ 699.00
<p><b>Airmotiv S12 (each)</b>  <b>Subwoofer</b>                      Heavily braced acoustically inert HDF cabinet with removable sculpted fabric-covered grill and black lacquer front bezel.                      Enclosure Loading: Tuned passive radiator.                      12" heavy-duty downward firing active low frequency driver.                      12" front firing passive radiator.                      Audiophile quality Class A/B amplifier with high-speed MOSFET tech.                      Amplifier power: 500W (RMS); 750W (peak).                      Inputs: Single XLR balanced input; summed left and right RCA unbalanced inputs.                      Controls: Crossover, Phase, Volume, LF Boost.                      Frequency response: 24 Hz - 200 Hz (+/-3dB).                      Dimensions (H x W x D mm): 441 x 400 x 429.                      Weight: 30 Kg.                      Magnetic Grille: Black cloth over a rigid frame</p>	£ 832.50	£ 999.00

