


# Rosemount Multipoint Thermocouple and RTD Profiling Sensors

## FEATURES

- *Efficiently monitor a temperature profile for a wide range of applications, including hot-spot detection in reactors*
- *Single process insertion for up to 60 independent measurement points*
- *Compact design of independent measurement points*
- *Reduces cost of individual measurement points*
- *Sensing elements can be individually replaced in the field*
- *Enclosure, sensor, and protection tube can be ordered as a complete assembly.*

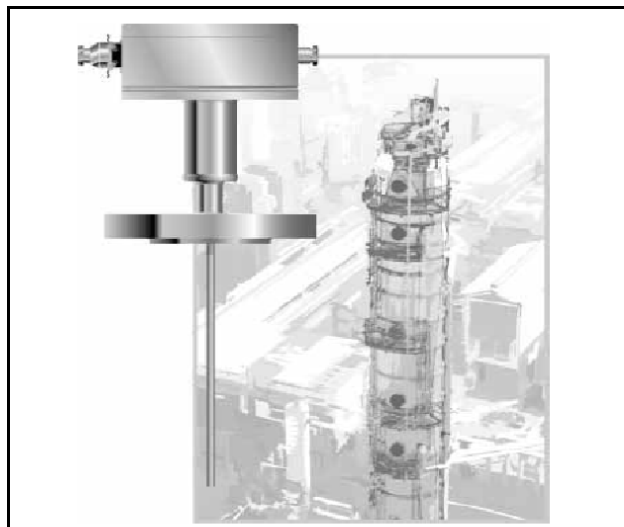

## Content

Rosemount Multipoint Thermocouple and RTD Profiling Sensor . . . . .	page 2
Rosemount 1080C Thermocouple . . . . .	page 5
Multipoint Sensor - Compact Design . . . . .	page 5
Rosemount 1080C Configuration Data Sheet (CDS) . . . . .	page 9
Rosemount 1080F Thermocouple Multipoint Sensor – Contacting Fixture Design .	page 11
Rosemount 1080F Configuration Data Sheet (CDS) . . . . .	page 16
Rosemount 1082R RTD Multipoint Sensor– Contacting Fixture Design . . . . .	page 18
Rosemount 1082R Configuration Data Sheet (CDS) . . . . .	page 22
Design Overview . . . . .	page 24

## Rosemount Multipoint Thermocouple and RTD Profiling Sensor

### Optimize plant efficiency and increase measurement reliability with industry proven design

- You can measure reactor profiles with only one temperature probe instead of multiple probes
- Optimized sensor design with more than six basic designs and many variations
- Up to 60 measuring points within one probe
- Designs for single measuring point replacement



### Easy implementation and installation in existing application

- Available in a wide variety of process connections, Junction boxes and designs
- Specific designs allow installation without the use of a crane or protection tube

### Achieve optimal efficiency with advanced High Density Transmitter technology

- Decrease the installation and engineering costs further by using 848T High density transmitters

### Explore the benefits of a Complete Point Solution from Rosemount Temperature Measurement

- If requested, Emerson can provide a complete point temperature solution, delivering an installation ready transmitter and sensor assembly
- Emerson has a complete portfolio of Single Point and High Density Temperature Measurement solutions, allowing you to effectively measure and control your processes with the reliability you trust from Rosemount products



### Experience global consistency and local support from numerous worldwide Rosemount Temperature sites



- Experienced Instrumentation Consultants help select the right product for any temperature application and advise on best installation practices.
- An extensive global network of Emerson service and support personnel can be on-site when and where they are needed.

## INTRODUCTION


Multipoint Temperature Profiling Sensors measure the temperature at different points along its length. These sensors are frequently used in chemical and petrochemical industries because they provide an excellent temperature profile for chemical reactors, catalytic crackers and fractionation towers. For these applications, Multipoint Temperature Profiling Sensors are the most efficient cost, maintenance and data acquisition solution. Multipoint Temperature Profiling Sensors allow, with a single pipe penetration, the reading of up to 60 points that can be evaluated to provide a complete temperature profile of the column, tank or reactor.

## TYPICAL APPLICATIONS

### Reactors

Multipoint Temperature Profiling Sensors improve monitoring and control of the reaction process within chemical reactors. A prime example of how Multipoint Temperature Profiling Sensors are used is in the production of organic acid. Many organic acids are produced through an exothermic oxidation process. This chemical reaction takes place in multiple tubes filled with catalysts. The reaction components flow into the tubes, form reactions due to the catalyst, then flow out as an acid. These tubes are cooled by running a coolant around the tubes. A critical process parameter is the control of the operating temperature. A Multipoint Temperature Profiling Sensor can measure the temperature profile inside a reaction tube. Through monitoring the temperature profile, the flow of reaction components and coolant can be controlled to maximize the process output and reaction efficiency. A high local resolution of the temperature profile is required to ensure that the hot-spot (maximum measured temperature) does not reach the maximum allowable process temperature.

Figure 1. Reactor

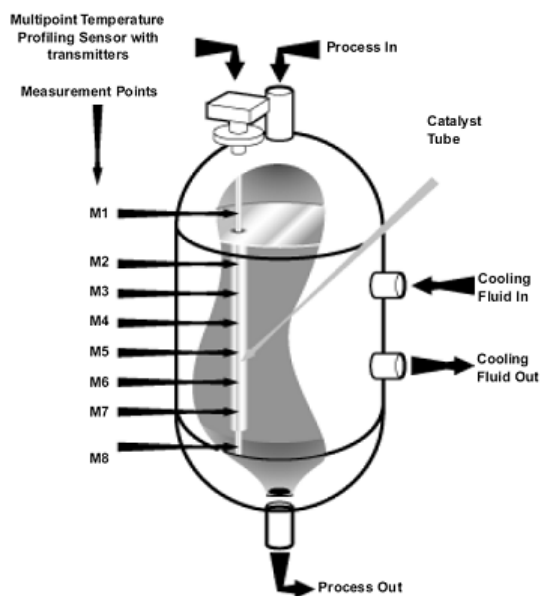


# Rosemount AIS Sensors

## Distillation Columns/Fractionators

In crude oil distillation processes, crude oil is heated and run into a distillation column or fractionators, where a significant temperature gradient is observed - high temperatures at the bottom, cooler at the top. Inside the column, crude oil is separated into components or fractions according to weight and boiling point. As these component vapors travel up, they condense to liquid form. These condensed components are captured by strategically mounted trays or "decks," located at a height where the column temperature matches a specific component's condensation point. The tray locations, or cut-points, are where products are then drawn from the column. Multipoint Temperature Profiling Sensors can be used to monitor the temperature at these cut-points and therefore control the temperature profile of the distillation column.

Figure 2. Distillation Column/Fractionator

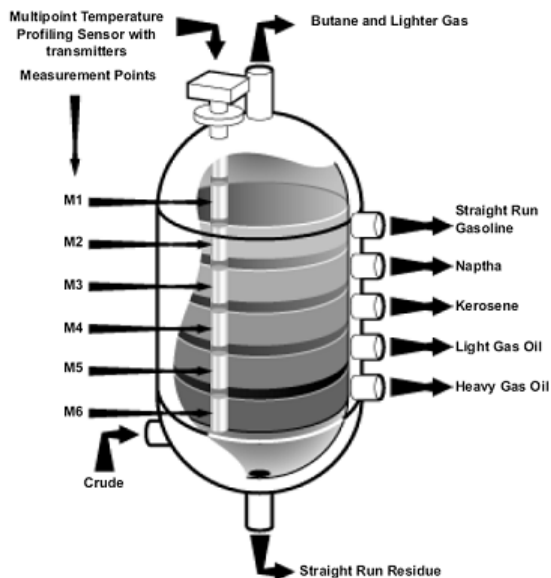

## Rosemount 1080C Thermocouple Multipoint Sensor - Compact Design

The Rosemount 1080C is a compact Multipoint Sensor. The sensing elements are single ungrounded thermocouples. The high number of measurement points allow the monitoring of temperature profiles with a very good local resolution. The Rosemount 1080C is often used

for


- hot-spot detection
- temperature profile monitoring

in

- tall reactors
- distillation columns

The Rosemount 1080C is delivered without a thermowell because the thermowell typically already exists at the installation site. If a thermowell is required, please contact Emerson Process Management. The Rosemount 1080C is delivered either with an insert tube or in the bundled version (see Figure 4 on page 6). The function of the insert tube is to fix the sensing elements and give mechanical stability to the sensor. The Rosemount 1080C, with an insert tube, can be shipped up to a length of 10 m (33 ft) and cannot be coiled for shipping. The Rosemount 1080C in the bundled version can be delivered up to a length of 30 m (99 ft) and is shipped as a coil (see Figure 3).

Figure 3. Bundled Multipoint Sensor Coiled for Shipping

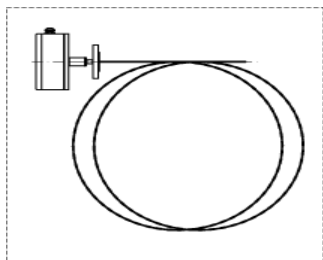

### SPECIFICATIONS

#### Functional

##### Number of Measurement Points

2 to 60

##### Temperature Limits

-40 to 750 °C (-40 to 1382 °F)

### Physical

#### Physical Dimensions

Table 1. Available Insert Tube Outer Diameters

Diameter		Maximum Measurement Points
mm	inch	
3.5	0.14	25
4.5	0.18	30
5.0	0.20	40
6.0	0.24	60
8.0	0.32	60

Table 2. Length Limits

With Insert Tube		Bundled Version	
m	ft	m	ft
10	33	30	99

### Performance

#### Ambient Temperature Limits

For enclosures and transmitters is -40 to 80 °C (-40 to 176 °F)

#### Insulation Resistance

Greater than 1000 MOhm at room temperature. See Table 3 for applied voltage.

Table 3. Applied Voltage for Insulation Resistance Measurement, based upon minearally insulated cable outside diameter

Outer Diameter		Test Voltage
mm	inch	
0.34	0.013	75 VDC
0.50	0.020	100 VDC
1.00	0.039	250 VDC

### Accuracy

Table 4. Limits of Error Interchangeability for Class I Thermocouples

Type	
E	1.5 °C or 0.004  t  <sup>(1)</sup> , -40 to 750 °C
J	1.5 °C or 0.004  t  <sup>(1)</sup> , -40 to 750 °C
K	1.5 °C or 0.004  t  <sup>(1)</sup> , -40 to 750 °C
N	1.5 °C or 0.004  t  <sup>(1)</sup> , -40 to 750 °C

(1) Whichever is greater. "t" is in degrees Celsius.

# Rosemount AIS Sensors

## Product Data Sheet

00813-0100-4119, Rev BA

May 2012


### Enclosures

The enclosures are described in "Enclosures with mounting hardware" on page 27.

### Individual Sensor Identification Data

By default, sensor 1 is closest to the flange. Remaining points are numbered incrementally. Use the C1 option and the CDS if a different numbering system is desired.

Figure 4. Multipoint Sensor Rosemount 1080C Compact

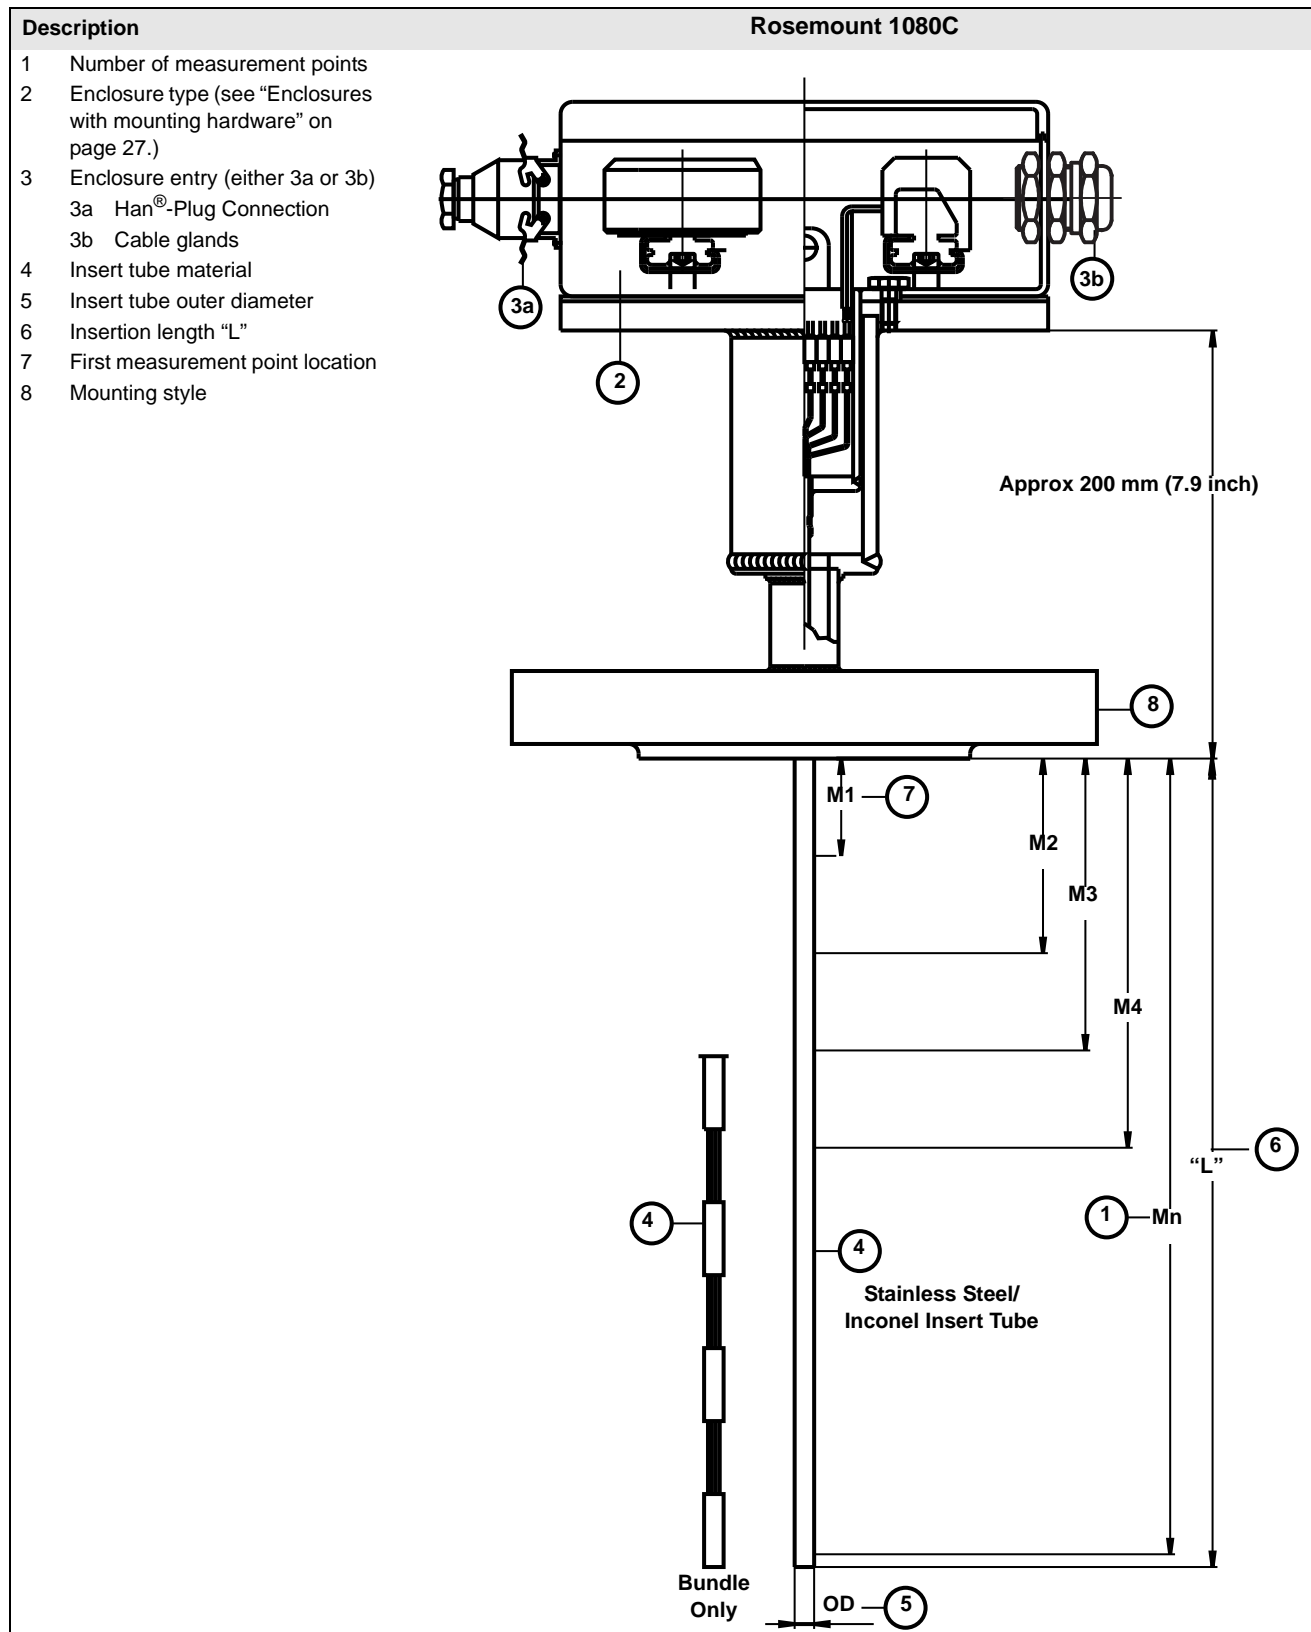

**ORDERING INFORMATION– ROSEMOUNT 1080C**

Model	Product Description			
1080C	Series 1080C Thermocouple Multipoint Profiling Sensor - Compact Design - Tolerance Class 1			
Code	Thermocouple Type		Operating Temperature Range	
			°C	°F
E1	E		-40 to 750	-40 to 1382
J1	J		-40 to 750	-40 to 1382
K1	K		-40 to 750	-40 to 1382
N1	N		-40 to 750	-40 to 1382
Code	Number of Measurement Points			
08	8			
16	16			
24	24			
32	32			
40	40			
48	48			
XX	Other Quantities (minimum. 02; maximum. 60)			
Code	Transmitter Mounting Hardware		Maximum Measuring Points	
A <sup>(1)</sup>	Mounting hardware for 848T		48	
B <sup>(1)</sup>	Mounting hardware for 644H		24	
C <sup>(1)</sup>	Mounting hardware for 248H		24	
D <sup>(1)</sup>	Mounting hardware for 148H		24	
N <sup>(1)</sup>	No transmitter hardware. Terminal strips only.		60	
Code	Enclosure Type	Material	IP Rating	NEMA Rating
A <sup>(1)</sup>	EEx d CENELEC Flameproof Approval (consult factory for availability)	Aluminum	65	NEMA 4
B <sup>(1)</sup>	EEx e CENELEC Increased Safety Approval (consult factory for availability)	Aluminum	65	NEMA 4
C <sup>(1)</sup>	EEx i Intrinsically Safety acc. EN 50014 and EN 50020 with manufacturer declaration for Ex i use in Zone 1	Aluminum	65	NEMA 4
D <sup>(1)</sup>	Standard Aluminum	Aluminum	65	NEMA 4
E <sup>(1)</sup>	Standard Polyester	Polyester	65	NEMA 4
S <sup>(1)</sup>	Special Enclosure Type - Configuration Data Sheet Required			
Code	Enclosure Entry			
1	Single Multi-core Cable Gland			
2	Multiple Cable Glands M20x1,5, one per measurement point			
3	Han <sup>®</sup> -Plug Connection IP65			
4	Customer Specified - Configuration Data Sheet Required			
Code	Insert Tube Material		Maximum Temperature	
			°C	°F
D	Stainless Steel - DIN 1.4404 (ANSI 316L)		450	842
P	Inconel <sup>®</sup>		750	1382
B	Bundle Only - DIN 1.4404 (ANSI 316L) - No Insertion Tube		450	842
C	Bundle Only - Inconel - No Insertion Tube		750	1382
S	Special Tube Material - Customer Specified - Configuration Data Sheet required			
Code	Insert Tube Outer Diameter		Maximum Measuring Points	
00	No Insert Tube (used with Insert Tube Material codes B and C)			
35	3.5 mm (0.14 inch)		25	
45	4.5 mm (0.18 inch)		30	
50	5.0 mm (0.20 inch)		40	
60	6.0 mm (0.24 inch)		60	
80	8.0 mm (0.32 inch)		60	
Code	Insertion Length “L”			
01000	1000 mm (39 inch)		Note: Length code is in mm. To convert to mm multiply the length in inches by 25.4.	
02000	2000 mm (79 inch)			
03000	3000 mm (118 inch)			
05000	5000 mm (197 inch)			
07000	7000 mm (276 inch)			
10000	10000 mm (394 inch)			
XXXXX	Other lengths (maximum 10000mm (394 inch) with Insert Tube) (maximum 30000 mm (1181 inch) bundle only)			

Note:  
Length code is in mm. To convert to mm  
multiply the length in inches by 25.4.

# Rosemount AIS Sensors

## Product Data Sheet

00813-0100-4119, Rev BA

May 2012

Code	Measurement Point Distribution	
A	Equally Distributed Points	
C	Customer Specified—Configuration Data Sheet required	
Code	First Measurement Point Location—Distance from base of mounting flange	
00500	500 mm (20 inch)	
01000	1000 mm (39 inch)	
02000	2000 mm (79 inch)	
03000	3000 mm (118 inch)	
04000	4000 mm (158 inch)	
XXXXX	Other Lengths	
Code	Mounting Style—Flange Material=DIN 1.4571 (ANSI 316Ti)	Process Connection
F06	Flanged, ANSI	1 inch 150# RF
F12	Flanged, ANSI	1.5 inch 150# RF
F18	Flanged, ANSI	2 inch 150# RF
F24	Flanged, ANSI	1 inch 300# RF
F30	Flanged, ANSI	1.5 inch 300# RF
F36	Flanged, ANSI	2 inch 300# RF
F42	Flanged, ANSI	1 inch 600# RF
F48	Flanged, ANSI	1.5 inch 600# RF
F54	Flanged, ANSI	2 inch 600# RF
F66	Flanged, ANSI	1.5 inch 900# RF
F72	Flanged, ANSI	2 inch 900# RF
D06	Flanged, DIN	DN 25 PN 16
D12	Flanged, DIN	DN 25 PN 40
D18	Flanged, DIN	DN 40 PN 16
D24	Flanged, DIN	DN 40 PN 40
D28	Flanged, DIN	DN 50 PN 40
CDS	Customer Specified—Configuration Data Sheet Required	
Code	Additional Options	
	Special Tagging and Configuration Options	
C1 <sup>(2)</sup>	Customer specified tagging and transmitter configuration—Configuration Data Sheet Required	
	Thermowell Options	
R16	Ring Joint Flange (ASME B16.5 ANSI flanged thermowells only)	
Typical Model Number: 1080C J1 08 D 1 D 35 01000 A 00500 F36		

(1) Transmitter must be ordered separately.

(2) Shipped with default numbered tagging of all measurement points. The first measurement point (closest to the enclosure) is tag "1." If other configuration is required, order option code C1.



## Rosemount 1080C Configuration Data Sheet (CDS)

### Page One

Copy this form, complete it as required, and fax it to the appropriate fax number listed on the next page

Customer Name: \_\_\_\_\_

Address: \_\_\_\_\_

Contact Person: \_\_\_\_\_

Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

Date: \_\_\_\_\_ Number of Pages: \_\_\_\_\_

Rosemount order / Quote number: \_\_\_\_\_

Model Number \_\_\_\_\_

#### Enclosure Type:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: \_\_\_\_\_

#### Enclosure Entry:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: \_\_\_\_\_

#### Insert Tube Material:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: ☐ DIN 1.4401 [ANSI 316]

☐ DIN 2.4816 [ASTM A494 (Inconel)]

☐ Other: \_\_\_\_\_

#### Mounting Style:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: ☐ Flange Rating: \_\_\_\_\_

☐ Flange Material:

☐ DIN 1.4401 [ANSI 316]

☐ DIN 2.4816 [ASTM A494 (Inconel)]

☐ Other: \_\_\_\_\_

# Rosemount AIS Sensors

## Product Data Sheet

00813-0100-4119, Rev BA

May 2012

### Page Two


#### Measurement Point Distribution:

- ☐ Selected as Standard Option in Model Structure
- ☐ Special Requirement (fill in table below)

#### Tagging:

- ☐ Default
- ☐ Special Requirement (fill in table below)— use with option code C1.

Point	Distance from Mounting Point	Point Tag	Transmitter Tag	Transmitter Range
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
30				
31				
32				
33				

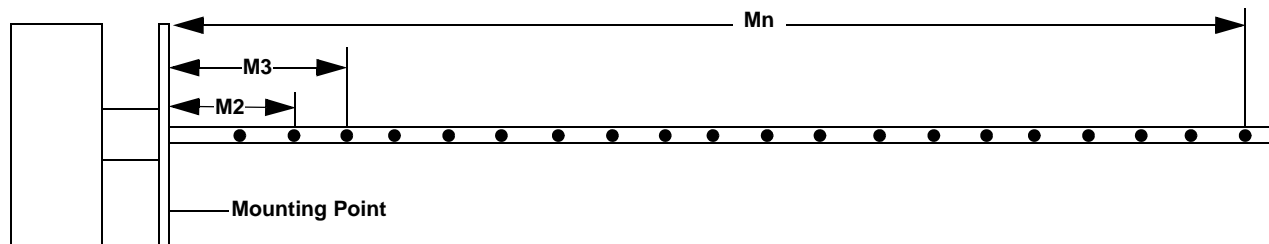

Rosemount Temperature GmbH  
 Frankenstrasse 21  
 63791 Karlstein  
 Germany  
 Fax: (49) 6188 992 286  
 Phone: (49) 6188 992 0

Emerson Process Management  
 8200 Market Boulevard  
 Chanhassen, MN 55317  
 USA  
 Fax: (1) 952 906 8889  
 Phone: (1) 800 999 9307

Fisher-Rosemount  
 Singapore Pte Ltd.  
 1 Pandan Crescent  
 Singapore  
 Fax: (65) 777 0947  
 Phone: (65) 777 8211

## **Rosemount 1080F Thermocouple Multipoint Sensor – Contacting Fixture Design**

The Rosemount 1080F Multipoint Sensor is versatile, robust, and designed for exceptional reliability with a long life expectancy. The individual measurement elements are ungrounded single thermocouples and the number of measurement points is limited to 20. These sensors are to be used for measurement of temperature profiles where a high local resolution is not required. The Rosemount 1080F can be ordered with or without a thermowell and is available in three different sensor configurations: Individual Guide Tube design, Radial Spring design, and Laminated Spring design.

### **Individual Guide Tube Design**

The individual guide tube design offers the advantage of replaceable individual elements (see Figure 5). Mineral insulated thermocouple elements are inserted into each guide tube and guided to the specified measurement point. When ordered with spring loaded fittings, good thermal contact (fast response time) is achieved, but the inside of the thermowell is not sealed from the atmosphere. When ordered with compression fittings, the thermowell is sealed from the atmosphere but the thermal contact isn't as good. The guide tube design, with or without a thermowell, cannot be coiled— which should be considered when shipping.

### **Radial Spring Design**

This design provides good thermal contact between the thermocouple and thermowell. In this design, a radial spring presses the thermocouple against the inner wall of the thermowell. The flattened MI cable has full thermal contact with the thermowell. This design ensures the best possible response time. If ordered without a thermowell, it will be shipped as a coil. The individual thermocouples cannot be replaced.

### **Laminated Spring Design**

This design provides good thermal contact between the thermocouple and the thermowell, facilitating a fast-time response. The laminated spring presses the thermocouple against the inner wall of the thermowell (see Figure 5) and is appropriate if the mounting flange is angled to the thermowell. The advantage of this design is the flexibility of the insert, which is similar to the flexibility of an oil dipstick. This design allows the sensor to follow the contour of the thermowell. If the laminated spring multipoint sensor is ordered without thermowell, it will be shipped as a coil. The individual thermocouples cannot be replaced.

### **Thermowell**

Every Rosemount 1080F requires a thermowell for operation. When the Rosemount 1080F is ordered without thermowell, check the inner diameter of the existing thermowell (see Table 5). The inner wall of the thermowell must be smooth, especially at the welding joints, to insure that the multipoint sensor will not be damaged during insertion.

## SPECIFICATIONS

### Functional

#### Number of Measuring Points

2 to 20

#### Temperature Limits

- Type E and J: -40 to 750 °C (-40 to 1382 °F)
- Type K and N: -40 to 800 °C (-40 to 1472 °F)

### Physical

#### Length Limits

10 m (33 ft) with thermowell— all designs

30 m (99 ft) without thermowell— Radial and Laminated designs only

#### Physical Dimensions

Table 5. Thermowell Diameter for Guide Tube and Laminated Spring Design

Number of Measurement Points	O.D.		I.D.	
	mm	inch	mm	inch
2-inch schedule 80				
2 to 5	60.33	2.34	49.25	1.94
2 1/2-inch schedule 80				
6 to 8	73	2.9	59	2.3
3-inch schedule 80				
9 to 20	88.9	3.5	73.7	2.9

Table 6. Thermowell Diameter for Radial Spring Design

Number of Measurement Points	O.D.		I.D.	
	mm	inch	mm	inch
2 to 8	73.0	2.9	59.0	2.3
9 to 20	88.9	3.5	73.7	2.9

## Performance

### Ambient Temperature Limits

For the enclosures and transmitters is -40 to 80 °C (-40 to 176 °F)

### Insulation Resistance

Greater than 1000 MOhm at room temperature, test voltage is 500 VDC.

### Accuracy

Table 7. Limits of Error Interchangeability for Class I Thermocouples

Type	
E	1.5 °C or 0.004  t  <sup>(1)</sup> , -40 to 750 °C
J	1.5 °C or 0.004  t , -40 to 750 °C
K	1.5 °C or 0.004  t , -40 to 800 °C
N	1.5 °C or 0.004  t , -40 to 800 °C

(1) Whichever is greater. .t. is in degrees Celsius.


### Enclosures

The enclosures are described in "Design Overview" on page 24 and 25.

### Individual Sensor Identification Data

By default, sensor 1 is closest to the flange. Remaining points are numbered incrementally. Use the C1 option and the CDS if a different numbering system is desired.

Figure 5. Multipoint Sensor Rosemount 1080F Thermocouple Multipoint Sensor. Contacting Fixture Design

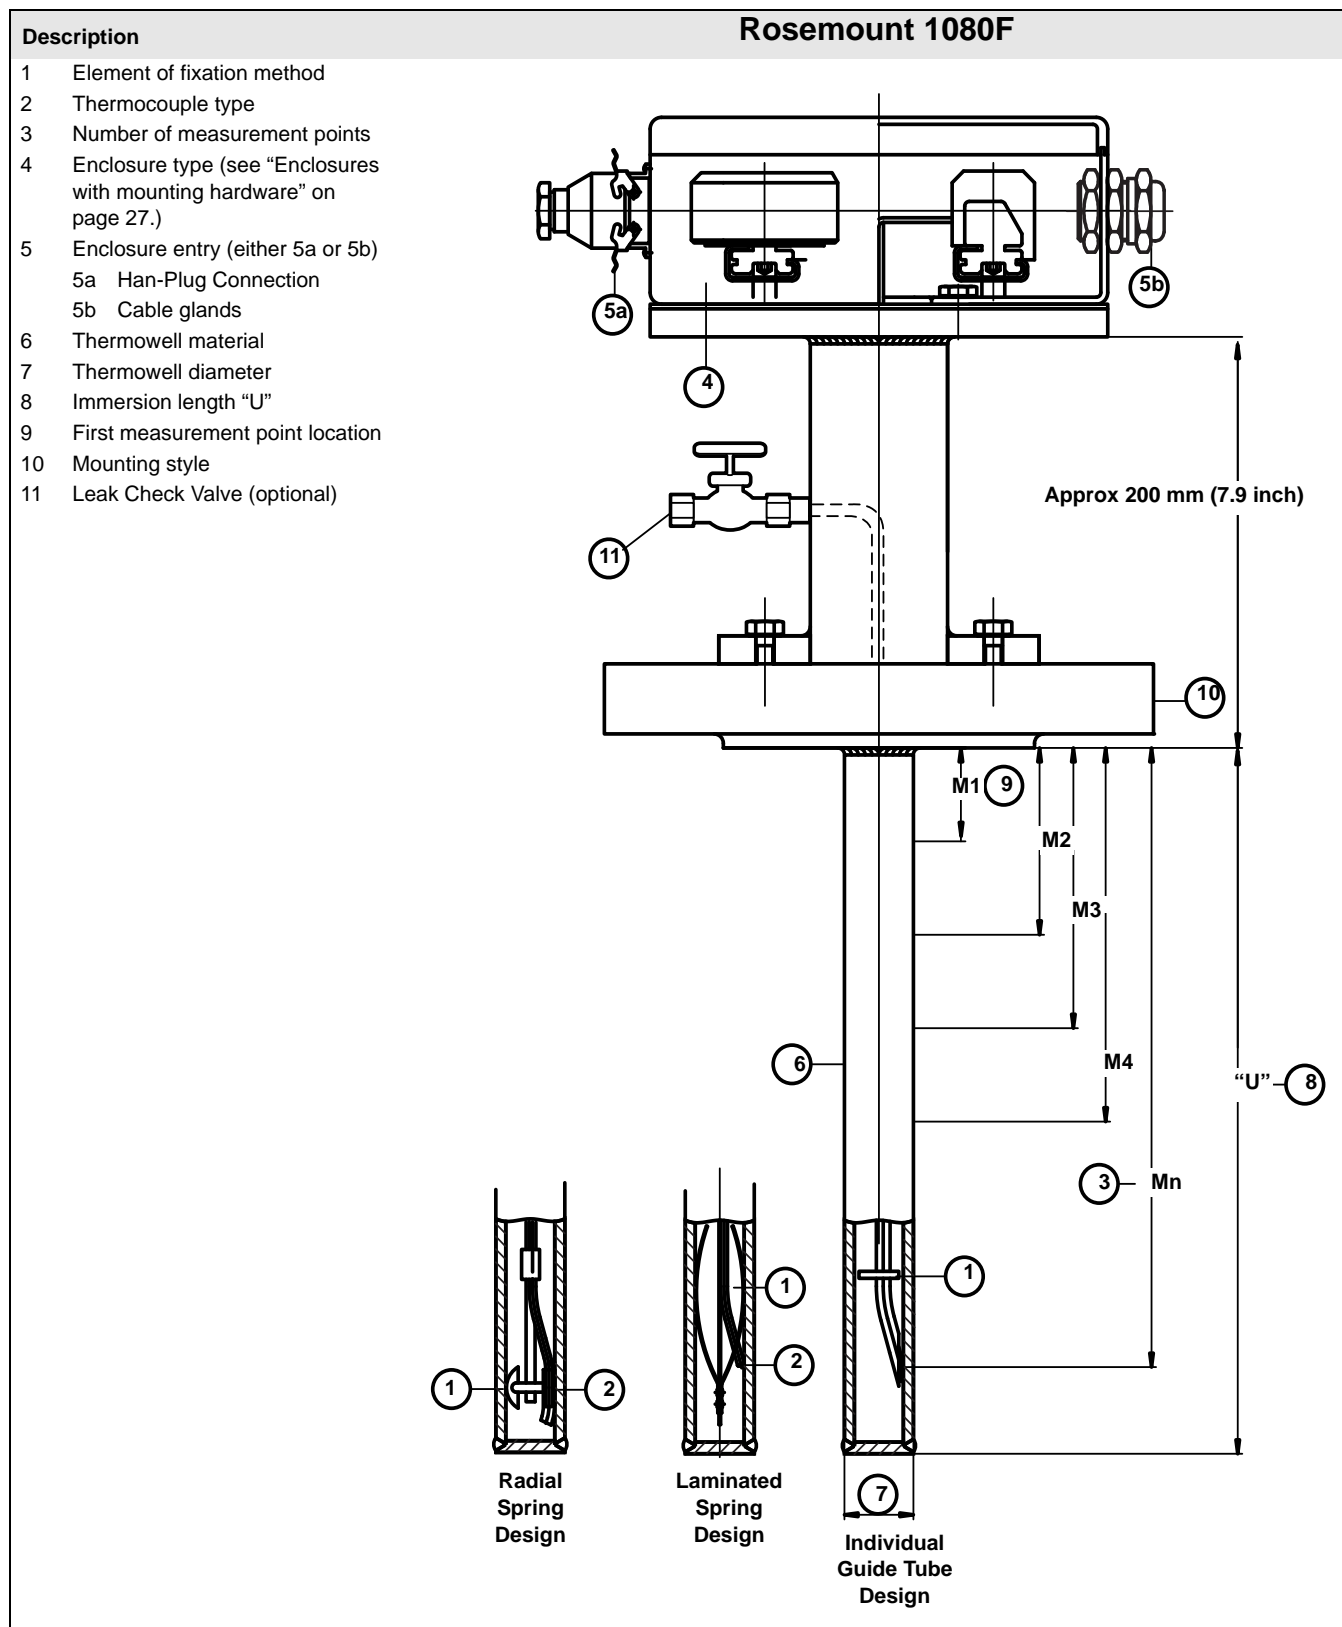

# Rosemount AIS Sensors

## Product Data Sheet

00813-0100-4119, Rev BA

May 2012

### ORDERING INFORMATION

Model	Product Description			
1080F	Series 1080F Thermocouple Multipoint Profiling Sensor– Contacting Fixture Design, Tolerance Class 1			
Code	Element Fixation Method			
1	Individual Guide Tubes, Compression Fittings, Replaceable Elements			
2	Individual Guide Tubes, Spring Loaded Fittings, Replaceable Elements			
3	Laminated Spring Design, Compression Fittings, Fixed Elements			
4	Radial Spring Design, Fixed Elements			
Code	Thermocouple Type		Operating Temperature Range	
			°C	°F
E1	E		-40 to 750	-40 to 1382
J1	J		-40 to 750	-40 to 1382
K1	K		-40 to 800	-40 to 1472
N1	N		-40 to 800	-40 to 1472
Code	Number of Measurement Points			
03	3			
08	8			
12	12			
16	16			
20	20			
XX	Other Quantities (minimum. 02; maximum. 20)			
Code	Transmitter Mounting Hardware		Maximum Measuring Points	
A <sup>(†)</sup>	Mounting hardware for 848T		20	
B <sup>(†)</sup>	Mounting hardware for 644H		20	
C <sup>(†)</sup>	Mounting hardware for 248H		20	
D <sup>(†)</sup>	Mounting hardware for 148H		20	
N <sup>(†)</sup>	No transmitter hardware. Terminal strips only.		20	
Code	Enclosure Type	Material	IP Rating	NEMA Rating
A <sup>(†)</sup>	EEx d CENELEC Flameproof Approved (consult factory for availability)	Aluminum	65	NEMA 4
B <sup>(†)</sup>	EEx e CENELEC Increased Safety Approval (consult factory for availability)	Aluminum	65	NEMA 4
C <sup>(†)</sup>	EEx i Intrinsically Safety acc. EN 50014 and EN 50020 with manufacturer declaration for Ex i use in Zone 1	Aluminum	65	NEMA 4
D <sup>(†)</sup>	Standard Aluminum	Aluminum	65	NEMA 4
E <sup>(†)</sup>	Standard Polyester	Polyester	65	NEMA 4
S <sup>(†)</sup>	Special Enclosure Type - Configuration Data Sheet Required			
Code	Enclosure Entry			
1	Single Multi-core Cable Gland			
2	Multiple Cable Glands M20x1,5, one per measurement point			
3	Han <sup>®</sup> -Plug Connection IP65			
4	Customer Specified - Configuration Data Sheet Required			
Code	Thermowell Material		Maximum Temperature	
			°C	°F
D	Stainless Steel - DIN 1.4404 (ANSI 316L)		450	842
P	Heat Resistant Steel–DIN 1.7380 (ANSI 182-F22)		800	1472
S	Special Tube Material - Customer Specified - Configuration Data Sheet Required		Consult factory	
N	No thermowell			
Code	Thermowell Diameter			
A	Standard–see Table 6			
C	Customer specified–Configuration Data Sheet Required			
Code	Immersion Length “U”			
01000	1000 mm (39 inch)		Note: Length code is in mm. To convert to mm multiply the length in inches by 25.4.	
02000	2000 mm (79 inch)			
03000	3000 mm (118 inch)			
05000	5000 mm (197 inch)			
07000	7000 mm (276 inch)			
10000	10000 mm (394 inch)			
XXXXX	Other Length maximum 10000mm (394 inch with thermowell) (maximum 30000 mm (1181 inch) without thermowell– Laminated and Radial Spring designs only)			

## Product Data Sheet

00813-0100-4119, Rev BA

May 2012

## Rosemount AIS Sensors

Code	Measurement Point Distribution	
A	Equally Distributed Points (last point placed approx 50 mm from the bottom of the thermowell)	
C	Customer Specified—Configuration Data Sheet Required	
Code	First Measurement Point Location—Distance from base of mounting flange	
00500	500 mm (20 in)	
01000	1000 mm (39 in)	
02000	2000 mm (79 in)	
Code	First Measurement Point Location—Distance from base of mounting flange	
03000	3000 mm (118 in)	
04000	4000 mm (158 in)	
XXXXX	Other Lengths	
Code	Mounting Style—Flange Material= DIN 1.4404 (ANSI 316L)	Process Connection
F36	Flanged, ANSI	2 inch 300# RF
F74	Flanged, ANSI	2½ inch 300# RF
F76	Flanged, ANSI	3 inch 300# RF
F54	Flanged, ANSI	2 inch 600# RF
F78	Flanged, ANSI	2½ inch 600# RF
F80	Flanged, ANSI	3 inch 600# RF
F72	Flanged, ANSI	2 inch 900# RF
F82	Flanged, ANSI	2½ inch 900# RF
F84	Flanged, ANSI	3 inch 900# RF
D26	Flanged, DIN	DN 50 PN 25/40
CDS	Customer Specified—Configuration Data Sheet required	
Code	Additional Options	
	Special Tagging and Configuration Options	
C1 <sup>(2)</sup>	Customer Specified Tagging and Transmitter Configuration—Configuration Data Sheet required	
	Thermowell Options	
Q8	Thermowell Material Certification, DIN EN 10204 3.1.B	
R01	Thermowell Pressure Testing	
R03	Thermowell Dye Penetration Testing	
R07	Full Penetration Weld	
R16	Ring Joint Flange (ASME B16.5 ANSI flanged thermowells only)	
	Process Connection Options	
P01	Leak Check Valve	
Typical Model Number: 1080F 2 J1 08 A D 1 D A 01000 A 00500 F36 R01 P01		

(1) Transmitter must be ordered separately.

(2) Shipped with default numbered tagging of all measurement points. The first measurement point (closest to the enclosure) is tag "1." If other configuration is required, order option code C1.

# Rosemount 1080F Configuration Data Sheet (CDS)

## Page One

Copy this form, complete it as required, and fax it to the appropriate fax number listed on the next page

Customer Name: \_\_\_\_\_

Address: \_\_\_\_\_

Contact Person: \_\_\_\_\_

Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

Date: \_\_\_\_\_ Number of Pages: \_\_\_\_\_

Rosemount order / Quote number: \_\_\_\_\_

Model Number \_\_\_\_\_

### Enclosure Type:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: \_\_\_\_\_

### Enclosure Entry:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: \_\_\_\_\_

### Thermowell Material:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: ☐ DIN 1.4401 [ANSI 316]

☐ DIN 2.4816 [ASTM A494 (Inconel)]

☐ Other: \_\_\_\_\_

### Thermowell Diameter:


☐ Selected as Standard Option in Model Structure

☐ Special Requirement: ☐ Dimensions in millimeters

☐ Dimensions in inches

Outer Diameter: \_\_\_\_\_

Inner Diameter: \_\_\_\_\_



### Mounting Style:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: ☐ Flange Rating: \_\_\_\_\_

☐ Flange Material:

☐ DIN 1.4401 [ANSI 316]

☐ DIN 2.4816 [ASTM A494 (Inconel)]

☐ Other: \_\_\_\_\_



## Product Data Sheet

00813-0100-4119, Rev BA

May 2012

# Rosemount AIS Sensors

### Page Two


#### Measurement Point Distribution:

- ☐ Selected as Standard Option in Model Structure
- ☐ Special Requirement (fill in table below)

#### Tagging:

- ☐ Default
- ☐ Special Requirement (fill in table below)– use with option code C1.

Point	Distance from Mounting Point	Point Tag	Transmitter Tag	Transmitter Range
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

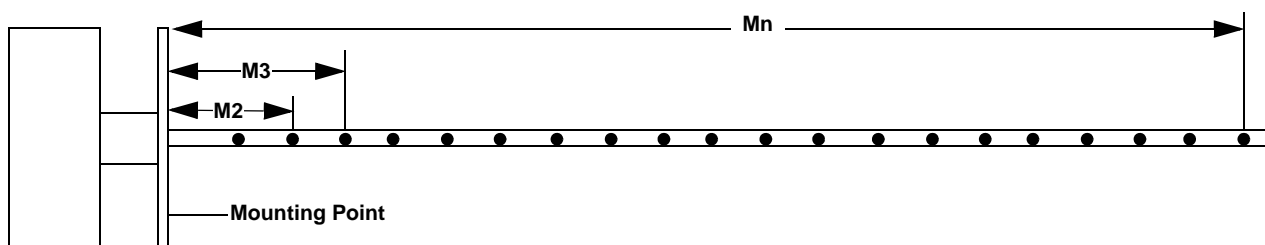

Rosemount Temperature GmbH  
Frankenstrasse 21  
63791 Karlstein  
Germany  
Fax: (49) 6188 992 286  
Phone: (49) 6188 992 0

Emerson Process Management  
8200 Market Boulevard  
Chanhassen, MN 55317  
USA  
Fax: (1) 952 906 8889  
Phone: (1) 800 999 9307

Fisher-Rosemount  
Singapore Pte Ltd.  
1 Pandan Crescent  
Singapore  
Fax: (65) 777 0947  
Phone: (65) 777 8211

## Rosemount 1082R RTD Multipoint Sensor— Contacting Fixture Design

The Rosemount 1082R Multipoint Sensor is a robust sensor with a long life expectancy. The individual measurement elements are resistance elements. The standard is a 4-wire RTD. The number of measurement points is restricted to 12. The Rosemount 1082R is used when a high local resolution is not required. These multipoint sensors can be ordered with or without thermowells.

The Rosemount 1082R is the best solution when data acquisition equipment requires an RTD output signal. However, a thermocouple multipoint sensor (such as the Rosemount 1080F) may be the optimal solution if transmitters are used (higher temperature range, more measurement points, same output). The Rosemount 1082R offers two different element fixation methods: the Radial Spring design and the Spacer Design.

### Radial Spring Design:

This design provides very good thermal contact between the RTD and the thermowell. A radial spring presses the RTD element against the inner wall of the thermowell ensuring the best possible response time (see Figure 6). If ordered without a thermowell, it will be shipped as a coil. The individual RTD elements cannot be replaced.

### Spacer Design:

This design (see Figure 6) uses spacer disks to guide the resistance elements into position. The individual RTD elements are not replaceable. For shipping purposes, the spacer design, with or without a thermowell, cannot be coiled.

### Thermowell

Every Rosemount 1082R requires a thermowell for operation. When the Rosemount 1082R is ordered without a thermowell, check the inner diameter of the existing thermowell (see Table 8). The inner wall of the thermowell must be smooth, especially at the welding joints, to insure that the multipoint sensor will not be damaged by insertion.

## SPECIFICATIONS

### Functional

#### Number of Measurement Points

2 to 12

#### Temperature Limits

-40 to 450 °C (-40 to 842 °F)

### Physical

#### Physical Dimensions

Table 8. Thermowell Required Diameters for the Radial Spring and Spacer Design

Number of Measurement Point	O.D.		I.D.	
	mm	inch	mm	inch
2 to 8	73	2.9	59	2.3
9 to 12	88.9	3.5	73.7	2.9

#### Length Limits

10 m (33 ft) with thermowell

30 m (99 ft) without thermowell— Radial Spring design only

### Performance

#### Ambient Temperature Limits

For the enclosures and transmitters is -40 to 80 °C (-40 to 176 °F)

#### Insulation Resistance:

Greater than 1000 MOhms at room temperature, test voltage is 500 VDC.

#### Accuracy

Table 9. Accuracy in Accordance to DIN EN 60751

Class	
A	$\pm(0.15K+0.0020* t )$
B	$\pm(0.30K+0.0050* t )$
<i>"t" is the temperature in °C.</i>	


### Enclosures

The enclosures are described in "Enclosures with mounting hardware" on page 27.

### Individual Sensor Identification Data

By default, sensor 1 is closest to the flange. Remaining points are numbered incrementally. Use the C1 option and the CDS if a different numbering system is desired.

Figure 6. Multipoint Sensor Rosemount 1082R, Radial Spring and Spacer Design (Pt 100 RTD)

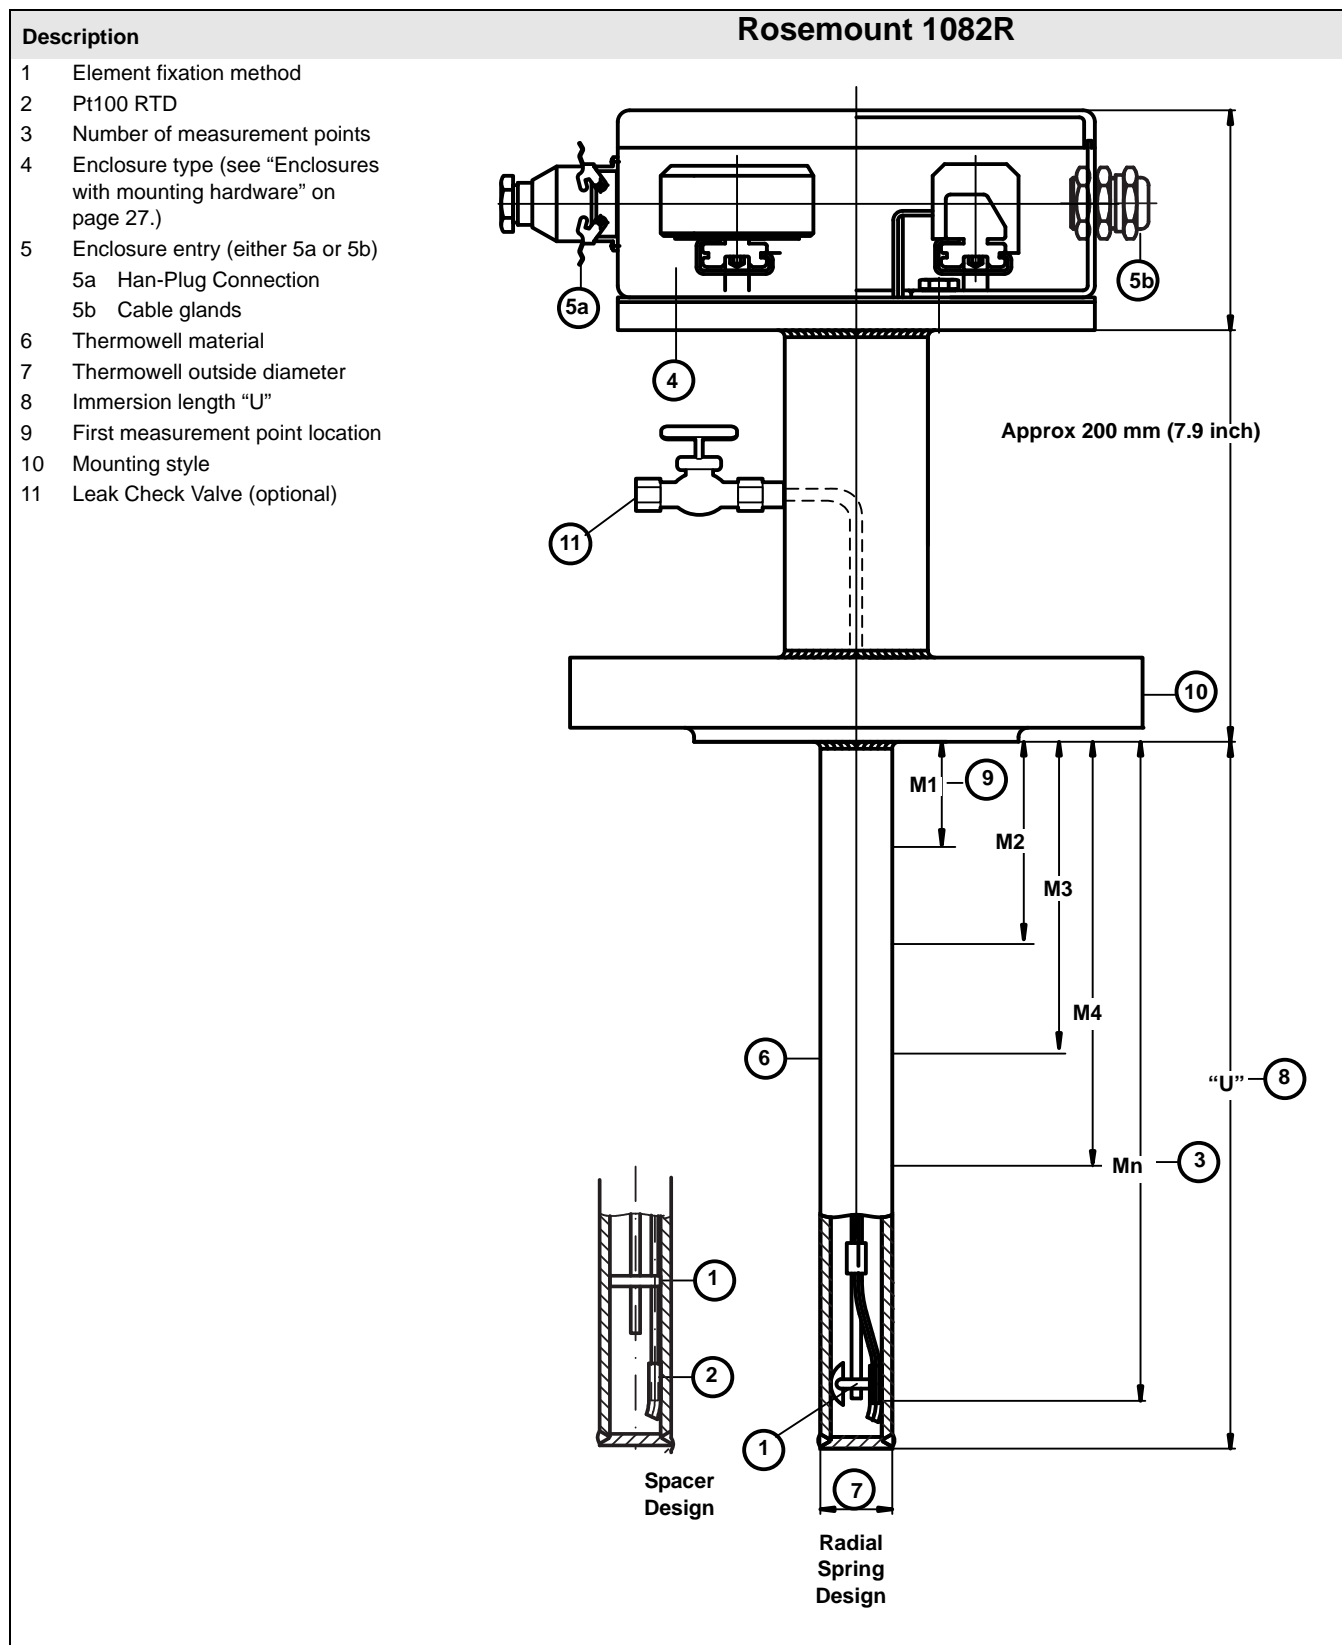

### ORDERING INFORMATION

Model	Product Description			
1082R	Series 1082R RTD Multipoint Profiling Sensor–Contacting Fixture Design			
Code	Element Fixation Method			
1	Radial Springs Design			
2	Spacer Design			
Code	Sensor Type		Operating Temperature Range	
			°C	°F
A	Pt100 Class A		–40 to 450	–40 to 842
B	Pt100, Class B		–40 to 450	–40 to 842
Code	Number of Measurement Points			
05	5			
08	8			
12	12			
XX	Other Quantities (minimum. 02; maximum. 12)			
Code	Transmitter Mounting Hardware		Maximum Measuring Points	
A <sup>(1)</sup>	Mounting hardware for 848T		12	
B <sup>(1)</sup>	Mounting hardware for 644H		12	
C <sup>(1)</sup>	Mounting hardware for 248H		12	
D <sup>(1)</sup>	Mounting hardware for 148H		12	
N <sup>(1)</sup>	No transmitter hardware. Terminal strips only.		12	
Code	Enclosure Type	Material	IP Rating	NEMA Rating
A <sup>(1)</sup>	EEx d CENELEC Flameproof Approved (consult factory for availability)	Aluminum	65	NEMA 4
B <sup>(1)</sup>	EEx e CENELEC Increased Safety Approval (consult factory for availability)	Aluminum	65	NEMA 4
C <sup>(1)</sup>	EEx i Intrinsically Safety acc. EN 50014 and EN 50020 with manufacturer declaration for Ex i use in Zone 1	Aluminum	65	NEMA 4
D <sup>(1)</sup>	Standard Aluminum	Aluminum	65	NEMA 4
E <sup>(1)</sup>	Standard Polyester	Polyester	65	NEMA 4
S <sup>(1)</sup>	Special Enclosure Type - Configuration Data Sheet Required			
Code	Enclosure Entry			
1	Single Multi-core Cable Gland			
2	Multiple Cable Glands M20x1,5, one per measurement point			
3	Han®-Plug Connection IP65			
4	Customer Specified - CDS required, consult factory			
Code	Thermowell Material		Maximum Temperature	
			°C	°F
D	Stainless Steel - DIN 1.4404 (ANSI 316L)		450	842
P	Heat Resistant Steel–DIN 1.7380 (ANSI 182-F22)		750	1382
S	Special Tube Material - Customer Specified - Configuration Data Sheet Required		Consult factory	
N	No thermowell			
Code	Thermowell Diameter			
A	Standard–see Table 8			
C	Customer Specified–CDS required			
Code	Immersion Length “U”			
01000	1000 mm (39 inch)	Note: Length code is in mm. To convert to mm multiply the length in inches by 25.4.		
02000	2000 mm (79 inch)			
03000	3000 mm (118 inch)			
05000	5000 mm (197 inch)			
07000	7000 mm (276 inch)			
10000	10000 mm (394 inch)			
XXXXX	Other Lengths maximum 10000mm (394 in) with thermowell) (maximum 30000 without thermowell–Radial Spring design only)			

## Product Data Sheet

00813-0100-4119, Rev BA

May 2012

## Rosemount AIS Sensors

Code	Measurement Point Distribution	
A	Equally Distributed Points (last point placed approx 50 mm from the bottom of the thermowell)	
C	Customer Specified–Customer Data Sheet required	
Code	First Measurement Point Location–Distance from base of mounting flange	
00500	500 mm (20 inch)	
01000	1000 mm (39 inch)	
02000	2000 mm (79 inch)	
03000	3000 mm (118 inch)	
04000	4000 mm (158 inch)	
XXXXX	Other Lengths	
Code	Mounting Style–Flange Material= DIN 1.4404 (ANSI 316L)	Process Connection
F36	Flanged, ANSI	2 inch 300# RF
F74	Flanged, ANSI	2 <sup>1</sup> / <sub>2</sub> inch 300# RF
F76	Flanged, ANSI	3 inch 300# RF
F54	Flanged, ANSI	2 inch 600# RF
F78	Flanged, ANSI	2 <sup>1</sup> / <sub>2</sub> inch 600# RF
F80	Flanged, ANSI	3 inch 600# RF
F72	Flanged, ANSI	2 inch 900# RF
F82	Flanged, ANSI	2 <sup>1</sup> / <sub>2</sub> inch 900# RF
F84	Flanged, ANSI	3 inch 900# RF
D26	Flanged, DIN	DN 50 PN 25/40
CDS	Customer Specified–Customer Data Sheet Required	
Code	Additional Options	
	<b>Special Tagging and Configuration Options</b>	
C1 <sup>(2)</sup>	Customer Specified Tagging Configuration Data Sheet required	
	<b>Thermowell Options</b>	
Q8	Thermowell Material Certification, DIN EN 10204 3.1.B	
R01	Thermowell Pressure Testing	
R03	Thermowell Dye Penetration Testing	
R07	Full Penetration Weld	
R16	Ring Joint Flange (ASME B16.5 ANSI flanged thermowells only)	
	<b>Process Connection Options</b>	
P01	Leak Check Valve	
Typical Model Number: 1082R 1 A 08 A D 1 D A 01000 A 00500 F36 R01		

(1) Transmitter must be ordered separately.

(2) Shipped with default numbered tagging of all measurement points. The first measurement point (closest to the enclosure) is tag "1." If other configuration is required, order option code C1.

# Rosemount 1082R Configuration Data Sheet (CDS)

## Page One

Copy this form, complete it as required, and fax it to the appropriate fax number listed on the next page

Customer Name: \_\_\_\_\_

Address: \_\_\_\_\_

Contact Person: \_\_\_\_\_

Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

Date: \_\_\_\_\_ Number of Pages: \_\_\_\_\_

Rosemount order / Quote number: \_\_\_\_\_

Model Number \_\_\_\_\_

### Enclosure Type:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: \_\_\_\_\_

### Enclosure Entry:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: \_\_\_\_\_

### Thermowell Material:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: ☐ DIN 1.4401 [ANSI 316]

☐ DIN 2.4816 [ASTM A494 (Inconel)]

☐ Other: \_\_\_\_\_

### Thermowell Diameter:


☐ Selected as Standard Option in Model Structure

☐ Special Requirement: ☐ Dimensions in millimeters

☐ Dimensions in inches

Outer Diameter: \_\_\_\_\_

Inner Diameter: \_\_\_\_\_



### Mounting Style:

☐ Selected as Standard Option in Model Structure

☐ Special Requirement: ☐ Flange Rating: \_\_\_\_\_

☐ Flange Material:

☐ DIN 1.4401 [ANSI 316]

☐ DIN 2.4816 [ASTM A494 (Inconel)]

☐ Other: \_\_\_\_\_

## Product Data Sheet

00813-0100-4119, Rev BA

May 2012

# Rosemount AIS Sensors

### Page Two


#### Measurement Point Distribution:

- ☐ Selected as Standard Option in Model Structure
- ☐ Special Requirement (fill in table below)

#### Tagging:

- ☐ Default
- ☐ Special Requirement (fill in table below)– use with option code C1.

Point	Distance from Mounting Point	Point Tag	Transmitter Tag	Transmitter Range
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				

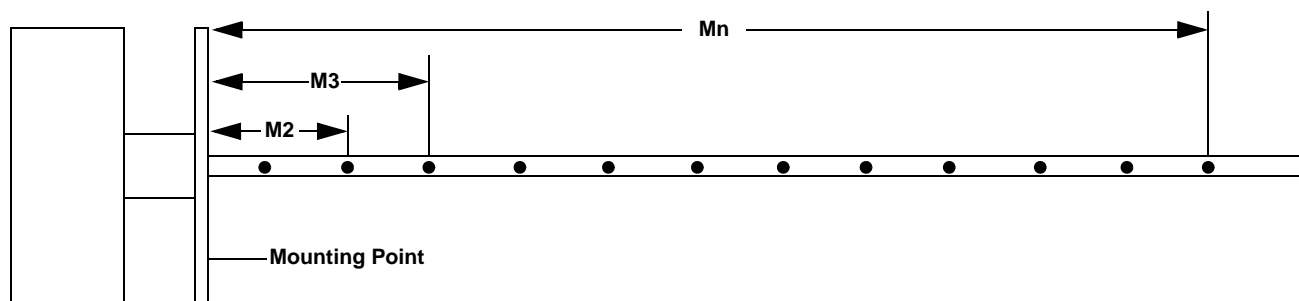

Rosemount Temperature GmbH  
Frankenstrasse 21  
63791 Karlstein  
Germany  
Fax: (49) 6188 992 286  
Phone: (49) 6188 992 0

Emerson Process Management  
8200 Market Boulevard  
Chanhassen, MN 55317  
USA  
Fax: (1) 952 906 8889  
Phone: (1) 800 999 9307

Fisher-Rosemount  
Singapore Pte Ltd.  
1 Pandan Crescent  
Singapore  
Fax: (65) 777 0947  
Phone: (65) 777 8211

## Design Overview


### Compact Design

The Compact Multipoint Sensor design is available in diameters from 2,5 mm (0.1 in.) to 40 mm (1.6 in.). Up to 60 measuring points can be monitored by this design using small diameter thermocouples in a single sheath. The high number of measurement points allows monitoring of temperature profiles with very good local resolution, making it the perfect solution for hot-spot detection in tall reactors or distillation columns. The compact design is available in two protection options, including bundled or insert tube. Insert tubes position the sensing elements in place and give mechanical stability to the sensor, but only give limited protection against the process medium.

Table 10. Available Insert Tube Outer Diameters

Diameter		Maximum Measurement Points
mm	Inch	
3,5	0.14	25
4,5	0.18	30
5,0	0.20	40
6,0	0.24	60
8,0	0.32	60

Figure 7. Compact Design



### Guiding Tube Design

The Guide Tube Multipoint design is available with grounded or ungrounded thermocouples, and can be used for 1-in. pipes or above. Between 2 and 8 mineral insulated grounded or ungrounded thermocouple sensors are inserted into individual guide tubes and fed to the specified measurement point. A slight bend at the tip of the measuring element ensures contact with the protection tube surface, giving optimum temperature response. Due to the construction of this design a minimum inner protection tube diameter of one inch is required and the maximum immersion length is limited to 10 m (32,8 ft.) even if no protection tube is required. RTD elements cannot be used in this design due to the physical constraints of bending the sheath.

Emerson Process Management offers this design with two different methods of mounting the elements inside the enclosure: sealed or unsealed. To ensure fast response time and a good thermal contact, two designs of spring loaded fittings are available, but the spring loaded fittings do not provide an environmental seal. Compression fittings provide an environment seal but this comes at the expense of good thermal contact. The protection tube size limits the number of measuring points as this design is not flexible and the guide tubes mounting and fixation need space. This makes this sensor a perfect solution for all profiling applications where lower local resolution is acceptable and a high process availability is needed.

Figure 8. Guiding Tube Design





## Product Data Sheet

00813-0100-4119, Rev BA


May 2012

# Rosemount AIS Sensors

### Radial Spring Design

The Radial Spring Multipoint design is available for diameters of 26 mm and above. This design uses between 2 and 20 flattened mineral insulated grounded or ungrounded thermocouples or RTD elements pressed against the inner wall of the protection tube by radial springs to provide better thermal contact with the process and ensure the best possible response time. The design of the spring loaded brace with angled blade and sliding head compensates for tube wall thickness and glides over obstacles in the tube for easy assembly. The head of the spring loaded brace is available in two different versions. The design shown in Figure 9 shows a ball at the end of the radial spring and is used if space is limited to inner protective diameters smaller than 30 mm (1.18 in.). This design is limited to a maximum length of 3 m (9.8 ft.). The design shown in Figure 9 uses a semicircular metal plate and is ideal in applications where enough space is available. Neither Radial Spring Multipoint design allows individual thermocouples to be replaced, but the entire sensor assembly can be replaced as one unit. This sensor design can be delivered with a maximum length of 30 m (98.4 ft.) as a coil if no protection tube is required. The maximum length is restricted to 10 m (32.8 ft.) if a protection tube is required that does not allow to coil the sensor for shipping.


Figure 9. Radial Spring Design

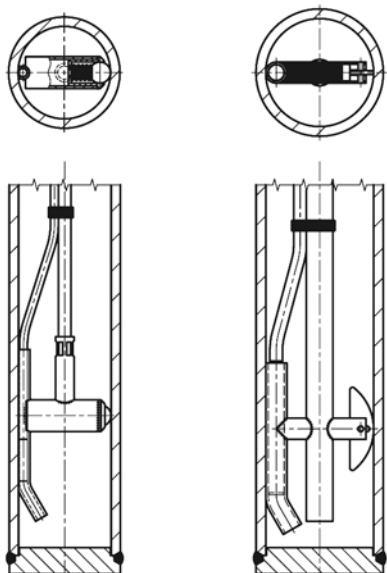

### Laminated Spring Design

The Laminated Spring Multipoint design is available for a maximum of 10 measuring points and is available in diameters of 40 mm (1.58 in.) and above. The laminated spring presses the thermocouple against the inner wall of the protection tube to provide good thermal contact between the thermocouple and the protection tube, enabling a fast time response. The advantage of this design is that the support framework is as flexible as an oil dipstick and can follow the contour of the protection tube even if the mounting flange is at an angle to the protection tube and the design can also be used in applications with high refractory wrapage. The individual thermocouples cannot be replaced in this design, but the entire sensor assembly can be replaced as one unit. This sensor design can be delivered with a maximum length of 30 m (98.4 ft.) as a coil if no protection tube is required. The maximum length is restricted to 10 m (32.8 ft.) if a protection tube is required that does not allow to coil the sensor for shipping.

Figure 10. Laminated Spring Design

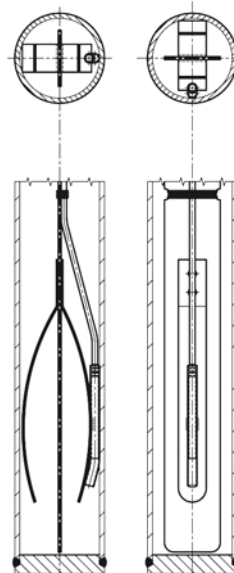


# Rosemount AIS Sensors

## Spacer Design

The Spacer Multipoint design is available for diameters of 18 mm (0.7 in.) and above making it the perfect solution for diameters where the laminated and radial spring design can not be used. This design uses spacer disks to guide and hold the tip of up to 10 measuring points measuring elements in position. The individual elements are permanently connected to the spacer disk and are not replaceable. The spacer disk design is primarily used in applications where response time is not critical or where the size of the protection tube prevents the use of a different design.

Figure 11. Spacer Design



## Other Designs

Emerson offers various other designs that are specifically designed to customer applications. Please contact an Emerson representative for more information.


## Freely Bendable Design

The Freely Bendable Multipoint design uses several MI-Cable thermocouple or RTD sensors that are inserted directly into the process or several compact design multipoint sensors inside an annealed protection tube. The individual MI-Cables allow three dimensional temperature measurements at high pressures with only one process penetration by passing the individual elements to any required position inside the reactor or vessel. Once the MI cables are passed through the process penetration, the sensors can be positioned to the desired three-dimensional array by simply bending the MI cable. This eliminates the need to have multiple horizontal or vertical straight-run multipoint sensors installed to accomplish the same effect. The drawback to this design is that it has limited pressure ratings.

## Enclosures with mounting hardware

The drawings in Figure 12 show examples of junction boxes with different transmitter types and plugs. Transmitters must be ordered separately. The size of the junction is influenced by the number and type of transmitters or terminal strips.

Figure 12. Enclosures

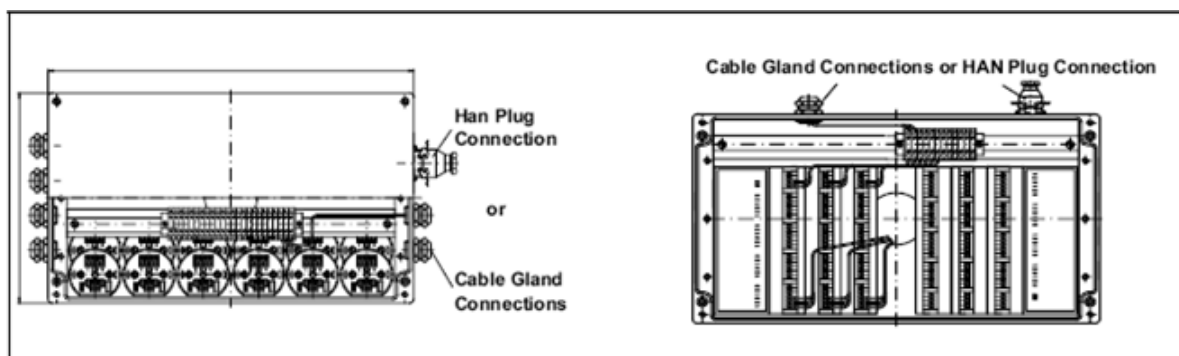


## Protection Tube


Protection tubes are needed for most of the multipoint designs and function as a barrier between the measuring element and the process. The optimal size depends on the multipoint design and number of measuring points as well as on the process conditions. The choice of the material and wall thickness is absolutely crucial and has to be done according to the process pressure, temperature and medium. The choice of the wrong material and sizes can lead to dramatically reduced sensor lifetimes and early failures. Protection tubes can be already installed or can be delivered by Emerson according to application specifications.

## MODEL EXAMPLES


**Radial Spring Multipoint Design**

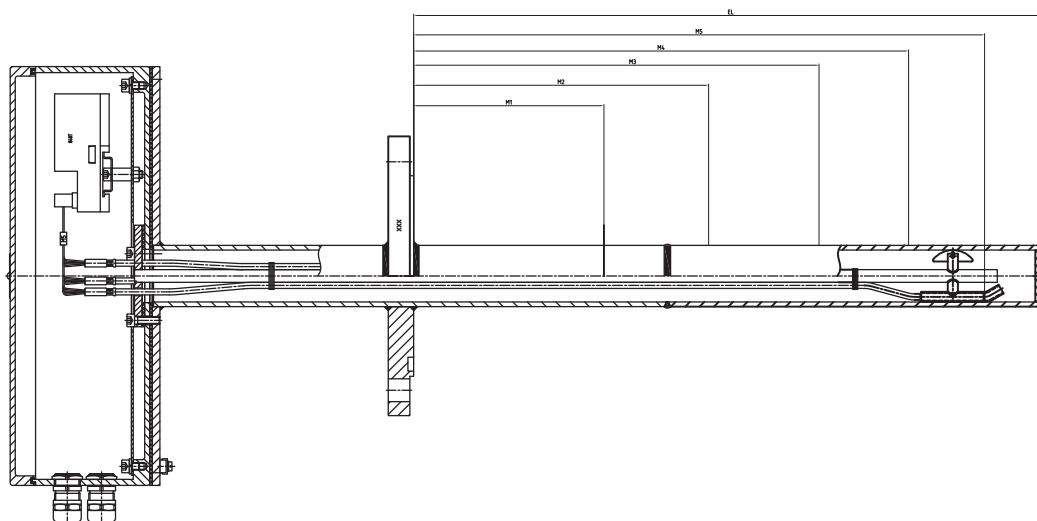


**Compact Multipoint Design**

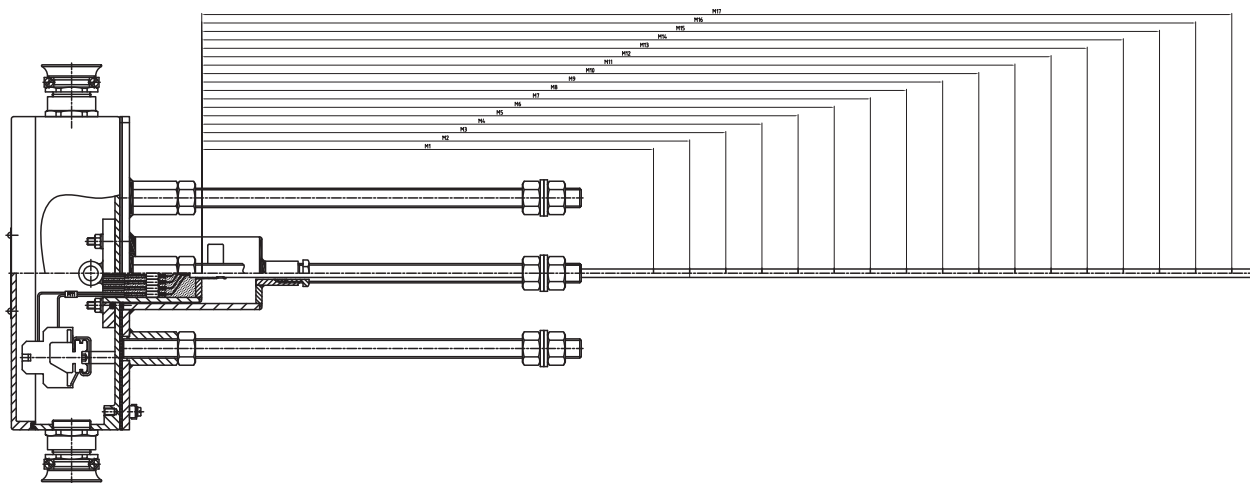

**Laminated Spring Multipoint design**

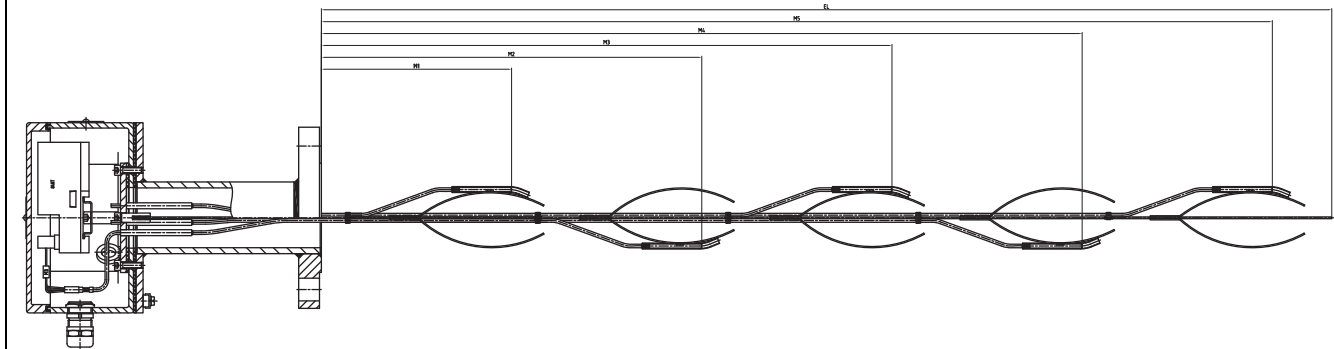

**Spacer Multipoint Design**

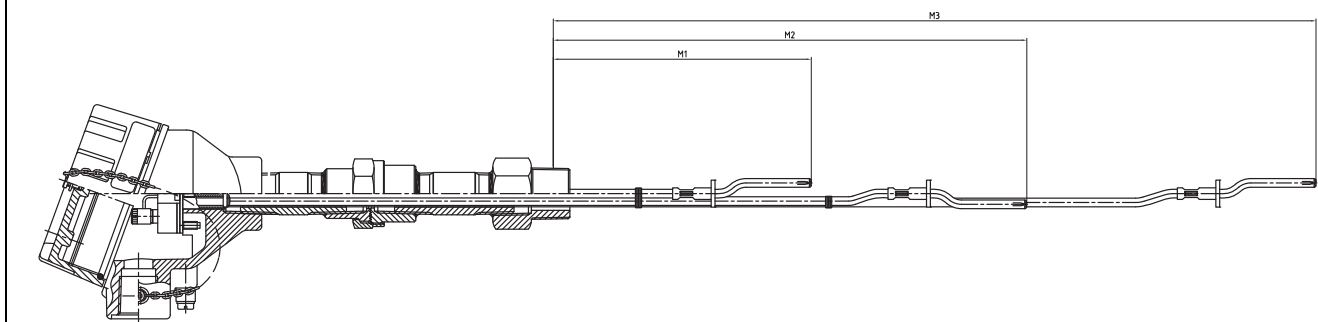

# Rosemount AIS Sensors

---

## Product Data Sheet

00813-0100-4119, Rev BA

May 2012

*Standard Terms and Conditions of Sale can be found at [www.rosemount.com/terms\\_of\\_sale](http://www.rosemount.com/terms_of_sale)  
The Emerson logo is a trade mark and service mark of Emerson Electric Co.  
Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc.  
PlantWeb is a registered trademark of one of the Emerson Process Management group of companies.  
HART and WirelessHART are registered trademarks of the HART Communications Foundation.  
FOUNDATION fieldbus is a trademark of the Fieldbus Foundation.  
All other marks are the property of their respective owners.*

© 2012 Rosemount Inc. All rights reserved.

**Emerson Process Management  
Rosemount Measurement**  
8200 Market Boulevard  
Chanhassen MN 55317 USA  
Tel (USA) 1 800 999 9307  
Tel (International) +1 952 906 8888  
Fax +1 952 906 8889

**Emerson Process Management**  
Blegistrasse 23  
P.O. Box 1046  
CH 6341 Baar  
Switzerland  
Tel +41 (0) 41 768 6111  
Fax +41 (0) 41 768 6300

**Emerson FZE**  
P.O. Box 17033  
Jebel Ali Free Zone  
Dubai UAE  
Tel +971 4 811 8100  
Fax +971 4 886 5465

**Emerson Process Management Asia Pacific  
Pte Ltd**  
1 Pandan Crescent  
Singapore 128461  
Tel +65 6777 8211  
Fax +65 6777 0947  
Service Support Hotline : +65 6770 8711  
Email : [Enquiries@AP.EmersonProcess.com](mailto:Enquiries@AP.EmersonProcess.com)



**EMERSON**  
Process Management