





BOSSPLOW.COM


See how BOSS continues to BACK YOU UP.
Get more info, watch videos, find a dealer or chat live.


Call 800-286-4155
Email sales@bossplow.com



 Ask your dealer or visit bossplow.com to explore the complete lineup of BOSS products, including Truck Equipment, ATV/UTV Equipment, Heavy Equipment, Ice Control Equipment and Accessories.

 Exclusive to BOSS Owners, joining this community gives you a profile page, a free gift and access to special offers and information on BOSS products and services.

 SnowCare for Troops is a nationwide outreach program that performs free snow removal for the families of men and women serving overseas and disabled veterans.



BOSS PRODUCTS
2010 THE BOSS WAY
P.O. BOX 787
IRON MOUNTAIN, MI 49801-0787

BOSS SNOWPLOW PRODUCTS
ARE DESIGNED AND MANUFACTURED IN
AN APPROVED ISO 9001:2008
REGISTERED FACILITY.

Patents: www.ticopats.com
©2017 BOSS PRODUCTS. ALL RIGHTS RESERVED.
PRINTED IN U.S.A. FORM #450-2017

The "f" logo is a registered trademark/service mark of Facebook, Inc. The Twitter logo is a registered trademark/service mark of Twitter, Inc. The YouTube logo is a registered trademark/service mark of Google Inc. The Google+ logo is a service mark of Google Inc. The "in" logo is a registered service mark of LinkedIn Corporation. The Instagram logo is a registered trademark/service mark of Instagram, LLC. The Blogger logo is a registered service mark of Google Inc. The National IPA logo is a service mark of the National Intergovernmental Purchasing Alliance Company. The Advantage International Registrar logo is a trademark of Advantage International Registrar, Inc. All other trademarks belong to BOSS Snowplow.



ICE CONTROL EQUIPMENT 2017

SPREADERS





2

3

BOSS designs their spreaders for the purpose of making the lives of snow and ice removal professionals easier and their work more efficient. So while the front of your vehicle is fighting to clear the streets of all things snow and ice, the back of your vehicle is putting the finishing touches on the parking lots, driveways and roads of the towns you call home. Because when you're out in the middle of a storm, BOSS will always be there to BACK YOU UP.

TABLE OF CONTENTS

4 VBX Hopper Spreaders

6 Full-Size UTV Hopper Spreader

8 Forge Hopper Spreader

10 TGS Tailgate Spreaders

12 Walk-Behind Spreaders

13 Materials Guide / Accessories

14 Specifications

VBX HOPPER SPREADERS

MAXIMUM EFFICIENCY, SPEED AND PRECISION

BOSS Hopper Spreaders are some of the most powerful tools in your snow and ice removal arsenal. Our fast-growing family of VBX Spreaders are fully featured for ease of use and maximum productivity for years of operation in harsh winter conditions. The VBX family features models with both pintle and auger feeds, powerful electric motors, standard worklights, easy to use controls and the flexibility to spread a variety of deicing materials. BOSS builds quality and durability into every spreader, helping you to RESTORE ORDER.

STANDARD FEATURES:

➤ VBX 6500, VBX 8000, VBX 9000

- **Pintle Chain or Auger Feed System** features either a heavy-duty pintle chain or mild steel helical auger for long life and reliability.
- **Poly Hopper** is built to outlast the elements.
- **Dual Variable Speed Controller** is equipped with auto-reverse (auger only) and over-load protection.
- **LCD Screen In-Cab Controller** is backlit for clear visibility and ease of use.
- **14.5" Diameter Urethane Spinner** is durable, corrosion-resistant and ensures consistent distribution.
- **Enclosed Spinner Motor** is weather and dust sealed to ensure performance, durability and reliability.
- **Tarp With Integral Tie-Downs** to protect spreading material from the elements.
- **Dual Variable Speed Vibrators** prevent material bridging for ease of operation (standard for auger; available as an accessory for pintle).

- **Inverted V-Baffle** reduces material build-up for optimal spreading efficiency (standard for auger; available as an accessory for pintle).
- **Chain Cleaning Brush** removes excess material from chain on every pass (pintle chain only).
- **Full-Length Slide-Out Tray** captures falling deicing material, keeping it away from truck bed, preventing corrosion (pintle chain only).

ADDITIONAL ACCESSORIES

- **Pre-Wet** allows contractors to pre-wet solid deicing materials, improving material efficiency. (Available accessory on new VBX Spreaders.)
- **Pro-Lid** weather-sealed, polyurethane hard cover protects deicing materials. (Available accessory for VBX Spreaders.)

PRO-LID

Weather-sealed, polyurethane hard cover protects deicing material inside the VBX Spreader. The BOSS Pro-Lid can be opened while remaining on the ground with most vehicles. (Available as an accessory on VBX Spreaders: VBX 6500, VBX 8000 and VBX 9000 only.)



VBX 6500
1.5 cubic yards of capacity

VBX 8000
2 cubic yards of capacity



VBX 9000
3 cubic yards of capacity

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

POWER AND PRODUCTIVITY FOR YOUR UTV

The BOSS VBX 3000 Spreader brings the power and efficiency of the VBX Spreader line to your UTV. It's fully featured for ease of use and delivers maximum productivity. Tough and durable, the BOSS VBX 3000 will give you years of operation no matter the conditions. So when you need the power and precision of a BOSS VBX Spreader on your UTV, the BOSS VBX 3000 is there to BACK YOU UP.

VBX 3000 (Auger)

STANDARD FEATURES:

- > **Shaftless 4" Auger With 4" of Pitch** reduces jamming.
- > **Poly Hopper** is built to outlast the elements.
- > **Vibrator** prevents material bridging for ease of operation.
- > **Tarp With Integral Tie-Downs** to protect spreading material from the elements.
- > **Inverted V-Baffle** reduces material build-up for optimal spreading efficiency.
- > **12" Diameter Urethane Spinner** is durable, corrosion-resistant and ensures consistent distribution.
- > **Spinner Motor** is sealed for durability and maximum spreading efficiency.
- > **Dual Motor Control** adjusts material flow and speed on the fly.

6

7

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.




QUESTIONS? CHAT LIVE ONLINE.
BOSSPLOW.COM



FIGHT ICE WITH STEEL

Introducing the BOSS Forge, a stainless steel Hopper Spreader from BOSS. It performs just as powerfully and reliably as the VBX Spreader line while offering a fully stainless steel hopper. The Forge is constructed using a combination of bolting, riveting and welding for optimal durability and serviceability throughout the spreader's lifetime. The stainless steel BOSS Forge is available with either a pintle chain or auger feed system. Both the hopper and the drive train housing are constructed with one of the heaviest-gauge materials in the market, enhancing the Forge's sturdiness and durability in adverse winter conditions. It's another example of a tough, reliable innovation from BOSS that is built to BACK YOU UP.

STANDARD FEATURES:



- > **Pintle Chain or Auger Feed System** features either a heavy-duty pintle chain or mild steel helical auger for long life and reliability.
- > **Chain Cleaning Brush** removes excess material from chain on every pass (pintle chain only).
- > **Stainless Steel Hopper** is built to outlast the elements.
- > **14.5" Diameter Urethane Spinner** is durable, corrosion-resistant and ensures consistent distribution.
- > **Enclosed Spinner Motor** is weather and dust sealed to ensure performance, durability and reliability.
- > **Vibrator** prevents material bridging for ease of operation (auger only).
- > **Inverted V-Baffle** reduces material build-up for optimal spreading efficiency (auger only).

- > **Full-Length Slide-Out Tray** captures falling deicing material, keeping it away from truck bed, preventing corrosion (pintle chain only).
- > **Dual Variable Speed Controller** is equipped with auto-reverse and over-load protection and is backlit for clear visibility and ease of use.

ADDITIONAL ACCESSORIES

- > **Pre-Wet** allows contractors to pre-wet solid deicing materials, improving material efficiency.
- > **For optional accessories, including the Forge light kit, tarp, vibrator, inverted V (pintle) and more, ask your BOSS Dealer.**

PRE-WET

Allows contractors to pre-wet solid deicing materials, improving the efficiency of solid deicing materials. Equipped with a 60-gallon tank capacity, this system is available as an option on all new VBX and Forge spreaders.



FORGE 2.0
2 cubic yards of capacity

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.



The BOSS TGS series works with a variety of deicing materials to fit the job at hand. See the Spreader Materials Guide on Page 13 to learn more.

TGS TAILGATE SPREADERS

GET THE JOB DONE RIGHT, FAST



The TGS Spreader series from BOSS is the easiest way to arm yourself against all things snow and ice. BOSS tailgate-mounted spreaders attach easily and disperse deicing materials quickly and efficiently to make your job as smooth and steady as possible. All TGS Spreaders are built tough to handle harsh conditions, because BOSS knows the faster you can RESTORE ORDER to your community, the better.

TGS 300, TGS 600, TGS 800, TGS 1100

STANDARD FEATURES:

- > **Adjustable Feed Gate** allows you to adjust the material discharge amount (optional on TGS 300).
- > **Poly Adjustable Material Deflector** allows you to adjust the material discharge width and direction pattern.
- > **12" Diameter Urethane Spinner** is durable, corrosion-resistant and ensures consistent distribution.
- > **Enclosed 12-Volt Electric High-Torque Motor** is weather and dust sealed to ensure performance, durability and reliability.
- > **Low-Profile Poly Hopper Design** provides better visibility.
- > **Variable Speed Control** equipped with blast feature and overload protection.
- > **Choose Your Attachment System** with a slide-in system or the RT3 system. (RT3 not available on TGS 300.)
- > **Solid Poly Hopper Cover** protects against weather and is made to last.
- > **Stabilizer Arms and Tie-Down Straps** minimize any side-to-side movement. (Stabilizer arms not available on TGS 300.)
- > **Top Screen With Bag Splitter** easily opens bags and filters deicing material. (Bag splitter not included on TGS 300.)
- > **Enclosed Feed Motor** powers the Feed Paddle Mechanism with 12 volts of high-torque electric power (TGS 800 only).
- > **Swing-Away Spinner Assembly** allows for quick removal of leftover material (TGS 800 only).
- > **Material Saver System** eliminates material flow when spreader is not in use. (Standard on TGS 300. Optional on the TGS 600 and TGS 1100, not available on TGS 800. Only needed for select materials.)
- > **For Optional Accessories, Ask Your BOSS Dealer.**

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

Optional RT3 Attachment System allows you to easily attach and detach your spreader (not available on TGS 300).



TGS 300 has a capacity of 3 cubic feet, or 200 lb.

TGS 600 has a capacity of 6 cubic feet, or 400 lb.

TGS 800 has a capacity of 8 cubic feet, or 780 lb.

TGS 1100 has a capacity of 11 cubic feet, or 800 lb.

SEE IT IN ACTION
BOSSPLOW.COM



The selection of proper deicing materials can be complicated and varies by personal preference, experience and environmental concerns. All factors should be considered before making your selection.

WALK-BEHIND SPREADERS



RESTORE ORDER TO ANY WALKWAY

Conquer sidewalks with a BOSS Walk-Behind Spreader. Simply and efficiently spread up to 100 lb of material with the professional-grade BOSS Walk-Behind Spreaders. Side and front adjustable baffles, weather cover and grate are all included, and both stainless steel and poly hopper options are available. It's another way the innovations at BOSS are built to BACK YOU UP.

STANDARD FEATURES:


- > Poly 80 lb, 100 lb
- > Stainless Steel 100 lb

- > **Hopper Construction** available in both stainless and poly.
- > **Available in 80 lb. or 100 lb. Capacity** to fit your needs.
- > **Enclosed Metal Gears** prevents debris interference.
- > **Adjustable Slide Gate** allows for adjustable opening for spreading a broad range of material.
- > **Powder Coated T-Handle With Rubber Grips** for professional use (poly only).
- > **Adjustable Front and Side Baffles** controls directional spread pattern.
- > **Solid Steel Linkage** allows the gate to open and close completely with precise adjustment.
- > **Wide Tread 12" Pneumatic Tires** to handle the winter terrain.
- > **Conical Auger** helps agitate material and minimize clumping.

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.



MATERIALS GUIDE

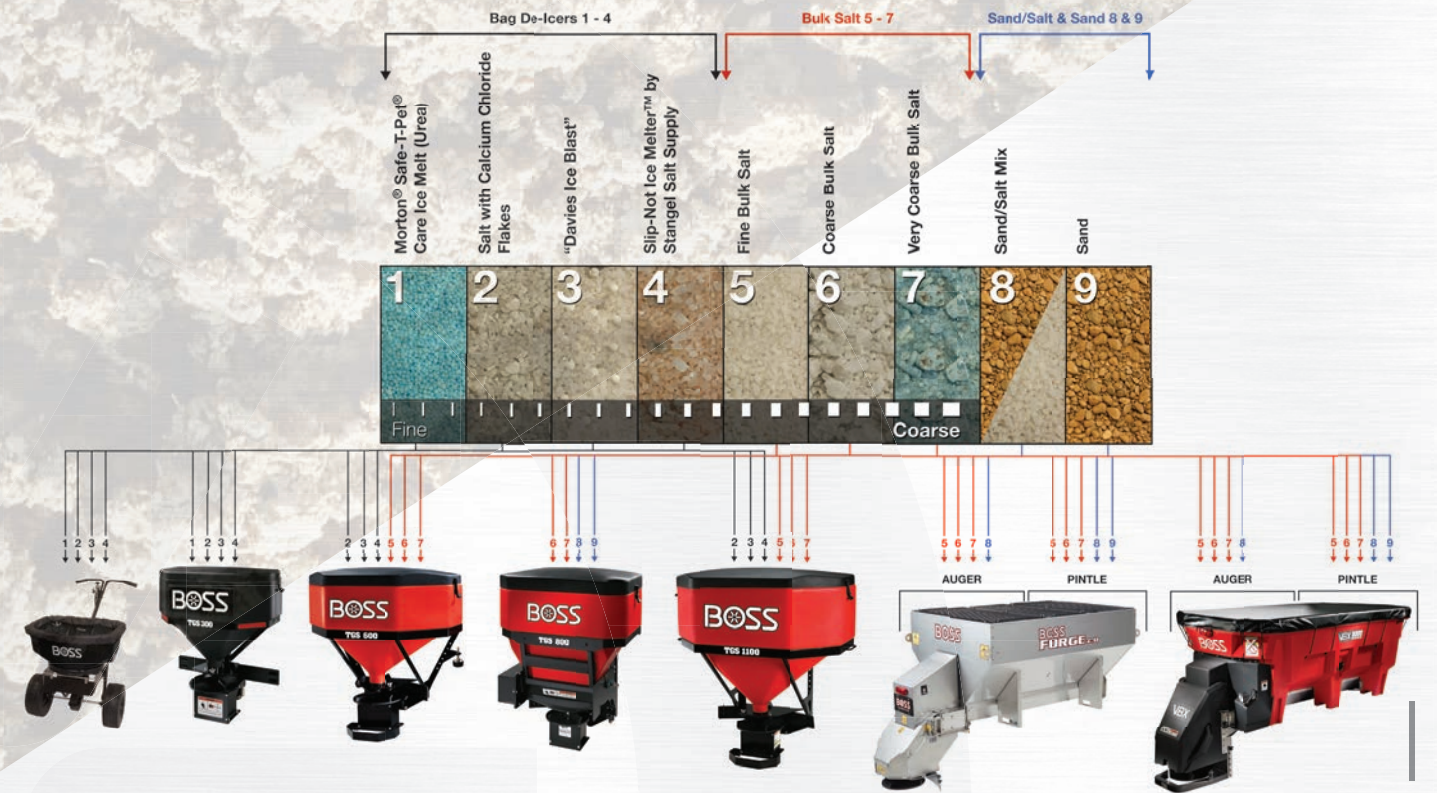

NOTE: Assumes Dry Free-Flowing Material

BOSS SNOWPLOW AUTHORIZED ACCESSORIES



PRO-LID

Weather seal protects deicing material inside the BOSS spreader. The easy open, ergonomic design allows operators to remain on the ground while opening cover doors.



VBX 6500 PRO-LID W/ HARDWARE.....	VBS15125
VBX 8000 AND FORGE PRO-LID W/ HARDWARE	VBS15130
VBX 9000 PRO-LID W/ HARDWARE.....	VBS15135

PRE-WET SYSTEM

Equipped with a 60-gallon tank and mounting bracket.

PRE-WET SYSTEM.....	MSC20100
---------------------	----------

LIGHT KIT

LIGHT KIT, FORGE 2.0.....	VBS19525
---------------------------	----------

TARP

TARP, FORGE 2.0.....	VBS17190
----------------------	----------

INVERTED V

(Optional on pintle, standard on auger systems.)

INVERTED V, FORGE 2.0	VBS17180
INVERTED V, VBX 6500.....	VBS15140
INVERTED V, VBX 8000 AND VBX 9000	VBS15320

VBX VIBRATOR KIT

For improved material flow and handling, consider the addition of the VBS Vibrator Kit. (Optional on pintle, standard on auger systems.)

SINGLE VBX VIBRATOR KIT	VBS14465
DOUBLE VBX VIBRATOR KIT	VBS14466
VIBRATOR KIT, FORGE 2.0	VBS14463

TGS VIBRATOR KIT

For improved material flow and handling, consider the addition of the TGS Vibrator Kit.

TGS VIBRATOR KIT	TGS05960
------------------------	----------

MATERIAL SAVER SYSTEM

MATERIAL SAVER SYSTEM	TGS11328
-----------------------------	----------

ICE CONTROL EQUIPMENT

TGS TAILGATE SPREADERS

VEHICLE APPLICATION: SUVs AND ½ TO 1-TON TRUCKS



SPECIFICATIONS	TGS 300*	TGS 600*	TGS 800**	TGS 1100*
Hopper Design	Low-profile	Low-profile	Low-profile	Low-profile
Hopper Construction	Polyethylene	Polyethylene	Polyethylene	Polyethylene
Hopper Capacity	3 cu ft / 200 lb (0.08 cu m / 91 kg)	6 cu ft / 400 lb (0.17 cu m / 181 kg)	8 cu ft / 780 lb (0.23 cu m / 354 kg)	11 cu ft / 800 lb (0.31 cu m / 363 kg)
Hopper Dimensions	21½"H x 29"W x 15"D (53 cm x 74 cm x 38 cm)	25¼"H x 38"W x 21"D (65 cm x 97 cm x 53 cm)	48"H x 36"W x 21"D (122 cm x 91 cm x 53 cm)	34"H x 44"W x 24"D (86 cm x 112 cm x 61 cm)
Spreader Weight	70 lb (31 kg) plus mount	101 lb (45 kg) plus mount	220 lb (100 kg) plus mount	152 lb (69 kg) plus mount
Hopper Cover	Solid poly	Solid poly	Solid poly	Solid poly
Feed Mechanism	Internal auger w/material saving brush and adjustable drop-feed gate	Internal auger with cable-link agitator and adjustable feed gate	Feed paddle	Internal auger with cable-link agitator and adjustable feed gate
Vibrator Kit	Not recommended	Optional	Optional	Optional
Top Screen with Bag Opener	Top Screen Only	Standard	Standard	Standard
Motor	High-torque / 12-volt DC	High-torque / 12-volt DC	High-torque / 12-volt DC	High-torque / 12-volt DC
Spinner	12" (31 cm) Poly	12" (31 cm) Poly	12" (31 cm) Poly	12" (31 cm) Poly
Spread Width	4 - 30 feet (1 - 9 meters)	4 - 30 feet (1 - 9 meters)	4 - 20 feet (1 - 6 meters)	4 - 30 feet (1 - 9 meters)
Material Deflector	Adjustable poly deflector	Adjustable poly deflector	Adjustable poly deflector	Adjustable poly deflector
Receiver Class Hitch	Class 2-4	Class 3 or 4	Class 4	Class 4
Control	Variable speed control with blast feature and overload protection	Variable speed control with blast feature and overload protection	Independent controls for material feed and spinner speed	Variable speed control with blast feature and overload protection
Vehicle Applications	SUV, light truck and up	¾ and 1-ton trucks	¾ and 1-ton trucks	¾ and 1-ton trucks

*Designed to spread dry, free-flowing material (i.e., salt, deicers, etc.). **Designed to spread sand, salt or a combination of both. See Spreader Materials Guide on Page 13 for more details on material spreading options.

VBX HOPPER SPREADERS

VEHICLE APPLICATION: FULL-SIZE UTVs



SPECIFICATIONS	VBX 3000	SPECIFICATIONS	VBX 3000
Hopper Capacity	12 cu ft (0.34 cu m)	Trough	Austinetic Stainless Steel
Hopper Length	33½" (85 cm)	Cab Controller	Standard / Dual variable speed
Hopper Overall Length	52" (132 cm)	Single Vibrator	Standard
Hopper Height	28" (71 cm)	Inverted V Baffle	Standard
Hopper Width	50" (127 cm)	Feed System	4" OD x 4" (10 cm x 10 cm) pitch shaftless full length auger
Complete Unit Weight (Empty)	230 lb (104 kg)	Adjustable Deflector	Standard
Hopper Construction	¾" (0.5 cm) Double Wall Polyethylene Hopper	Spinner Assembly	Easily removable
Spread Width	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material	Hopper Tie-Down Kit	Standard
Lighting	Single 55 watt halogen	Spinner	12" (30.5 cm) Diameter Urethane Spinner
Cover	VCP Tarp w/integral tie-downs	Spinner Gearmotor	½ HP Spinner Gearmotor (Located above spinner)
Top Screen	Standard	Minimum Bed Length	33½" (85.1 cm)
Motor	¼ HP Feed Motor	Payload	1,000 lb Bed Capacity Required

See Spreader Materials Guide on Page 13 for more details on material spreading options.

ICE CONTROL EQUIPMENT

FORGE AND VBX HOPPER SPREADERS

VEHICLE APPLICATION: ¾, 1-TON, DUMP BODY AND FLATBED TRUCKS



SPECIFICATIONS	FORGE 2.0 AUGER / PINTLE CHAIN	VBX 6500 AUGER / PINTLE CHAIN	VBX 8000 AUGER / PINTLE CHAIN	VBX 9000 AUGER / PINTLE CHAIN
Hopper Capacity	2 cu yd (1.53 cu m)	1.5 cu yd (1.15 cu m)	2 cu yd (1.53 cu m)	3 cu yd (2.29 cu m)
Hopper Length	70" (177.8 cm)	78" (198.1 cm)	96" (244 cm)	107" (272 cm)
Hopper Overall Length	98" (249 cm)	93½" (237.5 cm)	115" (292 cm)	126" (330 cm)
Hopper Height	38" (96.5 cm)	38¾" (97 cm)	38" (97 cm)	49" (124.5 cm)
Hopper Width	48" (122 cm)	48¼" (122.6 cm)	48¼" (123 cm)	48" (122 cm)
Complete Unit Weight (Empty)	650 lb (295 kg) / 700 lb (318 kg)	550 lb (250 kg) / 600 lb (272 kg)	600 lb (272 kg) / 650 lb (295 kg)	700 lb (322 kg) / 760 lb (345 kg)
Hopper Construction	14 ga Stainless Steel	¾" (0.5 cm) Double Wall Polyethylene Hopper	¾" (0.5 cm) Double Wall Polyethylene Hopper	¾" (0.5 cm) Double Wall Polyethylene Hopper
Spread Width	2 ft - 40 ft (0.6 m - 12.2 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material
Max Feed Rate	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute
Lighting	Optional	Dual 55 watt halogen variable output worklights	Dual 55 watt halogen variable output worklights	Dual 55 watt halogen variable output worklights
Cover	Optional	VCP Tarp w/integral tie-downs	VCP Tarp w/integral tie-downs	VCP Tarp w/integral tie-downs
Top Screen	Standard	Standard	Standard	Standard
Gearbox	Planetary Gearbox	Planetary Gearbox	Planetary Gearbox	Planetary Gearbox
Motor	½ HP Motor	¾ HP SS Feed Motor	¾ HP SS Feed Motor	¾ HP SS Feed Motor
Trough	Austinetic Stainless Steel	Austinetic Stainless Steel	Austinetic Stainless Steel	Austinetic Stainless Steel
Cab Controller	Dual Variable Speed Controller	LCD Display Controller	LCD Display Controller	LCD Display Controller
Dual Variable Speed Control	Standard	Standard	Standard	Standard
Variable Speed Vibrator	N/A	2 Standard (Auger) / Optional (Pintle)	2 Standard (Auger) / Optional (Pintle)	2 Standard (Auger) / Optional (Pintle)
Vibrator	1 Standard (Auger) / Optional (Pintle)	N/A	N/A	N/A
Inverted V Baffle	Standard / Optional	Standard / Optional	Standard / Optional	Standard / Optional
Feed System	6" OD x 9" (15 cm x 23 cm) pitch full length auger / 14" (36 cm) wide Pintle Chain	6" OD x 9" (15 cm x 23 cm) pitch full length auger / 14" (36 cm) wide Pintle Chain	6" OD x 9" (15 cm x 23 cm) pitch full length auger / 14" (36 cm) wide Pintle Chain	6" OD x 9" (15 cm x 23 cm) pitch full length auger / 14" (36 cm) wide Pintle Chain
LED CHMSL	Standard	Standard	Standard	Standard
Adjustable Deflector	Standard	Standard	Standard	Standard
Spinner Assembly	Easily removable, Swing Out	Easily removable and height adjustable	Easily removable and height adjustable	Easily removable and height adjustable
Hopper Tie-Down Kit	Standard	Standard	Standard	Standard
Spinner	14½" (36.8 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner
Spinner Gearmotor	½ HP Gearmotor (Located above spinner)	½ HP Spinner Gearmotor (Located above spinner)	½ HP Spinner Gearmotor (Located above spinner)	½ HP Spinner Gearmotor (Located above spinner)
Minimum Bed Length	6'6" (198.1 cm)	5'6" (167.6 cm)	6'6" (198.1 cm)	8" (243.8 cm)
GVWR	10,000 lb (4,535 kg)	9,000 lb Gross Vehicle Weight Required	10,000 lb Gross Vehicle Weight Required	13,000 lb Gross Vehicle Weight Required

See Spreader Materials Guide on Page 13 for more details on material spreading options.

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

TWO-YEAR LIMITED WARRANTY

All BOSS Snowplows and equipment are guaranteed to be free from defects in material and workmanship for two full years from the date of purchase. Stop by any authorized BOSS Dealer to receive complete details on our two-year parts and labor warranty. Please visit bossplow.com for more details.

LEGAL STATEMENT

Vehicles intended to be equipped with a spreader and/or snowplow must comply with the vehicle manufacturers' specifications for equipment application. BOSS Products reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein. BOSS Products may be protected by one or more patents; please see bossplow.com for more details.