




**LENNTECH**  
WATER TREATMENT SOLUTIONS

**MPT**  
**Self-Priming, Solids-Handling Pump**



*Experience In Motion*

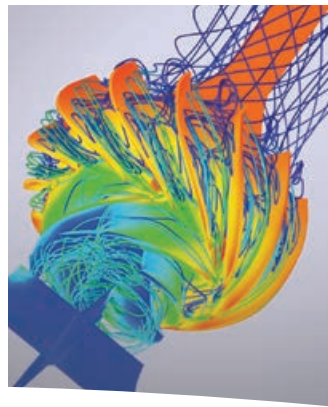

## **Pump Supplier to the World**

*Flowserve is the driving force in the global industrial pump marketplace. No other pump company in the world has the depth or breadth of expertise in the successful application of pre-engineered, engineered and special purpose pumps and systems.*

### **Life Cycle Cost Solutions**

Flowserve provides pumping solutions that permit customers to reduce total life cycle costs and improve productivity, profitability and pumping system reliability.

### **Market Focused Customer Support**

Product and industry specialists develop effective proposals and solutions directed toward market and customer preferences. They offer technical advice and assistance throughout each stage of the product life cycle, beginning with the inquiry.

### **Broad Product Lines**

Flowserve offers a wide range of complementary pump types, from pre-engineered process pumps, to highly engineered and special purpose pumps and systems. Pumps are built to recognized global standards and customer specifications.

Pump designs include:

- Single-stage process
- Between bearings single-stage
- Between bearings multistage
- Vertical
- Submersible motor
- Positive displacement
- Nuclear
- Specialty

### **Product Brands of Distinction**

*ACEC™ Centrifugal Pumps*

*Aldrich™ Pumps*

*Byron Jackson® Pumps*

*Calder™ Energy Recovery Devices*

*Cameron™ Pumps*

*Durco® Process Pumps*

*Flowserve® Pumps*

*IDP® Pumps*

*INNOMAG® Sealless Pumps*

*Lawrence Pumps®*

*Niigata Worthington™ Pumps*

*Pacific® Pumps*

*Pleuger® Pumps*

*Scienco™ Pumps*

*Sier-Bath® Rotary Pumps*

*TKL™ Pumps*

*United Centrifugal® Pumps*

*Western Land Roller™ Irrigation Pumps*

*Wilson-Snyder® Pumps*


*Worthington® Pumps*

*Worthington Simpson™ Pumps*

**MPT  
Self-Priming,  
Solids-Handling  
Pump**



**Complementary Pumps**

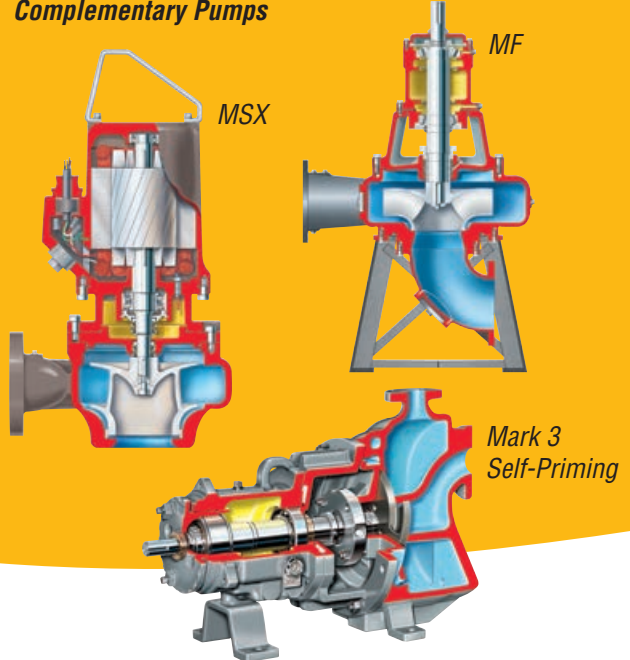

**Versatile and Reliable**

*The Flowserve MPT is a proven self-priming, solids-handling pump. The result of a long and successful association with leaders in the construction and waste water industries, the MPT's simple design provides reliable, peak performance while offering versatility, ease of maintenance and low cost of ownership.*

**Advantages Over Submersible Pumps**

- Dry mounting
- Higher temperature capability
- No sludge build-up on the motor
- Duty flexibility by changing pulley sizes
- Belt drive protection
- Blockages more easily removed
- Ease of maintenance

**Applications**

- |                    |                 |                   |
|--------------------|-----------------|-------------------|
| • Construction     | • Dewatering    | • Bilge pumping   |
| • Utilities        | • Sewage        | • Mining          |
| • Slurries         | • Cannery waste | • Pulp and paper  |
| • Industrial waste | • Scale pits    | • Food processing |
| • Dirty water      | • Sludge        | • Automotive      |
| • Drainage         | • Effluent      | • Wineries        |

**Complementary Pump Designs**


Flowserve also offers these pump designs:

- Durco Mark 3™ self-priming pump
- Durco Mark 3 ISO self-priming pump
- MSX solids-handling, submersible pump
- MF and MN end-suction, solids-handling pumps

**Benefits of the MPT**

- Ease of maintenance
  - Back pull-out design
  - Belt drive protection
  - Quick-disconnect clean-out
  - Quick, external impeller adjustment
  - Abrasion-resistant mechanical seal
  - No special tools required
  - Dual sight glasses
  - Normal maintenance can be performed without disconnecting piping
- Versatility
  - High-temperature capability
  - Duty flexibility by changing drive pulley sizes
  - Portability
  - Dimensionally interchangeable with major competitors
- Heavy-duty reliability
  - Generous wear allowance
  - Oversized shaft
  - Oversized bearings
  - Solid one-piece flap valve
  - Run-dry capability
  - Oil lubricated double mechanical seal
  - Hard-faced mechanical seals
- Low total cost of ownership
  - Replaceable wear plate
  - Reversible wear plate
  - Reduced maintenance
  - Externally adjustable clearances without shims

**MPT**  
Self-Priming,  
Solids-Handling  
Pump

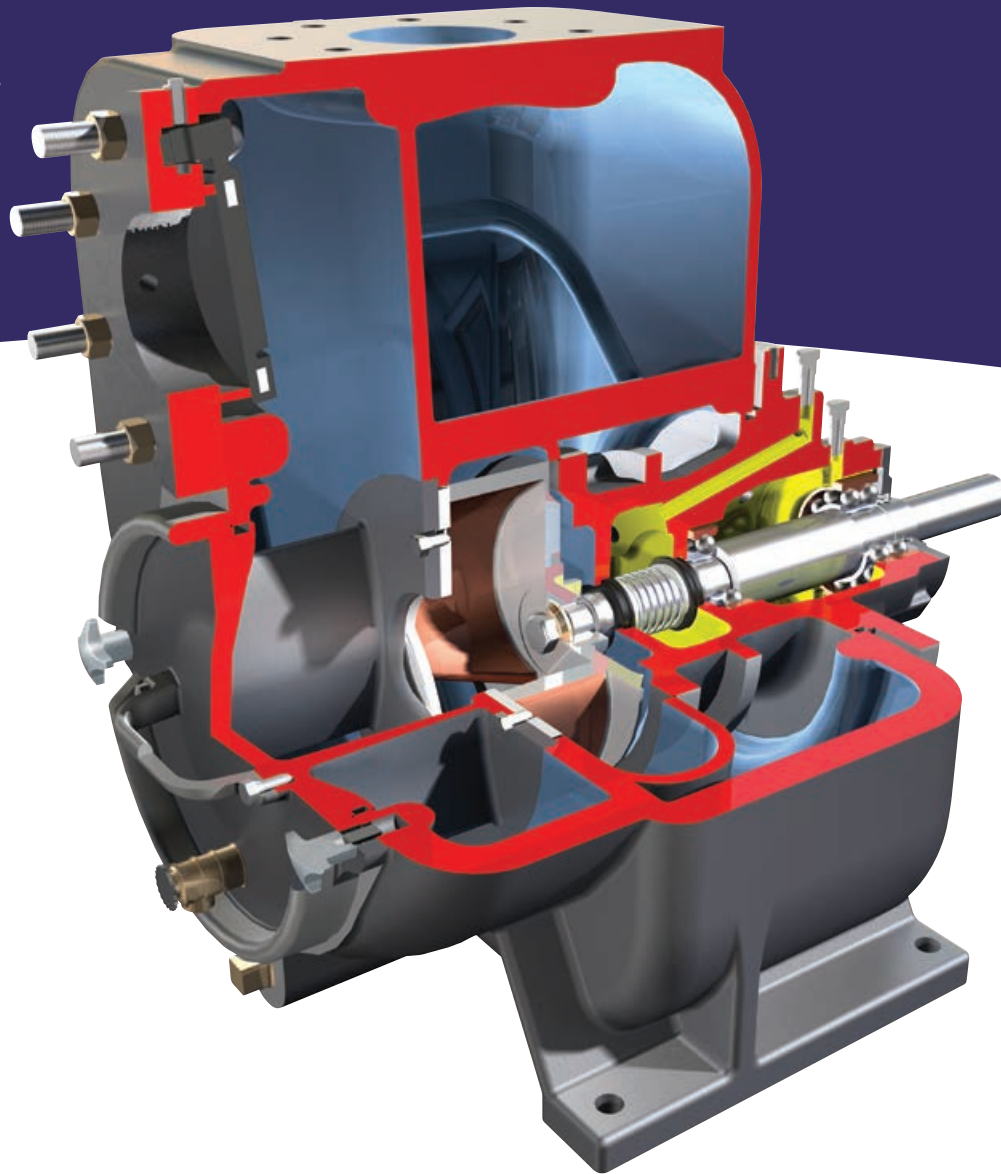

*The Flowserve MPT self-priming, solids-handling pump is engineered for reliability, low cost and long life in demanding services containing solids in suspension. Able to pass solids up to 75 mm (3 in), the MPT deftly handles dirty, gritty water as well as free-flowing slurries, sewage, sewage sludge and many trade effluents.*

**Operating Parameters**

- Flows to 600 m<sup>3</sup>/h (2650 US gpm)
- Heads to 35 m (115 ft)
- Temperatures to 75°C (165°F)
- Working pressures to 5 bar (72 psi)
- Sizes 50 to 200 mm (2 to 8 in)
- Solids to 75 mm (3 in) diameter

**Two-Vane, Semi-Open, Solids-Handling Impeller** has integral back pump-out vanes and is fully balanced. Impeller is threaded to shaft and spigotted for positive location.


**External Impeller Adjustment** via four adjustable bushings allows clearances to be accurately reset, thereby restoring performance.

**Abrasion-Resistant Mechanical Seal** prevents contaminants from entering the seal chamber. Large oil-filled chamber for long seal life.

**Quick-Disconnect Cover Plate** is fitted with a pressure relief valve to facilitate start-up. Quick removal exposes reversible wear plate and permits removal of blockages.

**Heavy-Duty Volute Casing** designed for rugged long life service.

*Double Mechanical Seal*

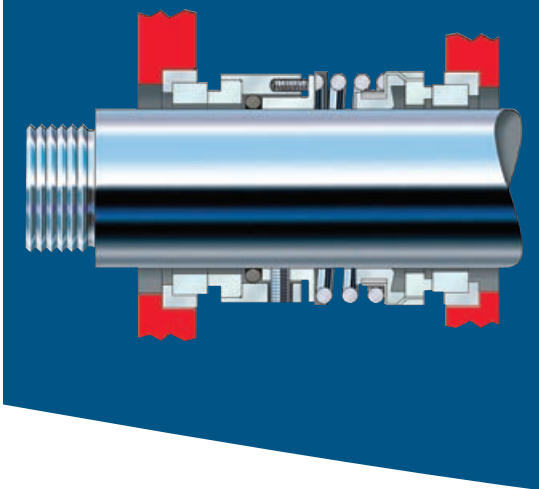

*Quick Disconnect Cover Plate*




### ***Abrasion-Resistant, Double Mechanical Seal***

The MPT comes standard with an abrasion-resistant double mechanical seal in an oil chamber. A hard-faced balanced rotary unit prevents liquid and grit from entering the seal chamber. Oil cools and lubricates the seal faces.


### ***Replaceable Seal Housing***

The MPT employs a replaceable seal housing to facilitate maintenance without disturbing the piping. As part of the back pull-out design, the seal housing is positively located, sealed and fastened to the bearing housing.

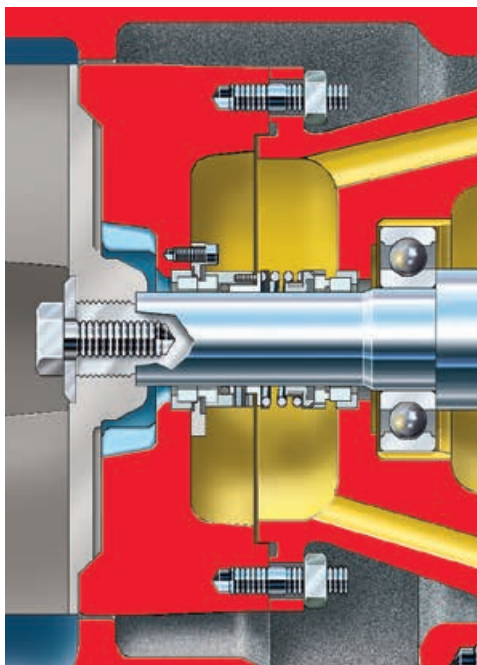


### ***Bearings***

Bearings are oil-lubricated, heavy-duty single row deep groove and angular contact double row type for radial and thrust loads, respectively. A lip seal protects bearings from dust, dirt and water. The bearing housing is equipped with eyebolt, oil breather cap and sight glasses.

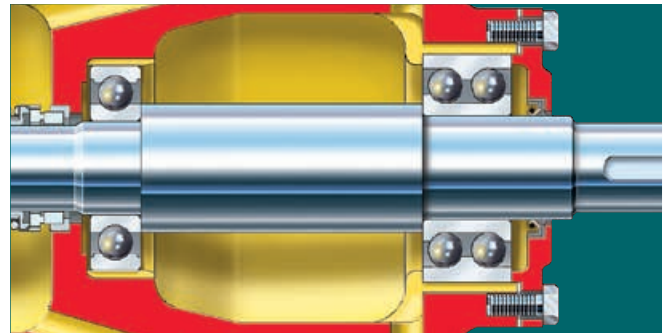

### ***Additional Features***

- Replaceable and reversible wear plate
- Extra large diameter shaft
- Solid one-piece flap valve
- Back pull-out design
- 431 SS shaft standard on all models

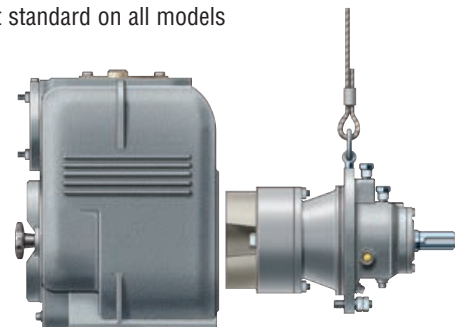

## Options and Technical Data



### Materials

The MPT is readily available from stock in the standard materials of construction. (See table below.) The pump also can be supplied in special materials, including stainless steel.

The choice of materials includes: ● Standard Material ● Optional Material	Casing	Impeller	Shaft	Wear Plate
Grey Cast Iron (CL 30)	●			●
Ductile Iron (A395)		●		
Stainless Steel			●	
CD4MCuN		●		●

### Trailer Mounting


The MPT is easily mounted to a trailer to enable mobile pumping capability at the plant site. This is especially useful for construction site and utility dewatering.

### Drive Options

Though typically belt driven, the following drive methods also are available with the MPT:

- AC motor, direct drive
- Gas engine, direct drive
- Diesel engine, direct drive

### MPT Range Chart

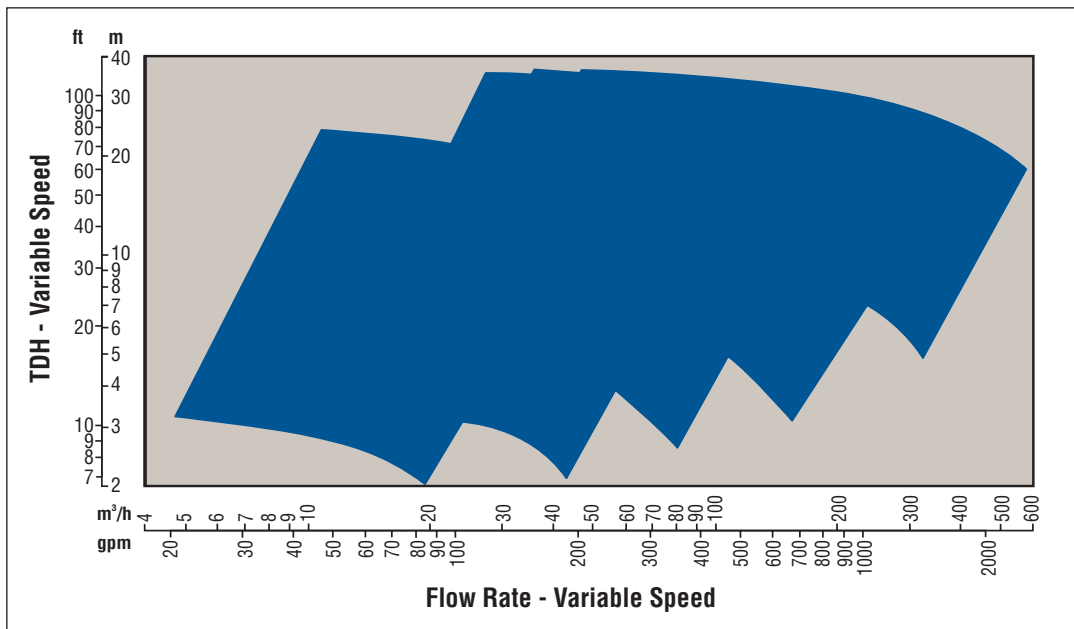

**Global Service  
and Technical  
Support**



## Life Cycle Cost Solutions

Typically, 90% of the total life cycle cost (LCC) of a pumping system is accumulated after the equipment is purchased and installed. Flowserve has developed a comprehensive suite of solutions aimed at providing customers with unprecedented value and cost savings throughout the life span of the pumping system. These solutions account for every facet of life cycle cost, including:

### Capital Expenses

- Initial purchase
- Installation


### Operating Expenses

- Energy consumption
- Maintenance
- Production losses
- Environmental
- Inventory
- Operating
- Removal

### Innovative Life Cycle Cost Solutions


- New Pump Selection
- Turnkey Engineering and Field Service
- Energy Management
- Pump Availability
- Proactive Maintenance
- Inventory Management

### Typical Pump Life Cycle Costs<sup>1</sup>

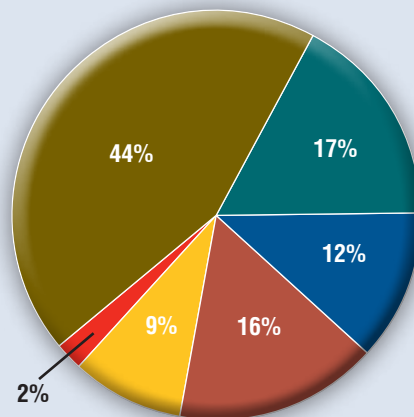

- Energy
- Maintenance and Repair
- Loss of Production
- Purchase and Installation
- Operational
- Decontamination and Removal

<sup>1</sup> While exact values may differ, these percentages are consistent with those published by leading pump manufacturers and end users, as well as industry associations and government agencies worldwide.

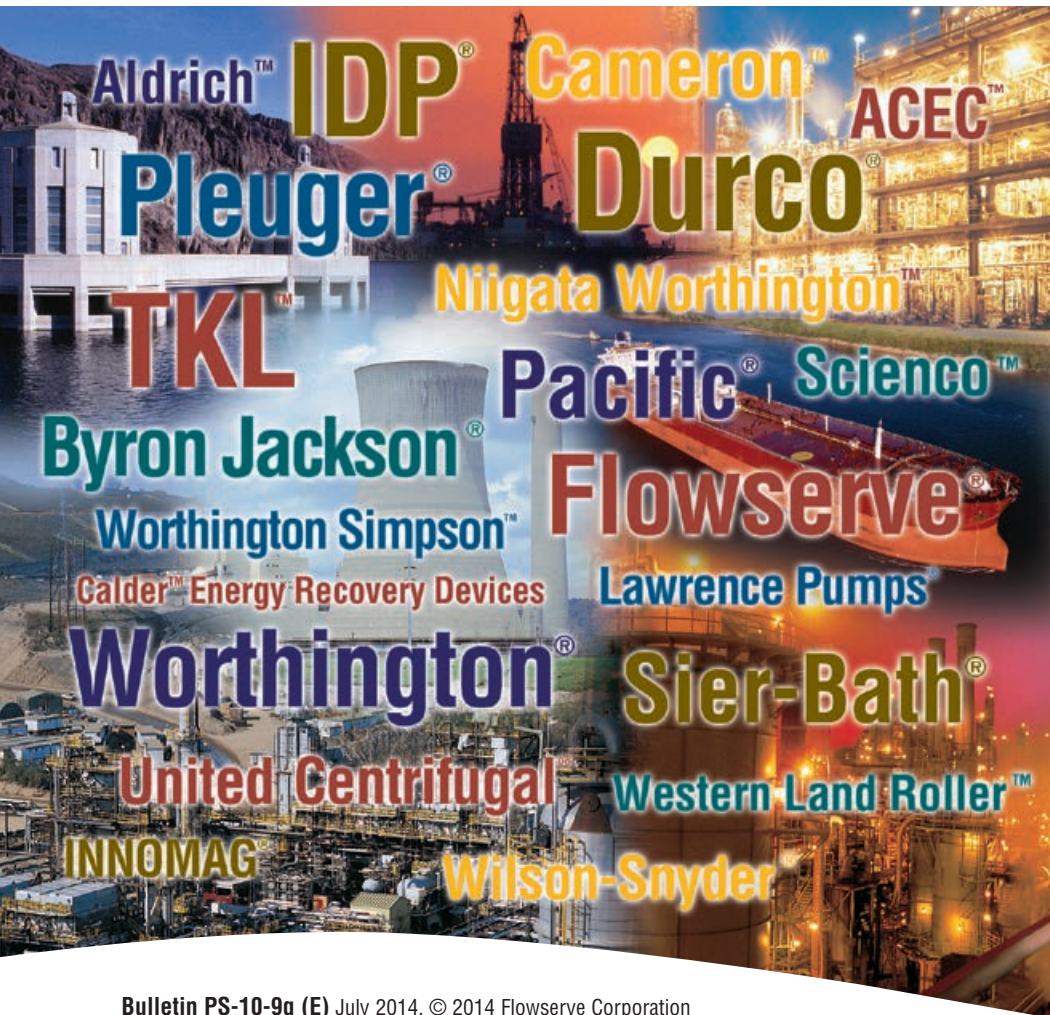

Bulletin PS-10-9g (E) July 2014. © 2014 Flowserve Corporation

*To find your local Flowserve representative:*

**LENNTECH**  
WATER TREATMENT SOLUTIONS

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289