

# Shafer™ RV-Series Rotary Vane Valve Actuators

## Operating Valves in Critical Pipeline Applications



**Shafer™**

  
**EMERSON™**  
Process Management



## Emergency Shut Down & Linebreak Protection

We take on the most  
critical applications.

That's our business!

Exceptional reliability  
with minimal  
maintenance



## Applications

Emerson Process Management – Valve Automation is recognized worldwide for the reliability of its actuators under the most demanding conditions. The Shafer™ RV-Series rotary vane actuator was specifically designed for pipeline applications where rugged dependability of equipment is vital.

Shafer rotary vane actuators are used to automate ball valves or plug valves in all types of severe climatic conditions. Over the last 60 years, more than 100,000 rotary vane actuators have been successfully installed on various kinds of pipelines, and most of the actuators are still in operation.

- Full open/close operation of ball valves and plug valves
- Automation of valves on natural gas pipelines where the actuators are typically powered by natural gas using gas-over-oil technology
  - Emergency Shut Down
  - Mainline isolation
  - Linebreak protection
  - Station blow down
  - Remote valve control
  - Hi/low pressure shutoff
  - River crossings
- The rotary vane's compact size and concentric weight distribution make it ideal for high vibration applications
  - Slurry pipelines
  - Pump and compressor stations
- Valve automation for crude oil or refined products pipelines with precise control of the stroking speed

## Capabilities


- Torque output range:  
1,000 lbf-in to 17.8 million lbf-in  
(113 Nm to 2.0 million Nm)
- Power supply pressure range:  
200 psi (13.8 bar) minimum, up to 3,000 psi (206.8 bar)  
on various models
- Ambient temperature range:  
-20°F to 250°F (-29°C to 121°C) Standard  
-50°F to 250°F (-46°C to 121°C) Optional  
-76°F to 250°F (-60°C to 121°C) Consult Factory

# Capabilities



The rotary vane is a hydraulic powered actuator. Hydraulic force simultaneously forces both of the rotor's vanes away from the stationary shoes producing rotation and perfectly balanced torque output. Hydraulic input power is reversed for rotation in the opposite direction.


There is no conversion of linear to rotary motion, so this highly efficient actuator design produces perfectly balanced torque.

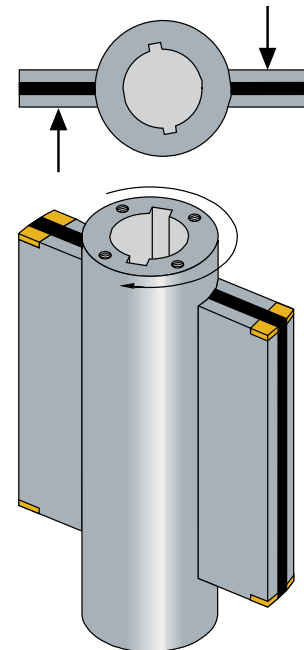

The rotary vane actuator models an ideal torque couple. The resultant force vectors acting on the vanes are always perpendicular to the vane surface. The two opposing forces form a torque couple which is the most efficient method of producing rotation.

The balanced torque output of the rotary vane actuator will not produce any destructive side loading forces that could be transmitted to the valve stem or the actuator's bearings.

## TORQUE OUTPUT PROFILE


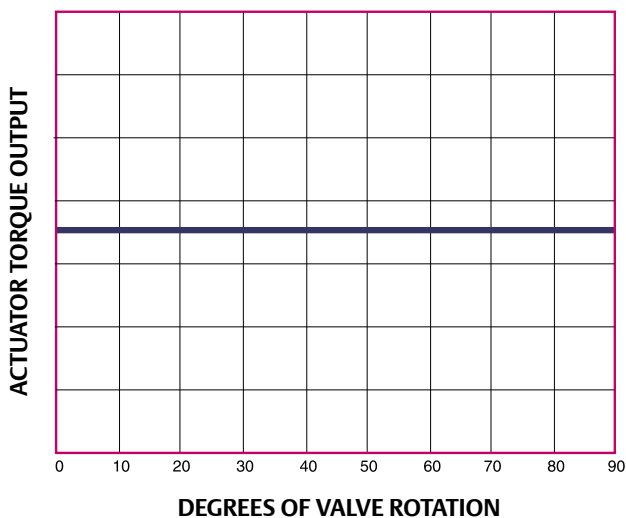


Torque output of the rotary vane actuator remains constant throughout the full rotation of the valve. This ensures that your specified safety factor will not be jeopardized at different positions during the valve stroke. Constant torque output is an especially important feature in the following applications:

- Potentially high flow applications like blow down and line break
- Plug valves or metal to metal seated valves
- Ball valves with rotating seats



# Construction

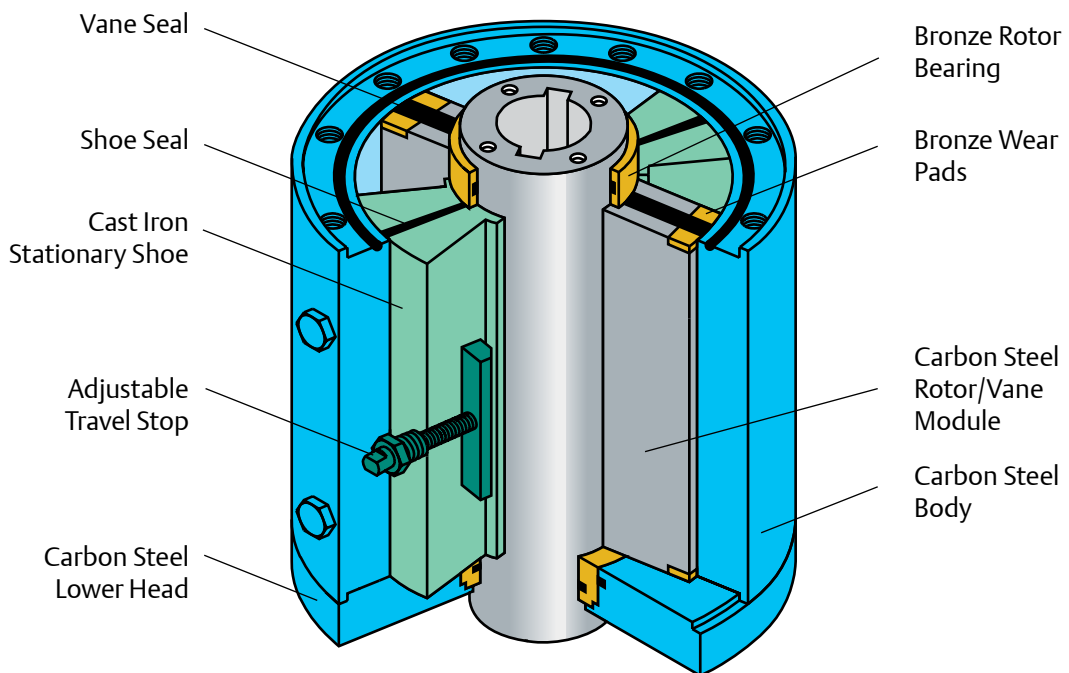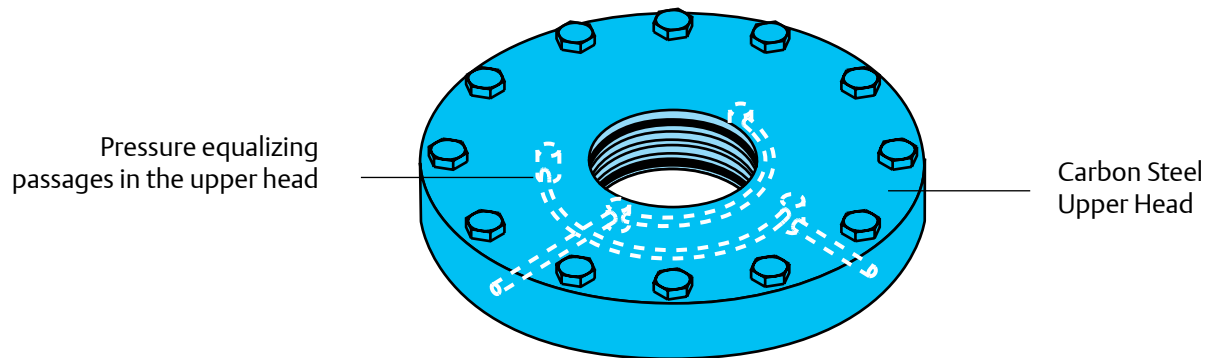


# Performance Features

- Life expectancy is 50 years with minimal maintenance
- Proven reliability backed by a 10 year warranty
- The most compact actuator available
- The double vane design will not generate any side loading forces on the valve stem or actuator bearings
- Constant torque output over the full 90° rotation
- Vibration resistant with the actuator body centered directly over the valve stem and weight equally distributed over the valve flange
- Maximum rated pressure and maximum operating pressure are equal
- Valve response is always smooth and always dependable




# Operating Sequence

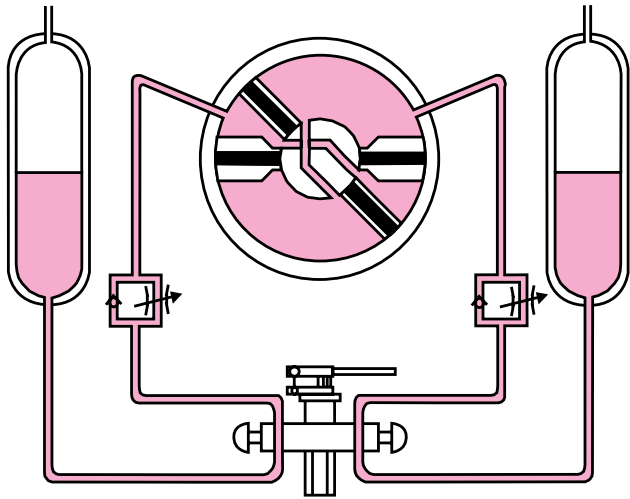


## SEQUENCE 1

The actuator may be powered by a hydraulic power unit, stored gas pressure or by natural gas pressure from a pipeline. In this illustration, the actuator is fitted with gas hydraulic tanks and is powered by gas pressure. In the first sequence, the actuator is in the open position. There is no pressure in the actuator or tanks.

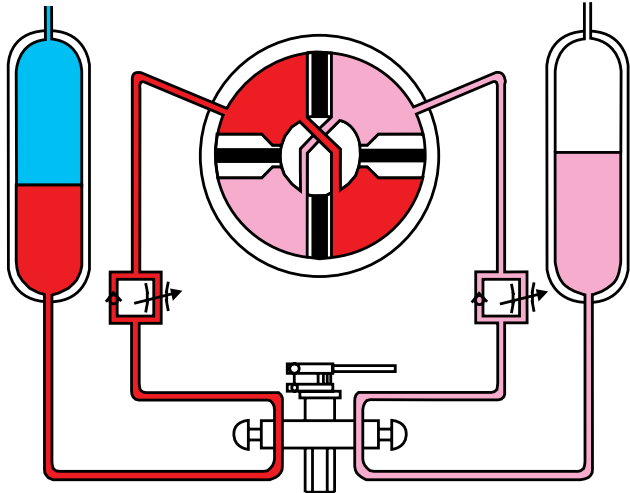




## SEQUENCE 2

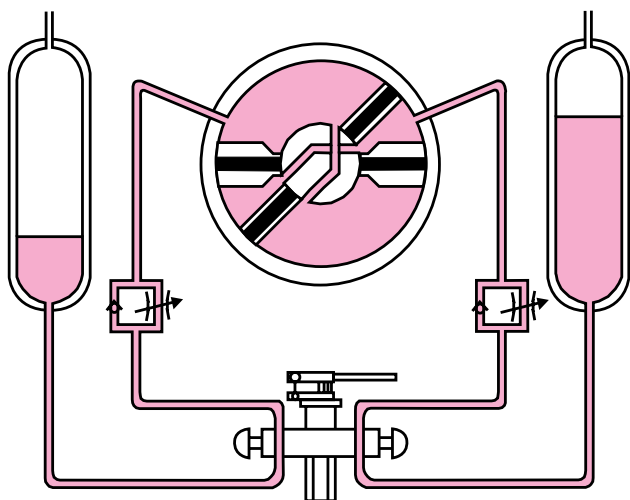The actuator control system is used to admit high pressure gas into the closing gas hydraulic tank. The pressurized gas in the tank forces hydraulic fluid into the actuator's closing port. Pressure equalizing passages allow both closing quadrants to be pressurized simultaneously providing balanced torque as the vanes push away from the stationary shoes. The actuator is rotating clockwise.



## SEQUENCE 3

When the actuator reaches the fully closed position, the control system will allow all remaining pressure in the tank to vent to atmosphere, thus neutralizing the pressure in the tank and actuator.


-  High Pressure Gas
-  Pressurized Hydraulic Fluid
-  Non-Pressurized Hydraulic Fluid

Shafer designs, builds and tests the complete valve operating system, including the actuator, controls and accessories. When you specify Shafer, you receive a complete system, factory tested, field proven and **guaranteed**.

Shafer RV-Series actuators can be operated locally, remotely or automatically by a variety of sensory and control devices. We have developed more than 4000 individual control systems to meet the many requirements of our customers.

## TYPICAL CONTROL SYSTEMS


- Local manual
- Remote two-way electric
- Linebreak Protection sensing rate of pressure drop
- Emergency Shutdown (ESD) or fail-safe
- High/low pressure shutoff

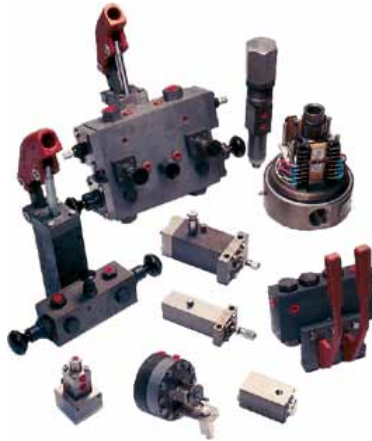

All accessories have undergone thorough testing and field evaluation to insure their performance as part of a larger system

## COMMON ACCESSORIES

- Manual hydraulic hand pump
- Control valves –hydraulic and pneumatic
- Sensors for automatic operation
- Power storage vessels
- Power supply units
- Limit switches and position transmitters
- Speed controls
- Regulators
- Filters



Proven reliability  
backed by a 10 year  
warranty

More than 4000  
control systems  
developed.

We design, build and  
test the complete  
valve control system





**Contact Us: Emerson Process Management, Valve Automation facilities at your nearest location:**

**NORTH & SOUTH AMERICA**

19200 Northwest Freeway  
Houston TX 77065  
USA  
T +1 281 477 4100  
F +1 281 477 2801

2500 Park Avenue West  
Mansfield, OH 44906  
USA  
T +1 419 529 4311  
F +1 419 529 3688

13840 Pike Road  
Missouri City, Texas 77489  
USA  
T +1 281 499 1561  
F +1 281 499 8445

Av. Hollingsworth,  
325, Iporanga Sorocaba,  
SP 18087-105  
Brazil  
T +55 15 3238 3788  
F +55 15 3228 3300

**MIDDLE EAST & AFRICA**

P.O. Box 17033  
Dubai  
United Arab Emirates  
T +971 4 811 8100  
F +971 4 886 5465

P.O. Box 105958  
Abu Dhabi  
United Arab Emirates  
T +971 2 697 2000  
F +971 2 555 0364

P.O. Box 3911  
Al Khobar 31952  
Saudi Arabia  
T +966 3 814 7560  
F +966 3 814 7570

P.O. Box 10305  
Jubail 31961  
Saudi Arabia  
T +966 3 340 8650  
F +966 3 340 8790

P.O. Box 32281  
Doha  
Qatar  
T +974 4 576777  
F +974 4 315448

Al Bradheya , Saeed Ameen St.  
Area Number 29, Villa 61 Basra  
Iraq  
T +971 557 008 704  
F +971 255 503 64

24 Angus Crescent  
Longmeadow Business Estate  
Modderfontein, Ext 5 1609  
P.O.Box 6908  
Greenstone 1616  
South Africa  
T +27 11 451 3700  
F +27 11 451 3800

**EUROPE**

Asveldweg 11  
7556 BR Hengelo (O)  
The Netherlands  
T +31 74 256 1010  
F +31 74 291 0938

Siemensring 112  
47877 Willich  
Germany  
T +49 2154 499 660  
F +49 2154 499 6613

25, Rue de Villeneuve  
Silic – BP 40434  
94583 Rungis  
France  
T +33 1 49 79 73 00  
F +33 1 49 79 73 99

Via Montello 71/73  
20038 Seregno (Milan)  
Italy  
T +39 0362 2285 207  
F +39 0362 2436 55

6 Bracken Hill  
South West Industrial Estate  
Peterlee SR8 2LS  
United Kingdom  
T +44 191 518 0020  
F +44 191 518 0032

2A Szturmowa Str  
02-678 Warsaw  
Poland  
T +48 22 45 89 237  
F +48 22 45 89 231

C/ Francisco Gervás, 1  
28108 Alcobendas – Madrid  
Spain  
T +34 0913 586 000  
F +34 0913 589 145

Letnikovskaya Str. 10-2  
115114 Moscow  
Russia and FSU  
T +7 495 981 98 11  
F +7 495 981 98 10

**ASIA PACIFIC**

No. 9 Gul Road  
#01-02 Singapore 629361  
T +65 6501 4600  
F +65 6268 0028

9/F Gateway Building  
No. 10 Ya Bao Road  
Chaoyang District  
Beijing 100020  
P.R.China  
T +86 10 8572 6666  
F +86 10 8572 6888

No.1 Lai Yuan Road  
Wuqing Development Area  
Tianjin 301700  
P.R. China  
T +86 22 8212 3300  
F +86 22 8212 3308

Lot 13112, Mukim Labu  
Kawasan Perindustrian Nilai  
71807 Nilai, Negeri Sembilan  
Malaysia  
T +60 6 799 2323  
F +60 6 799 9942

471 Mountain Highway  
Bayswater, Victoria 3153  
Australia  
T +61 3 9721 0200  
F +61 3 9720 0588

Delphi B Wing, 601 & 602  
6th Floor, Central Avenue  
Powai, Mumbai – 400 076  
India  
T +91 22 6662 0566  
F +91 22 6662 0500

© 2013 Emerson Process Management. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. "Brand mark listing" are marks of one of the Emerson Process Management family of companies. All other marks are property of their respective owners.

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.