

Siemens SST-600: Highly-versatile

Generator or mechanical drive – the Siemens SST-600 is configured for many possible applications.

The flexible SST-600 packaging fits a broad range of customer needs. It can be designed for optimum backfitting to an existing process, e.g. when a municipal utility is modernized.

Or, when space is limited, it can be adapted as a compact steam turbine package with a small oil piping system, e.g. as a boiler feedwater pump drive.

It is also well suited where high-efficiency steam turbines are demanded. The Siemens SST-600 is the right answer to meet all of these different needs.

Generator drive in various packages

We deliver a standard steam turbine generator set including the SST-600 (with or without gearbox), a generator, oil system, piping and instrumentation and control system.

The standard package can be extended to include a condenser, condensing plant or pre-heating system.

The SST-600 can also be supplied as a multi-casing variant. Siemens is thus offering a steam turbine for smaller applications up to 200 MW, in which even a smaller volume flow through reheat is exploited in a highly efficient manner.


Mechanical drive

The SST-600 is also an efficient and economic mechanical drive. Since the 1970s, hundreds of projects have been successfully implemented all over the world using the SST-600 to directly drive everything from the smallest boiler feed water pump as reliably as the biggest compressor even in the most complex processes. The SST-600 complies with regulations including the API standard.

Siemens SST-600

The SST-600 is a steam turbine designed for operation within a speed range of 3,000 to 18,000 rpm for generators or mechanical drives up to 200 MW. The turbine is used for both condensing and backpressure, either geared or directly coupled. The customized steam path is

arranged according to the customer's needs. The SST-600 with its reliable and flexible design is available with axial or radial exhaust.

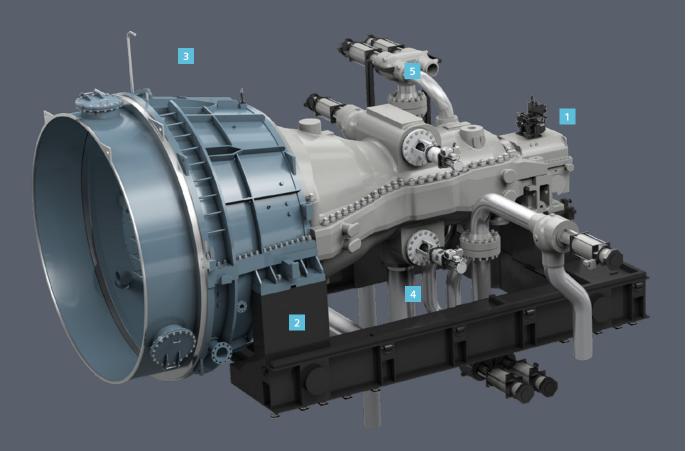

Overview

The SST-600 can be used as:

- Generator drive
- Compressor drive
- Boiler feed water pump drive
- Blower drive

Design enhancements provide:

- Increased efficiency due to lower flow losses
- Reduced start-up times due to faster turbine heat-up
- Fast load changes
- Compact design for simplified transportation
- Simplified maintenance thanks to improved availability, horizontal casing split and independently accessible bearings



Siemens SST-600: Technical overview

Power output:

up to 200 MW

Speed:

• 3,000 to 18,000 rpm

Controlled extractions (up to 2):

- Pressure, ext. valve ≤ 72 bar / 1,044 psi
- Temperature ≤ 480°C / 895° F

Uncontrolled extractions (up to 6):

• Pressure ≤ 85 bar / 1,233 psi

Live steam inlet pressure:


• ≤ 165 bar / ≤ 2,393 psi

Live steam inlet temperature :

• ≤ 565°C / ≤ 1,050° F

Exhaust conditions:

- Back pressure ≤ 80 bar / 1,160 psi
- Condensing ≤ 1.1 bar / 16 psi
- District heating ≤ 3.0 bar / 43 psi

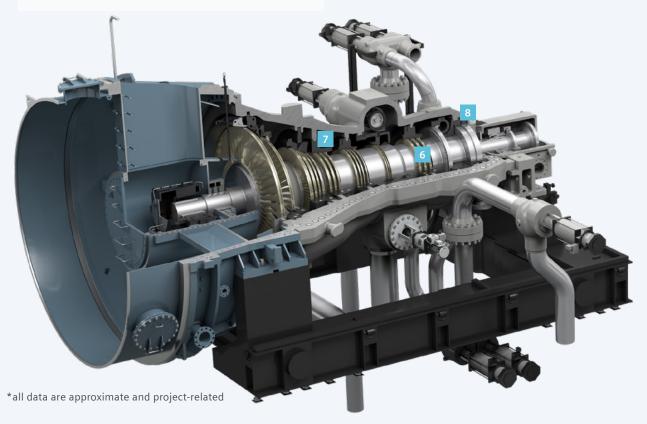

Typical applications for the SST-600















Siemens SST-600: Reference examples



Published by Siemens AG 2018

Power and Gas Division Freyeslebenstrasse 1 91058 Erlangen, Germany

www.siemens.com/steamturbines

For more information, please contact our Customer Support Center. Phone: +49 180 524 70 00 Fax: +49 180 524 24 71 (Charges depending on provider) E-mail: support.energy@siemens.com

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract