

SIEMENS

SINUMERIK 828D

Turning

Control system overview
for machine tools' sales people



09/2009

<u>Preface</u>	
<u>Introduction</u>	1
<u>System overview</u>	2
<u>CNC operation in manual mode (JOG)</u>	3
<u>Tool Management</u>	4
<u>User memory</u>	5
<u>Data transfer</u>	6
<u>Graphical support functions</u>	7
<u>CNC operation in automatic mode (AUTO)</u>	8
<u>CNC performance capability and optimization functions</u>	9
<u>CNC programming methods</u>	10
<u>Simulation</u>	11
<u>CNC technology cycles</u>	12
<u>Complete machining</u>	13
<u>PC software</u>	14
<u>Option list for the SINUMERIK package</u>	15
<u>Summary of the highlights</u>	16

Legal information

Warning notice system

This manual contains notices you have to observe in order to ensure your personal safety, as well as to prevent damage to property. The notices referring to your personal safety are highlighted in the manual by a safety alert symbol, notices referring only to property damage have no safety alert symbol. These notices shown below are graded according to the degree of danger.

⚠ DANGER
indicates that death or severe personal injury will result if proper precautions are not taken.
⚠ WARNING
indicates that death or severe personal injury may result if proper precautions are not taken.
⚠ CAUTION
with a safety alert symbol, indicates that minor personal injury can result if proper precautions are not taken.
CAUTION
without a safety alert symbol, indicates that property damage can result if proper precautions are not taken.
NOTICE
indicates that an unintended result or situation can occur if the corresponding information is not taken into account.

If more than one degree of danger is present, the warning notice representing the highest degree of danger will be used. A notice warning of injury to persons with a safety alert symbol may also include a warning relating to property damage.

Qualified Personnel

The product/system described in this documentation may be operated only by **personnel qualified** for the specific task in accordance with the relevant documentation for the specific task, in particular its warning notices and safety instructions. Qualified personnel are those who, based on their training and experience, are capable of identifying risks and avoiding potential hazards when working with these products/systems.

Proper use of Siemens products

Note the following:

⚠ WARNING
Siemens products may only be used for the applications described in the catalog and in the relevant technical documentation. If products and components from other manufacturers are used, these must be recommended or approved by Siemens. Proper transport, storage, installation, assembly, commissioning, operation and maintenance are required to ensure that the products operate safely and without any problems. The permissible ambient conditions must be adhered to. The information in the relevant documentation must be observed.

Trademarks

All names identified by ® are registered trademarks of the Siemens AG. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

Disclaimer of Liability

We have reviewed the contents of this publication to ensure consistency with the hardware and software described. Since variance cannot be precluded entirely, we cannot guarantee full consistency. However, the information in this publication is reviewed regularly and any necessary corrections are included in subsequent editions.

Preface

Scope of validity

This document provides you with an overview of the range of functions included in the **SINUMERIK 828D** Version **2.6** operator panel controller for turning machines.

The document is focusing on vendors and dealers of machine tools.

Organization of the information

- Of the varied functional features of the SINUMERIK products, only those are listed which are of direct value to the machine user.
- All functions contained in the machine's basic configuration will be identified as follows:
 - ☑ Basic configuration
- All functions not contained in the machine's basic configuration will be identified as follows:
 - ☑ Option: ...
- You can find a summary of the most important unique selling points of the SINUMERIK 828D in the chapter "Summary of highlights".
- For information on marketing options through the machine manufacturer, please see the technical description of each machine.

Subject to change without prior notice

Contact person at machine manufacturer

Marketing & Sales

Phone:	+49 xxx xxx
Fax:	+49 xxx xxx
Email:	xxx@machinemanufacturer.com

Service

Phone:	+49 xxx xxx
Fax:	+49 xxx xxx
Email:	xxx@machinemanufacturer.com

Homepage:

<http://www.machinemanufacturer.com>

Contact person at Siemens

Country	Name	e-mail	Phone
Argentina	Santiago Fernandez Veron	santiago_fernandez.veron@siemens.com	+54 (11) 4738-3348
Belgium	Pieter Vanderhaeghen	pieter.vanderhaeghen@siemens.com	+32 253-69697
Bosnia and Herzegovina	Helmut Stralz	helmut.stralz@siemens.com	+43 51 707 29115
Brazil	Gustavo Marino	marino.gustavo@siemens.com	+ 55 (11) 3908-1752
Bulgaria	Helmut Stralz	helmut.stralz@siemens.com	+43 51 707 29115
China	Yang Yifei	yifei.yang@siemens.com	+86 10 64765236
Denmark	Stefan Karlstrand	stefan.karlstrand@siemens.com	+46 500 774-148
Germany (Headquarters)	Gerhard Micka	gerhard.micka@siemens.com	+49 9131 98 3314
Finland	Juha Meriaho	juha.meriaho@siemens.com	+358 50 59 26181
France	François Chevalier	francois.chevalier@siemens.com	+33 (0)1 49 22 35 19
Great Britain	Tony Bennison	tony.bennison@siemens.com	+44 780 882 2054
India	Narayanan Shankar	narayanan.shankar@siemens.com	+91 99451 88837
Indonesia	Andy Lesmono	andy_lesmono@cncdesign.com.au	+62 21 7918 6001
Italy	Nicodemo Megna	nicodemo.megna@siemens.com	+39 335 6328927
Canada	Sagar Arora	sagar.arora@siemens.com	+1 (416) 270-4964
Korea	Kim Sung Hyun	sunghyun.kim@siemens.com	+ 82 55 268 1906
Croatia	Matjaz Mlinsek	matjaz.mlinsek@siemens.com	+386 1 47 46 152
Lithuania	Juha Meriaho	juha.meriaho@siemens.com	+358 50 59 26181
Malaysia	Ridwan Aziz	ridwan_aziz@cncdesign.com.au	+603 5621 6126
Mexico	Marco Lopez	marco.lopez@siemens.com	+52 (55) 5328-2000
Netherlands	Frank de Korte	frank.de.korte@siemens.com	+31 70 333 1568
Norway	Stefan Karlstrand	stefan.karlstrand@siemens.com	+46 500 774-148
Austria	Helmut Stralz	helmut.stralz@siemens.com	+43 51 707 29115
Portugal	Molaguero Godoy	juan.molaguero.ext@siemens.com	+34 670929001
Romania	Matjaz Mlinsek	matjaz.mlinsek@siemens.com	+386 1 47 46 152
Russia	Alexander Kudinov	alexander.kudinov@siemens.com	+7 495 737 2442
Sweden	Stefan Karlstrand	stefan.karlstrand@siemens.com	+46 500 774-148
Switzerland	Hans-Peter Kueng	hans-peter.kueng@siemens.com	+41 585 581 524
Serbia Montenegro	Helmut Stralz	helmut.stralz@siemens.com	+43 51 707 29115
Slovakia	Matjaz Mlinsek	matjaz.mlinsek@siemens.com	+386 1 47 46 152
Slovenia	Matjaz Mlinsek	matjaz.mlinsek@siemens.com	+386 1 47 46 152
Spain	Molaguero Godoy	juan.molaguero.ext@siemens.com	+34 670929001
Taiwan	Jerry Lin	jerry.lin@siemens.com	+886 4 2261 9225
Thailand	Rajeev Madhyastha	rajeev_madhyastha@cncdesign.com.au	+66(0)2993 7485
Czech	Eva Klocova	eva.klocova@siemens.com	+420 605726829
Turkey	Taner Okayi	taner.okayi@siemens.com.tr	+90 216 459 3906
Hungary	Istvan Joo	istvan.joo@siemens.hu	+36 1 471 1598
USA	Jon Cruthers	jon.cruthers@siemens.com	+1 (847) 952 4124
Vietnam	Pham-Vu Trung	pham-vu.trung@siemens.com	+84 908 346 534

Homepage:

For further information please visit ...

<http://www.siemens.de/cnc4you>

<http://www.automation.siemens.de/doconweb>

Table of contents

	Preface	3
1	Introduction	9
	1.1 Application.....	9
	1.2 Machine spectrum.....	9
2	System overview	11
	2.1 SINUMERIK 828D	11
	2.2 SINUMERIK 828D operator panels	12
	2.3 Performance versions	13
	2.4 Maintenance-free operation	13
	2.5 Languages of operating software	14
3	CNC operation in manual mode (JOG)	15
	3.1 TSM universal cycle	15
	3.2 Stock removal	16
	3.3 Measure tool	17
	3.4 Measure workpiece	18
	3.5 Work offsets	19
4	Tool Management	21
	4.1 Tool table	21
	4.2 Monitoring of tool life and quantity of workpieces	22
	4.3 Replacement tools	22
5	User memory	23
	5.1 Buffered CNC work memory	23
	5.2 Memory expansion by compact flash card	23
6	Data transfer	25
	6.1 Interfaces	25
	6.2 Program manager	26
	6.3 Data transfer by serial interface	27
	6.4 Data transfer using a USB memory stick or compact flash card	27
	6.5 RCS Commander.....	28
	6.6 Ethernet networking	29
	6.7 Easy Message.....	29

7	Graphical support functions	31
7.1	Animated Elements	31
7.2	Onboard documentation.....	32
8	CNC operation in automatic mode (AUTO).....	33
8.1	Block search.....	33
8.2	Program control.....	34
8.3	Simultaneous recording	35
9	CNC performance capability and optimization functions	37
9.1	80bit NANO ^{FP} accuracy.....	37
9.2	Jerk limitation	38
9.3	Dynamic feedforward control	38
10	CNC programming methods	39
10.1	Overview of programming methods	39
10.2	programGUIDE and SINUMERIK CNC programming	40
10.2.1	Introduction	40
10.2.2	Program editor	40
10.2.3	Languages	41
10.2.4	programGUIDE input support.....	42
10.3	ShopTurn.....	43
10.3.1	Introduction	43
10.3.2	Sequence editor	43
10.3.3	Interlinking of sequences	44
10.3.4	Broken-line graphics	45
10.4	Online ISO dialect interpreter.....	46
11	Simulation.....	47
11.1	2D simulation	47
11.2	3D simulation	48
12	CNC technology cycles.....	49
12.1	CNC technology cycles for programGuide and ShopTurn.....	49
12.2	Highlights of machining cycles.....	50
12.2.1	Stock removal along contour with blank contour	50
12.2.2	Engraving cycle.....	51
12.2.3	Counterspindle cycle.....	52
12.2.4	Residual material detection during turning.....	53
12.2.5	Detection of residual material when milling.....	54
12.2.6	Process measurements for workpieces and tools	55
13	Complete machining	57
13.1	End face machining (TRANSMIT).....	57
13.2	Peripheral surface machining (TRACYL).....	58

14	PC software	59
14.1	CAD reader for PC.....	59
14.2	SinuTrain.....	60
14.3	Computer-based training	60
15	Option list for the SINUMERIK package	61
16	Summary of the highlights	63
	Index	65

Introduction

1.1 Application

With the SINUMERIK 828D you get a CNC system which is customized for the application in turning and milling machines. CNC, PLC, user interface and axis control for six CNC measuring circuits are all combined within a single compact unit. The controller provides comprehensive CNC functions such as support of counterspindle machining and a powerful tool management capability. The SINUMERIK 828D offers comprehensive turning capabilities specially for turning machines as well as drilling and milling operations for face machining and peripheral surface machining of workpieces. The performance of the controller and the new motion control allow you to achieve mirror finish surfaces with a minimum machining time.

The SINUMERIK 828D has eliminated all unnecessary functionalities; this is particularly noticeable in the graphical user interface. This means it is optimally suitable for use in the workshop. Operation, programming and maintenance can quickly be mastered without any heavy training requirement.

- Optimum operator guidance thanks to CNC input screens with animated elements
- Easy data exchange thanks to USB, CF and Ethernet interfaces on the panel front
- Integral mobile radio modem for optimum process monitoring via mobile phone

1.2 Machine spectrum

The SINUMERIK 828D is perfectly tailored for equipping horizontal and vertical turning centers with one machining channel and up to eight CNC measuring circuits,

Apart from the main spindle and the geometry axes (X axis and Z axis), further machine units can also be operated:

- CNC controlled turret
- Tailstock axis (with travel to fixed stop)
- Driven tools and C axis mode for end face and peripheral surface machining
- Y axis (orthogonal or oblique)
- Counterspindle with synchronous spindle function for complete machining of workpieces

System overview

2.1 SINUMERIK 828D

The SINUMERIK 828D is a complete unit comprising screen, CNC keyboard and CNC electronics.

The motors can be easily connected to the digital drives via DRIVE-CLiQ. In combination with the modular structure of the SINAMICS S120 drive system, this design is conceived to ensure very simple and rugged installation with minimum wiring overhead.

The performance range of the controller has been selected to meet the requirements of standardized turning and milling machines - from one-off production runs to industrial scale manufacture.

- Digital drive controller
- Modular design for drive controller and power unit
- Up to 6 axes/spindles for milling applications
- Intelligent control functions meeting the highest standards of machining technology



Highlights



- **Maximum reliability due to compact design with few interfaces**
- **The same hardware for milling and for turning, leading to optimum spare parts management.**

2.2 SINUMERIK 828D operator panels

The operator panel consists of a hard-wearing die-cast magnesium alloy and is available in two versions, for horizontal and vertical mounting.

- 10.4" TFT color display
- Integrated QWERTY full CNC keyboard with short-stroke keys
- USB, CF card and Ethernet interfaces on the operator panel front



Highlights



- All relevant functions at a glance, thanks to horizontal and vertical softkeys
- Simple data handling using easily accessible sockets for USB and compact flash card storage media on the front panel

2.3 Performance versions

The 828D is available in two performance versions: the PPU 260/261 and the PPU 280/281. These allow optimum matching to the demands of the machine.

Scope of performance	PPU 260 / 261	PPU 280 / 281
Minimum block cycle time	~6 ms	~6 ms
CNC work memory	3 MB	5 MB
Maximum number of tools/cutting edges	128/256	256/512
Maximum number of axes/spindles	6	8

Highlights



- Outstanding performance even with the standard package
- Complete machining with counterspindle with expansion stage PPU 280/281

2.4 Maintenance-free operation

The SINUMERIK 828D offers maintenance-free operation:

- High reliability, as the SINUMERIK 828D does not have a hard disk, battery or fan
- Storage of part programs on a NVRAM, so no loss of data even during an extended loss of power

Highlight



- Highest machine availability thanks to reliable hardware

2.5 Languages of operating software

Basic configuration

The following languages are available on the operator interfaces of the SINUMERIK 828D. Pressing the CTRL + L keys or by softkey switching you can toggle between between languages.

- Chinese Simplified
- Chinese traditional
- German
- English
- French
- Italian
- Korean
- Portuguese
- Spanish

on request

Language extensions for the HMI sl operating software are available on request for the following languages:

- Danish
- Finnish
- Japanese
- Dutch
- Polish
- Romanian
- Russian
- Swedish
- Slovakian
- Czech
- Turkish
- Hungarian

Highlights



- Operator interface in your language so that the CNC is easy to learn and safe to operate
- All languages are available on the control and can online be changed


CNC operation in manual mode (JOG)

3.1 TSM universal cycle

Basic configuration

A universal cycle is available in the setup for the most commonly used machine functions:

- Tool change with direct access via the tool table (T)
- Spindle speed and direction (S)
- M functions (M)
- Activation of work offsets

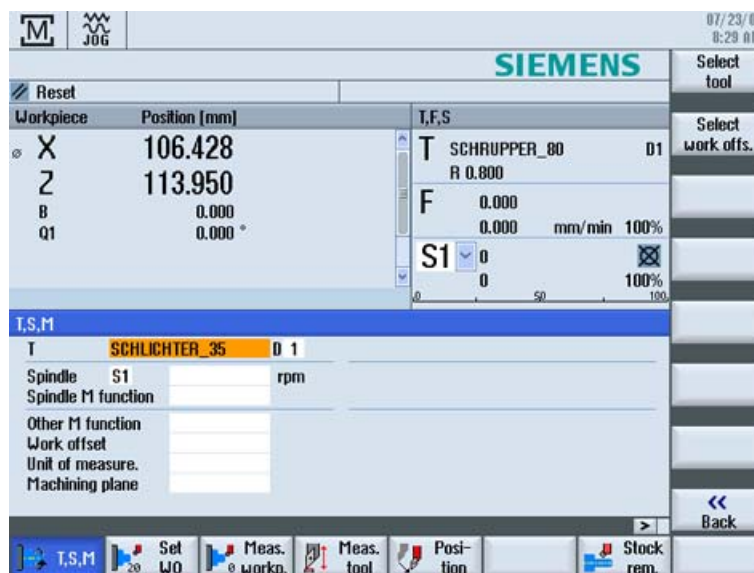

Highlight



- Take-over and change-in tools directly from the tool table



3.2 Stock removal

Basic configuration

Stock removal is conveniently available in the set-up. Soft collet chucks can, for example, be turned with this cycle.

The following parameters can be specified:

- Roughing or finishing
- Undercut for soft collet chucks

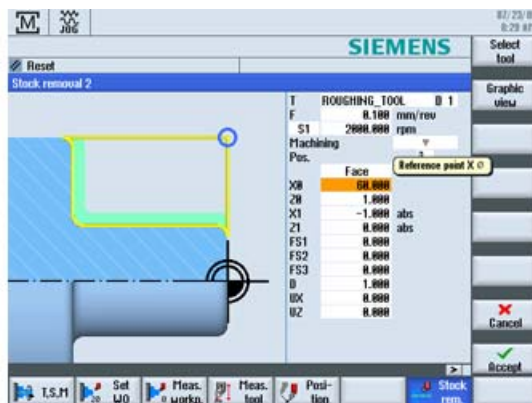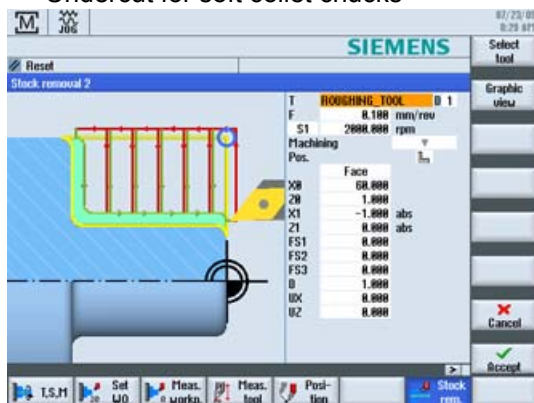

Highlight



- Preparation of workpiece or collet chuck without having to create a part program


3.3 Measure tool

Basic configuration

The tool compensation value can be directly determined in the machine set-up.

The following variants are supported:

- Touch chuck
- Determine lengths via reference diameter
- Tool measuring probe (tooleye) or magnifier

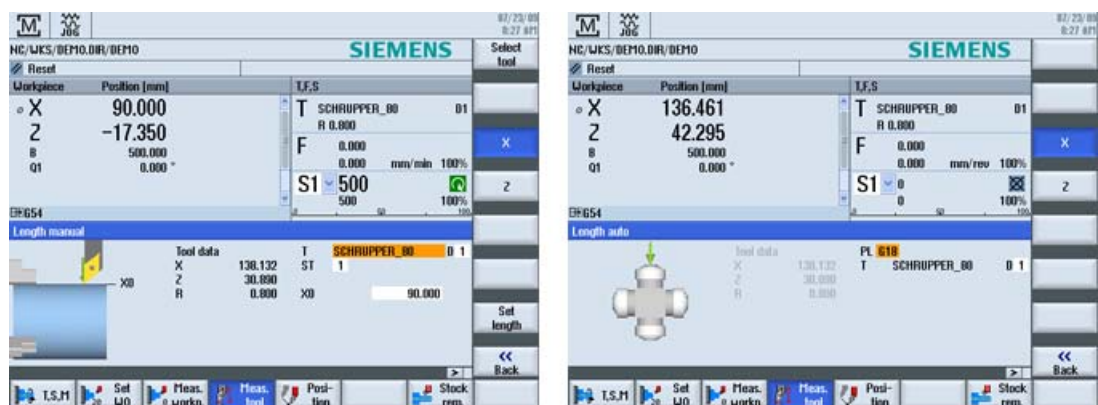

Highlight




- User-friendly functions for determining the tool dimensions directly in the machine

3.4 Measure workpiece

Basic configuration

The workpieces can be measured as follows:

- Reference tool

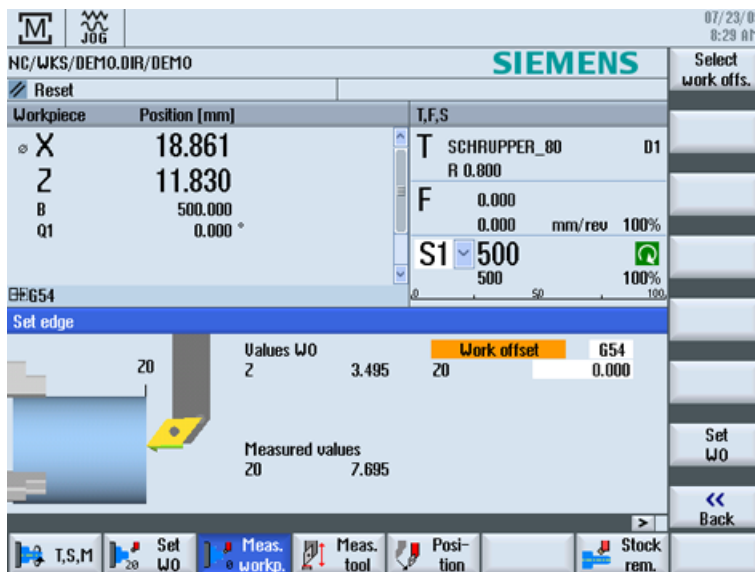

Highlight



- Fast zero point definition by dialog

3.5 Work offsets

Basic configuration

The following adjustable work offsets are available to you:

- A basic offset
- Maximum of 99 work offsets (G54, G55 ...)
- Each work offset with axis rotation and fine offset

	X	Z	B	Q1	C
G54	0.000	15.325	0.000	0.000	0.000
Fine	0.000	0.000	0.000	0.000	0.000
G55	0.000	190.000	0.000	0.000	0.000
Fine	0.000	0.000	0.000	0.000	0.000
G56	0.000	0.000	0.000	0.000	0.000
Fine	0.000	0.000	0.000	0.000	0.000
G57	0.000	0.000	0.000	0.000	0.000
Fine	0.000	0.000	0.000	0.000	0.000
G58	0.000	0.000	0.000	0.000	0.000
Fine	0.000	0.000	0.000	0.000	0.000
G59	0.000	0.000	0.000	0.000	0.000
Fine	0.000	0.000	0.000	0.000	0.000
G599	0.000	0.000	0.000	0.000	0.000
Fine	0.000	0.000	0.000	0.000	0.000

	X	Z	B	Q1	C
G54	0.000	15.325	0.000	0.000	0.000
Total WO	0.000	15.325	0.000	0.000	0.000

Highlights



- Flexible machining due to great number of adjustable work offsets
- Unlimited possibilities of programmable work offsets

Tool Management

4.1 Tool table

Basic configuration

Tools with their complete operating data can be managed in the tool list.

- The maximum number of tools/cutting edges for the controllers is:
 - PPU 260/261: 128/256
 - PPU 280/281: 256/512
- Tools are assigned to the desired magazine locations with the load function.
- For each tool, you can store the following data:
 - Tool type: e.g. roughing tools, finishing tools, plunge cutters, drilling and milling tools
 - Clear tool name in plain text, example: ROUGHING_TOOL_80DEGREES
 - Max. of 9 cutting edges per tool
 - Tool length and cutting plate geometry
 - Nose angle for drills or number of teeth for milling tools
 - Direction of spindle rotation and coolant (level 1 and 2)
- Direct transfer of the tool from the list in the program or for measurement

Loc.	Type	Tool name	ST	D	Length X	Length Z	Radius		Magazine 1	Loc. leng
1		SCHRUPPER_80	1	1	138.132	30.890	0.800	←	93.0 80	11.0
2		SCHRUPPER_55	1	1	134.310	35.920	0.800	←	93.0 55	11.0
3		SCHLICHTER_35	1	1	131.620	33.820	0.400	←	93.0 35	11.0
4		FRAESER_6_ST	1	1	41.320	30.000	6.000	4		
5		ZENTRIERER_ST	1	1	12.320	87.210	3.000		118.0	
6		BOHRER_5_ST	1	1	11.000	106.200	5.000		118.0	
7		GEBO_ST	1	1	9.500	87.000	5.000		1.000	
8		STECHE_3	1	1	65.720	26.420	0.100		3.000	11.0
9		GEWINDESTAHL_1.5	1	1	45.080	48.310	0.200			
10		SCHRUPPER_80	2	1	138.130	30.820	0.800	←	93.0 80	11.0
11		SCHRUPPER_80	3	1	138.150	30.840	0.800	←	93.0 80	11.0
12										
13										
14										
15										
16										
17										

Highlights



- All tool data at a glance
- Simple and secure handling via unmistakable tool names

4.2 Monitoring of tool life and quantity of workpieces

Basic configuration

You can use the SINUMERIK 828D to monitor the service life of your tools and the number of exchanges. You can give your tools meaningful names instead of cryptic numbers. You will come to appreciate this convenience when you read the CNC program, if not before.

- Monitor cutting time (T) in minutes or number of exchanges (C)
- Prewarning limit for timely preparation of new tools
- If the desired tool is not in the magazine, the SINUMERIK 828D will request a manual tool change.

Loc.	Type	Tool name	ST	D	ΔLength Z	ΔRadius	T _c	Set val	Prewar limit	Tool life	D
1		SCHRUPPER_80	1	1	0.000	0.000	T	30.0	25.0	29.5	
2		SCHRUPPER_55	1	1	0.000	0.000					
3		SCHLICHTER_35	1	1	0.000	0.000					
4		FRAESER_6_ST	1	1	0.000	0.000					
5		ZENTRIERER_ST	1	1	0.000	0.000					
6		BOHRER_5_ST	1	1	0.000	0.000					
7		GEBO_ST	1	1	0.000	0.000					
8		STECHEER_3	1	1	0.000	0.000					
9		GEWINDESTAHL_1.5	1	1	0.000	0.000					
10											
11											
12											
13											
14											
15											
16											
17											

Highlights



- Reduction of machine standstill times via tool monitoring
- Support of tool life monitoring or job time monitoring as standard

4.3 Replacement tools

Option: Replacement tools for tool management

If needed, you can even use the SINUMERIK 828D to manage replacement tools (sister tools). Tools with the same name are created as replacement tools. The replacement tools are identified with an incrementing number in the ST column.

Loc.	Type	Tool name	ST	D	Length X	Length Z	Radius	Loc. leng
1		SCHRUPPER_80	1	1	138.132	30.890	0.800	93.0 80 11.0
2		SCHRUPPER_55	1	1	134.310	35.920	0.800	93.0 55 11.0
3		SCHLICHTER_35	1	1	131.620	33.820	0.400	93.0 35 11.0
4		FRAESER_6_ST	1	1	41.320	30.000	6.000	4
5		ZENTRIERER_ST	1	1	12.320	87.210	3.000	118.0
6		BOHRER_5_ST	1	1	11.000	106.200	5.000	118.0
7		GEBO_ST	1	1	9.500	87.000	5.000	1.000
8		STECHEER_3	1	1	65.720	26.420	0.100	3.000 11.0
9		GEWINDESTAHL_1.5	1	1	45.080	48.310	0.200	
10		SCHRUPPER_80	2	1	138.130	30.820	0.800	93.0 80 11.0
11		SCHRUPPER_80	3	1	138.150	30.840	0.800	93.0 80 11.0
12								
13								
14								
15								
16								
17								

Highlight



- Automatic tool exchange for unmanned operation

User memory

5.1 Buffered CNC work memory

Basic configuration

	PPU 260 / 261	PPU 280 / 281
CNC work memory	3 MB	5 MB

Highlight



- Exceptionally large storage space in basic configuration already

5.2 Memory expansion by compact flash card

Basic configuration

CF card not included in the scope of delivery

A compact flash card slot is located directly at the operator panel front of the SINUMERIK 828D.

- Cover can be closed while the card is inserted in order to protect the unit from dust.
- No special software necessary for reading/writing compact flash cards via PC

Note:

Please ensure you use robust, high-quality compact flash cards for industrial use.



Highlight



- Commercially available mass storage as low-cost memory expansion

Data transfer

6.1 Interfaces

Basic configuration

The SINUMERIK 828D has the following interfaces available on the front panel of the unit. You can access the respective storage media using the program manager.



Highlights




- Freedom in the selection of the mass storage device
- Optimum accessibility for data transfer directly at the front of the operator panel

6.2 Program manager

Basic configuration

The program manager offers you an optimum overview of the directories and programs, and very easy-to-use file handling. It supports plain names of up to 24 characters for directories and files. Subdirectories can also be managed on external storage media such as CF cards and USB sticks.

All storage media including the network drives are displayed in the program manager. The part programs can be edited in all media.

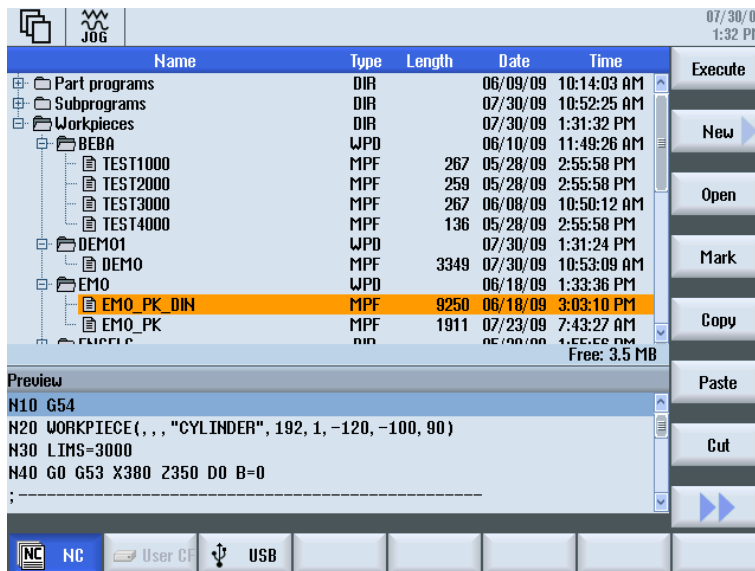

Highlight



- Easy and open exchange of data between the various storage media and the network
- User-friendly data handling in typical PC style with copy, paste, rename, etc.
- Preview window permits quick identification of programs without having to open them

6.3 Data transfer by serial interface


☑ Basic configuration

The SINUMERIK 828D permits easy data transfer to and from PCs, using the RS232C interface.

The main application for this is data archiving of part programs

Note:

You can use the RS232C interface either as a serial interface or the modem connection for Easy Message.

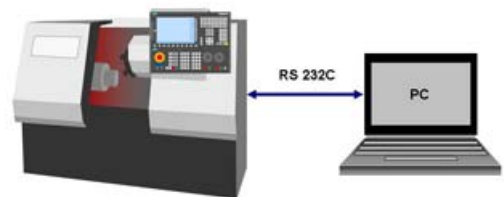

Highlight



- Easy and tried and tested data transfer, even using the serial interface

6.4 Data transfer using a USB memory stick or compact flash card

☑ Basic configuration

The SINUMERIK 828D has a USB stick socket on the front panel and another on the rear panel. The socket for a compact flash card is located on the front panel.

- Storage media can be inserted or removed during operation, i.e. the machine does not have to be restarted in order for the storage medium to be recognized.
- Loading, editing and executing of part programs from the storage medium
- When executing part programs from a storage medium there is no loss of speed (DNC operation), in which case executing from a CF card is recommended
- No special software is necessary for reading/writing the storage medium stick on the PC



Highlight



- Efficient and reliable solution for handling a large volume of user data
- Freedom in the selection of the mass storage device
- Part programs can also be edited directly on the storage medium

6.5 RCS Commander

- ☑ Basic configuration

Installation of the RCS Commander from the CD-ROM (included in the scope of delivery)

- ☑ Option: RCS Host remote diagnostics function

The RCS Commander is a powerful free-of-charge tool for the PC. It allows you to move data easily into the CNC controller using drag & drop. In addition, it offers a convenient means of viewing the contents of the CNC screen display on the PC. Simply connect your PC or Notebook on which the RCS Commander is installed to the Ethernet interface on the front panel. The network configuration will automatically include the SINUMERIK 828D. No knowledge of networks is required.

The SINUMERIK 828D also supports remote diagnostics via the Ethernet (see options). When connecting the PC to several machines, only one PC license is necessary for remote diagnostics via Ethernet. All machine tool controller diagnostic functions are also available in remote diagnostics.



Highlight



- Simple data transfer by drag & drop
- Remote diagnostics means shorter response times and reduced service costs
- Easy transfer of the contents of the screen display from the CNC to the PC; ideal for training purposes etc. (connecting a projector to the PC)

6.6 Ethernet networking

- ☑ Option: Control additional drives using Ethernet

The SINUMERIK 828D is set up for Ethernet (TCP/IP) networking (RJ45 connection).

- The data transfer rate is 10/100 Mbps.
- Remote access to the controller via the RCS Commander, e.g. for commissioning and remote diagnostics
- Access to the network drives is available directly from the program manager. No additional software is required on the server.

Note:

In addition to the Ethernet interface for a point to point connection to a PC (RCS Commander), the SINUMERIK 828D also has a second Ethernet interface for a fixed factory network.

Highlight




- Easy and economical connection via Ethernet (TCP/IP) to Windows PCs or Unix workstations
- No software needs to be installed on the servers

6.7 Easy Message

- ☑ Basic configuration, SIM card not included in the scope of delivery
- ☑ Option: Mobile-radio modem

Easy Message allows process information such as the degree of wear of tools to be sent simply by SMS to your cellular phone. The mobile phone modem with its associated mobile phone antenna ensures optimum transmission characteristics even in a harsh industrial environment.

- Personalized messaging thanks to user management
- Any text messages can be sent out directly from the CNC part program
- Short reaction time when performing service work is achieved by transmitting fault messages or maintenance information by SMS

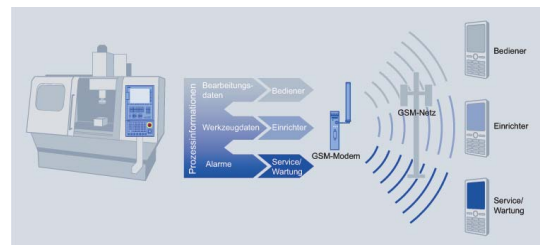

Highlight




- The right information to the right person thanks to user management
- Short response times allow perfect service

Graphical support functions

7.1 Animated Elements

Basic configuration

To illustrate which parameters affect what in the machining, the SINUMERIK 828D offers a new input support function with moving picture sequences. For instance, the difference between constant and changing cutting depth during stock removal or the turning direction of the main or counterspindle when accepting the workpiece for reverse side machining are shown.

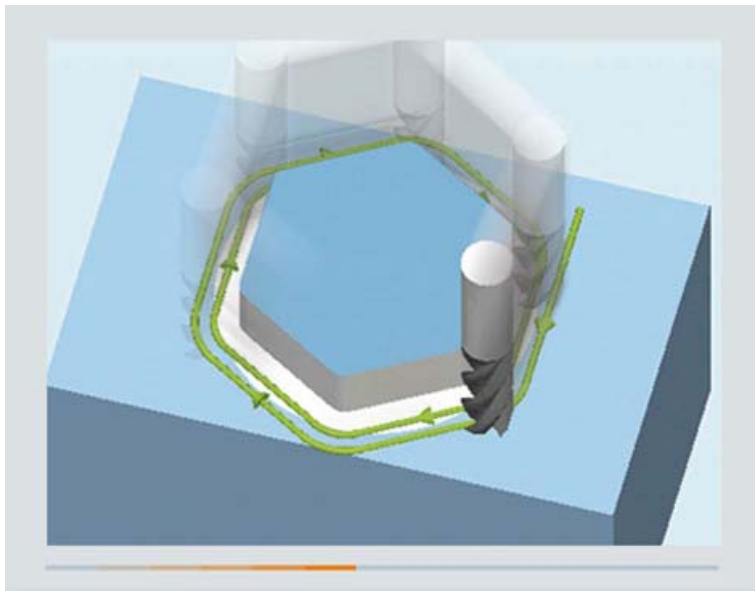

Highlight




- Process reliability during the setup
- Increased reliability at program input by easily understood depiction of selection options

7.2 Onboard documentation

Basic configuration

For each input field in the operating screens, SINUMERIK 828D automatically displays help in the form of a "cursor text". The SINUMERIK 828D provides further information in the form of a complete context-sensitive help system with many useful details and graphics.

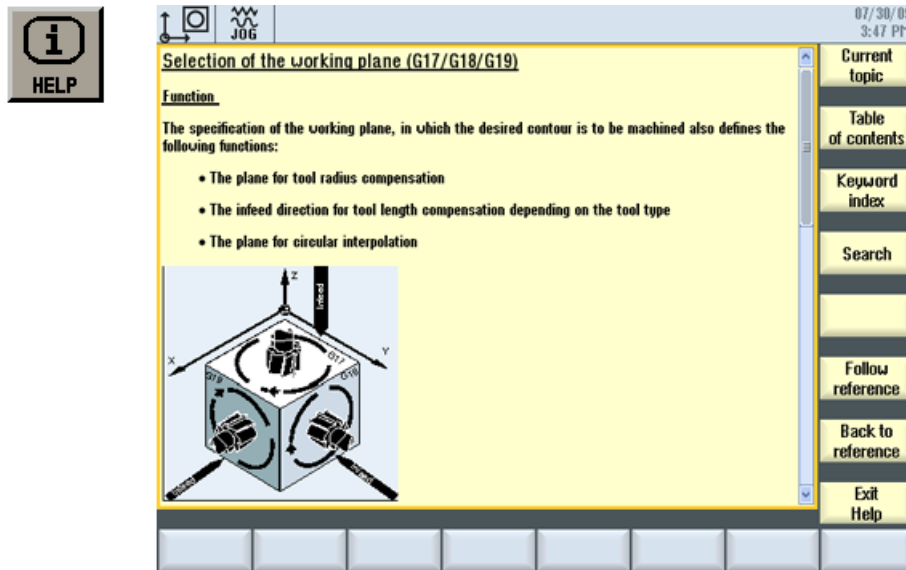

Highlight



- Programming on the machine without a handbook
- Help button to toggle between the editor and help screens

CNC operation in automatic mode (AUTO)

8.1 Block search

Basic configuration

A block search may be executed in machine status RESET, e.g. after a program interruption or to specifically return to machining. The program data are prepared in such a way that all relevant parameters (tool, work offsets, M functions etc.) are available when accessing the program.

The following search variants are available:

- Specifically to the interruption point
- To any CNC block in the DIN/ISO programs
- To any subroutine levels in DIN/ISO programs
- In work plan programs
- In position patterns when programming work plans
- Accelerated block search in large mold making programs

Program	Ext	P	Line	Type	Target
1 : DEMO	MPF	1	2	Line	N20 F_ROUGH("SCHRUPPER
2 :		0	0		
3 :		0	0		
4 :		0	0		
5 :		0	0		
6 :		0	0		
7 :		0	0		

Highlights



- Time-saving and secure restart at any program point, as no editing of the part program is required
- An extremely quick block search is also available for large part programs through the "External block search without calculation" function; overstore, if necessary

8.2 Program control

Basic configuration

Single block

Single block mode can be activated for startup of the program. For this purpose a program stop occurs after each traversing block.

Work plan programs maintain the alternative of stopping processing after each plane infeed.

Program test

Programs can be checked before processing in a program test mode. The program is executed to completion with stationary axes. This is especially meaningful in connection with the simultaneous recording option (real-time simulation).

Reduced rapid traverse

You have the facility of additionally limiting the traversing speed for rapid traverse so that when running-in a new program with rapid traverse, no undesirable high traversing speeds occur. In the rapid traverse mode, the traversing speed of the axes is reduced to the percentage value (0-100%) entered in RG0.

Program editing

In machine condition STOP, the program can be edited directly at the location of the fault, e.g. erroneous DIN/ISO blocks or wrongly parameterized sequences. After correcting the program you can continue machining.

Repositioning to the contour (REPOS)

In machine condition STOP, the machining axes may be moved to and away from the workpiece surface with the handwheel or the direction keys.

Highlights



- Secure positioning of new part programs
- Continue machining quickly after interruptions

8.3 Simultaneous recording

Option: Simultaneous recording

During machining, the tool paths can be simultaneously recorded on the display of the controller in side view, front view, two window view or in 3D view. Workpiece depiction and views correspond to the graphic simulation.



Highlight



- Machining can also be monitored in a complex machine room

CNC performance capability and optimization functions


9

9.1 80bit NANO^{FP} accuracy

Basic configuration

The accuracy of the workpiece is determined by more factors than just the mechanical characteristics of the machine. The CNC controller also contributes to a critical degree towards the precision of the workpieces. The SINUMERIK 828D offers a multitude of CNC functions for this purpose.

The SINUMERIK 828D and the SINAMICS drive calculate using 80-bit floating point accuracy. This enables a calculation accuracy much less than a nanometer. This exactness is available not only for closed loop position control but also for power and closed-loop speed control and also for sensor evaluation of the drive.

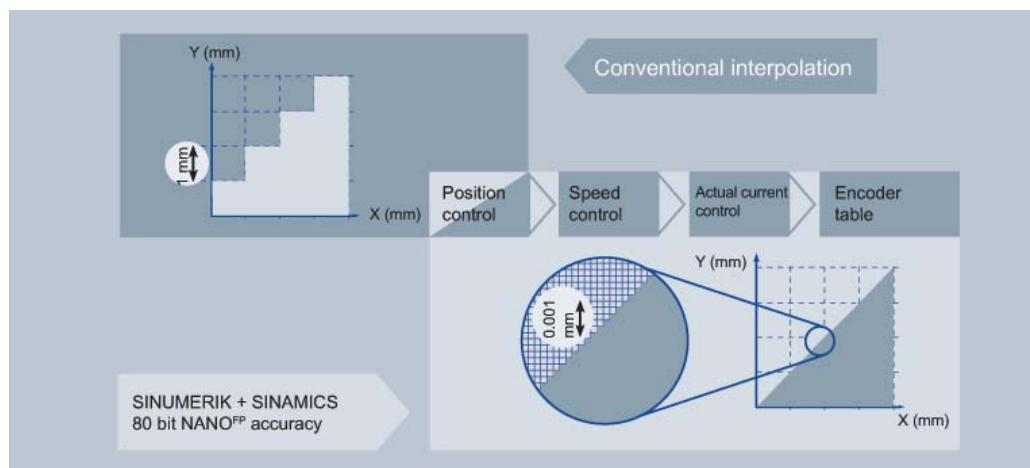

Highlight




- Maximum precision in the workpiece results based on extremely high calculation accuracy

9.2 Jerk limitation

Basic configuration

The control calculates a steady acceleration profile instead of jumps in acceleration. This enables jerk-free velocity characteristics for the involved path axes. The jerk limitation can also be directly activated in the part program with the »SOFT« NC language command.

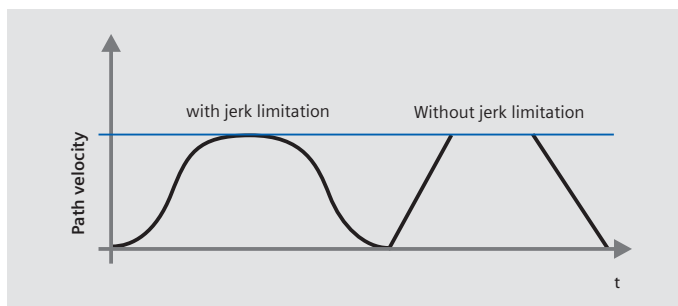

Highlights




- Longer machine lifespan through protection of the mechanical components
- Higher path accuracy through softer acceleration

9.3 Dynamic feedforward control

Basic configuration

Inaccuracies in the resulting workpiece contour due to following errors can practically be eliminated using dynamic feedforward control FFWON. The result is excellent machining precision even at high tool path feedrates. This is clarified with a circularity test on the machine.

Example:

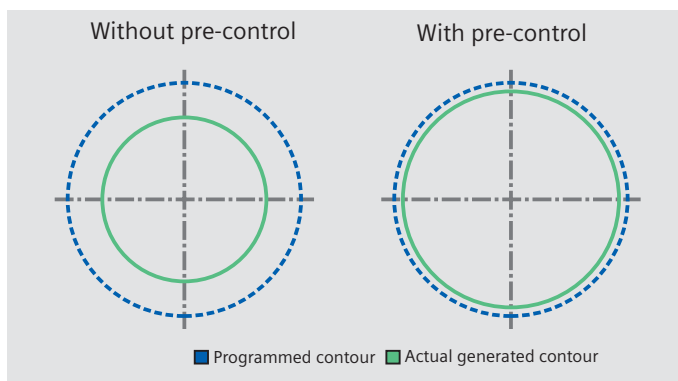

Highlight



- Higher path accuracy through compensation of contouring errors

CNC programming methods

10.1 Overview of programming methods

The SINUMERIK 828D offers you a choice of the following programming methods:

programGUIDE and SINUMERIK CNC programming

With programGUIDE you obtain the perfect combination of the SINUMERIK CNC programming language and the parameterization of technology cycles. The wide choice of technology cycles and the ease of parameterization allows you to reduce the programming time. The parameter input is supported by Animated Elements.

The SINUMERIK language statements with CNC high-level language elements offer you a very high degree of flexibility and guarantee minimum machining time.

programmGUIDE and SINUMERIK CNC programming are particularly suitable for medium series and large series production.

ShopTurn

Machining operations such as stock removal, grooving or thread cutting are shown in ShopTurn in the form of worksteps. In this way CNC programs – even for complex machining operations – are very compact and easily read. Associated sequences are automatically interlinked and can be assigned any position patterns. ShopTurn offers you the shortest programming times even for highly demanding machining tasks. The parameter input is supported by Animated Elements.

ShopTurn is particularly well suited for small series production.

ISO dialect and SINUMERIK CNC programming language

The SINUMERIK 828 allows you to perform ISO programming using the SINUMERIK CNC programming language combined with or exclusively in ISO dialect.

The online ISO dialect interpreter offers you the opportunity to use CNC programs from other manufacturers.

Step for step you can increase the performance capability by using SINUMERIK CNC programming.

Highlights



- Whether you use programGUIDE or ShopTurn – in either case the full range of technological cycles, position patterns and geometries is available to you
- Compatibility with the ISO dialect of other controller manufacturers is feasible

10.2 programGUIDE and SINUMERIK CNC programming

10.2.1 Introduction

Basic configuration

Below is an overview of the characteristic functions of programGUIDE and SINUMERIK CNC programming. This includes:

- DIN/ISO editor
- Languages
- programGUIDE input support


Programming with programGUIDE is available in the basic scope of the SINUMERIK 828D.

10.2.2 Program editor

A line-oriented program editor is available to you for DIN/ISO programming. The editor enables you to input CNC language commands directly or to edit them. Thereby, the complete range of CNC functions are available for the most complex machining.

The following functions are included in the program editor:

- Contour calculator
- Tool selection directly from tool list
- Support screens for standard machining and measuring cycles
- "Copy", "Insert" and "Cut" key group
- "Find", "Replace" and "Replace All" character string
- Renumbering a program
- Direct execution from any NC program block (block search)
- Jump to program start or program end

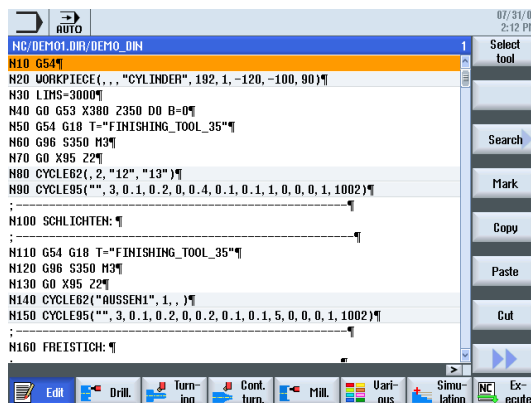

Highlights



- Time saving by using a powerful editor when programming
- Even large part programs allow extremely fast editing in MB size

10.2.3 Languages

The CNC interpreter of the SINUMERIK 828D can also process more complex CNC commands, in addition to DIN 66025 standard commands. The commands are presented in clearly readable form.

The following commands are available:

- **G-code**
G-code in accordance with DIN 66025 and in ISO dialect mode
- **G functions**
G0, G1, G2, G71 ...
- **Language commands (extended G functions)**
CIP, SOFT, BRISK, FFWON ...
- **Frame operations (programmable work offsets)**
The workpiece coordinate system can be shifted, scaled, mirrored or rotated with the commands TRANS, SCALE, MIRROR, ROT.
- **R parameters (arithmetic parameters)**
300 predefined R parameters are available as arithmetic parameters (floating point format).
- **User variables**
The user can define his own variables by name and type.
- **System variables**
System variables can be read/written in all programs. They enable access to work offsets, tool offsets, axis positions, measurement values, control conditions etc.
- **Calculation operations**
The following mathematical calculation operations are available for linking the variables:
calculation operations + - * / sin cos exp etc.
logical operations == <> >= etc.
- **Program control structures**
BASIC-style language commands are available for flexible programming of the user cycles: IF-ELSE-ENDIF, FOR, CASE ...

Highlights




- Established programming according to DIN 66025
- Unbeatable range of commands for flexibility and time saving while programming

10.2.4 programGUIDE input support

The cycle support is an extension of the highly flexible DIN/ISO programming. The input screens are based on the ShopTurn cycles input screens, so as to ensure optimum continuity.

Of course, the commands for tool, feedrate and spindle speed are still programmed in the DIN/ISO editor.

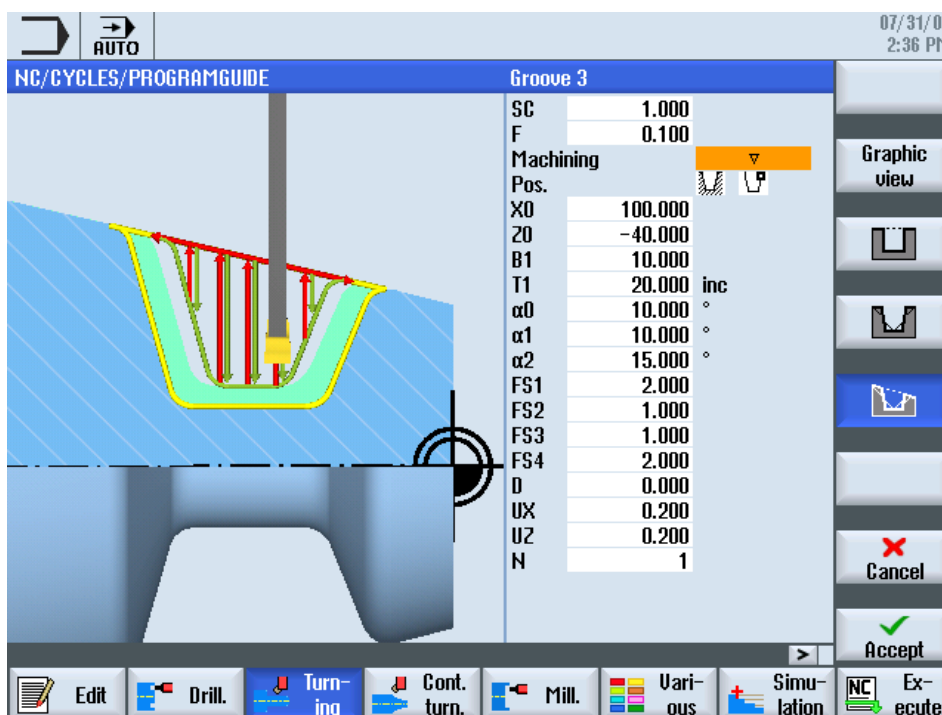

Highlights



- Existing DIN/ISO part programs with cycles can continue to be used
- Minimum learning requirements due to the continuity of the input support

10.3 ShopTurn

10.3.1 Introduction

- Option: Machining step programming ShopTurn

The following information provides you with an overview of the characteristic functions of ShopTurn. This includes:


- Sequence editor
- Interlinking of sequences
- Broken-line graphics

These functions are part of the machining step programming options package in ShopTurn.

10.3.2 Sequence editor

The graphical programming is performed via a graphic interactive sequence editor. Each program line represents a technological sequence (such as: face turning, centering, drilling, tapping) or geometric data required for the sequences (position patterns or contours). Graphical programming offers, in comparison to DIN/ISO programming, a compact and comprehensible program overview.

Entering individual sequences requires no knowledge of DIN/ISO. All required technical and geometric parameters are entered in screen forms. Simple, intuitive programming with sequences can always be expanded very flexibly by inputting DIN/ISO blocks and control functions.

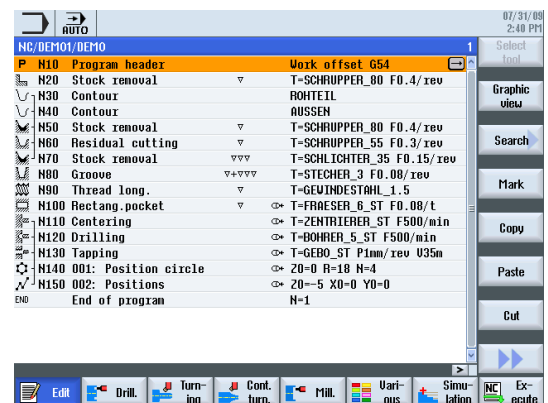

Highlights




- Intuitive program input, without knowledge of DIN/ISO or Operating Manual
- Compact, clearly arranged machining programs
- Reducing the programming time by graphical input masks and copying / inserting machining steps

10.3.3 Interlinking of sequences

In ShopTurn, associated sequences are interlinked with each other. The interlinked sequences are performed consecutively at the appropriate contours or pattern positions.

In the following example, the sequences centering, drilling and tapping are applied to 4 holes on the pitch circle pattern position.

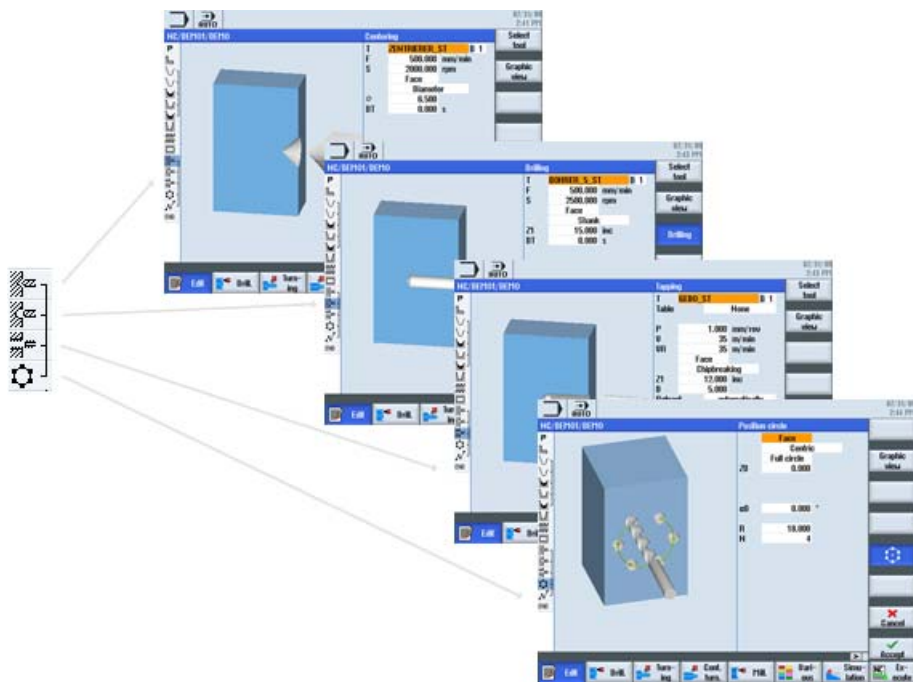

Highlight




- Reduced programming time due to linking of machining steps

10.3.4 Broken-line graphics

While programming, the previously entered sequences will be continuously displayed to scale. A simulation is not required for this. The switch over between the sequence program and the broken-line graphics is performed by the "Graphic View" softkey.

- Turning view
- Front face and peripheral side

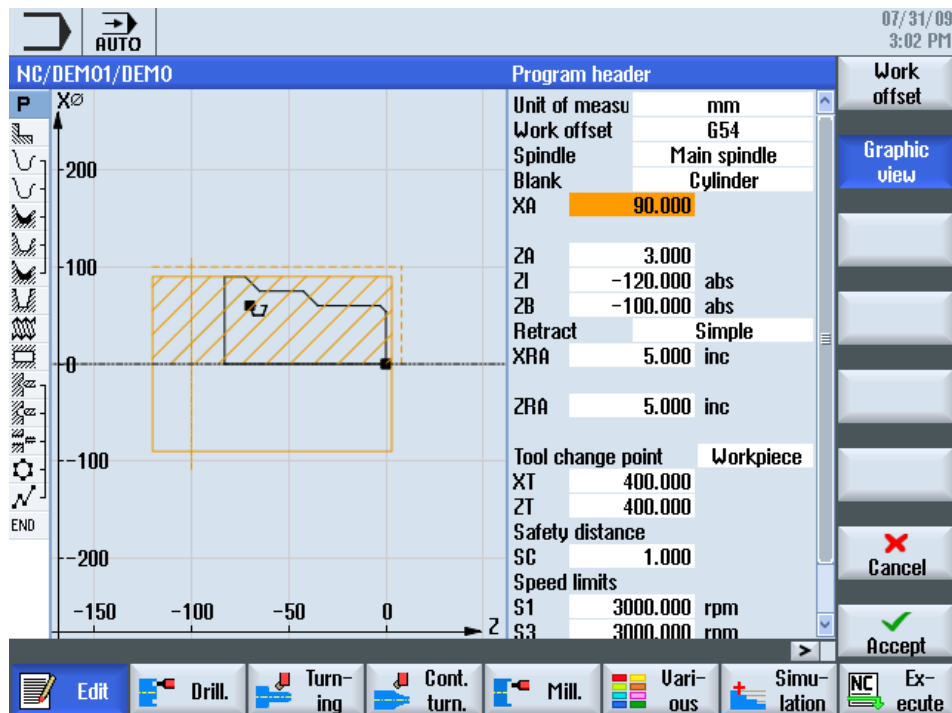

Highlight



- Increased reliability at program input by quickly checking the contour, without having to start a simulation run

10.4 Online ISO dialect interpreter

Basic configuration

It is always useful to be able to speak a foreign language. This is true even for a global player such as the SINUMERIK 828D. If you prefer classic ISO programming you can continue to use it. You can even mix ISO programming with the SINUMERIK CNC programming language. This enables you to increase the productivity and flexibility of your machine step by step.


In the controller, G commands from Siemens are interpreted as standard.

ISO dialect codes and Siemens codes can be mixed within a part program, but not within an NC block.

The switch over between Siemens operating mode and ISO dialect is performed using the following two G commands:

- G290 - "Siemens" NC programming language active
- G291 - "ISO dialect" NC programming language active

The performance capability of the ISO dialect extends even as far as using the cycles G73 to G89, such as cycle G84 for tapping.

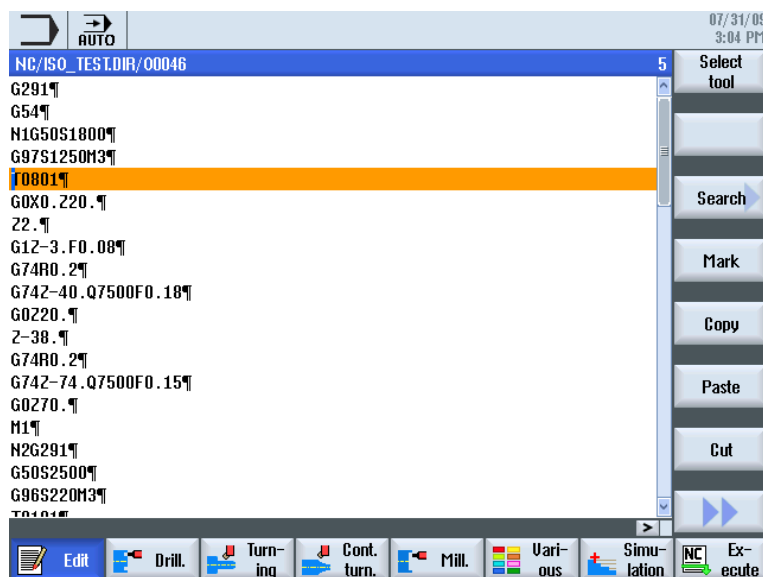

Highlights



- Even first-time users can initially continue programming the way they are accustomed to
- ISO dialect and SINUMERIK CNC programming languages can be mixed within part programs


Simulation

11.1 2D simulation

Basic configuration

The SINUMERIK 828D 2D simulation offers you the facility to make optimum and reliable preparations for machining workpieces, including detection of collisions. Calculating the machining time also supports optimum calculation of tooling costs.

- Use of the real geometry values of the tools mounted in the machine
- Simulation in side view, front view or two window view
- Simulation can be interrupted at any time, and the speed is controllable

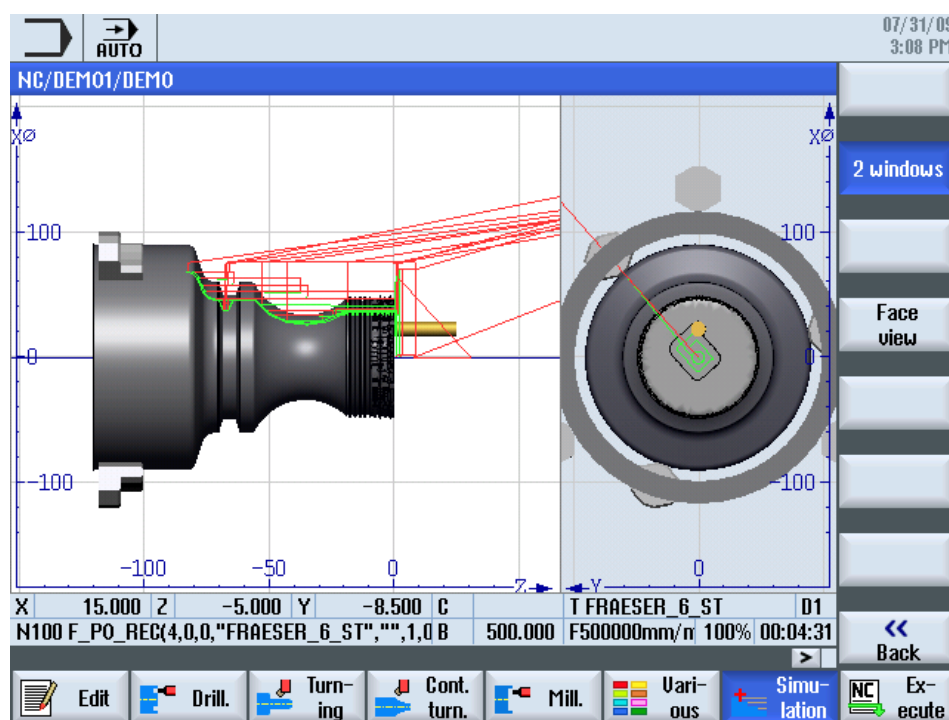

Highlights




- Maximum process reliability through simulation using real geometry values
- Perfect clarity by showing the workpiece dimensions with a scale

11.2 3D simulation

Option: 3D simulation

SINUMERIK 3D workpiece simulation offers you optimum assistance and reliability in programming and in quotation costing.

- Reliability:
Realistic 3D volume model, with zoom to details and free rotation of the viewing angle
- Support:
 - Simulation speed controllable by override
 - Single block operation and start / stop available at any time
- Checking:
Automatic calculation of machining time

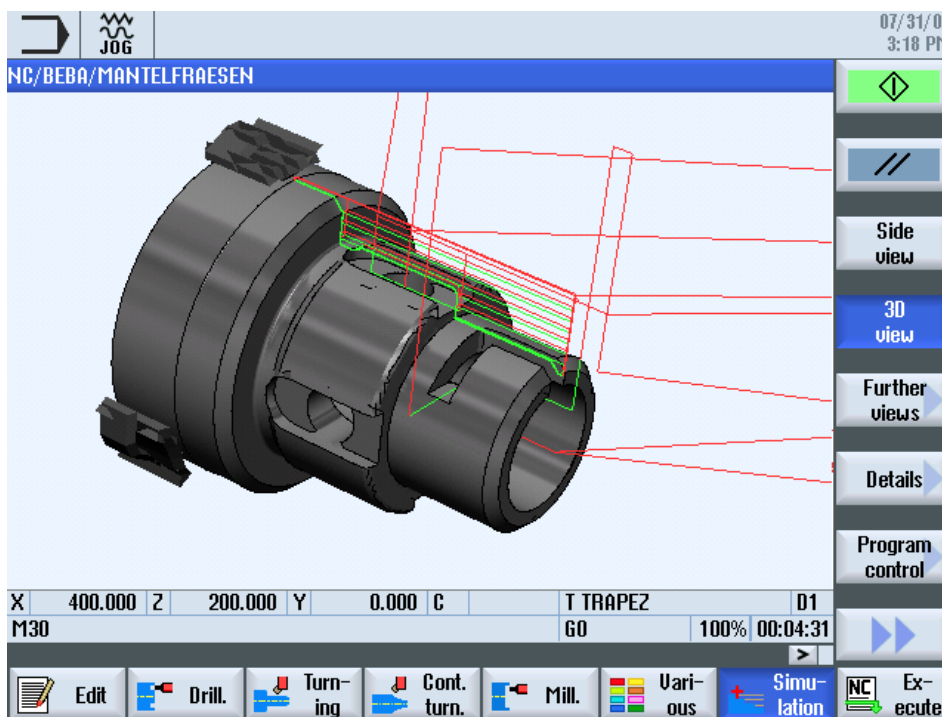

Highlights




- Particularly realistic simulation through representation of the tool
- Optimum help and reliability in programming and in quotation costing

CNC technology cycles

12.1 CNC technology cycles for programGuide and ShopTurn

Irrespective of whether you use programGUIDE or ShopTurn – in either case the full range of technological cycles, position patterns and geometries is available to you.

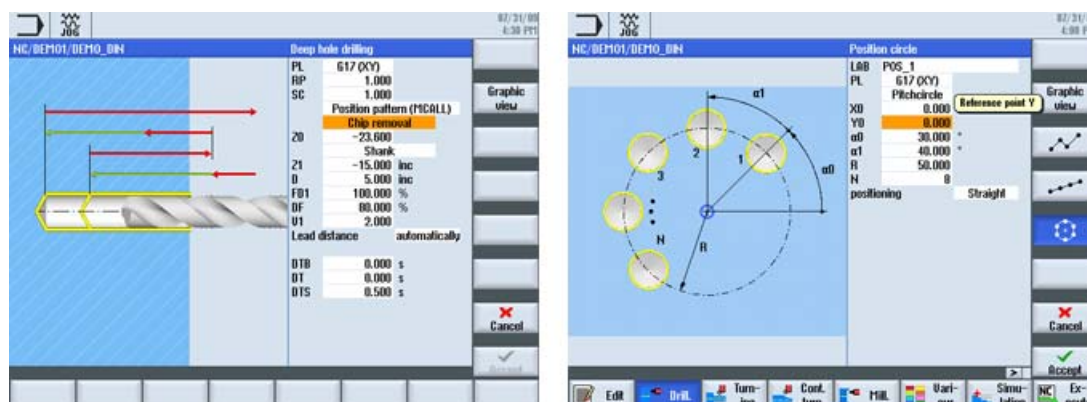

The SINUMERIK 828D offers you a unique range of CNC technology cycles for standard machining – including an engraving cycle. The assignment to the machining positions is performed very simply using a wide selection of ready position patterns.

For sustained accuracy of workpieces in an ongoing machining process, the SINUMERIK 828D supports you with the measuring cycles' optional package.

Thanks to the integrated geometry processor, you can create even complex contours directly at the CNC controller. In this case, partially defined contour elements are automatically calculated. In addition you can use the optional CAD reader to process DXF files.

The geometry processor supports you when inputting contours. The stock removal motions are generated fully automatically by the SINUMERIK 828D. To be able to achieve maximum productivity, you can pre-machine using a large plate angle. The optional identification of residual material permits selective remachining of the remaining material using a small plate angle.

Highlights




- Significant simplification of programming, even for complex jobs, using CNC technology cycles
- Continuity of cycles for programGuide and ShopTurn

12.2 Highlights of machining cycles

12.2.1 Stock removal along contour with blank contour

Basic configuration

With the intelligent contour stock removal cycle, free contours can be processed in a variety of ways:

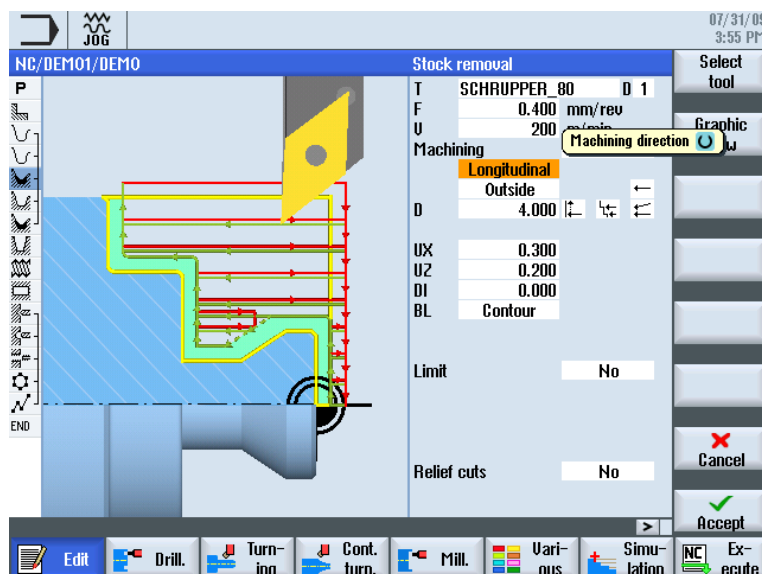

- Processing any contour calculator geometry
- Cylindrical blank, freely-defined blank, blank as allowance of finished-part contour
- Longitudinal / face / contour-parallel roughing on outside and inside
- Processing sloping contours (relief cuts)
- Consideration of tool's setting and plate angle
- Grooving any contours on outside, inside or end face
- Plunge turn any contours on outside, inside or end face
- Finishing with negative allowances (for machining electrodes)
- Roughing with feed interruption to reduce flow chips
- Optional number of cutting passes with orientation to workpiece edges
- Finishing with alternating cutting depth for longer tool life
- Arbitrary limitation to the machining segment with automatic blank actualization

Highlights



- **Effective processing through orientation to the actually existing material**
- **Lower risk of accident and better chip disposal through feed interruption**


12.2.2 Engraving cycle

Basic configuration

The engraving cycle is used to engrave a text on a workpiece along a line or arc. You can enter the text as fixed text or assign it via a variable as variable text.

Examples of variable texts:

- Date and time
The values for the date and time are read from the CNC.
- Quantity
The "Quantity" variable is available as a pre-defined user variable
- Numbers
When outputting numbers (e.g. measurement results), you can select the output format (digits before and after the point) of the number to be engraved.
- Text
Instead of entering a fixed text in the engraving text field, you can specify the text to be engraved via a text variable (e.g., `_VAR_TEXT="ABC123"`).

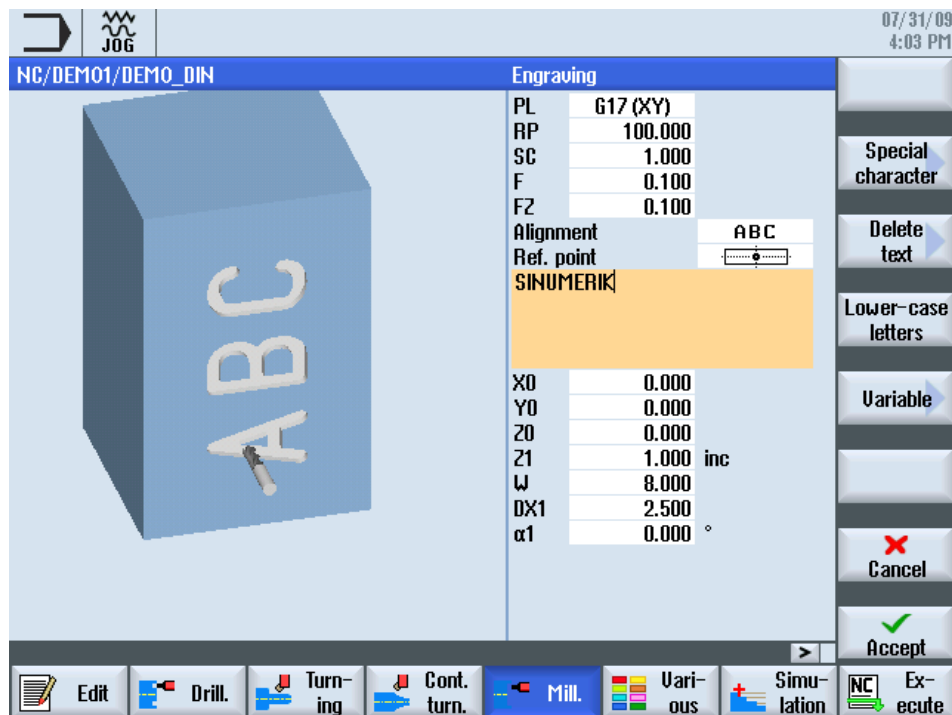

Highlights




- Reduction of set-up times by complete machining on one machine
- Simple program input of engraving

12.2.3 Counterspindle cycle

Basic configuration

SINUMERIK 828D enables the use of a fully-fledged counterspindle. The main spindle and counterspindle can be operated under conditions of angular synchronism.

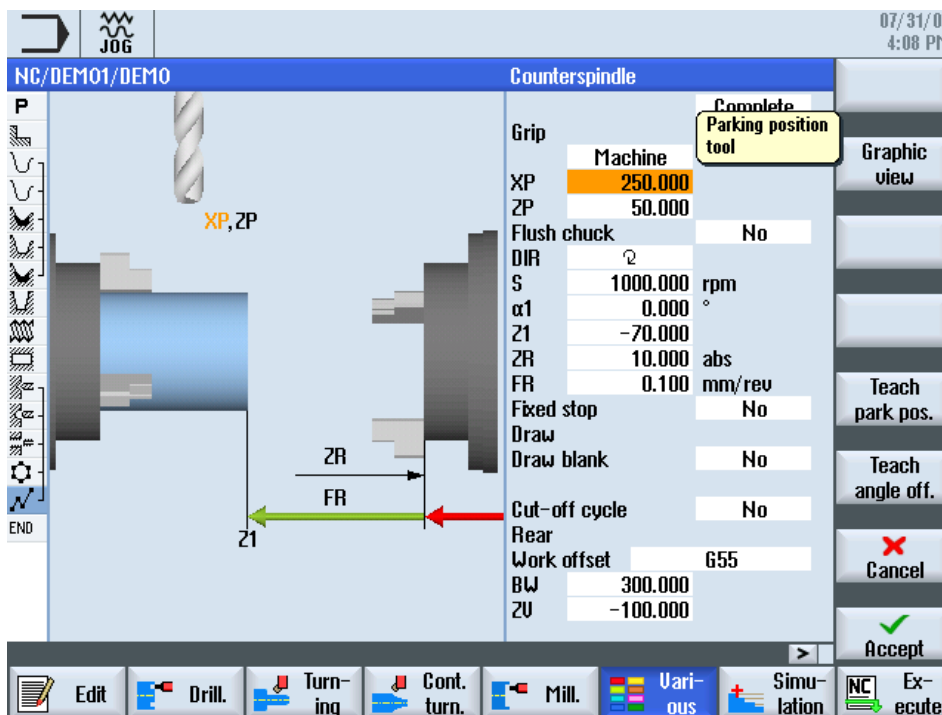

DIN/ISO programming

The commands for spindle synchronization and the axis movements for workpiece transfer can be programmed as DIN/ISO language commands.

Machining step programming

A user-friendly counterspindle cycle is conveniently available for spindle synchronization and axis movements for workpiece transfer.

Highlights



- Simple and secure programming of all counterspindle functions
- High quality of workpieces by workpiece transfer in synchronous spindle mode

12.2.4 Residual material detection during turning

Option: Residual material detection

Contour areas which do not permit machining by tools with large plate angles are automatically recognized in the stock removal cycle. The operator can rework these areas using a suitable tool with a smaller plate angle.



Highlight




- Time saving through avoiding idle cuts during residual stock removal

12.2.5 Detection of residual material when milling

Option: Residual material detection

Contour ranges which do not permit milling with large diameters are automatically identified in the cycle for contour pockets and contour pins. These areas can be selectively machined with a suitable smaller tool, rather than having to use this tool for the entire contour pocket or pin.

If you mill several pockets and wish to avoid unnecessary tool changeovers, remove stock from all the pockets first and then remove the residual material. In this case, you must enter the tool used for removing the residual material from the pocket in the "TR reference tool" parameter.

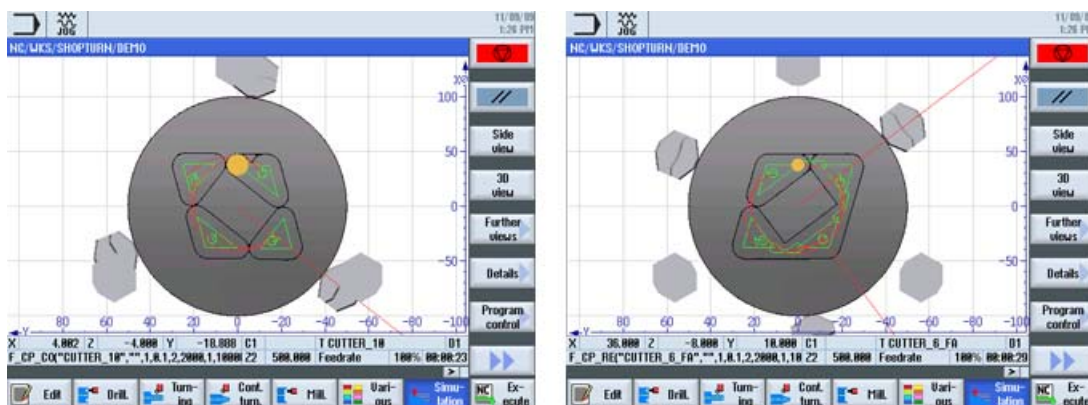

Highlight




- Shorter machining times through the use of a large tool for the substantial part of the stock removal and a smaller tool for the remaining residual material
- Avoidance of non-cutting movements while achieving extremely simple programming

12.2.6 Process measurements for workpieces and tools

Option: Measuring cycles

For measurement tasks in automatic mode, powerful measuring cycles are available both within the sequence and also in DIN/ISO programming. Input screens with dynamic help displays are used for convenient entry of the measuring parameters.

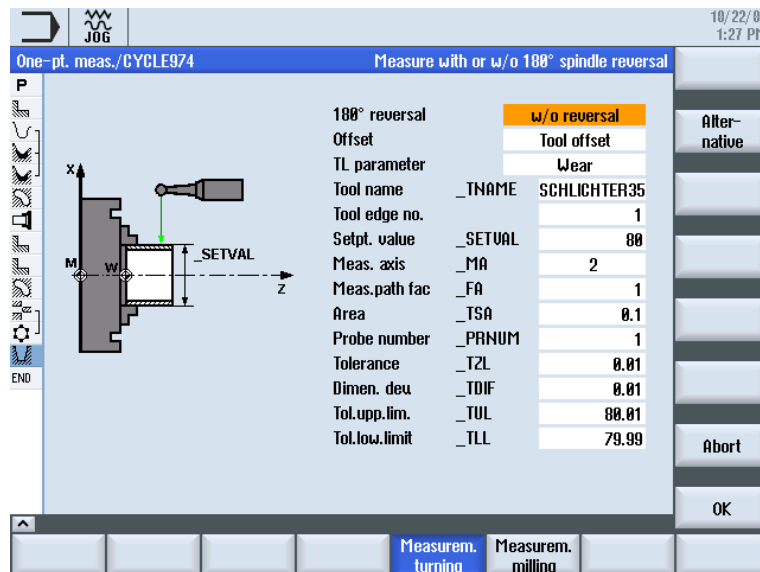

The following measuring variants are available:

- Calibrate workpiece and tool measuring inputs
- Tool measurement with tool measuring input
- Single-point workpiece measurement with reversal
- Two-point workpiece measurement

The following measuring tasks can be made:

- Automatic value correction for tool geometry or work offset
- Display of measurement results
- Logging of measurement results

Highlights



- Reliable quality of the manufactured parts by automatic measurement in the machine
- Fast programming for complex measuring tasks thanks to input screens with graphic support
- Measuring cycles are now also available for ShopTurn sequence programs

Complete machining

13.1 End face machining (TRANSMIT)

☑ Option: TRANSMIT and peripheral surface transformation

Drilling and milling can be performed on the front face of workpieces in the main and counterspindle with ShopTurn.

The part program is easily created in a right-angle coordinate system with the front surface transformation TRANSMIT (C axis mode) .


The path movements are conducted with the linear axes X / Z and the rotary axis C.

Machine without Y axis

- Machining with TRANSMIT

Machine with Y axis

- Machining with Y axis
- Machining with TRANSMIT



Highlights



- Full functional range for drilling and milling on the front end

13.2 Peripheral surface machining (TRACYL)

- ☑ Option: TRANSMIT and peripheral surface transformation


Using the peripheral surface transformation TRACYL, drilling and milling machining can be executed on the peripheral surface of workpieces in the main and counterspindle.

Machine without Y axis

- Any drill holes on the peripheral surface
- Any milling without slot wall offset on the peripheral surface

Machine with Y axis

- Any drill holes on the peripheral surface
- Any milling without slot wall offset on the peripheral surface
- Any milling with slot wall offset on the peripheral surface
- Grooving on parallel walls of the peripheral surface with milling radius correction

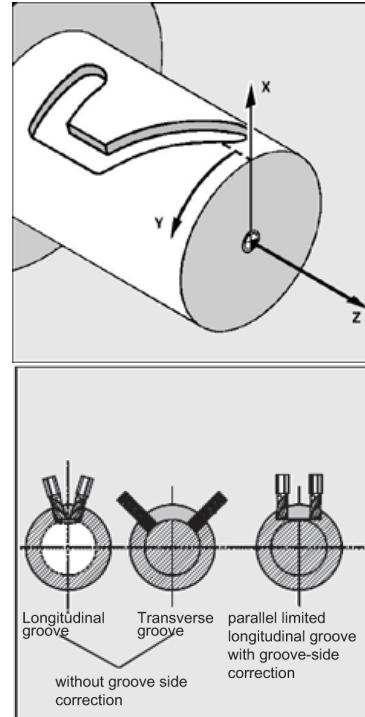

Highlights




- Full functional range for drilling and milling on the peripheral surface
- Reduction of set-up times by complete machining on one machine

PC software

14.1 CAD reader for PC

Contours and position patterns can be converted on the PC from DXF files into a format understandable to the controller with the software package "CAD Reader for PC". The contours can be remachined in the contour calculator of the controller.

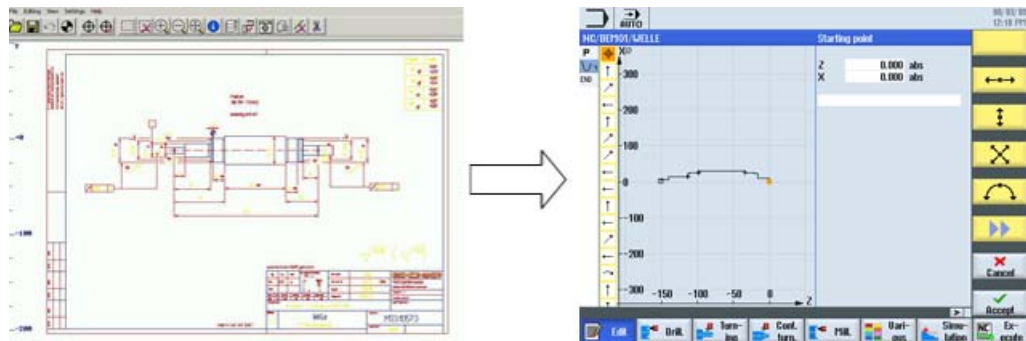

Highlight



- Save time by converting DXF files into contours and position patterns

14.2 SinuTrain

SinuTrain on your PC behaves in exactly the same way as your SINUMERIK 828D on the machine. This allows you to prepare part programs on the PC without having to occupy the machine. In addition, SinuTrain is an ideal training system for CNC training.

- Full functional scope
- Networking of several student and trainer units possible



Highlight



- PC software for training and work preparation without occupying the machine

14.3 Computer-based training

Multi-media initial study of turning technology.

- Programming exercises with guided examples
- Multi-lingualism
- Realistic machine



Highlight



- Graphically supported instruction software for beginners

Option list for the SINUMERIK package

The basic options and their Siemens order numbers are listed in the following:

Programming support

Machining step programming ShopTurn 6FC5800-0AP17-0YB0

Residual material detection and machining for contour pockets and cutting 6FC5800-0AP13-0YB0

Simulation

3D simulation, machined part 6FC5800-0AP25-0YB0

Simultaneous recording (real-time simulation of current machining) 6FC5800-0AP22-0YB0

Tools

Replacement tools for tool management 6FC5800-0AM78-0YB0

Transformations

TRANSMIT and peripheral surface transformation 6FC5800-0AM27-0YB0

Measuring functions/measuring cycles

Measuring cycles for drilling/milling and turning (calibrate workpiece probe, workpiece measurement, tool measurement) 6FC5800-0AP28-0YB0

Extended operator functions 6FC5800-0AP16-0YB0

Communication/data management

Controlling up to 4 additional drives using Ethernet 6FC5800-0AP01-0YB0

Languages

Additional languages for the HMI sl operating software, without license, e.g. Danish, Finnish, Dutch, Polish, Romanian, Russian, Swedish, Slovakian, Czech, Turkish and Hungarian On request

Diagnostic functions

RCS Host remote diagnostics function 6FC5800-0AP30-0YB0

RCS Commander (viewer function) RCS Commander for PC/PG (on CD-ROM, included in the scope of delivery of the 828D)

Summary of the highlights

The SINUMERIK 828D operator panel controller has the following notable features:

Compact

✓ **Maximum performance from the smallest possible dimensions**

- Robust and maintenance-free design
- All relevant functions at a glance on the 10.4" color screen
- Full-function QWERTY CNC keyboard for user-friendly programming at the machine
- Full freedom of data transfer via USB, CF card and Ethernet, directly at the operator panel

Strong

✓ **The most powerful CNC functions**

- 80bit NANO^{FP} accuracy for the maximum precision in the workpiece results
- Free input of blank workpiece contour allows effective processing through orientation to the actually existing material
- Powerful transformations for end faces and envelope faces of turned workpieces and oblique machining of milling workpieces
- Simple handling of tool and magazine data through clear and powerful tool management

Simple

✓ **Simple operation & programming**

- Animated Elements: unique facility to display machining parameters with animated sequences
- ShopTurn machining step programming: shortest programming times and clear CNC programs with technological sequences
- Common user interface for milling and turning
- Easy Message: simple process monitoring by SMS

Index

8

80bit NANO^{FP} accuracy, 37

A

Animated Elements, 31

B

Block search, 33

C

CAD Reader, 59

CNC memory, 23

CNC technology cycles

 programGuide, 49

 ShopTurn, 49

Contour stock removal cycle, 50

Contour-grooving, 50

D

Data transfer

 Easy Message, 29

 Ethernet, 29

 RCS Commander, 28

 USB, 27

Detection of residual material when milling, 54

DIN/ISO language, 41

DIN/ISO programming, 41

DXF converter, 59

E

Engraving cycle, 51

Ethernet, 29

F

Feed interruption, 50

Feedforward control, 38

Front end machining, 57

G

G code editor, 40

I

In-process measurement, 55

Interfaces

 CF card, 25

 RJ-45, 25

 USB 2.0, 25

M

Measure tool, 17

Memory expansion, 23

Monitoring of tool life and quantity of workpieces, 22

O

Online Help, 32

Operator panel, 12

Ordering data, 61

P

PC software, 59

Peripheral surface machining, 58

Plunge-turning, 50

Program control, 34

Program editing, 34

Program editor, 40

Program manager, 26

Program test, 34

R

RCS Commander, 28

Reduced rapid traverse, 34

Replacement tools, 22

Repositioning to the contour, 34

Residual material detection during turning, 53

S

Sequence editor, 43
Simulation
 2D, 47
 3D, 48
 Processing time, 48
Simultaneous recording, 35
Single block, 34
SINUMERIK 828D, 11
SinuTrain, 60

T

Tool Management, 21
TRACYL, 58
TRANSMIT, 57
TSM universal cycle, 15

U

Unique selling points, 63
USB stick, 27
User memory, 23

V

Velocity control, 38

W

Work offsets, 19