
Florida Sheriffs
Association
Fire/Rescue Bid
15-11-0116

Specification 19
S2L2PAL

Smeal Fire Apparatus Co.

Quotation

		Description	Qty.	
VEHICLE				
S	0100-011	MODEL	Metro Star	1
O	8012-002	CUSTOMERS / OEMS	Smeal (02070)[1002812]	1
S	8011-016	MODEL YEAR	Model Year - 2016	1
S	8001-001	COUNTRY OF SERVICE	Country of Service United States Of America	1
O	8006-009	APPARATUS TYPE	Apparatus Type Pumper	1
S	8008-001	VEHICLE TYPE	Vehicle Type Straight Truck	1
S	0104-001	AXLE CONFIGURATION	Axle Configuration 4x2 (Rear Axle Drive Only)	1
O	0101-003	GROSS AXLE WEIGHT RATINGS FRONT	GAWR Front 20000#	1
O	0102-004	GROSS AXLE WEIGHT RATINGS REAR	GAWR Rear 27000#	1
O	8010-002	PUMP PROVISION	Pump Provision Driveline Midship	1
CAB				
O	1000-007	CAB STYLE	Cab Style LFD 10" Raised Roof	1
O	1501-009	CAB FRONT FASCIA	Cab Frt Fascia Sirius II	1
O	1518-024	FRONT GRILLE	Cab Frt Grille Hinged Sirius II	1
S	1551-002	CAB UNDERCOAT	Cab Undercoat	1
S	1552-002	CAB SIDE DRIP RAIL	Cab Side Drip Rail	1
S	1521-001	CAB PAINT EXTERIOR	Cab Paint Exterior Single Color	1
S	1533-001	CAB PAINT MANUFACTURER	Cab Paint Manufacturer PPG	1
S	1522-001	CAB PAINT PRIMARY/LOWER COLOR	Cab Paint Primary/Lower Color No Selection/TBD	1
S	8013-031	CAB PAINT WARRANTY	Cab Paint Warranty 2016 (10) Year/100,000 Miles	1
O	1334-022	CAB PAINT INTERIOR	Cab Paint Int Zolatone Onyx Blk	1
O	1005-001	CAB ENTRY DOORS	Cab Entry Doors (4)	1
S	1101-001	CAB ENTRY DOOR TYPE	Cab Entry Door Type Full Length	1
S	1322-002	CAB INSULATION	Cab Insulation	1
O	1540-101	LH EXTERIOR REAR COMPARTMENT	LH Ext Rr Cmpt 21"H x 11"W/32"H Hng Dr	1
O	5313-002	LH EXTERIOR REAR COMPARTMENT LIGHTING	LH Ext Rr Cmpt Lt LED Strip Lt SoundOff Signal 10"	1
O	1548-002	LH EXTERIOR COMPARTMENT INTERIOR FINISH	LH Exterior Compartment Interior Finish DA Sand	1
O	1541-101	RH EXTERIOR REAR COMPARTMENT	RH Ext Rr Cmpt 21"H x 11"W/32"H Hng Dr	1
O	5345-002	RH EXTERIOR REAR COMPARTMENT LIGHTING	RH Ext Rr Cmpt Lt LED Strip Lt SoundOff Signal 10"	1
O	1549-002	RH EXTERIOR COMPARTMENT INTERIOR FINISH	RH Exterior Compartment Interior Finish DA Sand	1
S	8004-020	CAB STRUCTURAL WARRANTY	Cab Structural Warranty 2016 (10) Year/100,000 Miles	1
S	9001-006	CAB TEST INFORMATION	Cab Test Information Crash Test ECE-R29/SAE J2420/SAE J2422	1

ELECTRICAL POWER DISTRIBUTION

S	5000-001	ELECTRICAL SYSTEM	Elec System 12V DC	1
O	5004-003	LOAD MANAGEMENT SYSTEM	Load Management System Class 1 Total System Manager	1
S	5622-010	DATA RECORDING SYSTEM	Data Recording Sys Vehicle Data Weldon w/Remote USB Data Link	1
O	5004A-001	LOAD MANAGEMENT SYSTEM FAMILY	LOAD MANAGEMENT SYSTEM CLASS 1 TSM	1
S	5031-005	ACCESSORY POWER	Accessory Pwr & Gnd Stud 40A Batt Dir & 15A Ign Sw & 225A Batt Dir OEM Conn	1
S	5011-001	EXTERIOR ELECTRICAL TERMINAL COATING	Exterior Electrical Terminal Coating Spray On Plasti Dip	1

ENGINE

O	1701-146	ENGINE	Engine Diesel 450HP Cummins ISL9 - EPA 2013	1
S	1329-001	CAB ENGINE TUNNEL	Cab Engine Tunnel Small/Medium	1
S	1731-002	DIESEL PARTICULATE FILTER CONTROLS	DPF Ctrl Regeneration Sw & Inhibit Sw	1
S	1718-002	ENGINE PROGRAMMING HIGH IDLE SPEED	Engine Programming High Idle Speed 1250 RPM	1
O	1719-004	ENGINE HIGH IDLE CONTROL	Engine High Idle Ctrl Manual and Automatic	1
S	1710-001	ENGINE PROGRAMMING ROAD SPEED GOVERNOR	Engine Programming Road Speed Governor Enabled	1
O	1713-010	AUXILIARY ENGINE BRAKE	Aux Engine Brake Compression Brake w/VG Turbo	1
O	1708-004	AUXILIARY ENGINE BRAKE CONTROL	Aux Engine Brake Ctrl On/Off & Low/Med/High Sw Pnl	1
S	1720-003	ELECTRONIC ENGINE OIL LEVEL INDICATOR	Elec Engine Oil Level Indicator	1
S	1715-001	FLUID FILLS	Fluid Fills Fwd For Med Displacement Cap	1
S	1735-001	ENGINE DRAIN PLUG	Engine Drain Plug	1
S	8002-001	ENGINE WARRANTY	Engine Warranty Cummins (5) Year/100,000 Miles	1
O	1707-016	REMOTE THROTTLE HARNESS	Rmt Throttle Harness Cab Harness Only	1
O	1721-002	ENGINE PROGRAMMING REMOTE THROTTLE	Engine Program Rmt Throttle On	1
S	1727-001	ENGINE PROGRAMMING IDLE SPEED	Engine Programming Idle Speed 700 RPM	1

COOLING

S	2704-002	ENGINE FAN DRIVE	Engine Fan Drive Clutch	1
S	2701-010	ENGINE COOLING SYSTEM	Engine Cooling Sys Serial Flow Medium	1
S	2711-005	ENGINE COOLING SYSTEM PROTECTION	Engine Cooling System Protection Light Duty Skid Plate Paint Frame Color	1
S	2708-001	ENGINE COOLANT	Engine Coolant Extended Life	1
O	2707-002	ENGINE COOLANT FILTER	Engine Coolant Filter	1
S	2706-003	ELECTRONIC COOLANT LEVEL INDICATOR	Elec Low Coolant Level Indicator	1
O	2705-002	ENGINE PUMP HEAT EXCHANGER	Engine Pump Heat Exchanger	1
S	2709-004	COOLANT HOSES	Coolant Hoses Silicone Heater & Radiator w/Cab Int Rubber Hoses	1
O	2710-002	ENGINE COOLANT OVERFLOW	Engine Coolant Overflow Bottle	1

BOTTLE

AIR INTAKE

S	2801-005	ENGINE AIR INTAKE	Engine Air Intake Filtration and Restriction w/Replaceable Element	1
S	2802-003	AIR INTAKE PROTECTION	Air Intake Protection Light Duty Skid Plate Painted Frame Color	1

EXHAUST

O	2901-030	ENGINE EXHAUST SYSTEM	Eng Exhaust Sys Under Frm RH Fwd Outboard w/DPF/SCR Inline	1
O	2907-003	DIESEL EXHAUST FLUID TANK	Diesel Exhaust Fluid Tank LH 6 Gal Fill Thru Rr Step	1
S	2902-010	ENGINE EXHAUST ACCESSORIES	Engine Exh Acc Exh Temp Mitigation	1
S	2906-002	ENGINE EXHAUST WRAP	Engine Exhaust Wrap	1

TRANSMISSION

S	1801-015	TRANSMISSION	Transmission Allison 3000 EVS	1
O	1806-003	TRANSMISSION MODE PROGRAMMING	Transmission Mode Programming 5th Startup/6th Mode	1
O	1811-004	TRANSMISSION FEATURE PROGRAMMING	Transmission Feature Programming Allison Gen V-E I/O Package 198/Pumper	1
S	1815-002	ELECTRONIC TRANSMISSION OIL LEVEL INDICATOR	Elec Transmission Oil Level Indicator	1
S	1807-005	TRANSMISSION SHIFT SELECTOR	Transmission GEN V-E Shift Sel Key Pad/Push Button	1
S	1814-002	TRANSMISSION PRE-SELECT WITH AUXILIARY BRAKE	2nd Gear Pre-Select	1
S	1808-007	TRANSMISSION COOLING SYSTEM	Transmission Cooling System	1
S	1817-001	TRANSMISSION DRAIN PLUG	Transmission Drain Plug	1
S	8005-001	TRANSMISSION WARRANTY	Transmission Warranty Allison (5) Year	1

POWER TAKE OFF

S	2005-009	PTO LOCATION	PTO Location 8:00/4:00	1
---	----------	---------------------	------------------------	---

DRIVELINE

S	3001-001	DRIVELINE	Driveline Spicer 1710 HD	1
O	3005-002	MIDSHIP PUMP / GEARBOX	Midship Pump Jackshaft Only	1
O	3008-085	MIDSHIP PUMP / GEARBOX MODEL	Midship Pump/Gearbox Model Waterous CSUC20	1
O	3048-007	MIDSHIP PUMP GEARBOX DROP	Midship Pump Gearbox Drop Waterous "C"	1
O	3009-007	MIDSHIP PUMP RATIO	Midship Pump Ratio 2.27:1	1
O	3010-0895	MIDSHIP PUMP LOCATION C/L SUCTION TO C/L REAR AXLE	Midship Pump Location C/L Suction to C/L Rear Axle 89.5"	1

FUEL SYSTEMS

S	3109-021	FUEL FILTER/WATER SEPARATOR	Fuel Filter/Wtr Separator Fleetguard FS1003 w/Lt & Alarm	1
S	3111-001	FUEL LINES	Fuel Lines Nylon	1
S	3103-008	ELECTRIC FUEL PRIMER	Electric Fuel Primer Engine Sply Electric Lift Pump	1

O	3101-106	FUEL TANK	Fuel Tank 68 Gallon Short	1
S	3130-001	FUEL TANK MATERIAL AND FINISH	Fuel Tank Material Steel & Finish Painted Frame Color	1
S	3131-001	FUEL TANK STRAP MATERIAL	Fuel Tank Strap Material Steel	1
S	3102-007	FUEL TANK FILL PORT	Fuel Tank Fill Port LH Rwd/RH Mid	1
O	3114-002	FUEL TANK SERVICEABILITY PROVISIONS	Fuel Tank Serviceability Prov 8' Fuel Line Extension	1
S	3115-001	FUEL TANK DRAIN PLUG	Fuel Tank Drain Plug	1

FRONT AXLE

O	2401-003	FRONT AXLE	Frnt Axle Meritor MFS 20000# Beam	1
S	8059-012	FRONT AXLE WARRANTY	Front Axle Warranty Meritor 2016	1
S	2405-001	FRONT WHEEL BEARING LUBRICATION	Frnt Wheel Bearing Lube Oil	1

FRONT SUSPENSION

S	2502-002	FRONT SHOCK ABSORBERS	Frnt Shock Absorbers Bilstein	1
O	2501-006	FRONT SUSPENSION	Frnt Suspension 9 Leaf 20000-21500#	1

STEERING

O	2601-005	STEERING COLUMN/WHEEL	Steering Column/Wheel Tilt/Telescopic 18" 2 Spoke	1
S	2609-002	ELECTRONIC POWER STEERING FLUID LEVEL INDICATOR	Elec Power Steering Fluid Level Indicator	1
S	2603-001	POWER STEERING PUMP	Power Steering Pump TRW	1
O	2606-014	FRONT AXLE CRAMP ANGLE	Front Axle Cramp Angle 50L/45R Degrees	1
O	2610-003	POWER STEERING GEAR	Power Steering Gear TRW TAS 65 w/Assist	1
S	2608-001	CHASSIS ALIGNMENT	Chassis Alignment	1

REAR AXLE

O	3401-003	REAR AXLE	Rear Axle 27000# Meritor RS-25-160	1
S	3403-001	REAR AXLE DIFFERENTIAL LUBRICATION	Rear Axle Differential Lubrication Oil	1
S	8061-009	REAR AXLE WARRANTY	Rear Axle Warranty Meritor 2016	1
S	3411-001	REAR WHEEL BEARING LUBRICATION	Rear Wheel Bearing Lubrication Oil	1
S	3408-004	VEHICLE TOP SPEED	Vehicle Top Speed 65 MPH	1

REAR SUSPENSION

S	3501-032	REAR SUSPENSION	Rear Susp Reyco 79KB Spring 21000-31500# Conventional	1
---	----------	------------------------	---	---

TIRES

O	3601-038	FRONT TIRE	Frnt Tire 315/80R 22.5 Goodyear G289 WHA	2
O	3602-043	REAR TIRE	Rear Tire 12R 22.5 Goodyear G622 RSD	4
O	3413-643	REAR AXLE RATIO	Rear Axle Ratio 6.43	1
O	3606-003	TIRE PRESSURE EQUALIZATION SYSTEM	Tire Pressure Equalization System Crossfire Voucher	1

O	3614-010	TIRE PRESSURE INDICATOR	Tire Pressure Ind Frt Only Dial Voucher	1
---	----------	--------------------------------	---	---

WHEELS

O	3701-010	FRONT WHEEL	Frnt Wheel Accuride 22.5 x 9.00 Alum	2
O	3703-004	REAR WHEEL	Rr Whl Accuride 22.5 x 8.25 Alum	4
O	3702-002	WHEEL TRIM	Wheel Trim Hub & Nut Covers SS Shiploose	1

BRAKES

O	3205-012	BRAKE SYSTEM	Brake System ABS/ATC/ESC Sgl Axle	1
S	3206-001	FRONT BRAKES	Frnt Brakes S-Cam Drum 16.5" x 6"	1
O	3207-005	REAR BRAKES	Rr Brakes S-Cam Drum 16.5" x 7" Cast Iron Shoe	1
S	3208-001	PARK BRAKE	Prk Brake Rr Wheels Only	1
O	3204-029	PARK BRAKE CONTROL	Prk Brake Ctrl LH Tunnel Mnt, Integrated w/Shift Pod Console	1
S	3213-001	FRONT BRAKE SLACK ADJUSTERS	Frnt Brake Slack Adjusters Meritor	1
S	3214-001	REAR BRAKE SLACK ADJUSTERS	Rr Brake Slack Adjusters Meritor	1
S	3202-005	AIR DRYER	Air Dryer Wabco System Saver 1200 Bhd LH Batt Box	1
S	3215-001	FRONT BRAKE CHAMBERS	Frnt Brake Chambers MGM Type 30	1
O	3210-015	REAR BRAKE CHAMBERS	Rr Brake Chambers TSE 30/36 Long Stroke	1

AIR SUPPLY SYSTEMS

S	3320-001	AIR COMPRESSOR	Air Compressor Wabco SS318 18.7 CFM	1
S	3339-004	AIR GOVERNOR	Air Governor Mnt on Air Dryer Bracket	1
O	3305-003	AUXILIARY AIR RESERVOIR	Aux Air Reservoir (2) 1200 Cu In	1
S	3303-001	MOISTURE EJECTORS	Moisture Ejectors Manual	1
S	3307-001	AIR SUPPLY LINES	Air Sply Lines Nylon	1
S	3338-002	REAR AIR TANK MOUNTING	Rear Air Tank Mnt Any Bhd Rear Axle Perpendicular w/Frame	1

FRAME

O	2103-1875	WHEELBASE	Wheelbase 187.5"	1
O	2106-0540	REAR OVERHANG	Rear Overhang 54.0"	1
O	2101-002	FRAME	Frame Double Channel 35.00" Width	1
S	8007-015	FRAME WARRANTY	Frame Warranty Lifetime 2016	1
S	2110-101	FRAME PAINT	Frame Paint Powder Coat Black	1

BUMPER

S	2201-001	FRONT BUMPER	Frnt Bumper Stainless Steel Flat	1
O	2202-005	FRONT BUMPER EXTENSION LENGTH	Frnt Bumper Extension Length 21"	1
O	2226-004	FRONT BUMPER EXTENSION FRAME WIDTH	Frnt Bumper Extension Frame Width 48.25"	1
O	2208-006	FRONT BUMPER APRON	Frnt Bumper Apron For 21" Extension	1
O	5503-021	MECHANICAL SIREN	Mechanical Siren Federal Signal Q2B Recess Mnt	1
O	2218-009	MECHANICAL SIREN LOCATION	Mech Siren Location Frnt Bmpr Face LH Ctr	1
O	5511-003	MECHANICAL SIREN ACCESSORIES	Mechanical Siren Accessories Guards	1

O	5501-020	AIR HORN	Air Horn (2) 21" Round Hadley E-Tone	1
O	2216-007	AIR HORN LOCATION	Air Horn Location (2) Frt Bmpr Face RH	1
O	2232-012	AIR HORN RESERVOIR	Air Horn Reservoir (2) 2084 Cu In	1
O	5504-030	ELECTRONIC SIREN SPEAKER	Elect Siren Speaker (2) 100W Cast Products SA4301	1
O	2217-031	ELECTRONIC SIREN SPEAKER LOCATION	Elec Siren Speaker Location Frt Bmpr Face Ctr LH IB	1
O	2203-002	FRONT BUMPER TOW HOOKS	Frt Bumper Tow Hooks Painted Below Fwd	1

CAB TILT

S	2301-001	CAB TILT SYSTEM	Cab Tilt System	1
S	2305-001	CAB TILT CONTROL RECEPTACLE	Cab Tilt Ctrl Receptacle Temp	1

CAB GLASS

S	1401-009	CAB WINDSHIELD	Cab Windshield	1
S	1402-005	GLASS FRONT DOOR	Glass Frt Dr Roll Down/XDuty Regulator	1
S	1407-001	GLASS TINT FRONT DOOR	Glass Tint Frt Dr Automotive Green	1
O	1419-012	GLASS REAR DOOR RIGHT HAND	Glass Rr Dr RH Roll Down/XDuty Regulator	1
O	1430-001	GLASS TINT REAR DOOR RIGHT HAND	Glass Tint Rr Door RH Automotive Green	1
O	1412-013	GLASS REAR DOOR LEFT HAND	Glass Rr Dr LH Roll Down/XDuty Regulator	1
O	1431-001	GLASS TINT REAR DOOR LEFT HAND	Glass Tint Rr Door LH Automotive Green	1
O	1410-003	GLASS SIDE MID RIGHT HAND	Glass Side Mid RH Fxd 16"W x 26"H	1
O	1432-001	GLASS TINT SIDE MID RIGHT HAND	Glass Tint Side Mid RH Automotive Green	1
O	1409-003	GLASS SIDE MID LEFT HAND	Glass Side Mid LH Fxd 16"W x 26"H	1
O	1433-001	GLASS TINT SIDE MID LEFT HAND	Glass Tint Side Mid LH Automotive Green	1

CLIMATE CONTROL

O	1614-101	CLIMATE CONTROL	Climate Ctrl Htr Defroster Frt Ovrhd/Htr A/C Tunnel Mnt	1
O	1632-002	CLIMATE CONTROL DRAIN	Climate Control Drain Gravity	1
O	1617-101	CLIMATE CONTROL ACTIVATION	Climate Ctrl Actv Device Mnt Ovrhd/Device Mnt Tunnel	1
O	1603-003	A/C CONDENSER LOCATION	A/C Condenser Location Roof Mnt Fwd Ctr	1
O	1601-001	A/C COMPRESSOR	A/C Compressor Large Capacity	1
S	1530-001	UNDER CAB INSULATION	Under Cab Insulation Engine Tunnel	1

CAB INTERIOR

S	1327-001	INTERIOR TRIM FLOOR	Interior Trim Floor	1
S	1302-001	INTERIOR TRIM	Interior Trim Vinyl	1
S	1368-002	REAR WALL INTERIOR TRIM	Rear Wall Interior Trim Vinyl	1
O	1306-006	HEADER TRIM	Header Trim XDuty	1
O	1305-014	TRIM CENTER DASH	Trim Center Dash XDuty	1
O	1339-102	TRIM LEFT HAND DASH	Trim LH Dash XDuty	1
O	1321-004	TRIM RIGHT HAND DASH	Trim RH Dash XDuty Glove Cmpt/MDT Prov	1
S	1307-002	ENGINE TUNNEL TRIM	Eng Tnl Trim Flr Mat	1
O	5040-002	POWER POINT DASH MOUNT	Pwr Pnt Dash Mnt Mstr Sw Sw Pnl	1

S	1303-017	STEP TRIM	Step Trim Grip Strut Lwr Flex-Tred Mid	1
O	1379-003	UNDER CAB ACCESS DOOR	Under Cab Access Door Rear Step LH Painted	1
S	1102-013	INTERIOR DOOR TRIM	Interior Door Trim Painted	1
S	1323-001	DOOR TRIM CUSTOMER NAMEPLATE	Door Trim Customer Nameplate	1
O	1105-007	CAB DOOR TRIM REFLECTIVE	Cab Dr Trim Reflective Vert Stripe/12" Stop	1
S	1308-001	INTERIOR GRAB HANDLE "A" PILLAR	Interior Grab Handle 'A' Pillar 11" Molded	1
S	1332-008	INTERIOR GRAB HANDLE FRONT DOOR	Interior Grab Handle Frt Door Horiz 9"	1
O	1345-002	INTERIOR GRAB HANDLE REAR DOOR	Int Grab Handle Rr Dr Alum Window Span 30" Black Powder Coat	1
S	1301-003	INTERIOR SOFT TRIM COLOR	Interior Soft Trim Color Gray	1
S	1337-001	INTERIOR TRIM SUNVISOR	Interior Trim Sunvisor Vinyl	1
O	1304-002	INTERIOR FLOOR MAT COLOR	Interior Floor Mat Color Black	1
O	1335-003	CAB PAINT INTERIOR DOOR TRIM	Cab Paint Int Dr Trim Zolatone Onyx Black	1
O	1371-006	HEADER TRIM INTERIOR PAINT	Header Trim Interior Paint Zolatone Onyx Black	1
O	1370-006	TRIM CENTER DASH INTERIOR PAINT	Trim Center Dash Interior Paint Zolatone Onyx Black	1
O	1378-006	TRIM LEFT HAND DASH INTERIOR PAINT	Trim LH Dash Interior Paint Zolatone Onyx Black	1
O	1373-006	TRIM RIGHT HAND DASH INTERIOR PAINT	Trim RH Dash Interior Paint Zolatone Onyx Black	1
S	1344-002	DASH PANEL GROUP	Dash Pnl Group 3-Pnl	1
O	1312-005	SWITCHES CENTER PANEL	Switches Ctr Pnl 12 Upr	1
S	1313-014	SWITCHES LEFT PANEL	Switches Left Pnl 8 Upper w/Headlight/Dimmer/Wiper	1
O	1314-012	SWITCHES RIGHT PANEL	Switches Right Pnl 6 (3+3)	1

CAB SEATS

S	1225-018	SEAT BELT WARNING	Seat Belt Warn Indv Seat Loc & LED Display w/VDR Weldon	1
S	1237-004	SEAT MATERIAL	Seat Material Turnout Tuff	1
S	1243-001	SEAT COLOR	Seat Color Gray/Red Seat Belts	1
O	1249-039	SEAT BACK LOGO	Seat Back Logo Smeal Seal	6
O	1201-015	SEAT DRIVER	Seat Driver Seats Inc Battalion 4-Way Air ABTS	1
S	1213-025	SEAT BACK DRIVER	Seat Back Driver Non-SCBA ABTS	1
S	1219-001	SEAT MOUNTING DRIVER	Seat Mounting Driver	1
S	1202-021	SEAT OFFICER	Seat Officer Seats Inc Battalion Fixed ABTS	1
S	1214-028	SEAT BACK OFFICER	Seat Back Officer Non-SCBA ABTS	1
S	1220-002	SEAT MOUNTING OFFICER	Seat Mounting Officer	1
O	1273-001	SEAT BELT ORIENTATION CREW	Seat Belt Orientation Crew Outboard Shoulder To Inboard Hip	1
O	1263-001	SEAT REAR FACING OUTER LOCATION	Seat RFO Location (2) R/L	1
O	1203-012	SEAT CREW REAR FACING OUTER	Seat Crew RFO Seats Inc Battalion Fixed	2
O	1215-034	SEAT BACK REAR FACING OUTER	Seat Back RFO SCBA Zico QM-EZL-F w/Cushion Release	2
O	1221-009	SEAT MOUNTING REAR FACING OUTER	Seat Mounting RFO Rwd 2"	1
O	1266-001	SEAT FORWARD FACING CENTER	Seat FFC Location (2) Ctr	1

LOCATION				
O	1206-018	SEAT CREW FORWARD FACING CENTER	Seat Crew FFC Seats Inc Battalion Fixed	2
O	1218-038	SEAT BACK FORWARD FACING CENTER	Seat Back FFC SCBA Zico QM-EZL-F w/Cushion Release	2
O	1269-101	SEAT FRAME FORWARD FACING	Seat Frm Fwd Fcg Dual	1
O	1281-101	SEAT FRAME FORWARD FACING STORAGE ACCESS	Seat Frm Fwd Fcg Strg Acc Dr (2) R/L Sd	1
O	1224-002	SEAT MOUNTING FORWARD FACING CENTER	Seat Mounting Forward Facing Center	1
S	1311-101	CAB FRONT UNDERSEAT STORAGE ACCESS DOOR	Cab Frt Undrst Strg Acc Dr	1
O	1355-009	SEAT COMPARTMENT DOOR FINISH	Seat Compartment Door Finish Zolatone Onyx Black	1

CAB EXTERIOR

S	1511-003	WINDSHIELD WIPER SYSTEM	Windshield Wiper System Single Motor	1
S	1534-002	ELECTRONIC WINDSHIELD FLUID LEVEL INDICATOR	Electronic Windshield Fluid Level Indicator	1
S	1103-002	CAB DOOR HARDWARE	Cab Door Hardware Black	1
S	1111-001	DOOR LOCKS	Door Locks Manual	1
O	1115-002	DOOR LOCK LH REAR CAB COMPARTMENT	Door Lock LH Rear Cab Compartment Manual	1
O	1116-002	DOOR LOCK RH REAR CAB COMPARTMENT	Door Lock RH Rear Cab Compartment Manual	1
O	1503-008	GRAB HANDLES	Grab Handles 3-Pc Alum Knurled 18"	1
O	1504-053	REARVIEW MIRRORS	Mirror West Coast Velvac 2010 Rmt Htd Ltd	1
O	1529-004	REARVIEW MIRROR HEAT SWITCH	Rearview Mirror Heat Sw Mirror Ctrl Pnl	1
O	1525-003	EXTERIOR TRIM REAR CORNER	Exterior Trim Rear Corner Scuff Plate Shiploose	1
O	1513-001	CAB FENDER	Cab Fender SS	1
O	1514-002	MUD FLAPS FRONT	Mud Flaps Frt	1

START / CHARGING SYSTEMS

S	5109-001	IGNITION	Ign Mstr Sw w/Keyless Start	1
O	5101-002	BATTERY	Batt (6) Group 31 Harris	1
O	5106-003	BATTERY TRAY	Batt Tray (2) R/L Steel	1
O	5107-007	BATTERY BOX COVER	Batt Box Cover (2) Steel w/Black Handles	1
S	5102-001	BATTERY CABLE	Batt Cables	1
S	5108-002	BATTERY JUMPER STUD	Batt Jumper Stud Frt LH Lwr Step	1
O	5104-002	ALTERNATOR	Alternator Leece-Neville 320A	1

LINE VOLTAGE ELECTRICAL POWER DISTRIBUTION

O	3314-006	AUXILIARY AIR COMPRESSOR	Aux Air Cmp Kussmaul Auto Pump 120V Bhd Off Seat Mnt Horiz	1
O	5204-055	ELECTRICAL INLET	Elec Inlet 120V 20A Auto Eject	1
O	5209-002	ELECTRICAL INLET LOCATION	Elec Inlet Location LH Cab Side Mid	1
O	5210-010	ELECTRICAL INLET CONNECTION	Elec Inlet Conn to Air Pump	1

O	5206-002	ELECTRICAL INLET COLOR	Elec Inlet Color Yellow	1
---	----------	-------------------------------	-------------------------	---

LIGHTING

O	5301-102	HEADLIGHTS	Headlights 4 Headlamps LED	1
O	5303-004	FRONT TURN SIGNALS	Frnt Turn Signals Whelen 600 LED	1
S	5337-001	HEADLIGHT LOCATION	Headlights Below Frnt Warn Lts	1
O	5336-005	SIDE TURN/MARKER LIGHTS	Side Turn/Marker Lts LED Truck-Lite 10250Y	1
S	5302-003	MARKER & ICC LIGHTS	Marker & ICC Lts Face Mnt LED	1
S	5350-050	HEADLIGHT AND MARKER LIGHT ACTIVATION	Hdlt & Mrkr Lt Actv Rkr Sw/DRL	1
O	5333-003	CORNERING LIGHTS	Cornering Lts Whelen 500 Series 5mm LED on Bmpr Tail	1
O	5334-021	AUX SIDE MARKER/TURN LIGHTS	Aux Sd Mrkr/Turn Lts TruckLite Model 21 LED Bmpr Tail	1
O	5308-005	GROUND LIGHTS	Ground Lts LED Resp Dr & Prk Brk Sw	1
O	5309-003	LOWER CAB STEP LIGHTS	Lwr Cab Step Lts LED	1
S	5382-002	INTERMEDIATE STEP LIGHTS	Intermediate Step Lts LED	1
S	5312-001	ENGINE COMPARTMENT LIGHT	Engine Cmpt Work Lt (1)	1
O	5317-091	FRONT SCENE LIGHTS	Frnt Scene Lts Whelen Pioneer 12V LED PFP1	1
O	5335-002	FRONT SCENE LIGHTS ACTIVATION	Frnt Scene Lts Actv Rkr Sw Pnl	1
O	5329-003	FRONT SCENE LIGHT LOCATION	Frnt Scene Lt Loc Ctr Brow Pos	1
O	5306-065	SIDE SCENE LIGHTS	Side Scene Lts Whelen 900 12V Super 24 LED Clear Gradient	1
O	5318-004	SIDE SCENE LIGHT LOCATION	Side Scene Lt Loc Upper Mid Rwd 10" Roof Position	1
O	5316-004	SIDE SCENE ACTIVATION	Side Scene Actv Indv Sw & Resp Side Door	1
O	5305-180	INTERIOR OVERHEAD LIGHTS	Interior Overhead Lts Whelen LED w/Front Map Lts	1
O	5321-130	AUXILIARY DOME LIGHT LH	Aux Dome Lt LH Red LED w/Clr Lens LH Frnt Dr/Rkr Sw Actv	1
O	5322-133	AUXILIARY DOME LIGHT RH	Aux Dome Lt RH Red LED w/Clr Lens RH Frnt Dr Window Sill Rkr Sw Actv	1
O	5323-146	AUXILIARY DOME LIGHT FRONT CREW	Aux Dome Lt Frnt Crew Whelen Red/Clear LED Any Dr Actv	1
O	5324-146	AUXILIARY DOME LIGHT MID CREW	Aux Dome Lt Mid Crew LED (2) Red w/Clr Lens Rr Dr/Rkr Sw Actv	1

OPTICAL WARNING DEVICES

S	5406-001	DO NOT MOVE APPARATUS LIGHT	Do Not Move App Lt Flashing Red w/Alarm	1
S	5422-001	MASTER WARNING SWITCH	Mstr Warn Sw Pnl	1
O	5409-002	HEADLIGHT FLASHER	Headlight Flasher Alternating	1
O	5425-002	HEADLIGHT FLASHER SWITCH	Headlight Flasher Sw Pnl	1
O	5401-025	INBOARD FRONT WARNING LIGHTS	Inboard Frnt Warn Lts Weldon Diamondback 4x6 LED Chrm Bezel	1
O	5413-002	INBOARD FRONT WARNING LIGHTS COLOR	Inboard Frnt Warn Lts Color Red	1
O	5423-007	FRONT WARNING SWITCH	Frnt Warn Sw Pnl	1
O	5404-022	INTERSECTION WARNING LIGHTS	Intersection Warn Lts Weldon Diamondback 4x6 LED	1
O	5419-002	INTERSECTION WARNING LIGHTS COLOR	Int Warn Lts Color Red	1
O	5420-002	INTERSECTION WARNING LIGHTS LOCATION	Intersection Warn Lts Location Bumper Tail Rwd	1

O	5402-025	SIDE WARNING LIGHTS	Side Warn Lts Weldon Diamondback 4x6 LED	1
O	5418-002	SIDE WARNING LIGHTS COLOR	Side Warn Lts Color Red	1
O	5412-002	SIDE WARNING LIGHTS LOCATION	Side Warn Lts Location Lwr Mid	1
O	5424-008	SIDE AND INTERSECTION WARNING SWITCH	Side & Intersection Warn Sw Pnl	1

AUDIBLE WARNING DEVICES

O	5510-011	SIREN CONTROL HEAD	Siren Ctrl Head Signal Vehicle Products SS741MG	1
O	5514-002	HORN BUTTON SELECTOR SWITCH	Horn Btn Sel Sw Elec Horn/Air Horn	1
O	5512-005	AIR HORN ACTIVATION	Air Horn Actv Strg Whl/RH Lanyard	1
O	5513-002	MECHANICAL SIREN ACTIVATION	Mech Siren Actv R/L Ft Sw/Brk Sw	1
S	5505-002	BACK-UP ALARM	Back-Up Alarm Ecco 575	1

INSTRUMENTATION

S	5601-019	INSTRUMENTATION	Instrumentation Standard	1
S	5624-001	BACKLIGHTING COLOR	Backlighting Color Red	1

COMMUNICATIONS SYSTEMS

S	5721-002	WI-FI HOTSPOT	Wi-Fi Hotspot Mobile Gateway	1
S	5722-002	WI-FI HOTSPOT ANTENNA	Wi-Fi Hotspot Antenna Cab Roof Mid RH Abv B-Pillar	1
S	5020-001	PANEL LAYOUT	Panel Layout	1

ADDITIONAL EQUIPMENT

S	8814-002	CAB EXTERIOR PROTECTION	Cab Exterior Protection Front	1
S	8806-001	FIRE EXTINGUISHER	Fire Extinguisher Ship Loose	1
O	8807-002	ROAD SAFETY KIT	Road Safety Kit Ship Loose	1
S	8810-001	DOOR KEYS	Door Keys for Manual Locks (4)	1

SALES ADMIN


S	8003-127	WARRANTY	Warranty Cab and Chassis 2016 (2) Year	1
S	8017-001	CAB AND CHASSIS LABELING LANGUAGE	Cab and Chassis Labeling Language English	1
S	8030-006	CHASSIS OPERATION MANUAL	Chassis Operation Manual Digital Copy (2)	1
O	8031-023	ENGINE & TRANSMISSION OPERATION MANUAL	Eng & Trans Operation Man Sirius (2)Eng Hard Copy (2)Trans (2)Eng Owner Digital	1
O	8032-009	ENGINE SERVICE MANUAL	Engine Service Manual Hard Copy Cummins ISC/ISL (2)	1
O	8033-010	TRANSMISSION SERVICE MANUAL	Transmission Service Manual Hard Copy Allison 3000 EVS (2)	1
S	8805-007	CAB/CHASSIS AS BUILT WIRING DIAGRAMS	Cab/Chassis As Built Wiring Diagrams Digital Copy (2)	1
S	8039-001	SALES TERMS	Sales Terms	1

ENGINEERING

O	9005-002	DRIVELINE LAYOUT CONFIRMATION	Driveline Layout Confirmation Required	1
O	2124-002	EFCM/REAR CROSSMEMBERS	End of Frame Cross Member	1

Panel Visual Layout

5020-001 Panel Layout

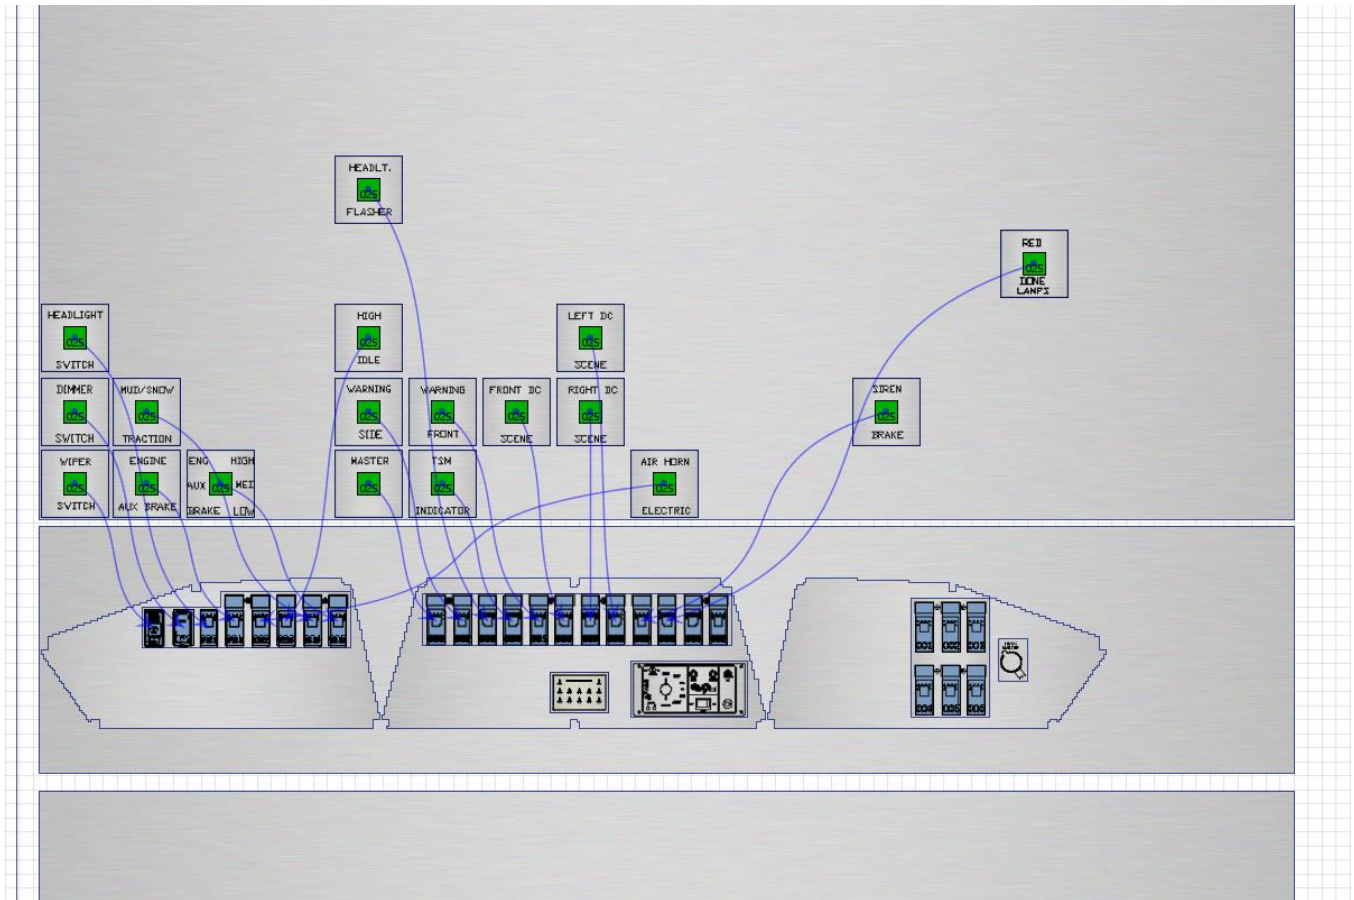

1312A-022 SW PNL CENTER 12 SW UPR 2010 94"









Port Info

Port	Label	Connected From
001	2933-NN2-001 (MASTER)	<u>5422A-001/5020PRT-025</u>
002	2933-NN2-026 (WARNING SIDE)	<u>5424A-001/5020PRT-025</u>
003	2933-NN2-020 (HEADLT. FLASHER)	<u>5425-002/5020PRT-025</u>
004	2933-NN2-086 (LOAD MNGR)	<u>5004A-001/5020PRT-025</u>
005	2933-NN2-024 (WARNING FRONT)	<u>5423A-001/5020PRT-025</u>
006	2933-NN2-214 (FRONT DC SCENE)	<u>5335-002/5020PRT-025</u>
007	2933-NN2-147 (RIGHT DC SCENE)	<u>5316A-001/5020PRT-025</u>
008	2933-NN2-146 (LEFT DC SCENE)	<u>5316-004/5020PRT-025</u>
009	2933-NN2-007 (SIREN BRAKE)	<u>5513A-001/5020PRT-025</u>
010	2933-NN2-351 (RED DOME LIGHTS)	<u>5322C-004/5020PRT-025</u>
011	1312A-022/5020PRT-011	---
012	1312A-022/5020PRT-012	---

1314A-018 SWITCH PANEL RH 6 (3+3) 2010 94"











Port Info

Port	Label	Connected From
	1314A-018/5020PRT-001	---
	1314A-018/5020PRT-002	---
	1314A-018/5020PRT-003	---
	1314A-018/5020PRT-004	---
	1314A-018/5020PRT-005	---
	1314A-018/5020PRT-006	---


1313A-008 SWITCH PANEL LH (8) UPPER SWITCH 2010



Port Info

Port	Label	Connected From
	2933-NN2-242 (ENGINE AUX BRAKE)	<u>1708B-002/5020PRT-025</u>
	2933-NN2-031 (AIR HORN / ELECTRIC)	<u>5514A-005/5020PRT-025</u>
	2933-NN2-081 (HIGH IDLE)	<u>1719B-001/5020PRT-025</u>
	2933-NN2-141 (MUD/SNOW TRACTION)	<u>3205B-004/5020PRT-025</u>
	2933-NN2-260 (ENG AUX BRAKE / HI / MED / LO)	<u>1708A-001/5020PRT-025</u>
	HEADLIGHTS	<u>5350A-001/5020PRT-025</u>
	WIPER	<u>1511A-003/5020PRT-025</u>
	DIMMER	<u>5350B-001/5020PRT-025</u>

Weight Distribution

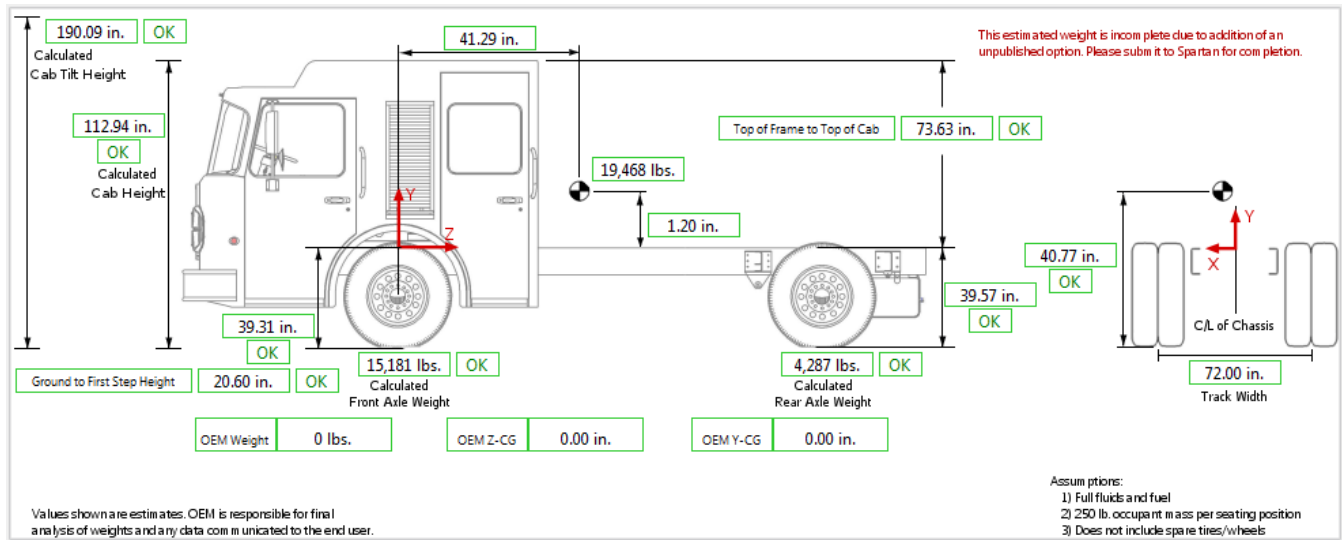

Calculated Apparatus Weight 19,468 lbs.
 Calculated Apparatus Z-CG 41.29 in.
 Calculated Apparatus Y-CG 1.20 in.


Note:

The Y-CG value above is calculated from the top of the frame.
 Apparatus refers to total combined value for cab and chassis and OEM inputs.


Seat Locations



Frame Dimensions

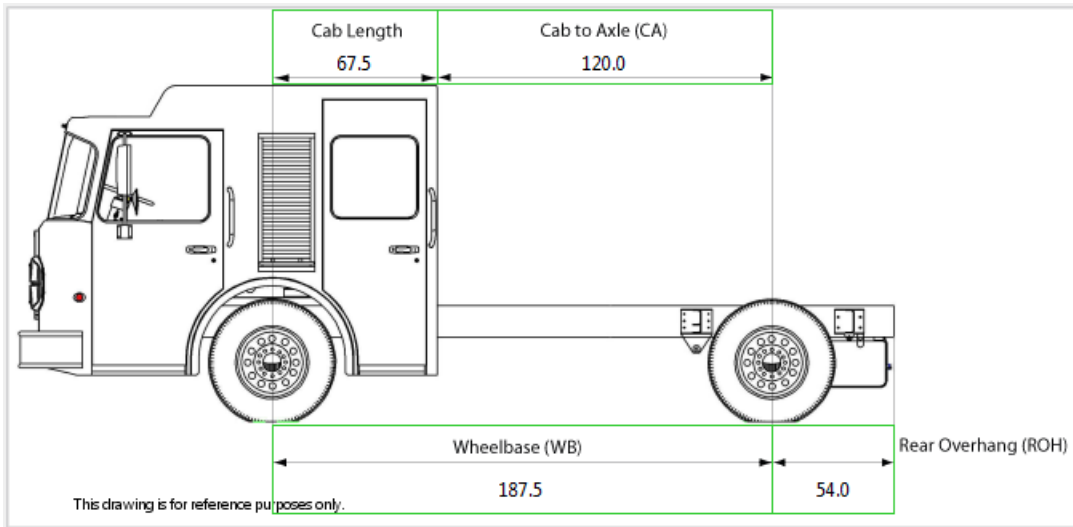

Turning Radius

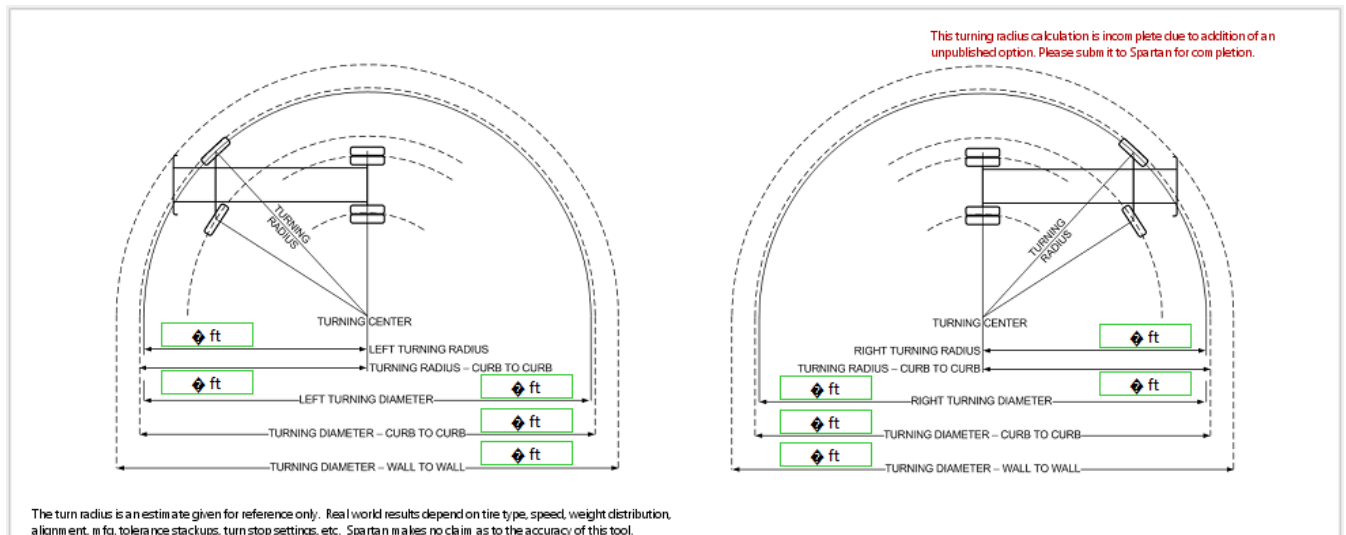

Status
Help Message
Invalid Subcategory
Invalid Subcategory

false
Add missing option.
2606A
2606C



610 WEST 4TH ST. - P.O. BOX 4
 SNYDER, NEBRASKA 68664
smeal.com
 (402) 568-2224
WE BUILD RESPECT.

Quote Summary with Notes

Customer: 2015 Florida Sheriffs

Dealership:

Quote No: 0013429 **Quote Name:** Florida Sheriffs - Custom Pumper - Level 2 - Alum - Sirius II
S.O. #: **Unit Type:**

Option ID	Entity	Description	Qty	UOM
	Basic Unit Type	Custom Side Mount Pumper	1	SET
S00496	Country	United States	1	EA
S00440	Standards Version	NFPA 1901-2009	1	NA
S00439	Bidding Prerequisites	Yes	1	NA
S00464	Documentation	NFPA	1	NA
S00460	Intent of Specifications	Pumper	1	NA
	Actual Overall Height (in)	116	1	SET
	Actual Overall Length (in)	368	1	SET
	Actual Wheelbase (in)	188	1	SET
	Actual Angle of Approach (deg)	12	1	SET
	Actual Angle of Departure (deg)	12	1	SET
S00472	Top Speed	Top Speed - GVWR 26,000 lb (11,800 kg) or greater	1	NA
S00490	Miscellaneous Equipment Allowance	Miscellaneous Equipment Allowance - 2,000 Lb.	1	EA
S00483	Miscellaneous Equipment Provider	Customer Supplied Miscellaneous Equipment - Pumper	1	EA
M00058	Owners Manuals and Schematics - Electronic Format	1 USB Drive	1	EA
S00468	Pre-Construction Meeting	Pre-Construction Meeting at Customer/Dealer Location	1	NA
S00471	Final Inspection	Yes	1	NA
S00444	Inspection Certificate	NFPA 1901 Compliance	1	EA
M00014	Unit Certification	NFPA 1901-2009 - Pumper Firefighting Apparatus	1	EA
M00044	Pump Testing	Independent Third Party Certification Pump Testing	1	EA
S00457	Pump Certification	U.S. GPM	1	NA
S00310	Electrical System Test	12 Volt Electrical System Test	1	EA

Option ID	Entity	Description	Qty	UOM
M00048	Tilt-Table Test	Yes	1	EA
W10100	Body Structural Integrity Warranty	10 Year	1	EA
W10200	Paint and Corrosion Warranty	10 Year / 10 Year	1	EA
W10300	Stainless Plumbing Warranty	10 Year	1	EA
W05810	Pump Warranty	Waterous Standard 5 Year	1	EA
WLF810	Water Tank Warranty	Pro Poly Standard Lifetime	1	EA
W20100	Galvanized Substructure Warranty	20 Year	1	EA
W01500	Smeal Manufactured Parts Warranty	1 Year	1	EA
W01400	OEM Purchased Parts Warranty	1 Year	187	TH

Chassis

S00560	Chassis Make	Smeal	1	EA
S00568	Model	Sirius II	1	EA
S00578	Cab Type	4-Door	1	EA
S00536	Axle Type	Single	1	EA
S00580	V-Mux Cab	Yes	1	EA
005241	Chassis Preparations	Sirius Preparations	1	EA
	Spartan APS System	No APS	1	SET
001379	Heat Exchanger	Yes	1	EA
001200	Mud Flaps	Yes	1	SET
008280	Emblems	Chassis Supplied - SFA Installed Emblems	1	EA
008384	Additional Option(s)	Chassis Supplied Four Gauge Cluster on Pump Panel	1	EA
005591	Charger	Chassis Supplied and Installed 110V Charger and Shoreline Receptacle/AutoEject	1	EA
S00658	Charger Eject	Chassis Supplied and Installed Manual/Auto Eject	1	EA
S00662	Switch Panel	Chassis Supplied and Installed Switch Panel	1	EA
S00717	Vehicle Data Recorder	Chassis Supplied and Installed	1	EA
006245	Front Bumper	Chassis Supplied Front Bumper Extension - SFA Supplied Tread Plate Gravel Shield	1	EA
S00682	Air Horn	Chassis Supplied and Installed Air Horns	1	EA
S00713	Air Horn Activation	Chassis Installed in Steering Wheel	1	EA
007110	Additional Air Horn Activation	Officer's Side Push Button Activation	1	EA
S00719	Electronic Siren	Chassis Supplied and Installed Siren in Cab	1	EA
S00796	Speaker	Chassis Supplied and Installed Speaker(s)	0	EA

Pumps

000067	Pump	Waterous CSUC20 1500 GPM Single-Stage Pump	1	EA
---------------	-------------	---	----------	-----------

Option ID	Entity	Description	Qty	UOM
S00777	Pump Transmission	C20-Series Transmission	1	EA
S00181	Pump Class Rating	Class A Single-Stage Pump Rating	1	EA
S00112	Pump Rating	1250 GPM	1	EA
S00068	Pump Body	Waterous Pump Body	1	EA
S00205	Pump Mounting	Fire Pump Mounting	1	EA
S00071	PumpColor_USC	Pump Primed Black (Intakes Unpainted) by Pump Manufacturer	1	EA
002792	Discharge/Inlet Anodes	Waterous Zinc Anodes - 2 Discharge and 2 Intake	1	SET
S00061	Impellers	Waterous Impeller with Flame Plated Hubs as Standard	1	EA
S00066	Impeller Wear Rings	Yes	1	EA
S00076	Seals	Waterous Grafoil Packing	1	EA
000098	Pump Shift	Waterous Air-Operated Pump Shift	1	EA
000100	Pump Shift Lights	Waterous Pump Shift Indicating Lights	1	EA
000102	Priming Pump	Waterous VPO/VPOS Oil-Less Priming Pump	1	EA
005702	Priming Activation Method	Waterous VAP Vacuum-Activated Priming Valve	1	EA
000106	Discharge Relief Valve/Governor	Waterous Discharge Relief Valve	1	EA
005263	Class 1 Enfo IV	Yes	1	EA
008641	PumpHourMeter	Pump Hour Meter	1	EA
002210	Intake Relief Valve	Elkhart Intake Relief Valve	1	EA
002179	Vernier Throttle	Vernier Throttle Control	1	EA
000112	Master Drain Valve	Trident Master Drain Valve	1	EA
005706	Lubrication System	Yes	1	EA
009960	Pump and Engine Cooling System	Standard - Pump Panel	1	EA
006643	Manifold	Waterous Standard Non-Foam Manifold	1	EA
002618	Port T	3" Tank to Pump	1	EA
000391	Valve	Akron Brass 3" 8800 Tank-to-Pump Valve Controlled at Operators Panel	1	EA
006394	Valve Controller	Trident Push-Pull Handle for Swing-Out Valve	1	EA
S00453	Check Valve	Tank-to-Pump Check Valve	1	EA
S00050	Label Color	SFA Standard Black	1	EA
002596	Port 15	2" Tank Fill	1	EA
006661	Valve	Akron Brass 2" 8800 Valve Controlled at Operators Panel	1	EA
006394	Valve Controller	Trident Push-Pull Handle for Swing-Out Valve	1	EA
S00050	Label Color	SFA Standard Black	1	EA
002603	Port D	6" Left-Side Steamer	1	EA
S00136	Suction Tube	Short Suction Tube	1	EA
S00806	Termination	MNST Thread	1	EA
007475	Cap	Trident 6" NST Vented Chrome Cap with Smeal Logo	1	EA

Option ID	Entity	Description	Qty	UOM
S00051	Label Color	SFA Standard Chrome	1	EA
002601	Port O	6" Right-Side Steamer	1	EA
S00136	Suction Tube	Short Suction Tube	1	EA
S00806	Termination	MNST Thread	1	EA
007475	Cap	Trident 6" NST Vented Chrome Cap with Smeal Logo	1	EA
S00051	Label Color	SFA Standard Chrome	1	EA
002564	Port DR	2-1/2" Left-Side (Rearward) Partially Recessed Inlet	1	EA
007059	Valve	Akron Brass 2-1/2" 8800 Valve Controlled at Valve	1	EA
S00450	Valve Controller	Akron TSC Manual Control Handle	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
S00802	Termination	FNST Thread	1	EA
001246	Plug	South Park 2-1/2" NST Chrome Plug with Chain	1	EA
S00050	Label Color	SFA Standard Black	1	EA
002545	Port 1	2-1/2" Left-Side Discharge	1	EA
006676	Valve	Akron Brass 2-1/2" 8600 Valve Controlled at Operators Panel - Rack & Sector	1	EA
002664	Valve Controller	Trident Push-Pull Handle for Rack and Sector Valve	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
005849	Gauge	2-1/2" Thuemling Liquid Filled Pressure Gauge - psi 0-400	1	EA
S00797	Termination	MNST Thread	1	EA
002954	Elbow	Kochek 2-1/2" FNH x 2-1/2" MNH 30 Degree Elbow	1	EA
UPO0000015936	Cap	South Park 2-1/2" NST Vented Chrome Cap with Chain	1	EA
S00042	Label Color	SFA Standard Red	1	EA
002545	Port 2	2-1/2" Left-Side Discharge	1	EA
006676	Valve	Akron Brass 2-1/2" 8600 Valve Controlled at Operators Panel - Rack & Sector	1	EA
002664	Valve Controller	Trident Push-Pull Handle for Rack and Sector Valve	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
005849	Gauge	2-1/2" Thuemling Liquid Filled Pressure Gauge - psi 0-400	1	EA
S00797	Termination	MNST Thread	1	EA
002954	Elbow	Kochek 2-1/2" FNH x 2-1/2" MNH 30 Degree Elbow	1	EA
UPO0000015936	Cap	South Park 2-1/2" NST Vented Chrome Cap with Chain	1	EA
S00045	Label Color	SFA Standard Blue	1	EA
002538	Port 3	2-1/2" Right-Side Discharge	1	EA
006663	Valve	Akron Brass 2-1/2" 8800 Valve Controlled at Operators Panel	1	EA
006394	Valve Controller	Trident Push-Pull Handle for Swing-Out Valve	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
005849	Gauge	2-1/2" Thuemling Liquid Filled Pressure Gauge - psi 0-400	1	EA

Option ID	Entity	Description	Qty	UOM
S00797	Termination	MNST Thread	1	EA
002954	Elbow	Kochek 2-1/2" FNH x 2-1/2" MNH 30 Degree Elbow	1	EA
UPO0000015936	Cap	South Park 2-1/2" NST Vented Chrome Cap with Chain	1	EA
S00039	Label Color	SFA Standard Orange	1	EA
002541	Port 4	2-1/2" Right Rear Discharge	1	EA
006663	Valve	Akron Brass 2-1/2" 8800 Valve Controlled at Operators Panel	1	EA
006394	Valve Controller	Trident Push-Pull Handle for Swing-Out Valve	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
005849	Gauge	2-1/2" Thuemling Liquid Filled Pressure Gauge - psi 0-400	1	EA
S00797	Termination	MNST Thread	1	EA
002954	Elbow	Kochek 2-1/2" FNH x 2-1/2" MNH 30 Degree Elbow	1	EA
UPO0000015936	Cap	South Park 2-1/2" NST Vented Chrome Cap with Chain	1	EA
S00040	Label Color	SFA Standard Burnt Orange	1	EA
002553	Port 5	4" LDH Right-Side Discharge	1	EA
007060	Valve	Akron Brass 3" 8800 Valve Controlled at Operators Panel	1	EA
003769	Valve Controller	Elkhart Brass RC-10 Chrome Handwheel with Position Indicator	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
005849	Gauge	2-1/2" Thuemling Liquid Filled Pressure Gauge - psi 0-400	1	EA
S00797	Termination	MNST Thread	1	EA
006214	Elbow	South Park 4" FNST x 4" MNST 30 Degree Elbow	1	EA
001247	Cap	South Park 4" NST Vented Chrome Cap with Chain	1	EA
S00047	Label Color	SFA Standard Dark Green	1	EA
S00498	Port 7	1-1/2" Preconnect Crosslay	1	EA
006661	Valve	Akron Brass 2" 8800 Valve Controlled at Operators Panel	1	EA
006394	Valve Controller	Trident Push-Pull Handle for Swing-Out Valve	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
005849	Gauge	2-1/2" Thuemling Liquid Filled Pressure Gauge - psi 0-400	1	EA
S00797	Termination	MNST Thread	1	EA
S00184	Cap	Preconnect Discharge	1	EA
S00044	Label Color	SFA Standard Yellow	1	EA
S00498	Port 8	1-1/2" Preconnect Crosslay	1	EA
006661	Valve	Akron Brass 2" 8800 Valve Controlled at Operators Panel	1	EA
006394	Valve Controller	Trident Push-Pull Handle for Swing-Out Valve	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
005849	Gauge	2-1/2" Thuemling Liquid Filled Pressure Gauge - psi 0-400	1	EA
S00797	Termination	MNST Thread	1	EA
S00184	Cap	Preconnect Discharge	1	EA

Option ID	Entity	Description	Qty	UOM
S00049	Label Color	SFA Standard White	1	EA
002560	Port 16	3" Deluge Riser - Center	1	EA
007060	Valve	Akron Brass 3" 8800 Valve Controlled at Operators Panel	1	EA
003769	Valve Controller	Elkhart Brass RC-10 Chrome Handwheel with Position Indicator	1	EA
008028	Drain	Trident Quarter-Turn Manual Drain	1	EA
005849	Gauge	2-1/2" Thuemling Liquid Filled Pressure Gauge - psi 0-400	1	EA
005274	Riser	3" Riser Terminating NPT	1	EA
S00053	Label Color	SFA Standard Magenta	1	EA
Tanks				
004758	Water Tank	Pro-Poly Rectangular 750 U.S. Gallon Tank	1	EA
S00013	Water Tank Mounting	Standard	1	EA
000350	Water Tank Drain	1-1/2" Drain Valve	1	EA
UPO0000015021	Fill Tower	Pro-Poly Tank Fill Tower, 12x12	1	EA
004776	Overflow	Pro-Poly 4" Overflow	1	EA
003589	Water Level Gauge(s)	Class 1 Intelli-Tank - Pump Operator's Panel	1	EA
Doors and Lights				
Pump Compartment				
002633	Pump Compartment Material	1/8" Aluminum Custom Side Mount	1	EA
S00154	Pump Compartment Structure	Separate Pump Compartment	1	EA
000630	Lighting Inside of Pump Compartment	Truck Lite 9185-40003 Pump Module Lights	1	PR
004789	Pump Panel	Left Side Controls - Line-X Panel	1	SET
003659	Pump Panel Lighting	On-Scene Night Axe LED Pump Panel Lighting	1	PR
006940	Master Gauges	4-1/2" Thuemling Liquid Filled Pressure/Vacuum Gauges - psi - - 30-0-400	1	PR
000356	Pressure Vacuum Test Ports	Class 1 Model 121384 Pressure and Vacuum Test Ports	1	EA
007164	Bezels and Trim Rings	Standard Bezels and Trim Rings	1	EA
003556	Left Running Board	Tread Plate Bolt-On Running Board	1	EA
006969	Right Running Board	Tread Plate Bolt-On Running Board with Storage Well	1	EA
004568	Storage Well Restraint	Pac Trac Straps	1	PR
007001	Crosslay(s)	Two (2) 1-1/2" Crosslays Above Pump Panel	1	SET
S00163	Crosslay 1 Capacity	Crosslay - 200' of 1-3/4" Hose	1	EA
S00172	Crosslay 1 Stack Type	Single Stack - Crosslay	1	EA
S00163	Crosslay 2 Capacity	Crosslay - 200' of 1-3/4" Hose	1	EA
S00172	Crosslay 2 Stack Type	Single Stack - Crosslay	1	EA
004557	Crosslay(s) End Covers	Crosslay Webbing End Covers - Sides Over Rollers with Velcro Center	1	SET

Option ID	Entity	Description	Qty	UOM
007020	Crosslay(s) Top Cover	Hinged Tread Plate Cover (Side Mount)	1	EA
000205	Crosslays Rollers	Yes	1	SET
007018	Crosslay Flooring	Dura-Dek Flooring	1	EA
007013	Crosslays Finish Coating	Abraded Finish	1	EA
007015	Crosslays Divider	Aluminum Divider	1	EA
000935	Crosslays Divider Coating	Abraded Finish	1	EA
005149	Front Access Panel	Tread Plate Front Access Panel with Compression Latches - Alum. Body	1	EA
000460	Right Access Panel	Tread Plate Access Panel with Compression Latches	1	EA
Body				
002630	Body Material	1/8" Aluminum Custom Body - 100" Wide	1	EA
005155	Screws	Stainless Steel Screws	1	EA
001210	Bag of Bolts	Bag of Bolts	1	EA
M00005	Body Length	Aluminum Body 160" - 179"	1	EA
005119	Subframe	Hot-Dip Galvanized Sub-Frame	1	EA
005954	Heat Deflector Shield	5" Exhaust Heat Deflector Shield - Aluminum Body	1	EA
S50092	Left Body Configuration	Custom Pumper Full Depth Rescue Style	1	EA
006361	Left Door Configuration	Left Door Configuration	1	EA
S50093	Compartment	L1	1	EA
S00204	Compartment Door	ROM Roll-Up Door Construction - Satin Finish	1	EA
S00213	Door Handle	ROM Non-Locking	1	EA
002513	Compartment Lighting	ROM V4 LED 66" Light	2	EA
	Requested Dimensions	No Requested Dimensions	1	SET
	Opening Height	556.50	1	SET
	Opening Width	43.00	1	SET
	Upper Depth	25.75	1	SET
	Lower Depth	25.75	1	SET
	Intermediate Divide Height	56.50	1	SET
000424	Additional Option(s)	Full Height Cmpt - Full Depth - Double Set of Aluminum Strut Channels	1	SET
002742	Additional Option(s)	Shelf - Adjustable - Abraded Aluminum - Full Depth	2	EA
000563	Additional Option(s)	Tray - 300# - Austin Hardware - Floor-Mounted Abraded Roll-Out - 100% Extension	1	EA
S50094	Compartment	L2	1	EA
S00204	Compartment Door	ROM Roll-Up Door Construction - Satin Finish	1	EA
S00213	Door Handle	ROM Non-Locking	1	EA
002505	Compartment Lighting	ROM V4 LED 18" Light	2	EA
	Requested Dimensions	No Requested Dimensions	1	SET
	Opening Height	27.00	1	SET


Option ID	Entity	Description	Qty	UOM
	Opening Width	57.00	1	SET
	Upper Depth	25.75	1	SET
	Lower Depth	25.75	1	SET
	Intermediate Divide Height	27.00	1	SET
S50095	Compartment	L3	1	EA
S00204	Compartment Door	ROM Roll-Up Door Construction - Satin Finish	1	EA
S00213	Door Handle	ROM Non-Locking	1	EA
002510	Compartment Lighting	ROM V4 LED 48" Light	1	EA
	Requested Dimensions	No Requested Dimensions	1	SET
	Opening Height	56.50	1	SET
	Opening Width	39.00	1	SET
	Upper Depth	25.75	1	SET
	Lower Depth	25.75	1	SET
	Intermediate Divide Height	56.50	1	SET
000424	Additional Option(s)	Full Height Cmpt - Full Depth - Double Set of Aluminum Strut Channels	1	SET
002742	Additional Option(s)	Shelf - Adjustable - Abraded Aluminum - Full Depth	2	EA
000563	Additional Option(s)	Tray - 300# - Austin Hardware - Floor-Mounted Abraded Roll-Out - 100% Extension	1	EA
S50112	Right Body Configuration	Custom Pumper Split Depth Rescue Style	1	EA
006360	Right Door Configuration	Right Door Configuration	1	EA
S50113	Compartment	R1	1	EA
S00204	Compartment Door	ROM Roll-Up Door Construction - Satin Finish	1	EA
S00213	Door Handle	ROM Non-Locking	1	EA
002510	Compartment Lighting	ROM V4 LED 48" Light	2	EA
	Requested Dimensions	No Requested Dimensions	1	SET
	Opening Height	56.50	1	SET
	Opening Width	43.00	1	SET
	Upper Depth	15.25	1	SET
	Lower Depth	25.75	1	SET
	Intermediate Divide Height	26.50	1	SET
S50114	Compartment	R2	1	EA
S00204	Compartment Door	ROM Roll-Up Door Construction - Satin Finish	1	EA
S00213	Door Handle	ROM Non-Locking	1	EA
002505	Compartment Lighting	ROM V4 LED 18" Light	2	EA
	Requested Dimensions	No Requested Dimensions	1	SET
	Opening Height	27.00	1	SET
	Opening Width	57.00	1	SET

Option ID	Entity	Description	Qty	UOM
	Upper Depth	15.25	1	SET
	Lower Depth	15.25	1	SET
	Intermediate Divide Height	27.00	1	SET
S50115	Compartment	R3	1	EA
S00204	Compartment Door	ROM Roll-Up Door Construction - Satin Finish	1	EA
S00213	Door Handle	ROM Non-Locking	1	EA
002510	Compartment Lighting	ROM V4 LED 48" Light	1	EA
	Requested Dimensions	No Requested Dimensions	1	SET
	Opening Height	56.50	1	SET
	Opening Width	39.00	1	SET
	Upper Depth	15.25	1	SET
	Lower Depth	25.75	1	SET
	Intermediate Divide Height	26.50	1	SET
S66871	Rear Body Configuration	Flat Back - Ladders to Right of Water Tank - 1 Cmpt - Roll-Up Door	1	EA
006042	Rear Door Configuration	Rear Door Configuration	1	EA
S66872	Compartment	T1	1	EA
S00204	Compartment Door	ROM Roll-Up Door Construction - Satin Finish	1	EA
S00213	Door Handle	ROM Non-Locking	1	EA
002507	Compartment Lighting	ROM V4 LED 30" Light	1	EA
	Requested Dimensions	No Requested Dimensions	1	SET
	Opening Height	37.00	1	SET
	Opening Width	41.00	1	SET
	Upper Depth	33.00	1	SET
	Lower Depth	33.00	1	SET
	Intermediate Divide Height	37.00	1	SET
000474	Body Compartment Venting	All Compartments - Air Release and Drain Holes	1	EA
S00020	Tread Plate	Walkways/Overlays/Stepping Surfaces - NFPA 1901	1	EA
003558	Rear Deck	Bolt-On Tread Plate Rear Deck - Flat Back	1	EA
007868	Rear Steps	Bolt-On Steps - Eight (8) - 4 Left and 4 Right	1	SET
002186	Wheel Well	Single Axle Rear Wheel Wells	1	SET
003559	Fenderettes	Stainless Steel Fenderettes	1	PR
S00288	Door Finish	Brushed Finish	1	EA
S00978	Wheel Well Location	WL1 Wheel Well Position	1	EA
007489	Wheel Well Option	Single 8" Air Bottle Compartment - OEM Stainless Steel Brushed Door	1	EA
S00980	Wheel Well Location	WL3 Wheel Well Position	1	EA

Option ID	Entity	Description	Qty	UOM
007490	Wheel Well Option	Single 8" Air Bottle Compartment - OEM Stainless Steel Brushed Door	1	EA
002662	Left Fuel Fill	Left Fuel Fill - Fire Shopp Brushed Door	1	EA
S00981	Wheel Well Location	WR1 Wheel Well Position	1	EA
007490	Wheel Well Option	Single 8" Air Bottle Compartment - OEM Stainless Steel Brushed Door	1	EA
S00983	Wheel Well Location	WR3 Wheel Well Position	1	EA
007489	Wheel Well Option	Single 8" Air Bottle Compartment - OEM Stainless Steel Brushed Door	1	EA
005118	Rub Rails	"C" Channel Design Body Rub Rails	1	EA
000515	Tow Option(s)	One Rear Tow Hook	1	EA
000588	Hose Bed	Standard Hose Bed	1	EA
S01341	Hose Type - Position C	Double-Jacket Hose - 800' of 4"	1	EA
S01025	Hose Bed Restraint	Restraint Incorporated with the Top Cover	1	EA
S00260	Hose Bed Finish	Painted Primary Body Color	1	EA
000597	Hose Bed Cover	Pumper Vinyl Hose Bed Cover - Side Button Snaps with Footman Loop / J-Hook on Rear	1	EA
S00255	Cover Color	Red Vinyl Restraint	1	EA
004933	Hose Bed Divider	1/4" Abraded Aluminum Adjustable Hose Bed Divider	1	EA
	Hose Bed Capacity	70	1	SET
	Hose Bed Actual Capacity	82	1	SET
002221	Ladder Storage	Inside Body - Right of Water Tank - Tread Plate Door	1	EA
006010	Ladder(s)	Alco-Lite 10' Folding Attic Ladder with Brackets - FL-10	1	EA
001302	Ladder(s)	Alco-Lite 14' Roof Ladder - PRL-14	1	EA
001305	Ladder(s)	Alco-Lite 24' Two-Section Ladder - PEL-24	1	EA
S00309	Pike Pole Storage	Aluminum Pike Pole Tube in Ladder Storage Compartment	2	EA
002274	Pike Pole(s)	Akron 10' Ultra-Lite Fiberglass Pike Pole - UL-10	2	EA
004949	Wheel Chocks	Cast Products Wheel Chocks - TMC1008-4 and Bracket - Alum Body	1	PR
S00030	Location	Wheel Chocks Under Left Front of Body	1	EA
S00015	Handrail(s) Material	Knurled Aluminum Handrails	1	EA
000526	Additional Option(s)	Knurled Aluminum Handrail - Body (Rear) - Rear Face - Vertical - Left	1	EA
005158	Additional Option(s)	Knurled Aluminum Handrail - Body (Rear) - Rear Face - Vertical - Right	1	EA
000517	Additional Option(s)	Knurled Aluminum Handrail - Body (Rear) - Above Compartment and Below Hose Bed - Horizontal	1	EA
002427	Additional Option(s)	License Plate Bracket	1	EA
004929	Additional Option(s)	Access Panel for Fuel Tank Gauge - Pumpers	1	EA
Electrical				
002955	Electrical System	Standard Electrical System	1	EA

Option ID	Entity	Description	Qty	UOM
S00314	Sealed Switches	V-Mux Sealed Switches	1	EA
002851	Tail Lights	Whelen - 600 Series LED Stop/Tail/Turn/Halogen Backup - 4-Light Vertical Cluster	1	PR
008730	Turn-Signal Lights	Two Truck-Lite Model 21 LED Lights in the Rub Rails	1	PR
002728	Ground Lights	Truck-Lite Ground Lights - Model 40	4	EA
002796	Ground Lighting Bracket(s)	Ground Light Bracket	4	EA
006261	Clearance Lights	Grote Red LED Clearance Lights	1	SET
000645	Hose Bed Loading Lights	Unity AG-R Light on Rear	1	EA
002192	Rear Work Light Switch	Rear Work Light Switch	1	EA
	Radio Model	None	1	SET
003800	Generator	Onan 8kW Hydraulic Generator - 8RBAB	1	EA
007539	Starter Option	Start - Hydraulic Generators - In Cab	1	EA
000680	PTO Option	Standard Hot Shift PTO	1	EA
S00312	Generator Info Center	Onan Generator Display	1	EA
002784	Location	Above Pump Module	1	EA
000683	Load Center	8-Circuit Non-GFI Breaker Box	1	EA
S00886	Load Center Location	L1 - Back Wall	1	EA
004935	Load Center Cmpt Drip Tray	ROM Drip Tray	1	EA
S00422	Warning Light Zone	Upper Zone A	1	NA
000748	Warning Light(s)	Whelen - Freedom 55" LED Lightbar - FN55VLED - Flat Roof - 6 Red, 2 White	1	EA
S00424	Warning Light Zone	Upper Zone C	1	NA
007200	Warning Light(s)	Whelen RB6 Rotating Beacons - Red Left - Amber Right	1	PR
S00426	Warning Light Zone	Lower Zone A	1	NA
S00383	Warning Light(s)	Chassis Supplied Warning Lights	2	NA
S00427	Warning Light Zone	Lower Zone B	1	NA
003646	Warning Light(s)	Whelen - 600 Series Super-LED Warning Light - Red	2	EA
S00428	Warning Light Zone	Lower Zone C	1	NA
003646	Warning Light(s)	Whelen - 600 Series Super-LED Warning Light - Red	2	EA
S00429	Warning Light Zone	Lower Zone D	1	NA
003646	Warning Light(s)	Whelen - 600 Series Super-LED Warning Light - Red	2	EA
005745	AC Lighting Option(s)	FRC Halogen 750W Focus - Side Mount Push-Up Telescoping 120V Light - FCA530-S75	1	EA
004904	AC Lighting Option(s)	120V Light Switch In Cab	1	EA
S00354	AC Lighting Option(s)	On Front Face of the Body - Left Side	1	EA
005745	AC Lighting Option(s)	FRC Halogen 750W Focus - Side Mount Push-Up Telescoping 120V Light - FCA530-S75	1	EA
004904	AC Lighting Option(s)	120V Light Switch In Cab	1	EA
S00355	AC Lighting Option(s)	On Front Face of the Body - Right Side	1	EA





Option ID	Entity	Description	Qty	UOM
Paint and Striping				
009171	Paint Process	Single Tone (Aluminum)	1	EA
008841	Single Tone Body Color	Red - PPG# FBCH-71096-ALT	1	EA
S00715	Chassis Paint Option	Chassis Manufacturer Painted Single Tone	1	EA
001170	Under-Body Finish	Two-Step Undercoating Process	1	EA
007460	Compartment Finish	White Amerlock	1	EA
S00556	Coating Material	Standard	1	EA
001033	Touch-Up Paint	Standard - Two-Ounce Bottle	1	EA
006089	Corrosion Protection	Standard - Electrolysis Corrosion Kontrol (ECK)	1	EA
008610	Body Striping Option	4" Striping - Straight Around Perimeter	1	EA
S00589	Striping Wrap Around Front of Cab	Stop at Side of Bumper - Stripe on Front Bumper	1	EA
S00615	Main Stripe Color	White	1	EA
004522	Rub Rail Striping	Standard	1	EA
S01010	Interior Cab Door Striping	Reflective Striping - Chassis Supplied	1	EA
003620	Chevron Location	Entire Rear and Other Storage Doors - *Exclude T1	1	SET
S00604	Chevron Color	Red / Fluorescent Yellow-Green	1	EA

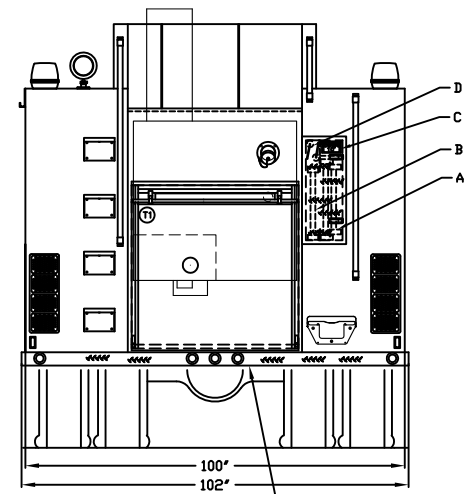

STEP ADJUSTABLE TO MEET NFPA STEPPING HEIGHT

GROUND LADDERS & PIKE POLES			
ITEM	LADDER LENGTH	MODEL	QTY
A	24' 2 SEC	PEL-24	1
B	14' ROOF	PRL-14	1
C	10' ATTIC	FL-10	1
D	PIKE POLES		2
E			
F			
G			
H			
I			

COMPT.	OPENING	UPPER DEPTH	LOWER
L1	43W X 56.5H	25.75	25.75
L2	57W X 27H	25.75	N/A
L3	39W X 56.5H	25.75	25.75
R1	43W X 56.5H	15.25	25.75
R2	57W X 27H	15.25	N/A
R3	39W X 56.5H	15.25	25.75
T1	41W X 37H	33	33
INTERMEDIATE DIVIDE HEIGHT			
R1/R3	26.5		

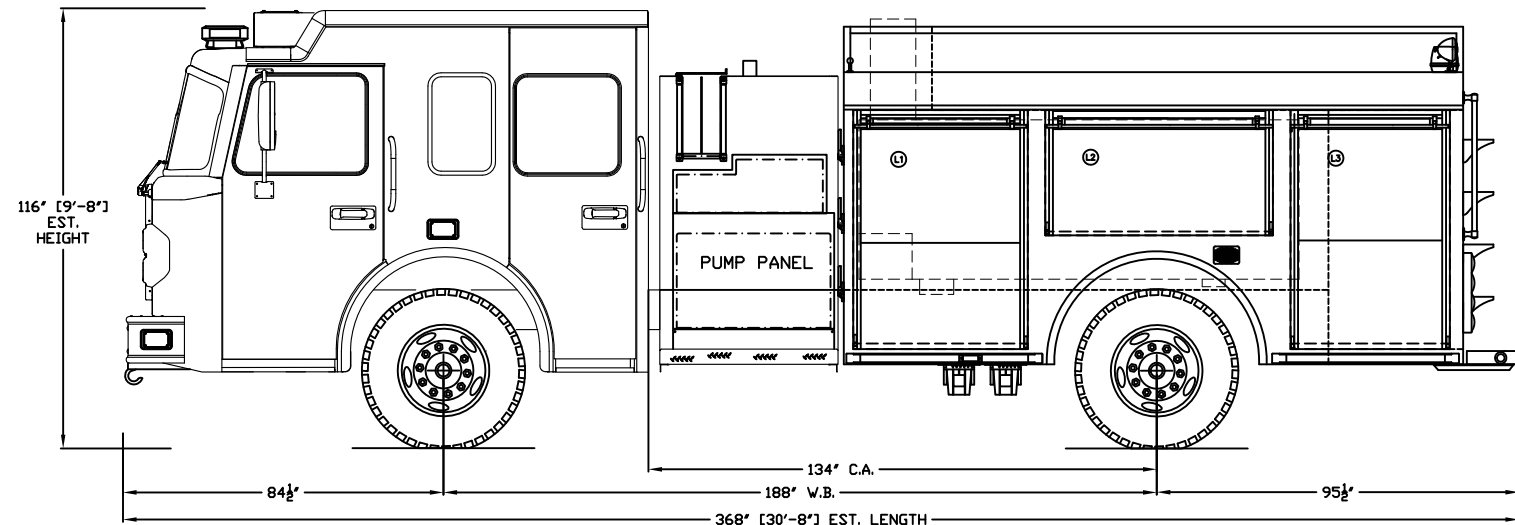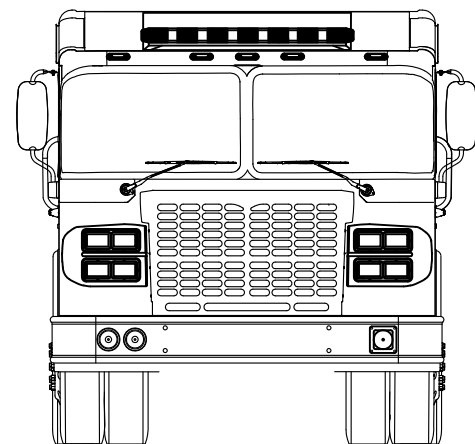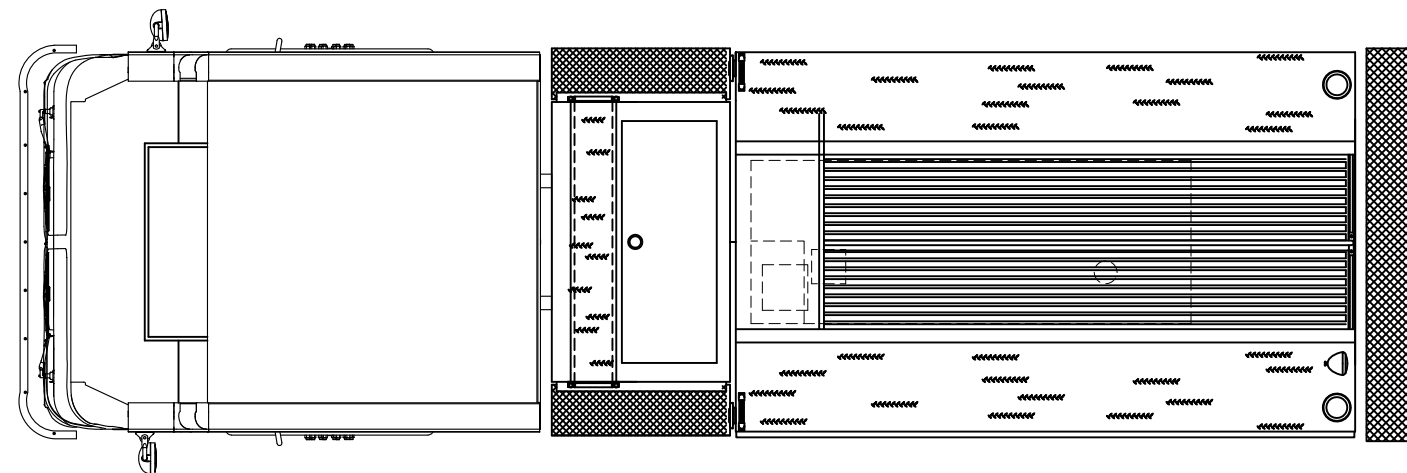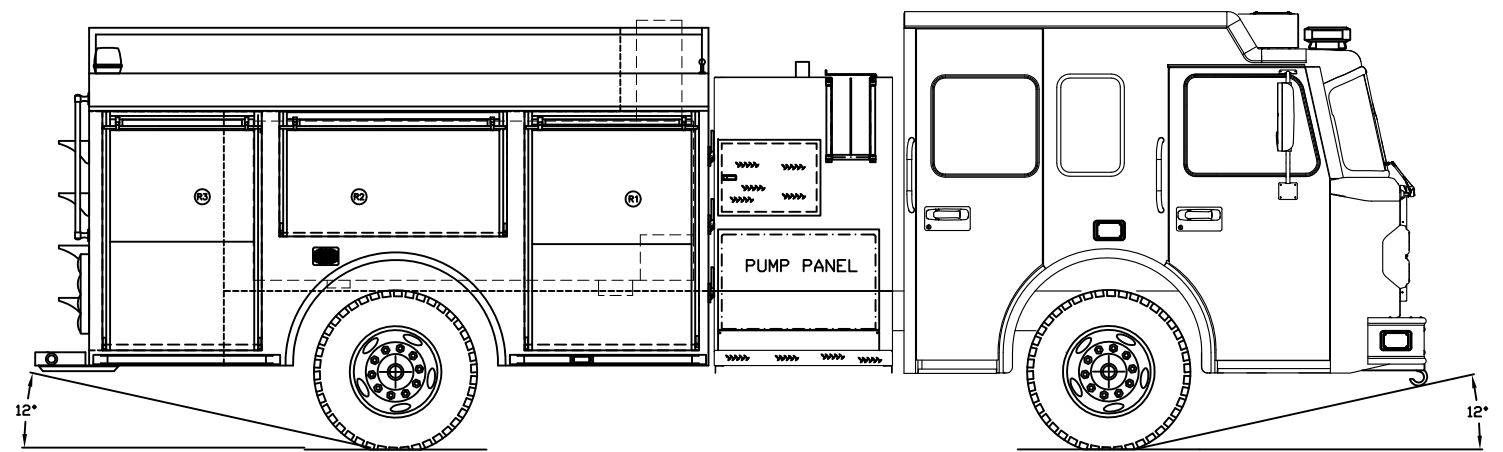

NOTE:
UNSPECIFIED DECKGUNS WILL NOT BE INCLUDED IN THE OVERALL HEIGHT OF THE VEHICLE. THE ADDITION OF A DECKGUN MAY INCREASE THE OVERALL HEIGHT OF THE VEHICLE.


NOTE:
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO CHANGE AS MAY BE FOUND NECESSARY DURING CONSTRUCTION. MINOR DETAILS MAY NOT BE SHOWN.
THE DRAWING IS FOR REFERENCE PURPOSES ONLY. SOME ITEMS MAY OR MAY NOT APPEAR ON THE DRAWING THAT MAY OR MAY NOT BE INCLUDED IN THE SPECIFICATIONS.

SPECIFICATIONS SHALL BE THE FINAL AUTHORITY TO DETERMINE WHAT IS SUPPLIED ON THE APPARATUS.

PUMP: WATERIOUS CSUC20 1500 GPM
TANK: POLY 750 USG
FOAM: N/A
BODY: ALUMINUM
HOSE BED: 82 CUBIC FEET
COMPARTMENTS: 180 CUBIC FEET
CHASSIS: SMEAL SIRIUS II MFD

PROPOSAL

Date	Approval Signatures	Revisions
	DEALER	
	FIRE CHIEF	
	SALES AD.	
	PRODUCTION	
	ENGINEERING	



Revisions	SMEAL FIRE APPARATUS SNYDER, NE 68664		
	FLORIDA SHERIFF'S ASSOCIATION QS20020		
	Drawn by:	Scale:	Material:
	D. Brodd	3/8"=1'	
	Chk'd:	Date:	Drawing No.:
		12-30-14	13429
	18 x 24	BID	

Smeal Fire Apparatus Co.

CHASSIS

MODEL

The chassis shall be a Metro Star model. The cab and chassis shall include design considerations for multiple emergency vehicle applications, rapid transit and maneuverability. The chassis shall be manufactured for heavy duty service with the strength and capacity to support a fully laden apparatus, one hundred (100) percent of the time.

MODEL YEAR

The chassis shall have a vehicle identification number that reflects a 2016 model year.

COUNTRY OF SERVICE

The chassis shall be put in service in the country of United States of America (USA).

The chassis will meet applicable U.S.A. federal motor vehicle safety standards per CFR Title 49 Chapter V Part 571 as clarified in the incomplete vehicle book per CFR Title 49 Chapter V Part 568 Section 4 which accompanies each chassis. Spartan Chassis is not responsible for compliance to state, regional, or local regulations. Dealers should identify those regulations and order any necessary optional equipment from Spartan Chassis or their OEM needed to be in compliance with those regulations.

APPARATUS TYPE

The apparatus shall be a pumper vehicle designed for emergency service use which shall be equipped with a permanently mounted fire pump which has a minimum rated capacity of 750 gallons per minute (3000 L/min). The apparatus shall include a water tank and hose body whose primary purpose is to combat structural and associated fires.

VEHICLE TYPE

The chassis shall be manufactured for use as a straight truck type vehicle and designed for the installation of a permanently mounted apparatus behind the cab. The apparatus of the vehicle shall be supplied and installed by the apparatus manufacturer.

AXLE CONFIGURATION

The chassis shall feature a 4 x 2 axle configuration consisting of a single rear drive axle with a single front steer axle.

GROSS AXLE WEIGHT RATINGS FRONT

The front gross axle weight rating (GAWR) of the chassis shall be 18,000 pounds.

This front gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

GROSS AXLE WEIGHT RATINGS REAR

The rear gross axle weight rating (GAWR) of the chassis shall be 24,000 pounds.

Smeal Fire Apparatus Co.

This rear gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

PUMP PROVISION

The chassis shall include provisions to mount a drive line pump in the middle of the chassis, behind the cab, more commonly known as the midship location.

CAB STYLE

The cab shall be a custom, fully enclosed, MFD model with a flat roof over the driver, officer, and crew area, designed and built specifically for use as an emergency response vehicle by a company specializing in cab and chassis design for all emergency response applications. The cab shall be designed for heavy-duty service utilizing superior strength and capacity for the application of protecting the occupants of the vehicle. This style of cab shall offer up to eight (8) seating positions.

The cab shall incorporate a fully enclosed design with side wall roof supports, allowing for a spacious cab area with no partition between the front and rear sections of the cab. To provide a superior finish by reducing welds that fatigue cab metal; the roof, the rear wall and side wall panels shall be assembled using a combination of welds and proven industrial adhesives designed specifically for aluminum fabrication for construction.

The cab shall be constructed using multiple aluminum extrusions in conjunction with aluminum plate, which shall provide proven strength and the truest, flattest body surfaces ensuring less expensive paint repairs if needed. All aluminum welding shall be completed to the American Welding Society and ANSI D1.2-96 requirements for structural welding of aluminum.

All interior and exterior seams shall be sealed for optimum noise reduction and to provide the most favorable efficiency for heating and cooling retention.

The cab shall be constructed of 5052-H32 corrosion resistant aluminum plate. The cab shall incorporate tongue and groove fitted 6061-T6 0.13 & 0.19 inch thick aluminum extrusions for extreme duty situations. A single formed, one (1) piece extrusion shall be used for the "A" pillar, adding strength and rigidity to the cab as well as additional roll-over protection. The cab side walls and lower roof skin shall be 0.13 inch thick; the rear wall and raised roof skins shall be 0.09 inch thick; the front cab structure shall be 0.19 inch thick.

The exterior width of the cab shall be 94.00 inches wide with a minimum interior width of 88.00 inches. The overall cab length shall be 131.10 inches with 54.00 inches from the centerline of the front of the axle to the back of the cab.

The cab interior shall be designed to afford the maximum usable interior space and attention to ergonomics with hip and legroom while seated which exceeds industry standards. The crew cab floor shall be flat across the entire walking area for ease of movement inside the cab.

The cab shall offer an interior height of 57.50 inches from the front floor to the headliner and a rear floor to headliner height of 55.00 inches at a minimum. The cab shall offer an interior measurement at the floor level from the rear of the engine tunnel to the rear wall of the cab of 51.88 inches. All interior measurements shall include the area within the interior trimmed surfaces and not to any unfinished surface.

The cab shall include a driver and officer area with two (2) cab doors large enough for personnel in full firefighting gear. The front doors shall offer a clear opening of 40.25 inches wide X 53.50 inches high, from

Smeal Fire Apparatus Co.

the cab floor to the top of the door opening. The cab shall also include a crew area with up to two (2) cab doors, also large enough for personnel in full firefighting gear. The rear doors shall offer a clear opening of 32.25 inches wide X 51.00 inches high, from the cab floor to the top of the door opening.

The cab shall incorporate a progressive two (2) step configuration from the ground to the cab floor at each door opening. The progressive steps are vertically staggered and extend the full width of each step well allowing personnel in full firefighting gear to enter and exit the cab easily and safely.

The first step for the driver and officer area shall measure approximately 11.50 inches deep X 31.13 inches wide. The intermediate step shall measure approximately 8.50 inches deep X 32.50 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 11.00 inches.

The first step for the crew area shall measure approximately 11.50 inches deep X 20.44 inches wide. The intermediate step shall measure approximately 10.25 inches deep X 22.75 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 12.80 inches.

OCCUPANT PROTECTION

The vehicle shall include the Advanced Protection System™ (APS) which shall secure belted occupants and increase the survivable space within the cab. The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The system components shall include:

- Driver steering wheel airbag
- Driver dual knee air bags (patent pending) with energy management mounting (patent pending) and officer knee airbag.
- Driver and officer large side curtain airbags
- APS advanced seat belt system - retractor pre-tensioners tighten the seat belts around the occupants, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries
- Heavy truck Restraints Control Module (RCM) - receives inputs from the outboard sensors, selectively deploys APS systems, and records sensory inputs immediately before and during a detected qualifying event
- Integrated outboard crash sensors mounted at the perimeter of the vehicle - detects a qualifying front or side impact event and monitors and communicates vehicle status and real time diagnostics of all critical subsystems to the RCM
- Fault-indicating Supplemental Restraint System (SRS) light on the driver's instrument panel

Frontal impact protection shall be provided by the outboard sensors and the RCM. In a qualifying front impact event the outboard sensors provide inputs to the RCM. The RCM activates the steering wheel airbag, driver

Smeal Fire Apparatus Co.

side dual knee airbags (patent pending), officer side knee airbag, and advanced seat belts for each occupant in the cab.

The APS frontal impact system shall be independently tested to ensure occupant injury criteria does not exceed injury criteria defined in Federal Motor Vehicle Safety Standard (FMVSS) 208. Frontal impact into a rigid barrier at 25 mph shall be conducted by an independent third party test facility using belted 95th percentile Hybrid II test dummies.

Rollover, side impact, and ejection mitigation shall be provided by the outboard sensors and the RCM. In qualifying rollover or side impact events the outboard sensors provide inputs to the RCM. The RCM activates the side curtain airbags and advanced seat belts for each occupant in the cab. The RCM measures roll angle, lateral acceleration, and roll rate to determine if a rollover event or side impact event is imminent or occurring.

In the event of a qualifying offset or other non-frontal impact, the RCM shall determine and intelligently deploy the front impact protection system, the side impact protection system, or both front and side impact protection systems based on the inputs received from the outboard crash sensors.

The APS side impact system shall be independently tested to ensure occupant injury criteria does not exceed injury criteria defined in Federal Motor Vehicle Safety Standard (FMVSS) 214. Side impact from a moving barrier at 17 mph shall be conducted by an independent third party test facility using belted 50th percentile ES-2re test dummies.

CAB FRONT FASCIA

The front cab fascia shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate which shall be an integral part of the cab. The fascia shall be Sirius II styled, offering an aerodynamic look for a stylish appearance. The cab fascia shall encompass the front of the aluminum cab structure from the bottom of the windshield to the lower section of the cab.

The Sirius II style cab fascia shall include provisions for headlights, turn signals and warning light assemblies designed to permit easy access for maintenance. The fascia shall include additional intake provisions at the lower portion just above the bumper further enhancing the total free air intake for engine cooling.

Chrome plated molded plastic bezels shall be provided for lighting assemblies located on each side of the cab fascia for optimum visibility.

FRONT GRILLE

The Sirius II fascia shall include a two (2) piece front grille. The upper portion of the grille shall be hinged to provide service access behind the grille.

CAB UNDERCOAT

There shall be a rubberized undercoating applied to the underside of the cab that provides abrasion protection, sound deadening and corrosion protection.

CAB SIDE DRIP RAIL

There shall be a drip rail along the top radius of each cab side. The drip rails shall help prevent water from the cab roof running down the cab side.

Smeal Fire Apparatus Co.

CAB PAINT EXTERIOR

The cab shall be painted prior to the installation of glass accessories and all other cab trim to ensure complete paint coverage and the maximum in corrosion protection of all metal surfaces.

All metal surfaces on the entire cab shall be ground by disc to remove any surface oxidation or surface debris which may hinder the paint adhesion. Once the surface is machine ground a high quality acid etching of base primer shall be applied. Upon the application of body fillers and their preparation, the cab shall be primed with a coating designed for corrosion resistance and surface paint adhesion. The maximum thickness of the primer coat shall be 2.00 mils.

The entire cab shall then be coated with an intermediate solid or epoxy surfacing agent that is designed to fill any minor surface defects, provide an adhesive bond between the primer and the paint and improve the color and gloss retention of the color. The finish to this procedure shall be a sanding of the cab with 360 grit paper followed by sealing the seams with SEM brand seam sealer.

The cab shall then be painted the specific color designated by the customer with an acrylic urethane type system designed to retain color and resist acid rain and most atmospheric chemicals found on the fire ground or emergency scene. The paint shall have a minimum thickness of 2.00 mils, followed by a clear top coat not to exceed 2.00 mils. The entire cab shall then be baked at 180 degrees for one (1) hour to speed the curing process of the coatings.

CAB PAINT MANUFACTURER

The cab shall be painted with PPG Industries paint.

CAB PAINT PRIMARY/LOWER COLOR

The primary/lower paint color shall be:

CAB PAINT WARRANTY

The cab and chassis shall be covered by a limited manufacturer paint warranty which shall be in effect for ten (10) years from the first owner's date of purchase or in service or the first 100,000 actual miles, whichever occurs first.

CAB PAINT INTERIOR

The visible interior cab structure surfaces shall be painted with a Zolatone #20-72 silver gray texture finish.

CAB ENTRY DOORS

The cab shall include four (4) entry doors, two (2) front doors and two (2) crew doors designed for ease of entering and egress when outfitted with an SCBA. The doors shall be constructed of extruded aluminum with a nominal thickness of 0.13 inch. The exterior skins shall be constructed of 0.13 inch aluminum plate.

The doors shall include a double rolled style automotive rubber seal around the perimeter of each door frame and door edge which ensures a weather tight fit.

Smeal Fire Apparatus Co.

All door hinges shall be hidden within flush mounted cab doors for a pleasing smooth appearance and perfect fit along each side of the cab. Each door hinge shall be piano style with a 0.38 inch pin and shall be constructed of stainless steel.

CAB ENTRY DOOR TYPE

All cab entry doors shall be full length in design to fully enclose the lower cab steps.

CAB INSULATION

The cab ceiling and walls shall include 1.00 inch thick foam insulation. The insulation shall act as a barrier absorbing noise as well as assisting in sustaining the desired climate within the cab interior.

CAB STRUCTURAL WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN CHASSIS, INC. LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The cab structure shall be warranted for a period of ten (10) years or one hundred thousand (100,000) miles which ever may occur first. The warranty period shall commence on the date the vehicle is delivered to the first end user.

CAB TEST INFORMATION

The cab shall have successfully completed the preload side impact, static roof load application and frontal impact without encroachment to the occupant survival space when tested in accordance with Section 4 of SAE J2420 COE Frontal Strength Evaluation Dynamic Loading Heavy Trucks, Section 5 of SAE J2422 Cab Roof Strength Evaluation Quasi –Static Loading Heavy Trucks and ECE R29 Uniform Provisions Concerning the Approval of Vehicles with regard to the Protection of the Occupants of the Cab of a Commercial Vehicles Annex 3 Paragraph 5.

The above tests have been witnessed by and attested to by an independent third party. The test results were recorded using cameras, high speed imagers, accelerometers and strain gauges. Documentation of the testing shall be provided upon request.

ELECTRICAL SYSTEM

The chassis shall include a single starting electrical system which shall include a 12 volt direct current system, suppressed per SAE J551. The wiring shall be appropriate gauge cross link with 311 degree Fahrenheit insulation. All SAE wires in the chassis shall be color coded and shall include the circuit number and function where possible. The wiring shall be protected by 275 degree Fahrenheit minimum high temperature flame retardant loom.

LOAD MANAGEMENT SYSTEM

The apparatus shall be equipped with a Class 1 Total System Manager (TSM) for performing electrical load management. The TSM shall have sixteen (16) programmable outputs to supply warning and load switching

Smeal Fire Apparatus Co.

requirements. Outputs one (1) through twelve (12) shall be independently programmable to activate during the scene mode, the response mode, or both. These outputs can also be programmed to activate with the ignition or master warning switch, or to sequence and shed along with the priority. Output thirteen (13) shall be designated to activate a fast idle system. Output fourteen (14) shall provide a low voltage warning for an isolated battery. Output fifteen (15) is a user configurable output and shall be programmable for activating between 10.50 and 15.00 volts. Output sixteen (16) shall provide a low voltage alarm that activates at the NFPA required 11.80 volts. The TSM shall have a digital display to indicate system voltage in normal operation mode and also indicate the output configuration during programming mode. The TSM shall be protected against reverse polarity and shorted outputs and be enclosed in a metal enclosure to enhance EMI/RFI protection.

DATA RECORDING SYSTEM

The chassis shall have a Weldon Vehicle Data Recorder (VDR) system installed. The system shall be designed to meet NFPA 1901. The following information shall be recorded:

- Vehicle Speed
- Acceleration
- Deceleration
- Engine Speed
- Engine Throttle Position
- ABS Event
- Seat Occupied Status
- Seat Belt Status
- Master Optical Warning Device Switch Position
- Service Brake
- Engine Hours
- Time
- Date

Each portion of the data shall be recorded at the specified intervals and stored for the specified length of time to meet NFPA 1901 guidelines and shall be retrievable by connecting a laptop computer to the VDR system. The laptop connection shall be a panel mounted female type B USB connection point, remotely mounted in the left side foot well of the cab.

ACCESSORY POWER

The electrical distribution panel shall include two (2) power studs. The studs shall be size #10 and each of the power studs shall be circuit protected with a fuse of the specified amperage. One (1) power stud shall be capable of carrying up to a 40 amp battery direct load. One (1) power stud shall be capable of carrying up to a 15 amp ignition switched load. The two (2) power studs shall share one (1) #10 ground stud. A 225 amp battery direct power and ground stud shall be provided and installed on the chassis near the left hand battery box for OEM body connections.

EXTERIOR ELECTRICAL TERMINAL COATING

All terminals exposed to the elements will be sprayed with a high visibility protective rubberized coating to prevent corrosion.

ENGINE

Smeal Fire Apparatus Co.

The chassis engine shall be a Cummins ISL9 engine. The ISL9 engine shall be an in-line six (6) cylinder, four cycle diesel powered engine. The engine shall offer a rating of 350 horse power at 2000 RPM and shall be governed at 2200 RPM. The torque rating shall feature 1000 foot pounds of torque at 1400 RPM with 543 cubic inches (8.9 liters) of displacement.

The ISL9 engine shall feature a VGT™ Turbocharger, a high pressure common rail fuel system, fully integrated electronic controls with an electronic governor, and shall be EPA certified to meet the 2013 emissions standards using cooled exhaust gas recirculation and selective catalytic reduction technology.

The engine shall include an engine mounted combination full flow/by-pass oil filter with replaceable spin on cartridge for use with the engine lubrication system. The engine shall include Citgo brand Citgard 500, or equivalent SAE 15W40 CJ4 low ash engine oil which shall be utilized for proper engine lubrication.

A wiring harness shall be supplied ending at the back of the cab. The harness shall include a connector which shall allow an optional harness for the pump panel. The included circuits shall be provided for a tachometer, oil pressure, engine temperature, hand throttle, high idle and a PSG system. A circuit for J1939 data link shall also be provided at the back of the cab.

CAB ENGINE TUNNEL

The cab interior shall include an integrated engine tunnel constructed of 5052-H32 Marine Grade, 0.19 of an inch thick aluminum. The tunnel shall be a maximum of 41.50 inches wide X 25.50 inches high.

DIESEL PARTICULATE FILTER CONTROLS

There shall be two (2) controls for the diesel particulate filter. One (1) control shall be for regeneration and one (1) control shall be for regeneration inhibit.

ENGINE PROGRAMMING HIGH IDLE SPEED

The engine high idle control shall maintain the engine idle at approximately 1250 RPM when engaged.

ENGINE HIGH IDLE CONTROL

The vehicle shall be equipped with an automatic high-idle speed control. It shall be pre-set so when activated, it will operate the engine at the appropriate RPM to increase alternator output. This device shall operate only when the master switch is activated and the transmission is in neutral with the parking brake set. When automatically engaged the high idle shall disengage when the operator depresses the brake pedal, or the transmission is placed in gear, and shall be available to manually or automatically re-engage when the brake is released, or when the transmission is placed in neutral.

ENGINE PROGRAMMING ROAD SPEED GOVERNOR

The engine shall include programming which will govern the top speed of the vehicle.

AUXILIARY ENGINE BRAKE

The engine shall utilize a variable geometry turbo (VGT). The VGT auxiliary engine brake shall be an integral part of the turbo and shall offer a variable rate of exhaust flow, which when activated shall slow the engine and in turn slow the vehicle.

Smeal Fire Apparatus Co.

The VGT shall actuate the vehicle's brake lights when engaged as an auxiliary brake. A cutout relay shall be installed to disable the VGT when in pump mode or when an ABS event occurs. The VGT engine brake shall activate at a 0% accelerator throttle position when in operation mode.

AUXILIARY ENGINE BRAKE CONTROL

An engine variable geometry turbo brake control device shall be included. The electronic control device shall monitor various conditions and shall activate the engine brake only if all of the following conditions are simultaneously detected:

- A valid gear ratio is detected.
- The driver has requested or enabled engine compression brake operation.
- The throttle is at a minimum engine speed position.
- The electronic controller is not presently attempting to execute an electronically controlled final drive gear shift.

The variable geometry turbo brake control shall be controlled through an on/off rocker switch.

ELECTRONIC ENGINE OIL LEVEL INDICATOR

The engine oil shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal. The warning shall activate in a low oil situation upon turning on the master battery and ignition switches without the engine running.

FLUID FILLS

The front of the chassis shall accommodate fluid fill for the engine oil through the grille. This area shall also accommodate a check for the engine oil. The transmission, power steering, and coolant fluid fills and checks shall be under the cab. The windshield washer fill shall be accessible through the front left side mid step.

ENGINE DRAIN PLUG

The engine shall include an original equipment manufacturer installed magnetic oil drain plug.

ENGINE WARRANTY

The Cummins engine shall be warranted for a period of five (5) years or 100,000 miles, whichever occurs first.

REMOTE THROTTLE HARNESS

An apparatus interface wiring harness for the engine and transmission pump interlocks shall be supplied with the chassis. The harness shall include a connector for connection to a chassis pump panel harness supplied by the body builder and shall terminate in the left frame rail behind the cab for connection by the body builder. The harness shall include circuits deemed for a pump panel and shall contain circuits for a hand throttle, and a multiplexed gauge. Separate circuits shall also be included for a pump control switch, "Pump Engaged" and "OK to Pump" indicator lights, open compartment ground, start signal, park brake ground, ignition signal, master power, clean power, customer ignition, air horn solenoid switch, high idle switch and high idle indicator light.

ENGINE PROGRAMMING REMOTE THROTTLE

Smeal Fire Apparatus Co.

The engine ECM discreet wire remote throttle circuit will be turned on for use with a discreet wire based pump controller.

ENGINE PROGRAMMING IDLE SPEED

The engine low idle speed will be programmed at 700 rpm.

ENGINE FAN DRIVE

The engine cooling system fan shall incorporate a thermostatically controlled, Horton clutched type fan drive.

When the clutched fan is disengaged it shall facilitate improved vehicle performance, cab heating in cold climates, and fuel economy. The fan clutch design shall be fail safe so that if the clutch drive fails the fan shall engage to prevent engine overheating due to the fan clutch failure.

ENGINE COOLING SYSTEM

There shall be a heavy-duty aluminum cooling system designed to meet the demands of the emergency response industry. The cooling system shall have the capacity to keep the engine properly cooled under all conditions of road and pumping operations. The cooling system shall be designed and tested to meet or exceed the requirements specified by the engine and transmission manufacturer and all EPA requirements. The complete cooling system shall be mounted to isolate the entire system from vibration or stress. The individual cores of the cooling system shall be mounted in a manner to allow expansion and contraction at various rates without inducing stress into the adjoining cores.

The cooling system shall utilize a charge air cooler to radiator serial flow package that provides the maximum cooling capacity for the specified engine as well as serviceability. The main components shall include a surge tank, an air to air charge air cooler bolted to the front of the radiator, recirculation shields, a shroud, a fan, and required tubing.

The radiator shall be a down-flow design constructed with aluminum cores, plastic end tanks, and a steel frame. The radiator shall be equipped with a drain cock to drain the coolant for serviceability.

The cooling system shall include a one piece injection molded polymer eleven (11) blade fan with a fiberglass fan shroud.

The cooling system shall be equipped with a surge tank that is capable of removing entrained air from the system. The surge tank shall be equipped with a low coolant probe and sight glass to monitor the level of the coolant. The surge tank shall have a dual seal cap that meets the engine manufacturer's pressure requirements, and allows for expansion and recovery of coolant into a separate integral expansion chamber.

All radiator tubes shall be formed from aluminized steel tubing. Recirculation shields shall be installed where required to prevent heated air from reentering the cooling package and affecting performance.

The charge air cooler shall be a cross-flow design constructed completely of aluminum with cast tanks. All charge air cooler tubes shall be formed from aluminized steel tubing and installed with silicone hump hoses and stainless steel "constant torque" style clamps meeting the engine manufacturer's requirements.

ENGINE COOLING SYSTEM PROTECTION

Smeal Fire Apparatus Co.

The engine cooling system shall include a recirculation shield designed to act as a light duty skid plate below the radiator to provide additional protection for the engine cooling system from light impacts, stones, and road debris. The skid plate shall be painted to match the frame color.

ENGINE COOLANT

The cooling package shall include Extended Life Coolant (ELC). The use of ELC provides longer intervals between coolant changes over standard coolants providing improved performance. The coolant shall contain a 50/50 mix of ethylene glycol and de-ionized water to keep the coolant from freezing to a temperature of -34 degrees Fahrenheit.

Proposals offering supplemental coolant additives (SCA) shall not be considered, as this is part of the extended life coolant makeup.

ENGINE COOLANT FILTER

An engine coolant filter with a shut-off valve for the inlet and outlet shall be installed on the chassis. The location of the filter shall allow for easy maintenance.

Proposals offering engines equipped with coolant filters shall be supplied with standard non-chemical type particulate filters.

ELECTRONIC COOLANT LEVEL INDICATOR

The instrument panel shall feature a low engine coolant indicator light which shall be located in the center of the instrument panel. An audible tone alarm shall also be provided to warn of a low coolant incident.

ENGINE PUMP HEAT EXCHANGER

A single bundle type coolant to water heat exchanger shall be installed between the engine and the radiator. The heat exchanger shall be designed to prohibit water from the pump from coming in contact with the engine coolant. This shall allow the use of water from the discharge side of the pump to assist in cooling the engine.

COOLANT HOSES

The cooling system hoses shall be silicone heater hose with rubber hoses in the cab interior. The radiator hoses shall be formed silicone coolant hoses with formed aluminized steel tubing. All heater hose, silicone coolant hose, and tubing shall be secured with stainless steel constant torque band clamps.

ENGINE AIR INTAKE

The engine air intake system shall include an ember separator air intake filter which shall be located in the front of the cab behind the right hand side fascia. This filter shall protect the downstream air filter from embers using a combination of unique flat and crimped metal screens constructed into a corrosion resistant steel frame. This multilayered screen shall be designed to trap embers or allow them to burn out before passing through the pack, while creating only minimal air flow restriction through the system. Periodic cleaning or replacement of the screen shall be all that is required after installation.

The engine shall also include an air intake filter which shall be bolted to the frame and located under the front of the cab on the right hand side. The system shall utilize a replaceable dry type filter which ensures dust and debris remains safely contained inside the housing during operation via leak-tight seals. The service cover

Smeal Fire Apparatus Co.

shall be located on the bottom of the housing, eliminating the chance of contaminating the air intake system during air filter service.

The air flow distribution and dust loading shall be uniform throughout the high-performance filter element, which shall result in pressure differential for improved horsepower and fuel economy. The air intake ember separator shall be mounted within easy access via a hinged panel behind the right hand side headlight module. The air intake system shall include a restriction indicator light in the warning light cluster on the instrument panel, which shall activate when the air cleaner element requires replacement.

AIR INTAKE PROTECTION

A light duty skid plate shall be supplied for the engine air intake system below the right front side of the cab. The skid plate shall provide protection for the air intake system from light impacts, stones, and road debris.

ENGINE EXHAUST SYSTEM

The exhaust system shall include a diesel particulate filter (DPF), a diesel oxidation catalyst, and a selective catalytic reduction (SCR) catalyst to meet current EPA standards. The selective catalytic reduction catalyst utilizes a diesel exhaust fluid solution consisting of urea and purified water to convert NOx into nitrogen, water, and trace amounts of carbon dioxide. The solution shall be injected into the system through the decomposition tube between the DPF and SCR.

The system shall utilize 0.07 inch thick stainless steel exhaust tubing between the engine turbo and the DPF. Zero leak clamps seal all system joints between the turbo and DPF.

The DPF, the decomposition tube, and the SCR canister through the end of the tailpipe shall be connected with zero leak clamps. The discharge shall terminate horizontally on the right side of the vehicle ahead of the rear tires.

The exhaust system shall be mounted below the frame in the outboard position with the SCR canister in line rearward of the DPF.

DIESEL EXHAUST FLUID TANK

The exhaust system shall include a molded cross linked polyethylene tank for Diesel Exhaust Fluid (DEF). The tank shall have a capacity of six (6) usable gallons and shall be mounted on the left hand side of the chassis frame behind the batteries below the frame.

The DEF tank shall be designed with capacity for expansion in case of fluid freezing. Engine coolant, which shall be thermostatically controlled, shall be run through lines in the tank to help prevent the DEF from freezing and to provide a means of thawing the fluid if it should become frozen.

The tank fill tube shall be routed under the rear of the cab with the fill neck and splash guard accessible in the top rear step.

ENGINE EXHAUST ACCESSORIES

An exhaust temperature mitigation device shall be shipped loose for installation by the body manufacturer on the vehicle. The temperature mitigation device shall lower the temperature of the exhaust by combining ambient air with the exhaust gasses at the exhaust outlet.

Smeal Fire Apparatus Co.

ENGINE EXHAUST WRAP

The exhaust tubing between the engine turbo and the diesel particulate filter (DPF) shall be wrapped with a thermal cover in order to retain the necessary heat for DPF regeneration. The exhaust wrap shall also help protect surrounding components from radiant heat which can be transferred from the exhaust.

TRANSMISSION

The drive train shall include an Allison model EVS 3000 torque converting, automatic transmission which shall include electronic controls. The transmission shall feature two (2) 10-bolt PTO pads located on the converter housing.

The transmission shall include two (2) internal oil filters and Castrol TranSynd™ synthetic TES 295 transmission fluid which shall be utilized in the lubrication of the EVS transmission. An electronic oil level sensor shall be included with the readout located in the shift selector.

The transmission gear ratios shall be:

1st	3.49:1
2nd	1.86:1
3rd	1.41:1
4th	1.00:1
5th	0.75:1
6th	0.65:1 (if applicable)
Rev	5.03:1

TRANSMISSION MODE PROGRAMMING

The transmission, upon start-up, will automatically select a four (4) speed operation. The fifth speed over drive shall be available with the activation of the mode button on the shifting pad.

TRANSMISSION FEATURE PROGRAMMING

The Allison Gen V-E transmission EVS group package number 127 shall contain the 198 vocational package in consideration of the duty of this apparatus as a pumper. This package shall incorporate an automatic neutral with selector override. This feature commands the transmission to neutral when the park brake is applied, regardless of drive range requested on the shift selector. This requires re-selecting drive range to shift out of neutral for the override.

This package shall be coupled with the use of a split shaft PTO and incorporate pumping circuits. These circuits shall be used allowing the vehicle to operate in the fourth range lockup while operating the pump mode due to the 1 to 1 ratio through the transmission, therefore the output speed of the engine is the input speed to the pump. The pump output can be easily calculated by using this input speed and the drive ratio of the pump itself to rate the gallons of water the pump can provide.

A transmission interface connector shall be provided in the cab. This package shall contain the following input/output circuits to the transmission control module. The Gen V-E transmission shall include prognostic diagnostic capabilities. These capabilities shall include the monitoring of the fluid life, filter change indication, and transmission clutch maintenance.

Function ID Description
Inputs

Wire assignment

Smeal Fire Apparatus Co.

C	PTO Request	142
J	Fire Truck Pump Mode (4th Lockup)	122 / 123
Outputs		
C	Range Indicator	145 (4th)
G	PTO Enable Output	130
	Signal Return	103

ELECTRONIC TRANSMISSION OIL LEVEL INDICATOR

The transmission fluid shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal.

TRANSMISSION SHIFT SELECTOR

An Allison pressure sensitive range selector touch pad shall be provided and located to the right of the driver within clear view and easy reach. The shift selector shall have a graphical Vacuum Florescent Display (VFD) capable of displaying two lines of text. The shift selector shall provide mode indication and a prognostic indicator (wrench symbol) on the digital display. The prognostics monitor various operating parameters and shall alert you when a specific maintenance function is required.

TRANSMISSION PRE-SELECT WITH AUXILIARY BRAKE

When the auxiliary brake is engaged, the transmission shall automatically shift to second gear to decrease the rate of speed assisting the secondary braking system and slowing the vehicle.

TRANSMISSION COOLING SYSTEM

The transmission shall include a water to oil cooler system located in the cooling loop between the radiator and the engine. The transmission cooling system shall meet all transmission manufacturer requirements. The transmission cooling system shall feature continuous flow of engine bypass water to maintain uninterrupted transmission cooling.

TRANSMISSION DRAIN PLUG

The transmission shall include an original equipment manufacturer installed magnetic transmission fluid drain plug.

TRANSMISSION WARRANTY

The Allison EVS series transmission shall be warranted for a period of five (5) years with unlimited mileage. Parts and labor shall be included in the warranty.

PTO LOCATION

The transmission shall have two (2) power take off (PTO) mounting locations, one (1) in the 8:00 o'clock position and one (1) in the 4:00 o'clock position.

DRIVELINE

Smeal Fire Apparatus Co.

All drivelines shall be heavy duty metal tube and equipped with Spicer 1710 series universal joints. The shafts shall be dynamically balanced prior to installation to alleviate future vibration. In areas of the driveline where a slip shaft is required, the splined slip joint shall be coated with Glide Coat[®].

MIDSHIP PUMP / GEARBOX

A temporary jackshaft driveline shall be installed by the chassis manufacturer to accommodate the mid-ship split shaft pump as specified by the apparatus manufacturer.

MIDSHIP PUMP / GEARBOX MODEL

The midship pump/gearbox provisions shall be for a Hale QMAX pump.

MIDSHIP PUMP GEARBOX DROP

The Hale pump gearbox shall have an "L" (long) drop length.

MIDSHIP PUMP RATIO

The ratio for the midship pump shall be 2.28:1 (23).

MIDSHIP PUMP LOCATION C/L SUCTION TO C/L REAR AXLE

The midship pump shall be located so the dimension from the centerline of the suction to the centerline of the rear axle is 80.00 inches.

FUEL FILTER/WATER SEPARATOR

The fuel system shall have a Fleetguard FS1003 fuel filter/water separator as a primary filter. The fuel filter shall have a drain valve.

A water in fuel sensor shall be provided and wired to an instrument panel lamp and audible alarm to indicate when water is present in the fuel/water separator.

A secondary fuel filter shall be included as approved by the engine manufacturer.

FUEL LINES

The fuel system supply and return lines installed from the fuel tank to the engine shall be reinforced nylon tubing rated for diesel fuel. The fuel lines shall be brown in color and connected with brass fittings.

ELECTRIC FUEL PRIMER

Integral to the engine assembly is an electric lift pump that serves the purpose of pre-filter fuel priming.

FUEL TANK

The fuel tank shall have a capacity of fifty (50) gallons and shall measure 35.00 inches in width X 15.00 inches in height X 24.00 inches in length. The baffled tank shall be made of 14 gauge aluminized steel. The exterior of the tank shall be painted with a PRP Corsol[™] black anti-corrosive exterior metal treatment finish. This results in a tank which offers the internal and external corrosion resistance.

Smeal Fire Apparatus Co.

The tank shall have a vent port to facilitate venting to the top of the fill neck for rapid filling without "blow-back" and a roll over ball check vent for temperature related fuel expansion and draw.

The tank is designed with dual draw tubes and sender flanges. The tank shall have 2.00 inch NPT fill ports for right or left hand fill. A 0.50 inch NPT drain plug shall be centered in the bottom of the tank.

The fuel tank shall be mounted below the frame, behind the rear axle. Two (2) three-piece strap hanger assemblies with "U" straps bolted midway on the fuel tank front and rear shall be utilized to allow the tank to be easily lowered and removed for service purposes. Rubber isolating pads shall be provided between the tank and the upper tank mounting brackets. Strap mounting studs through the rail, hidden behind the body shall not be acceptable.

FUEL TANK MATERIAL AND FINISH

The fuel tank shall be constructed of 14 gauge aluminized steel. The exterior of the fuel tank shall be painted to match the frame color.

FUEL TANK STRAP MATERIAL

The fuel tank straps shall be constructed of ASTM A-36 steel.

FUEL TANK FILL PORT

The fuel tank fill ports shall be offset with the left fill port located in the rearward position and the right fill port located in the middle position on the fuel tank.

FUEL TANK DRAIN PLUG

A 0.5 inch NPT drain plug shall be centered in the bottom of the fuel tank.

FRONT AXLE

The front axle shall be a Meritor Easy Steer Non drive front axle, model number MFS-18. The axle shall include a 3.74 inch drop and a 71.00 inch king pin intersection (KPI). The axle shall include a conventional style hub with a standard knuckle. The weight capacity for the axle shall be rated to 18,000 pounds.

FRONT AXLE WARRANTY

The front axle shall be warranted by Meritor for two (2) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

FRONT WHEEL BEARING LUBRICATION

The front axle wheel bearings shall be lubricated with oil. The oil level can be visually checked via clear inspection windows in the front axle hubs.

FRONT SHOCK ABSORBERS

Two (2) Bilstein inert, nitrogen gas filled shock absorbers shall be provided and installed as part of the front suspension system. The shocks shall be a monotubular design and fabricated using a special extrusion

Smeal Fire Apparatus Co.

method, utilizing a single blank of steel without a welded seam, achieving an extremely tight peak-to-valley tolerance and maintains consistent wall thickness. The monotubular design shall provide superior strength while maximizing heat dissipation and shock life.

The ride afforded through the use of a gas shock is more consistent and shall not deteriorate with heat, the same way a conventional oil filled hydraulic shock would.

The Bilstein front shocks shall include a digressive working piston assembly allowing independent tuning of the compression and rebound damping forces to provide optimum ride and comfort without compromise. The working piston design shall feature fewer parts than most conventional twin tube and "road sensing" shock designs and shall contribute to the durability and long life of the Bilstein shock absorbers.

Proposals offering the use of conventional twin tube or "road sensing" designed shocks shall not be considered.

FRONT SUSPENSION

The front suspension shall include a four (4) leaf spring pack consisting of 54.00 inch long and 4.00 inch wide taper leaf springs and shall feature a military double wrapped front eye. Both spring eyes shall have a case hardened threaded bushing installed with lubrication counter bore and lubrication land off cross bore with grease fitting. The spring capacity shall be rated at 18,000 pounds.

STEERING COLUMN/ WHEEL

The cab shall include a Douglas Autotech steering column which shall include a seven (7) position tilt, a 2.25 inch telescopic adjustment, and an 18.00 inch, four (4) spoke steering wheel located at the driver's position. The steering wheel shall be covered with black polyurethane foam padding.

The steering column shall contain a horn button, self-canceling turn signal switch, four-way hazard switch and headlamp dimmer switch.

ELECTRONIC POWER STEERING FLUID LEVEL INDICATOR

The power steering fluid shall be monitored electronically and shall send a signal to activate an audible alarm and visual warning in the instrument panel when fluid level falls below normal.

POWER STEERING PUMP

The hydraulic power steering pump shall be a TRW PS and shall be gear driven from the engine. The pump shall be a balanced, positive displacement, sliding vane type.

FRONT AXLE CRAMP ANGLE

The chassis shall have a front axle cramp angle of 50-degrees to the left and right.

POWER STEERING GEAR

The power steering gear shall be a TRW model TAS 85.

CHASSIS ALIGNMENT

Smeal Fire Apparatus Co.

The chassis frame rails shall be measured to insure the length is correct and cross checked to make sure they run parallel and are square to each other. The front and rear axles shall be laser aligned. The front tires and wheels shall be aligned and toe-in set on the front tires by the chassis manufacturer.

REAR AXLE

The rear axle shall be a Meritor model RS-24-160 single drive axle. The axle shall include precision forged, single reduction differential gearing, and shall have a rated capacity of 24,000 pounds.

The axle shall be built of superior construction and quality components to provide the rugged dependability needed to stand up to the fire industry's demands. The axle shall include rectangular shaped, hot-formed housing with a standard wall thickness of 0.50 of an inch for extra strength and rigidity and a rigid differential case for high axle strength and reduced maintenance.

The axle shall have heavy-duty Hypoid gearing for longer life, greater strength and quieter operation. Industry-standard wheel ends for compatibility with both disc and drum brakes, and unitized oil seal technology to keep lubricant in and help prevent contaminant damage will be used.

REAR AXLE DIFFERENTIAL LUBRICATION

The rear axle differential shall be lubricated with oil.

REAR AXLE WARRANTY

The rear axle shall be warranted by Meritor for two (2) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

REAR WHEEL BEARING LUBRICATION

The rear axle wheel bearings shall be lubricated with oil.

VEHICLE TOP SPEED

The top speed of the vehicle shall be approximately 65 MPH +/-2 MPH at governed engine RPM.

REAR SUSPENSION

The single rear axle shall feature a Reyco 79KB vari-rate, self-leveling captive slipper type conventional multi-leaf spring suspension, with 57.50 inch X 3.00 inch springs. One (1) adjustable and one (1) fixed torque rod shall be provided.

The rear suspension capacity shall be rated from 21,000 to 31,500 pounds.

FRONT TIRE

The front tires shall be Goodyear 315/80R-22.5 20PR "L" tubeless radial G291 highway tread.

The front tire stamped load capacity shall be 18,180 pounds per axle with a speed rating of 68 miles per hour when properly inflated to 130 pounds per square inch.

Smeal Fire Apparatus Co.

The Goodyear Intermittent Service Rating load capacity shall be 18,180 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 130 pounds per square inch. The Goodyear Intermittent Service Rating limits the operation of the emergency vehicle to no more than fifty (50) miles of continuous operation under maximum recommended payload, or without stopping for at least twenty (20) minutes. The emergency vehicle must reduce its speed to no more than 50 MPH after the first fifty (50) miles of travel.

REAR TIRE

The rear tires shall be Goodyear 11R-22.5 16PR "H" tubeless radial G661 HSA regional tread.

The rear tire stamped load capacity shall be 24,020 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating load capacity shall be 25,700 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch. The Goodyear Intermittent Service Rating limits the operation of the emergency vehicle to no more than fifty (50) miles of continuous operation under maximum recommended payload, or without stopping for at least twenty (20) minutes. The emergency vehicle must reduce its speed to no more than 50 MPH after the first fifty (50) miles of travel.

REAR AXLE RATIO

The rear axle ratio shall be 5.38:1.

TIRE PRESSURE EQUALIZATION SYSTEM

There shall be a voucher provided with the chassis for Crossfire dual tire equalization system provided on both sets of dual tires on the rear axle. The Crossfire pressure system shall equalize and monitor tire pressure through the valve which is mounted between the dual tires. This shall bolt easily to the drive axle end allowing air to flow freely from one tire to the other, maintaining equal tire pressure and load distribution. The Crossfire system shall maximize tire life, decrease rolling resistance for increased fuel mileage and improve stability braking and overall safety.

The Crossfire dual tire equalization system shall be redeemed upon the vehicle manufacturer's receipt of the voucher along with the vehicle in-service weight for each axle.

TIRE PRESSURE INDICATOR

There shall be a voucher provided with the chassis for a dial style tire pressure indicator at the front tire valve stem. The indicator shall provide visual indication of pressure in the specific tire.

The tire pressure indicators shall be redeemed upon the vehicle manufacturer's receipt of the voucher for installation by the customer.

FRONT WHEEL

The front wheels shall be Alcoa hub piloted, 22.50 inch X 9.00 inch polished LvL One™ aluminum wheels. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts. The wheels shall feature one-piece forged strength and a polished finish that lasts.

REAR WHEEL

Smeal Fire Apparatus Co.

The outer rear wheels shall be Alcoa hub piloted, 22.50 inch X 8.25 inch LvL One™ aluminum wheels with a polished outer surface. The inner rear wheels shall be Alcoa hub piloted, 22.50 inch X 8.25 inch aluminum wheels with LvL One™ bright machine finish. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts.

WHEEL TRIM

The front wheels shall include stainless steel lug nut covers and stainless steel baby moons shipped loose with the chassis for installation by the apparatus builder. The baby moons shall have cutouts for oil seal viewing when applicable.

The rear wheels shall include stainless steel lug nut covers and band mounted spring clip stainless steel high hats shipped loose with the chassis for installation by the apparatus builder.

The lug nut covers, baby moons, and high hats shall be RealWheels® brand constructed of 304L grade, non-corrosive stainless steel with a mirror finish. Each wheel trim component shall meet D.O.T. certification.

BRAKE SYSTEM

A rapid build-up air brake system shall be provided. The air brakes shall include a two (2) air tank, three (3) reservoir system with a total of 4152 cubic inch of air capacity. A floor mounted treadle valve shall be mounted inside the cab for graduated control of applying and releasing the brakes. An inversion valve shall be installed to provide a service brake application in the unlikely event of primary air supply loss. All air reservoirs provided on the chassis shall be labeled for identification.

The rear axle spring brakes shall automatically apply in any situation when the air pressure falls below 25 PSI and shall include a mechanical means for releasing the spring brakes when necessary. An audible alarm shall designate when the system air pressure is below 60 PSI.

A four (4) sensor, four (4) modulator anti-lock braking system (ABS) shall be installed on the front and rear axles in order to prevent the brakes from locking or skidding while braking during hard stops or on icy or wet surfaces. This in turn shall allow the driver to maintain steering control under heavy braking and in most instances, shorten the braking distance. The electronic monitoring system shall incorporate diagonal circuitry which shall monitor wheel speed during braking through a sensor and tone ring on each wheel. A dash mounted ABS lamp shall be provided to notify the driver of a system malfunction. The ABS system shall automatically disengage the auxiliary braking system device when required. The speedometer screen shall be capable of reporting all active defaults using PID/SID and FMI standards.

Additional safety shall be accommodated through Automatic Traction Control (ATC) which shall be installed on the single rear axle. The ATC system shall apply the ABS when the drive wheels loose traction. The system shall scale the electronic engine throttle back to prevent wheel spin while accelerating on ice or wet surfaces.

A momentary rocker style switch shall be provided and properly labeled "mud/snow". When the switch is pressed once, the system shall allow a momentary wheel slip to obtain traction under extreme mud and snow conditions. During this condition the ATC light and the light on the rocker switch shall blink continuously notifying the driver of activation. Pressing the switch again shall deactivate the mud/snow feature.

The Electronic Stability Control (ESC) unit is a functional extension of the electronic braking system. It is able to detect any skidding of the vehicle about its vertical axis as well as any rollover tendency. The control unit comprises an angular-speed sensor that measures the vehicle's motion about the vertical axis, caused, for instance, by cornering or by skidding on a slippery road surface. An acceleration sensor measures the

Smeal Fire Apparatus Co.

vehicle's lateral acceleration. The Controller Area Network (CAN) bus provides information on the steering angle. On the basis of lateral acceleration and steering angle, an integrated microcontroller calculates a theoretical angular speed for the stable vehicle condition.

FRONT BRAKES

The front brakes shall be Meritor 16.50 inch x 6.00 inch S-cam drum type.

REAR BRAKES

The rear brakes shall be Meritor 16.50 inch X 8.63 inch S-cam drum type.

PARK BRAKE

Upon application of the push-pull valve in the cab, the rear brakes will engage via mechanical spring force. This is accomplished by dual chamber rear brakes, satisfying the FMVSS parking brake requirements.

PARK BRAKE CONTROL

A Meritor-Wabco manual hand control push-pull style valve shall operate the parking brake system. The control shall be yellow in color.

The parking brake actuation valve shall be mounted on the center of the tunnel within easy access of both the driver and officer positions.

FRONT BRAKE SLACK ADJUSTERS

The front brakes shall include Meritor automatic slack adjusters installed on the chassis which features a simple, durable design offering reduced weight. The automatic slack adjusters shall feature a manual adjusting nut which cannot inadvertently be backed off and threaded grease fittings for easy serviceability.

REAR BRAKE SLACK ADJUSTERS

The rear brakes shall include Meritor automatic slack adjusters installed on the axle which features a simple, durable design offering reduced weight. The automatic slack adjusters shall feature a manual adjusting nut which cannot inadvertently be backed off and threaded grease fittings for easy serviceability.

AIR DRYER

The brake system shall include a Wabco System Saver 1200 air dryer with an integral heater with a Metri-Pack sealed connector. The air dryer incorporates an internal turbo cutoff valve that closes the path between the air compressor and air dryer purge valve during the compressor "unload" cycle. The turbo cutoff valve allows purging of moisture and contaminants without the loss of turbo boost pressure. The air dryer shall be mounted behind the battery box on the left hand side.

FRONT BRAKE CHAMBERS

The front brakes shall be provided with MGM type 30 brake chambers.

REAR BRAKE CHAMBERS

Smeal Fire Apparatus Co.

The rear axle shall include TSE 30/30 brake chambers which shall convert the energy of compressed air into mechanical force and motion. This shall actuate the brake camshaft, which in turn shall operate the foundational brake mechanism forcing the brake shoes against the brake drum. The TSE Type 30 brake chamber shall offer a 30.00 square inch effective area.

AIR COMPRESSOR

The air compressor provided for the engine shall be a Wabco® SS318 single cylinder pass-through drive type compressor which shall be capable of producing 18.7 CFM at 1200 engine RPMs. The air compressor shall feature a higher delivery efficiency translating to more air delivery per horsepower absorbed. The compressor shall include an aluminum cylinder head which shall improve cooling, reduce weight and decrease carbon formation. Superior piston and bore finishing technology shall reduce oil consumption and significantly increasing the system component life.

AIR GOVERNOR

An air governor shall be provided to control the cut-in and cut-out pressures of the engine mounted air compressor. The governor shall be calibrated to meet FMVSS requirements. The air governor shall be located on the air dryer bracket on the left frame rail behind the battery box.

AUXILIARY AIR RESERVOIR

One (1) auxiliary air reservoir with a 2084 cubic inch capacity shall be installed on the chassis to act as an additional reserve supply to the air system for air horn, air tool, or other non-service brake use. The reservoir shall be isolated with a 90 PSI pressure protection valve on the reservoir supply side to prevent depletion of the air to the air brake system.

MOISTURE EJECTORS

Manual pet-cock type drain valves shall be installed on all reservoirs of the air supply system.

AIR SUPPLY LINES

The air system on the chassis shall be plumbed with color coded reinforced nylon tubing air lines. The primary (rear) brake line shall be green, the secondary (front) brake line red, the parking brake line orange and the auxiliary (outlet) will be blue.

Brass compression type fittings shall be used on the nylon tubing. All drop hoses shall include fiber reinforced neoprene covered hoses.

REAR AIR TANK MOUNTING

If a combination of wheel base, air tank quantity, or other requirements necessitate the location of one or more air tanks to be mounted rear of the fuel tank, these tank(s) will be mounted perpendicular to frame.

WHEELBASE

The chassis wheelbase shall be 190.00 inches.

REAR OVERHANG

Smeal Fire Apparatus Co.

The chassis rear overhang shall be 37.00 inches.

FRAME

The frame shall consist of single rails running parallel to each other with cross members forming a ladder style frame. The frame rails shall be formed in the shape of a "C" channel, 10.25 inch web X 3.50 inches deep upper and lower flanges X 0.38 inches thick. Each rail shall be constructed of 110,000 psi minimum yield high strength low alloy steel. Each single rail shall be rated by a Resistance Bending Moment (RBM) minimum of 1,830,400 inch pounds and have a minimum section modulus of 16.64 cubic inches calculated by the radius method. The outside dimension frame shall measure 34.25 inches in width.

Proposals calculating the frame strength using the "box method" shall not be considered.

Proposals including heat treated rails shall not be considered. Heat treating frame rails produces rails that are not uniform in their mechanical properties throughout the length of the rail. Rails made of high strength, low alloy steel are already at the required yield strength prior to forming the rail.

A minimum of seven (7) fully gusseted 0.25 inch thick cross members shall be installed. The inclusion of the body mounting, or bumper mounting shall not be considered as a cross member. The cross members shall be attached using zinc coated grade 8 fasteners. The bolt heads shall be flanged type, held in place by distorted thread flanged lock nuts. Each cross member shall be mounted to the frame rails utilizing a minimum of 0.25 inch thick gusset reinforcement plates at all corners balancing the area of force throughout the entire frame.

Any proposals not including additional reinforcement for each cross member shall not be considered.

All relief areas shall be cut in with a minimum 2.00 inch radius at intersection points with the edges ground to a smooth finish to prevent a stress concentration point.

The frame and cross members shall carry a lifetime warranty to the original purchaser. A copy of the frame warranty shall be made available upon request.

Proposals offering warranties for frames not including cross members shall not be considered.

FRAME WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN CHASSIS, INC. LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The frame and cross members shall carry a limited lifetime warranty to the original purchaser. The warranty period shall commence on the date the vehicle is delivered to the first end user.

FRAME PAINT

The frame shall be powder coated black prior to any attachment of components.

All powder coatings, primers and paint shall be compatible with all metals, pretreatments and primers used. The cross hatch adhesion test per ASTM D3359 shall not have a fail of more than ten (10) squares. The pencil

Smeal Fire Apparatus Co.

hardness test per ASTM D3363 shall have a final post-curved pencil hardness of H-2H. The direct impact resistance test per ASTM D2794 shall have an impact resistance of 120.00 inches per pound at 2 mils.

Any proposals offering painted frame with variations from the above process shall not be accepted. The film thickness of vendor supplied parts shall also be sufficient to meet the performance standards as stated above.

FRONT BUMPER

A one piece, two (2) rib wrap-around style, polished stainless steel front bumper shall be provided. The material shall be 10 gauge 304 stainless steel, 12.00 inches high and 99.00 inches wide.

FRONT BUMPER EXTENSION LENGTH

The front bumper shall be extended approximately 24.00 inches ahead of the cab.

FRONT BUMPER EXTENSION FRAME WIDTH

The front bumper extension frame shall feature an overall width of 47.50 inches.

MECHANICAL SIREN

The front bumper shall include an electro mechanical Federal Q2B™ siren, which shall be streamlined, chrome-plated and shall produce 123 decibels of sound at 10.00 feet. The Q2B™ siren produces a distinctive warning sound that is recognizable at long distances. A unique clutch design provides a longer coast down sound while reducing the amp draw to 100 amps. The siren shall measure 10.50 inches wide X 10.00 inches high X 14.00 inches deep. The siren shall include mounting hardware designed to recess or flush mount.

MECHANICAL SIREN LOCATION

The siren shall be recess mounted on the left side of the front fascia of the bumper approximately in the center of the flat surface between the bumper radius and the frame rail.

MECHANICAL SIREN ACCESSORIES

The front of the siren shall include (2) stainless steel flat bars approximately 1.00 inch wide by 19.00 inches long. Each bar shall be placed vertically on the right and left side of the siren face wrapping around towards the back of the siren into the bumper extension offering protection to the Q2B siren.

AIR HORN

The front bumper shall include two (2) Hadley brand E-Tone air horns which shall measure 21.00 inches long with a 6.00 inch round flare. The air horns shall be trumpet style with a chrome finish on the exterior and a painted finish deep inside the trumpet.

AIR HORN LOCATION

The air horns shall be recess mounted in the front bumper fascia between the frame rails in the right and left outboard positions.

AIR HORN RESERVOIR

Smeal Fire Apparatus Co.

One (1) air reservoir, with a 1200 cubic inch capacity, shall be installed on the chassis to act as a supply tank for operating air horns. The reservoir shall be isolated with a 90 PSI pressure protection valve on the reservoir supply side to prevent depletion of the air to the air brake system.

ELECTRONIC SIREN SPEAKER

There shall be one (1) Cast Products Inc. model SA4301, 100 watt speaker provided. The speaker shall measure 6.20 inches tall X 7.36 inches wide X 3.06 inches deep. The speaker shall include a flat mounting flange which shall be polished aluminum.

ELECTRONIC SIREN SPEAKER LOCATION

The electronic siren speaker shall be located on the front bumper face on the right side outboard of the frame rail in the far outboard position.

FRONT BUMPER TOW HOOKS

Two (2) heavy duty tow hooks, painted to match the chassis frame, shall be installed in a rearward position out of the approach angle area, bolted directly to the side of the chassis frame with grade 8 bolts.

CAB TILT SYSTEM

The entire cab shall be capable of tilting approximately 45-degrees to allow for easy maintenance of the engine and transmission. The cab tilt pump assembly shall be located on the right side of the chassis above the battery box.

The electric-over-hydraulic lift system shall include an ignition interlock and red cab lock down indicator lamp on the tilt control which shall illuminate when holding the "Down" button to indicate safe road operation.

It shall be necessary to activate the master battery switch and set the parking brake in order to tilt the cab. As a third precaution the ignition switch must be turned off to complete the cab tilt interlock safety circuit.

Two (2) spring-loaded hydraulic hold down hooks located outboard of the frame shall be installed to hold the cab securely to the frame. Once the hold-down hooks are set in place, it shall take the application of pressure from the hydraulic cab tilt lift pump to release the hooks.

Two (2) cab tilt cylinders shall be provided with velocity fuses in each cylinder port. The cab tilt pivots shall be 1.90 inch ball and be anchored to frame brackets with 1.25 inch diameter studs.

A steel safety channel assembly, painted safety yellow shall be installed on the right side cab lift cylinder to prevent accidental cab lowering. The safety channel assembly shall fall over the lift cylinder when the cab is in the fully tilted position. A cable release system shall also be provided to retract the safety channel assembly from the lift cylinder to allow the lowering of the cab.

CAB TILT AUXILIARY PUMP

A manual cab tilt pump module shall be attached to the cab tilt pump housing.

CAB TILT CONTROL RECEPTACLE

Smeal Fire Apparatus Co.

The cab tilt control cable shall include a receptacle which shall be temporarily located on the right hand chassis rail rear of the cab to provide a place to plug in the cab tilt remote control pendant. The tilt pump shall include 8.00 feet of cable with a six (6) pin Deutsch receptacle with a cap.

The remote control pendant shall include 20.00 feet of cable with a mating Deutsch connector. The remote control pendant shall be shipped loose with the chassis.

CAB WINDSHIELD

The cab windshield shall have a surface area of 2825.00 square inches and be of a two (2) piece wraparound design for maximum visibility.

The glass utilized for the windshield shall include standard automotive tint. The left and right windshield shall be fully interchangeable thereby minimizing stocking and replacement costs.

Each windshield shall be installed using black self-locking window rubber.

GLASS FRONT DOOR

The front cab doors shall include a window which is 27.00 inches in width X 26.00 inches in height. These windows shall have the capability to roll down completely into the door housing. This shall be accomplished manually utilizing a crank style handle on the inside of the door. A reinforced window regulator assembly shall be provided for severe duty use.

There shall be an irregular shaped fixed window which shall measure 2.50 inches wide at the top, 8.00 inches wide at the bottom X 26.00 inches in height, more commonly known as "cozy glass" ahead of the front door roll down windows.

The windows shall be mounted within the frame of the front doors trimmed with a black anodized ring on the exterior.

GLASS TINT FRONT DOOR

The windows located in the left and right front doors shall have a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS REAR DOOR RH

The rear right hand side door shall include a window which is 27.00 inches in width X 26.00 inches in height. This window shall roll up and down manually utilizing a crank style handle on the inside of the door. A reinforced window regulator assembly shall be provided for severe duty use.

GLASS TINT REAR DOOR RIGHT HAND

The window located in the right hand side rear door shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS REAR DOOR LH

Smeal Fire Apparatus Co.

The rear left hand side door shall include a window which is 27.00 inches in width X 26.00 inches in height. This window shall roll up and down manually utilizing a crank style handle on the inside of the door. A reinforced window regulator assembly shall be provided for severe duty use.

GLASS TINT REAR DOOR LEFT HAND

The window located in the left hand side rear door shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS SIDE MID RH

The cab shall include a window on the right side behind the front and ahead of the crew door which shall measure 16.00 inches wide X 26.00 inches high. This window shall be fixed within this space and shall be rectangular in shape. The window shall be mounted using self locking window rubber. The glass utilized for this window shall include a green automotive tint unless otherwise noted.

GLASS TINT SIDE MID RIGHT HAND

The window located on the right hand side of the cab between the front and rear doors shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS SIDE MID LH

The cab shall include a window on the left side behind the front door and ahead of the crew door and above the wheel well which shall measure 16.00 inches wide X 26.00 inches high. This window shall be fixed within this space and shall be rectangular in shape. The window shall be mounted using self-locking window rubber. The glass utilized for this window shall include a green automotive tint unless otherwise noted.

GLASS TINT SIDE MID LEFT HAND

The window located on the left hand side of the cab between the front and rear doors shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

CLIMATE CONTROL

The cab shall include a 57,500 BTU @ 425 CFM front overhead heater/defroster which shall be provided and installed above the windshield between the sun visors.

The cab shall also include a combination heater air-conditioning unit mounted on the engine tunnel. This unit shall offer eight (8) adjustable louvers, four (4) forward facing and four (4) rearward facing, a temperature control valve and two (2) blowers offering three (3) speeds which shall be capable of circulating 550 cubic feet of air per minute. The unit shall be rated for 42,500 BTU/Hr of cooling and 36,000 BTU/Hr of heating. The temperature and blower controls shall be located on the heater/air conditioning unit.

All defrost/heating systems shall be plumbed with one (1) seasonal shut-off valve at the front corner on the right side of the cab.

The air conditioner lines shall be a mixture of custom bend zinc coated steel fittings and Aero-quip GH 134 flexible hose with Aero-quip EZ clip fittings.

CLIMATE CONTROL DRAIN

Smeal Fire Apparatus Co.

The climate control system shall include a gravity drain for water management. The gravity drain shall remove condensation from the air conditioning system without additional mechanical assistance.

CLIMATE CONTROL ACTIVATION

The heating and defrosting controls shall be located on the front overhead climate control unit. There shall be additional heating and air conditioning controls located on the engine tunnel mounted climate control unit.

A/C CONDENSER LOCATION

A roof mounted A/C condenser shall be installed on the center of the cab, mid-roof.

A/C COMPRESSOR

The air-conditioning compressor shall be a belt driven, engine mounted, open type compressor that shall be capable of producing a minimum of 32,000 BTU at 1500 engine RPMs. The compressor shall utilize R-134A refrigerant and PAG oil.

UNDER CAB INSULATION

The underside of the cab tunnel surrounding the engine shall be lined with multi-layer insulation, engineered for application inside diesel engine compartments.

The insulation shall act as a noise barrier, absorbing noise thus keeping the decibel level in the cab well within NFPA recommendations. As an additional benefit, the insulation shall assist in sustaining the desired temperature within the cab interior.

The engine tunnel insulation shall measure approximately 0.75 inch thick including a vertically lapped polyester fiber layer, a 1.0 lb/ft² PVC barrier layer, an open cell foam layer, and a moisture and heat reflective foil facing reinforced with a woven fiberglass layer. The foil surface acts as protection against moisture and other contaminants. The insulation shall meet or exceed FMVSS 302 flammability test.

The insulation shall be cut precisely to fit each section and sealed for additional heat and sound deflection. The insulation shall be held in place by 3 mils of acrylic pressure sensitive adhesive and aluminum pins with hard hat, hold in place fastening heads.

INTERIOR TRIM FLOOR

The floor of the cab shall be covered with a multi-layer mat consisting of 0.25 inch thick sound absorbing closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The covering shall be held in place by a pressure sensitive adhesive and aluminum trim molding. All exposed seams shall be sealed with silicone caulk matching the color of the floor mat to reduce the chance of moisture and debris retention.

INTERIOR TRIM

The cab interior shall include trim on the front ceiling, rear crew ceiling, and the cab walls. It shall be easily removable to assist in maintenance. The trim shall be constructed of insulated vinyl over a hard board backing.

REAR WALL INTERIOR TRIM

Smeal Fire Apparatus Co.

The rear wall of the cab shall be trimmed with vinyl.

HEADER TRIM

The cab interior shall feature header trim above the driver and officer positions constructed of vacuum formed ABS material.

TRIM CENTER DASH

The main center dash area shall be constructed of durable vacuum formed ABS composite.

TRIM LH DASH

The left hand dash shall be a one (1) piece durable vacuum formed ABS composite housing which shall be custom molded for a perfect fit around the instrument panel. The left hand dash shall offer lower vertical surface area to the left and right of the steering column to accommodate control panels.

TRIM RH DASH

The right hand dash trim shall consist of a vacuum formed ABS composite module, which contains a glove compartment with a hinged locking door and a Mobile Data Terminal (MDT) provision. The glove compartment size shall be 13.50 inches wide X 6.25 inches high X 5.50 inches deep. The MDT provision shall be provided above the glove compartment.

ENGINE TUNNEL TRIM

The cab engine tunnel shall be covered with a multi-layer mat consisting of 0.25 inch closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The mat shall be held in place by pressure sensitive adhesive. The engine tunnel mat shall be trimmed with anodized aluminum stair nosing trim for an aesthetically pleasing appearance.

STEP TRIM

Each cab entry door shall include a three step entry. The first step closest to the ground shall be constructed of polished 5032 H32 aluminum Grip Strut® grating with angled outer corners. The step shall feature a splash guard to reduce water and debris from splashing in to the step. The splash guard shall have an opening on the outer edge to allow debris and water to flow through rather than becoming trapped within the stepping surface. The lower step shall be mounted to a frame which is integral with the construction of the cab for rigidity and strength. The middle step shall be integral with the cab construction and shall be trimmed with a Flex-Tred® adhesive grit surface material.

UNDER CAB ACCESS DOOR

The cab shall include an aluminum access door in the left crew step riser painted to match the cab interior paint with a push and turn latch. The under cab access door shall provide access to the diesel exhaust fluid fill.

INTERIOR DOOR TRIM

Smeal Fire Apparatus Co.

The interior trim on the doors of the cab shall consist of an aluminum panel constructed of Marine Grade 5052-H32 0.13 of an inch thick aluminum plate. The door panels shall include a painted finish.

DOOR TRIM CUSTOMER NAMEPLATE

The interior door trim on the front doors shall include a customer nameplate which states the vehicle was custom built for their Department.

CAB DOOR TRIM REFLECTIVE

The interior of each door shall include high visibility reflective tape. A white reflective tape shall be provided vertically along the outer rear edge of the door. The lowest portion of each door skin shall include solid white reflective tape. The tape shall measure 6.00 inches in height.

INTERIOR GRAB HANDLE "A" PILLAR

There shall be two (2) rubber covered 11.00 inch grab handles installed inside the cab, one on each "A" post at the left and right door openings. The left handle shall be located 7.88 inches above the bottom of the door window opening and the right handle shall be located 2.88 inches above the bottom of the door window opening. The handles shall assist personnel in entering and exiting the cab.

INTERIOR GRAB HANDLE FRONT DOOR

Each front door shall include one (1) ergonomically contoured 9.00 inch cast aluminum handle mounted horizontally on the interior door panels. The handles shall feature a textured black powder coat finish to assist personnel entering and exiting the cab.

INTERIOR GRAB HANDLE REAR DOOR

A black powder coated cast aluminum assist handle shall be provided on the inside of each rear crew door. A 30.00 inch long handle shall extend horizontally the width of the window just above the window sill. The handle shall assist personnel in exiting and entering the cab.

INTERIOR SOFT TRIM COLOR

The cab interior soft trim surfaces shall be gray in color.

INTERIOR TRIM SUNVISOR

The header shall include two (2) sun visors, one each side forward of the driver and officer seating positions above the windshield. Each sun visor shall be constructed of Masonite and covered with padded vinyl trim.

INTERIOR ABS TRIM COLOR

The cab interior vacuum formed ABS composite trim surfaces shall be gray in color.

INTERIOR FLOOR MAT COLOR

The cab interior floor mat shall be gray in color.

CAB PAINT INTERIOR DOOR TRIM

Smeal Fire Apparatus Co.

The inner door panel surfaces shall be painted with Zolatone #20-72 silver gray texture finish.

DASH PANEL GROUP

The main center dash area shall include three (3) removable panels located one (1) to the right of the driver position, one (1) in the center of the dash and one (1) to the left of the officer position. The center panel shall be within comfortable reach of both the driver and officer.

SWITCHES CENTER PANEL

The center dash panel shall include twelve (12) rocker switch positions in a six (6) over six (6) switch configuration in the left portion of the panel.

A rocker switch with a blank legend installed directly above shall be provided for any position without a switch and legend designated by a specific option. The non-specified switches shall be two-position, black switches with a green indicator light. Each blank switch legend can be custom engraved by the body manufacturer. All switch legends shall have backlighting provided.

SWITCHES LEFT PANEL

The left dash panel shall include eight (8) switches in a single row configuration. Five (5) of the switches shall be rocker type and the left three (3) shall be the headlight switch, the instrument lamp dimmer switch and the windshield wiper/washer control switch.

A rocker switch with a blank legend installed directly above shall be provided for any position not designated by a specific option. The non-designated switches shall be two-position, black switches with a green indicator light. Each blank switch legend can be custom engraved by the body manufacturer. All switch legends shall have backlighting provided.

SWITCHES RIGHT PANEL

The right dash panel shall include no rocker switches or legends.

SEAT BELT WARNING

A Weldon seat belt warning system, integrated with the Vehicle Data Recorder system, shall be installed for each seat within the cab. The system shall activate an indicator light in the instrument panel, a digital seat position indicator with a seat position legend in the switch panel, and an audible alarm.

The warning system shall activate when any seat is occupied with a minimum of 60 pounds and the corresponding seat belt remains unfastened. The warning system shall also activate when any seat is occupied and the corresponding seat belt was fastened in an incorrect sequence. Once activated, the visual indicators and audible alarm shall remain active until all occupied seats have the seat belts fastened.

SEAT MATERIAL

The seats shall be covered with Turnout Tuff™ rugged material. This material shall be semi-resistant to UV rays and from being saturated or contaminated by fluids.

SEAT COLOR

Smeal Fire Apparatus Co.

All seats supplied with the chassis shall be gray in color. All seats shall include red seat belts.

SEAT BACK LOGO

The seat back shall include the "Smeal Fire Apparatus Co." logo. The logo shall be centered on the standard headrest of the seat back and on the left side of a split headrest.

SEAT DRIVER

The driver's seat shall be a Seats Inc. 911 Universal series. The four-way seat shall feature 3.00 inch vertical travel air suspension and manual fore and aft adjustment with 6.00 inches of travel. The suspension control shall be located on the seat below the left front corner of the bottom cushion. The bottom seat cushion shall include an adjustment for rake angle offering added comfort.

The seat position shall include a three-point shoulder harness with lap belt and an automatic retractor attached to the cab. The buckle portion of the seat belt shall be mounted on a semi-rigid stalk extending from the seat base within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for this belted seating position shall be 37.00 inches measured with the seat suspension height adjusted to the upper limit of its travel.

This model of seat shall have successfully completed the static load tests set forth by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. This model of seat installed in the cab model, as specified, shall have successfully completed the dynamic sled testing using FMVSS 208 as a guide with the following accommodations. In order to reflect the larger size outfitted firefighters, the test dummy used shall be a 95th percentile hybrid III male weighing 225 pounds rather than the 50th percentile male dummy weighing 165 pounds as referenced in FMVSS 208.

The materials used in construction of the seat shall also have successfully completed testing with regard to the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which dictates the allowable burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK DRIVER

The driver's seat shall feature a two (2) way adjustable lumbar support and offer an infinite fully reclining adjustable titling seat back. The seat back shall also feature a contoured head rest.

SEAT MOUNTING DRIVER

The driver's seat shall be installed in an ergonomic position in relation to the cab dash.

OCCUPANT PROTECTION DRIVER

The driver's position shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The driver's seating area APS shall include:

Smeal Fire Apparatus Co.

- Advanced seat belt system - retractor pre-tensioner tightens the seat belt around the driver, securing the occupant in the seat and the load limiter plays out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.
- Large side curtain airbag - protects the driver's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to the driver in a qualifying event by covering the window and the upper portion of the door.
- Dual knee airbags (patent pending) with energy management mounting (patent pending) - protects the driver's lower body from dangerous surface contact injuries, acceleration injuries, and from intrusion as well as locks the lower body in place so the upper body shall be slowed by the load limiting seat belt.

Steering wheel airbag - protects the driver's head, neck, and upper torso from contact injuries, acceleration injuries, and contact points with intrusive surfaces as a result of a collision.

SEAT OFFICER

The officer's seat shall be a Seats Inc. 911 ABTS Battalion series. The seat shall feature a tapered and padded seat, and cushion. The seat shall be a non-adjustable type seat.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for this belted seating position shall be 35.00 inches.

This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. This model of seat installed in the cab model, as specified, shall have successfully completed the dynamic sled testing using FMVSS 208 as a guide with the following accommodations. In order to reflect the larger size outfitted firefighters, the test dummy used shall be a 95th percentile hybrid III male weighing 225 pounds rather than the 50th percentile male dummy weighing 165 pounds as referenced in FMVSS 208. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK OFFICER

The officer's seat shall include a standard seat back incorporating the all belts to seat feature (ABTS). The seat back shall feature a contoured head rest.

SEAT MOUNTING OFFICER

The officer's seat shall be installed in an ergonomic position in relation to the cab dash.

Smeal Fire Apparatus Co.

OCCUPANT PROTECTION OFFICER

The officer's position shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The officer's seating area APS shall include:

- Advanced seat belt system - retractor pre-tensioner tightens the seat belt around the officer, securing the occupant in the seat and the load limiter plays out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.
- Large side curtain airbag - protects the officer's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to the officer in a qualifying event by covering the window and the upper portion of the door.

Knee airbags - protects the officer's lower body from dangerous surface contact injuries, acceleration injuries, and from contact points with intrusive surfaces as a result of a collision as well as locks the lower body in place so the upper body shall be slowed by the load limiting seat belt.

SEAT BELT ORIENTATION CREW

The crew position seat belts shall follow the standard orientation which extends from the outboard shoulder extending to the inboard hip.

SEAT FORWARD FACING OUTER LOCATION

The crew area shall include two (2) forward facing outboard seats, which include one (1) located next to the outer wall of the cab on the left side of the cab and one (1) located next to the outer wall on the right side of the cab.

SEAT CREW FORWARD FACING OUTER

The crew area shall include a seat in the forward facing outer position which shall be a Seats Inc. 911 Battalion series. The seat shall feature a tapered and padded seat, and cushion. The seat shall be mounted in a fixed position.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for each belted seating position shall be 35.00 inches.

This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. This model of seat installed in the cab model, as specified, shall

Smeal Fire Apparatus Co.

have successfully completed the dynamic sled testing using FMVSS 208 as a guide with the following accommodations. In order to reflect the larger size outfitted firefighters, the test dummy used shall be a 95th percentile hybrid III male weighing 225 pounds rather than the 50th percentile male dummy weighing 165 pounds as referenced in FMVSS 208. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK FORWARD FACING OUTER

The seat back(s) in the forward facing outboard position shall be comprised of a standard seat back. The seat back shall feature an all belts to seat (ABTS) style safety restraint. The ABTS feature shall include a red, three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant. The seat back shall feature a contoured, adjustable head rest.

SEAT MOUNTING FORWARD FACING OUTER

The forward facing outer seat shall be mounted inboard from the side wall for additional clearance facing the front of the cab.

SEAT FRAME FORWARD FACING

The forward facing seating position shall include two (2) channel type risers for each seat. The risers shall be constructed of 0.19 inch thick steel with 1.50 inch flanges. The risers shall be painted black.

CAB FRONT UNDERSEAT STORAGE ACCESS

The left and right under seat storage areas shall have a solid aluminum hinged door with non-locking latch.

SEAT COMPARTMENT DOOR FINISH

All underseat storage compartment access doors shall have a Zolatone #20-72 silver gray texture.

WINDSHIELD WIPER SYSTEM

The cab shall include a dual arm wiper system which shall clear the windshield of water, ice and debris. There shall be two (2) windshield wipers which shall be affixed to a radial wet arm. The system shall include a single motor which shall initiate the arm in which both the left hand and right hand windshield wipers are attached, initiating a back and forth motion for each wiper. The wiper motor shall be activated by an intermittent wiper control located within easy reach of the driver's position.

ELECTRONIC WINDSHIELD FLUID LEVEL INDICATOR

The windshield washer fluid level shall be monitored electronically. When the washer fluid level becomes low the yellow "Check Message Center" indicator light on the instrument panel shall illuminate and the message center in the dual air pressure gauge shall display a "Check Washer Fluid Level" message.

CAB DOOR HARDWARE

The cab entry doors shall be equipped with exterior pull handles, suitable for use while wearing firefighter gloves. The handles shall be made of a fiber reinforced plastic composite with a black matt finish.

Smeal Fire Apparatus Co.

The interior exit door handles shall be flush paddle type with a black finish, which are incorporated into the upper door panel.

All cab entry doors shall include locks which are keyed alike. The door locks shall be designed to prevent accidental lockout.

DOOR LOCKS

Each cab entry door shall include a manually operated door lock. Each door lock may be actuated from the inside of the cab by means of a red knob located on the paddle handle of the respective door or by using a TriMark key from the exterior. The door locks are designed to prevent accidental lock out.

GRAB HANDLES

The cab shall include one (1) 18.00 inch knurled, anti-slip, one-piece exterior assist handle behind each cab door. The grab handle shall be made of 14 gauge 304- stainless steel and be 1.25 inch diameter to enable non-slip assistance with a gloved hand.

REARVIEW MIRRORS

Retrac Aerodynamic style single vision mirror heads model 613265 shall be provided and installed on the front cab doors.

The mirrors shall be mounted via 1.00 diameter tubular stainless steel arms to provide a rigid mounting to reduce vibration.

The mirrors shall measure 8.00 inches wide X 19.00 inches high and shall include an 8.00 inch convex mirrors with a stainless steel back, model 980-4, installed below the flat glass to provide a wider field of vision. The flat mirrors shall be motorized with remote horizontal and vertical adjustment. The control switches shall be mounted within easy reach of the driver. The convex mirrors shall be manually adjustable.

The mirrors shall be constructed of a vacuum formed chrome plated ABS plastic housing that is corrosion resistant and shall include the finest quality non-glare glass.

EXTERIOR TRIM REAR CORNER

There shall be stainless steel scuff plates on the outside corners at the back of the cab which shall be shipped loose and installed by the OEM. The stainless steel plate shall feature a number seven mirror finish and shall include two sided adhesive tape.

CAB FENDER

Full width wheel well liners shall be installed on the extruded cab to limit road splash and enable easier cleaning. Each two-piece liner shall consist of an inner liner 16.00 inches wide made of vacuum formed ABS composite and an outer fenderette 3.50 inches wide made of 14 gauge 304 polished stainless steel.

MUD FLAPS FRONT

The front wheel wells shall have mud flaps installed on them.

Smeal Fire Apparatus Co.

IGNITION

A master battery system with a keyless start ignition system shall be provided. Each system shall be controlled by a one-quarter turn Cole Hersee switch, both of which shall be mounted to the left of the steering wheel on the dash. A chrome push type starter button shall be provided adjacent to the master battery and ignition switches.

Each switch shall illuminate a green LED indicator light on the dash when the respective switch is placed in the "ON" position.

The starter button shall only operate when both the master battery and ignition switches are in the "ON" position.

BATTERY

The single start electrical system shall include six (6) Harris BCI 31 950 CCA batteries with a 210 minute reserve capacity and 4/0 welding type dual path starter cables per SAE J541.

BATTERY TRAY

The batteries shall be installed within two (2) steel battery trays located on the left side and right side of the chassis, securely bolted to the frame rails. The battery trays shall be coated with the same material as the frame.

The battery trays shall include drain holes in the bottom for sufficient drainage of water. A durable, non-conducting, interlocking mat made by Dri-Dek shall be installed in the bottom of the trays to allow for air flow and help prevent moisture build up. The batteries shall be held in place by non-conducting phenolic resin hold down boards.

BATTERY BOX COVER

Each battery box shall include a steel cover which protects the top of the batteries. Each cover shall include flush latches which shall keep the cover secure as well as a black powder coated handle for convenience when opening.

BATTERY CABLE

The starting system shall include cables which shall be protected by 275 degree F. minimum high temperature flame retardant loom, sealed at the ends with heat shrink and sealant.

BATTERY JUMPER STUD

The starting system shall include battery jumper studs. These studs shall be located in the forward most portion of the driver's side lower step. The studs shall allow the vehicle to be jump started, charged, or the cab to be raised in an emergency in the event of battery failure.

ALTERNATOR

The charging system shall include a 270 amp Leece Neville 12 volt alternator. The alternator shall include a self-excited integral regulator.

Smeal Fire Apparatus Co.

HEADLIGHTS

The cab front shall include four (4) rectangular LED headlamps with separate high and low beams mounted in bright chrome bezels.

FRONT TURN SIGNALS

The front fascia shall include two (2) Whelen model 600 4.00 inch X 6.00 inch programmable LED amber turn signals which shall be installed in a chrome bezel outboard of the front warning and headlamps.

HEADLIGHT LOCATION

The headlights shall be located on the front fascia of the cab directly below the front warning lights.

SIDE TURN/MARKER LIGHTS

The sides of the cab shall include two (2) LED round side marker lights which shall be provided just behind the front cab radius corners.

MARKER AND ICC LIGHTS

In accordance with FMVSS, there shall be five (5) LED cab marker lamps designating identification, center and clearance provided. These lights shall be installed on the face of the cab within full view of other vehicles from ground level.

HEADLIGHT AND MARKER LIGHT ACTIVATION

The headlights and marker lights shall be controlled through a rocker switch within easy reach of the driver. There shall be a dimmer switch within easy reach of the driver to adjust the brightness of the dash lights. The headlamps shall be equipped with the "Daytime Running" light feature, which shall illuminate the headlights to 80% brilliance when the battery master switch is in the "On" position and the parking brake is released.

CORNERING LIGHTS

The bumper tail shall include two (2) Whelen 500 Series 5mm LED steady-on cornering lights with clear lenses, one (1) each side. The light heads shall illuminate when the turn signals are activated.

GROUND LIGHTS

Each door shall include an incandescent NFPA compliant ground light mounted to the under side of the cab step below each door. Each light shall include a polycarbonate lens, a housing which is vibration welded and a bulb which shall be shock mounted for extended life. The ground lighting shall be activated by the opening of the respective door as well as rocker switched.

LOWER CAB STEP LIGHTS

The middle step located at each door shall include a recess mounted 4.00 inch round LED light which shall activate with the opening of the respective door.

INTERMEDIATE STEP LIGHTS

Smeal Fire Apparatus Co.

The intermediate step well area at each door shall include an LED light within a chrome housing. The Egress step lights shall provide visibility to the step well area for the first step exiting the vehicle. The Egress step lights shall activate with Entry step lighting.

ENGINE COMPARTMENT LIGHT

There shall be an LED NFPA compliant light mounted under the engine tunnel for area work lighting on the engine. The light shall include a polycarbonate lens, a housing which is vibration welded and a bulb which shall be shock mounted for extended life. The light shall activate automatically when the cab is tilted.

FRONT SCENE LIGHTS

The front of the cab shall include a Whelen Pioneer model PCP2 contour roof mount scene light installed on the brow of the cab.

Each lamp head shall have two (2) 12 volt high intensity LED panels. One side of each lamp head shall include a flood light and the other side shall include an 8-degree spotlight. Each lamp head shall draw 12.0 amps and generate 14,000 lumens total. Each lamp head shall measure 4.25 inches in height X 14.00 inches in width. The lamp heads and brackets shall be powder coated white.

FRONT SCENE LIGHTS ACTIVATION

The front scene lighting shall be activated by a rocker switch.

FRONT SCENE LIGHT LOCATION

There shall be one (1) scene light mounted center on the front brow of the cab.

SIDE SCENE LIGHTS

The cab shall include two (2) Whelen Pioneer model PCPSM2B LED surface mount lights installed one (1) on each side of the cab.

The PCPSM2B configuration shall consist of 24 white Super-LEDs for the spot light with a specialized spot reflector on the bottom, 48 white Super-LEDs in the flood light with a clear optic collimator/metalized reflector assembly on the top, and a clear non-optic polycarbonate lens. Each lamp head shall draw 12.0 amps and generate 7,800 lumens. Each lamp head shall measure 6.37 inches in height X 16.22 inches in width. Each lamp head housing shall be painted black.

SIDE SCENE LIGHT LOCATION

The scene lighting located on the left and right sides of the cab shall be mounted in the upper forward portion of the cab between the front and rear crew doors.

SIDE SCENE ACTIVATION

The scene lights shall be activated by two (2) rocker switches located in the switch panel, one (1) for each light.

INTERIOR OVERHEAD LIGHTS

Smeal Fire Apparatus Co.

The cab shall include a two-section, red and clear Weldon incandescent dome lamp located over each door. The dome lamps shall be rectangular in shape and shall measure approximately 9.50 inches in length X 5.00 inches in width with a black colored bezel. The clear portion of each lamp shall be activated by opening the respective door and both the red and clear portions can be activated by individual switches on each lamp.

An additional incandescent three (3) light module with dual map lights shall be located over the engine tunnel which can be activated by individual switches on the lamp.

AUXILIARY DOME LIGHT LH

The cab shall include one (1) 7.00 inches diameter clear auxiliary dome light and one (1) 7.00 inches diameter red auxiliary dome light over the left hand front seating position. The clear light shall be activated by the opening of the left hand front door as well as an individual switch located on the side of the light. The red light shall be activated by an individual switch located on the side of the light.

AUXILIARY DOME LIGHT RH

The cab shall include one (1) 7.00 inches diameter clear auxiliary dome light and one (1) 7.00 inches diameter red auxiliary dome light over the right hand front seating position. The clear light shall be activated by the opening of the right hand front door as well as an individual switch located on the side of the light. The red light shall be activated by an individual switch located on the side of the light.

DO NOT MOVE APPARATUS LIGHT

The front headliner of the cab shall include a flashing red Whelen 500 Series 5mm LED light clearly labeled "Do Not Move Apparatus". In addition to the flashing red light, an audible alarm shall be included which shall sound while the light is activated.

The flashing red light shall be 5.40 inches long X 1.70 inches wide X 0.90 inches high and shall be located centered left to right for greatest visibility.

The light and alarm shall be interlocked for activation when either a cab door is not firmly closed or an apparatus compartment door is not closed, and the parking brake is released.

MASTER WARNING SWITCH

A master switch shall be included in the main rocker switch panel. The switch shall be a rocker type, red in color and labeled "Master" for identification. The switch shall feature control over all devices wired through it. Any warning device switch left in the "ON" position shall automatically power up when the master switch is activated.

INBOARD FRONT WARNING LIGHTS

The cab front fascia shall include dual modules containing headlight bulbs in the left and right inboard positions. These lights shall not be wired.

HORN BUTTON SELECTOR SWITCH

A rocker switch shall be installed in the switch panel between the driver and officer to allow control of either the electric horn or the air horn from the steering wheel horn button. The electric horn shall sound by default when the selector switch is in either position to meet FMCSA requirements.

Smeal Fire Apparatus Co.

AIR HORN ACTIVATION

The air horn activation shall be accomplished by the steering wheel horn button for the driver and a right hand side Linemaster model SP491-S81 foot switch for the officer. An air horn activation circuit shall be provided to the chassis harness pump panel harness connector.

MECHANICAL SIREN ACTIVATION

The mechanical siren shall be actuated by two (2) Linemaster model SP491-S81 foot switches mounted in the front section of the cab for use by the driver and officer. A red momentary siren brake rocker switch shall be provided in the switch panel on the dash.

The siren shall only be active when master warning switch is on to prevent accidental engagement.

BACK-UP ALARM

An ECCO model 575 backup alarm shall be installed at the rear of the chassis with an output level of 107 dB. The alarm shall automatically activate when the transmission is placed in reverse.

INSTRUMENTATION

An ergonomically designed instrument panel shall be provided. Each gauge shall be backlit with LED lamps. Stepper motor movements shall drive all gauges. The instrumentation system shall be multiplexed and shall receive ABS, engine, and transmission information over the J1939 data bus to reduce redundant sensors and wiring.

The instrument panel shall contain the following gauges:

One (1) electronic speedometer shall be included. The primary scale on the speedometer shall read from 0 to 100 MPH, and the secondary scale on the speedometer shall read from 0 to 160 KM/H.

One (1) electronic tachometer shall be included. The scale on the tachometer shall read from 0 to 3000 RPM.

One (1) two-movement gauge displaying primary system, and secondary system air volumes and integral LCD odometer/trip odometer shall be included on the lower portion of the LCD. The scale on the air pressure gauges shall read from 0 to 150 pounds per square inch (PSI). The air pressure scales shall be linear to operate with an accuracy of 1 degree of the measured data with a red indication zone on the gauge showing critical levels of air pressure. A red indicator light in the gauge shall indicate a low air pressure, as well as a message on the LCD screen. The odometer shall display up to 9,999,999.9 miles. The trip odometer shall display 9,999.9 miles. The LCD shall display Transmission Temperature in degrees Fahrenheit on the upper portion of the LCD. The LCD screen shall also be capable of displaying certain diagnostic functions.

One (1) four-movement gauge displaying engine oil pressure, coolant temperature, fuel level, voltmeter, and an *indicator bar displaying Diesel Exhaust Fluid (DEF) LED bar shall be included. The scale on the engine oil pressure gauge shall read from 0 to 120 pounds per square inch (PSI). The engine oil pressure scale shall be linear to operate with an accuracy of 1 degree of the measured. A red indicator light in the gauge shall indicate a low engine oil pressure, as well as a message on the LCD screen. The scale on the coolant temperature gauge shall read from 100 to 250 degrees Fahrenheit (F). The coolant temperature scale shall be linear to operate with an accuracy of 1 degree of the measured data with a red indication zone on the gauge showing critical levels of air pressure. A red indicator light in the gauge shall indicate high coolant temperature, as well

Smeal Fire Apparatus Co.

as a message on the LCD screen. The scale on the fuel level gauge shall read from empty to full as a percentage of fuel remaining. An amber indicator light shall indicate low fuel at 25% tank level. The scale on the voltmeter shall read from 10 to 16 volts with a red indication zone on the gauge showing critical levels of battery voltage. A red indicator light shall indicate high or low system voltage, as well as a message on the LCD screen. The scale on the DEF LED bar will consist of four (4) LEDs displaying levels in increments of 25% of useable DEF in green. Upon decreasing levels, the indicator bar will change colors to notify the driver of decreasing levels of DEF and action will be required. An amber indicator light shall indicate low levels of DEF, as well as a message on the LCD screen and an audible alarm.

The instrument panel shall include a light bar that contains the following LED indicator lights and produce the following audible alarms in applicable configurations:

RED LAMPS

Stop Engine-indicates critical engine fault
Air Filter Restricted-indicates excessive engine air intake restriction
Park Brake-indicates parking brake is set
Seat Belt Indicator-indicates when a seat is occupied and corresponding seat belt remains unfastened
Low Coolant-indicates engine coolant is required

AMBER LAMPS

MIL-indicates an engine emission control system fault
Check Engine-indicates engine fault
Check Trans-indicates transmission fault
High Transmission Temperature-indicates excessive transmission oil temperature
ABS-indicates anti-lock brake system fault
HEST-indicates a high exhaust system temperature
Water in Fuel-indicates presence of water in fuel filter
*DPF-indicates a restriction of the diesel particulate filter
*Regen Inhibit-indicates regeneration has been postponed due to user interaction
Range Inhibit-indicates a transmission operation is prevented and requested shift request may not occur.
*SRS-indicates a problem in the supplemental restraint system
Check Message-Turn Signal On
Check Message-Door Ajar
Check Message-Cab Ajar
*Check Message-ESC Active
*Check Message-DPF Regen Active
Check Message-No Engine Data
Check Message-No Transmission Data
Check Message-No ABS Data
Check Message-No Data All Communication With The Vehicle Systems Has Been Lost
Check Message-Check Engine Oil Level
Check Message-Check Washer Fluid Level
Check Message-Check Power Steering Fluid Level
Check Message-Low Transmission Fluid Level
Check Message-Check Coolant Level

GREEN LAMPS

Left and Right turn signal indicators
*ATC-indicates low wheel traction for automatic traction control equipped vehicles, also indicates mud/snow mode is active for ATC system
High Idle-indicates engine high idle is active.

Smeal Fire Apparatus Co.

Cruise Control-indicates cruise control is active
OK to Pump-indicates the pump engage conditions have been met
Pump Engaged-indicates the pump is currently in use
Auxiliary Brake-indicates secondary braking device is active

BLUE LAMP

High Beam Indicator

WHITE LAMP

Wait to Start-indicates active engine air preheat cycle

AUDIBLE ALARMS FROM GAUGE PACKAGE

High Trans Temp
High or Low Voltage
Check Engine
Check Transmission
Stop Engine
Low Air Pressure
Fuel Low
Water in Fuel
*ESC
High Coolant Temperature
Low Engine Oil Pressure
Low Coolant Level
*Low DEF Level
Air Filter Restricted
Extended Left and Right Turn Remaining On
Cab Ajar
Door Ajar
ABS System Fault
Seatbelt Indicator

EXTERNAL AUDIBLE ALARM

Air Filter
Cab Ajar
Door Ajar
Check Engine
Stop Engine
Low Air Pressure
Low Engine Oil Pressure
Water in Fuel
*Low DEF
ABS System Fault
Seatbelt Indicator
*Items marked with an asterisk are provided only in applicable configurations.

LCD MESSAGES

Transmission Temperature
Battery Voltage
Engine Hours
Vehicle Speed

Smeal Fire Apparatus Co.

Engine RPMs
Fuel Level
DEF Level
Engine Oil Pressure
Ammeter (If quipped)
Auxiliary Ammeter (If quipped)
Engine Coolant Temp
Primary System Air Pressure
Secondary System Air Pressure
Turbo Boost Pressure
Exhaust Temperature
Engine Load
Engine Torque
Instant Fuel Economy
Average Fuel Economy

BACKLIGHTING COLOR

The instrumentation gauges and the switch panel legends shall be backlit using red LED backlighting.

SPARTAN MOBILE GATEWAY

A vehicle mobile gateway router shall be provided. The device, once supplied with a customer provided USB aircard(s) and data plan SIM card(s), shall produce a mobile Wi-Fi hotspot in and around the vehicle using a cellular data connection. The vehicle router also enhances the vehicle's effective cellular data coverage and range. This option comes with free access to remote configuration software for a year. The mobile data hotspot shall be mounted in the cab on the "B" pillar, behind the front officer seat.

MOBILE GATEWAY ANTENNA

A mobile gateway Wi-Fi hotspot antenna shall be provided. The antenna shall be mounted on the right hand mid area of the cab roof above the "B" pillar so not to interfere with light bars or other roof mounted equipment installed by Spartan Chassis.

CAB EXTERIOR PROTECTION

The cab face shall have a removable plastic film installed over the painted surfaces to protect the paint finish during transport to the body manufacturer.

FIRE EXTINGUISHER

A 2.50 pound D.O.T approved fire extinguisher with BC rating shall be shipped loose with the cab.

ROAD SAFETY KIT

The cab and chassis shall include one (1) emergency road safety triangle kit.

DOOR KEYS

The cab and chassis shall include a total of four (4) door keys for the manual door locks.

Smeal Fire Apparatus Co.

DIAGNOSTIC SOFTWARE OCCUPANT PROTECTION

Diagnostic software for the Spartan Advanced Protection System shall be available for free download from the Spartan Chassis website to Spartan authorized OEMs, dealers and service centers, as well as the vehicle owner.

The software has been validated to be compatible with the following RP1210 interface adapters:

- Dearborn Group DPA4 Plus
- Noregon Systems JPRO[®] DLA+
- Cummins INLINE5
- Cummins INLINE6
- NexIQ[™] USB-Link[™]

The software and adapter utilize the SAE J1939-13 heavy duty nine (9) pin connector which is located below the driver's side dash to the left of the steering column.

WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN CHASSIS, INC. LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The chassis manufacturer shall provide a limited parts and labor warranty to the original purchaser of the custom built cab and chassis for a period of twenty-four (24) months, or the first 36,000 miles, whichever occurs first. The warranty period shall commence on the date the vehicle is delivered to the first end user.

CAB AND CHASSIS LABELING LANGUAGE

The cab and chassis shall include the applicable caution, warning, and safety notice labels with text to be written in English.

CHASSIS OPERATION MANUAL

There shall be two (2) digital copies of the chassis operation manual provided with the chassis. The digital data shall include a parts list specific to the chassis model.

ENGINE AND TRANSMISSION OPERATION MANUALS

The following manuals specific to the engine and transmission models ordered will be included with the chassis in the ship loose items:

- (2) Digital copies of the Engine Owner's manual
- (2) Digital copies of the Transmission Operator's manual
- (2) Hard copies of the Engine Operation and Maintenance manual with CD

Smeal Fire Apparatus Co.

CAB/CHASSIS AS BUILT WIRING DIAGRAMS

The cab and chassis shall include two (2) digital copies of wiring schematics and option wiring diagrams.

SALES TERMS

The sale of the Spartan Chassis shall be governed by the terms contained on the Sales Terms – Acceptance of Purchase Order document, a copy of which is attached to this option.

DRIVELINE LAYOUT CONFIRMATION

During the design phase of the chassis the Spartan Chassis driveline engineer shall submit the driveline layout to an OEM engineer to review the chassis design for any potential problems integrating the OEM body to the chassis. The OEM engineer shall provide approval to the driveline engineer prior to driveline bills of materials being released.

BODY

NFPA 1901-2009

The National Fire Protection Association "Standard for Automotive Fire Apparatus", 2009 edition, is hereby adopted and made a part of these specifications, the same as if it were written out in full detail, with the exception of the section dealing with "Equipment Recommended for Various Types of Apparatus". Bidders shall provide the equipment requested herein and the buyer shall supply the rest before the apparatus is put into service. It is the intent of the purchaser to purchase an apparatus that meets 100% of the minimum standards defined and outlined in NFPA 1901-2009 edition. There are to be no exceptions to this requirement.

PREREQUISITE BIDDING REQUIREMENTS

Any manufacturer submitting a proposal or bid, to these specifications, shall meet the following conditions:

- The manufacturer of the apparatus herein specified, shall be wholly owned (100%) and managed by a Company, Corporation, and/or Parent Company that is wholly based and permanently resides in the United States of America.
- The Company, Corporation, and/or Parent Company, and all assets belonging to such, shall be wholly owned and managed (100%) by the entities specified above.
- Any proposal, bid, or response to these specifications by any foreign based, owned, or managed (in part or in whole) Company, Corporation, and/or Parent Company shall be cause for immediate rejection.
- Any proposal, bid, or response to these specifications by any Company, Corporation, and/or Parent Company, that is owned, operated, managed, or held in contract, in part or wholly by a partnership or other agreement, shall be cause for immediate rejection.

Exceptions to these conditions will not be allowed under any circumstances.

CONSTRUCTION DOCUMENTATION

Smeal Fire Apparatus Co.

The contractor shall supply, at the time of delivery, at least one (1) copy of the following documents:

1. The manufacturers record of apparatus construction details, including the following information:

- Owners name and address
- Apparatus manufacturer, model, and serial number
- Chassis make, model, and serial number
- GAWR of front and rear axles
- Front tire size and total rated capacity in pounds or kilograms
- Rear tire size and total rated capacity in pounds or kilograms
- Chassis weight distribution in pounds with water and manufacturer mounted equipment (front and rear)
- Engine make, model, serial number, rated horsepower and related speed, and governed speed
- Type of fuel and fuel tank capacity
- Electrical system voltage and alternator output in amps
- Battery make, model, and capacity in cold cranking amps (CCA)
- Chassis transmission make, model, and serial number; and if so equipped, chassis transmission PTO(s) make, model, and gear ratio
- If applicable, the pump make, model, rated capacity in gallons or liters per minute, and serial number
- Pump transmission make, model, serial number, and gear ratio, if unit is equipped with a pump
- If applicable, the auxiliary pump make, model, rated capacity in gallons or liters per minute, and serial number
- Water tank certified capacity in gallons or liters
- On aerial apparatus, the device type, rated vertical height in feet or meters, rated horizontal reach in feet or meters, and rated capacity in pounds or kilograms
- Paint manufacturer and paint number(s)
- Company name and signature of responsible company representative

2. Certification of slip resistance of all stepping, standing, and walking surfaces

3. If the apparatus has a fire pump, a copy of the following shall be provided: pump manufacturers certification of suction capability, apparatus manufacturers approval for stationary pumping applications, engine manufacturers certified brake horsepower curve showing the maximum governed speed, pump manufacturers certification of the hydrostatic test, and the certification of inspection and test for the fire pump

Smeal Fire Apparatus Co.

4. If the apparatus has an aerial device, the certification of inspection and test for the aerial device, and all the technical information required for inspections to comply with NFPA 1914, Standard for Testing Fire Department Aerial Devices
5. If the apparatus has a fixed line voltage power source, the certification of the test for the fixed power source
6. If the apparatus is equipped with an air system, test results of the air quality, the SCBA fill station, and the air system installation
7. Weight documents from a certified scale showing actual loading on the front axle, rear axle(s), and overall fire apparatus (with the water tank full but without personnel, equipment, and hose)
8. Written load analysis and results of the electrical system performance tests
9. When the apparatus is equipped with a water tank, the certification of water tank capacity

OPERATION AND SERVICE DOCUMENTATION

The contractor shall supply, at time of delivery, at least two (2) sets of complete operation and service documentation covering the completed apparatus as delivered and accepted. The documentation shall address at least the inspection, service, and operations of the fire apparatus and all major components thereof. The contractor shall also provide documentation of the following items for the entire apparatus and each major operating system or major component of the apparatus:

1. Manufacturer's name and address
2. Country of manufacturer
3. Source of service and technical information
4. Parts and replacement information
5. Descriptions, specifications, and ratings of the chassis, pump, and aerial device
6. Wiring diagrams for low voltage and line voltage systems to include the following information: representations of circuit logic for all electrical components and wiring, circuit identification, connector pin identification, zone location of electrical components, safety interlocks, alternator-battery power distribution circuits, and input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems
7. Lubrication charts
8. Operating instructions for the chassis, any major components such as a pump or aerial device, and any auxiliary systems
9. Precautions related to multiple configurations of aerial devices, if applicable
10. Instructions regarding the frequency and procedure for recommended maintenance
11. Overall apparatus operating instructions
12. Safety considerations

Smeal Fire Apparatus Co.

13. Limitations of use
14. Inspection procedures
15. Recommended service procedures
16. Troubleshooting guide
17. Apparatus body, chassis, and other component manufacturers warranties
18. Special data required by this standard
19. Copies of required manufacturer test data or reports, manufacturer certifications, and independent third-party certifications of test results
20. A material safety data sheet (MSDS) for any fluid that is specified for use on the apparatus

The contractor shall deliver with the apparatus all manufacturers operations and service documents supplied with components and equipment that are installed or supplied by the contractor.

STATEMENT OF EXCEPTIONS

The proposed apparatus as described in this specification document and all related material with the bid package shall meet or exceed all applicable sections for the category of apparatus as defined by NFPA 1901, unless specifically noted within this specification or other official documents associated with this bid.

Should any area, section or portion of the apparatus not meet the intent and applicable requirements, a clearly defined listing or explanation of what and why compliance was not achieved shall be provided to the purchaser at the time of delivery.

INTENT OF SPECIFICATIONS

It is the intent of these specifications to cover the furnishing and delivery to the purchaser of a complete apparatus equipped as herein specified. With a view to obtaining the best results and the most acceptable apparatus for service in the fire department, these specifications cover the general requirements as to the type of construction, together with certain details as to finish, equipment, and appliances with which the successful bidder must conform. Minor details of construction and materials where not otherwise specified are left to the discretion of the contractor, who shall be solely responsible for the design and construction of all features.

Bids shall only be considered from companies that have an established reputation in the field of fire apparatus construction and have been in business for a minimum of 50 years.

Each bidder shall furnish satisfactory evidence of his ability to construct the apparatus specified, and shall state the location of the factory where the apparatus is to be built. The bidder shall also show that they are in a position to render prompt service and furnish replacement parts for said apparatus.

CONTRACTOR'S SPECIFICATIONS

Each bid shall be accompanied by a set of "Contractor's Specifications" consisting of a detailed description of the apparatus and equipment proposed and to which the apparatus furnished under contract must conform.

Smeal Fire Apparatus Co.

These specifications shall indicate size, type, model, and make of all component parts and equipment.

TIMELY PROPOSALS

It is the bidder's responsibility to see that their proposals arrive on time. Late proposals, facsimiles, e-mails, telegram, or telephone bids shall not be considered.

DRAWINGS

All bid drawings shall be stamped PROPOSAL.

- A total of six (6) packets of 11" x 17" drawings, each packet complete with a single view drawing for each side of the apparatus shall be supplied
- All drawings shall be drawn and printed to an appropriate scale to maximize the size of the apparatus on each 11" x 17" sheet of paper.
- Compartment door opening dimensions shall be shown in each compartment.
- Drawings shall be five (5) views. (left, right, front, rear, top) with the exception of chassis that are not always available as AutoCAD drawings
- Rear plumbing, such as 2-1/2" discharges, rear steamers, and direct tank fills, shall be shown
- Ladders shall be labeled with a letter designation referring to the table for an explanation of the ladder type
- OAL (overall length) in feet & inches -

Estimated length shall be rounded up to the nearest inch

- OAH (overall height) in feet & inches

Estimated height shall be rounded up to the nearest inch

- Body dimensions shown - pump house width & front of the body to centerline of the rear axle
- Wheelbase in inches
- Estimated in-service weight
- Turning clearance radius
- Front and rear overhang in inches
- No pump panel or instrument panel controls, discharges or inlets. To be blank and labeled "Pump Panel"
- Water tank outline
- Foam tank(s) fill towers
- Exterior mounted hard suction hose

Smeal Fire Apparatus Co.

- Warning lights
- D.O.T. lights
- Generator outline
- No front bumper layout
- Rollup doors will be shown in open position. Lap doors will be shown in the closed position
- Compartment depth break over measurement. The measurement where the compartment switches from full depth to shallow depth
- Angle of approach and departure
- Top view of chassis

Text Block Items

- Chassis model
- Water tank capacity
- Foam tank capacity
- Hose bed capacity in cubic feet
- Total compartment cubic feet
- Drawing box is to read "BID" and utilize the bid number
- Drawings shall be printed on white paper with black ink; blue line drawings shall not be acceptable.

PURCHASER'S OBLIGATIONS

The purchaser reserves the right to accept or reject any or all bids on such basis as the purchaser deems to be in its best interest. All bidders shall be advised that the purchaser is not bound in any manner to automatically accept the lowest bid. The purchaser shall only be obligated to purchase the lowest bid that meets these detailed specifications as closely as possible.

SAFETY REQUIREMENTS

It is required that the bidder shall meet all State and Federal safety standards and laws that are in effect on the date of the bid for the item(s) that are being specified and the particular use for which they are meant.

ACQUAINTANCE WITH SPECIFICATIONS

It is the responsibility of the bidder to review all of the bidding requirements. Failure of a bidder to be acquainted with this information shall not relieve them from any obligations of the bid requirements.

QUALITY AND WORKMANSHIP

Smeal Fire Apparatus Co.

The design of the apparatus shall embody the latest approved automotive engineering practices. Experimental designs and methods shall not be acceptable.

The workmanship shall be of the highest quality in its respective field. Special consideration shall be given to the following points: accessibility of the various units that require periodic maintenance, ease of operation (including both pumping and driving), and symmetrical proportions.

GENERAL CONSTRUCTION

The complete apparatus, assemblies, subassemblies, component parts, and so on, shall be designed and constructed with due consideration to the nature and distribution of the load to be sustained and to the general character of the service to which the apparatus is to be subjected when placed in service.

All parts of the apparatus shall be strong enough to withstand the general service under full load. The apparatus shall be so designed that the various parts are readily accessible for lubrication, inspection, adjustment and repair.

The apparatus shall be designed and constructed, and the equipment so mounted, with due consideration to distribution of the load between the front and rear axles, and side to side loading that all specified equipment, including a full complement of specified ground ladders, full water tank, loose equipment, and firefighters; shall be carried without overloading or damaging the apparatus as per requirements defined in NFPA 1901.

The main apparatus body structure shall have an approximate width of 100" in order to maximize the enclosed compartment space of the apparatus. The 100" wide measurement represents the main body structure measured from the bottom, outermost rear corners of the apparatus body structure. Components affixed or fastened to the apparatus will increase the body width proportionately.

LIABILITY

The bidder, if their bid is accepted, shall defend any and all suits and assume all liability for the use of any patented process, device or article forming a part of the apparatus or any appliance furnished under the contract.

WARRANTY

A copy of the warranties for the chassis, pump, body, paint, and water tank shall be furnished with each bidder's proposal.

BID FORMS / SPECIFICATIONS

All bid forms shall be submitted on the attached bid form. The bid form and/or these specifications shall be filled out by checking either the "YES" or "NO" column for each and every section/paragraph. Failure to use this form and/or these specifications shall be cause for immediate rejection of any bid.

EXCEPTION TO SPECIFICATIONS

The following chassis, pump, and body specifications shall be strictly adhered to. Exceptions shall be allowed if they are equal to or superior to that specified (as judged by the customer), and provided they are listed and

Smeal Fire Apparatus Co.

fully explained on a separate page entitled "EXCEPTIONS TO SPECIFICATIONS". Exception lists shall refer to the specification page number. Each check in the "NO" column shall be listed and fully explained. Where no check is made in a particular paragraph with either "YES" or "NO", it shall be assumed the bidder is taking exception to that paragraph. If a paragraph contains an empty column, where the bidder neglected to check the proper "YES" or "NO" column, it is assumed the bidder is not conforming to the requirements of this paragraph. If no explanation is given in the "EXCEPTIONS TO SPECIFICATIONS" document, the bid is subject to immediate rejection.

PROPOSALS TAKING TOTAL EXCEPTION TO THESE SPECIFICATIONS WILL BE IMMEDIATELY REJECTED.

The buyer is aware that all bidders shall have to take some exceptions therefore; BIDDERS THAT TAKE NO EXCEPTIONS shall BE REQUIRED TO MEET EVERY PARAGRAPH TO THE FULLEST EXTENT SHOULD THEIR BID BE ACCEPTED. It is the intent of the purchaser to receive bids that do not require telephone calls or other communications to ascertain what a bidder is intending to supply.

Upon delivery, the apparatus shall be inspected against THESE specifications and not those supplied by the bidder with their proposal. Deviations shall not be acceptable unless they were noted as exceptions at the time of bid and the apparatus shall be rejected until said deviations are corrected to the satisfaction of the buyer.

Decisions regarding equal to or better than, shall be the sole responsibility of the recipient of the bids rather than those companies submitting bids. All deviations, regardless of significance must be explained in the "EXCEPTIONS TO SPECIFICATIONS" section of the bid.

When exceptions are not taken but inconsistencies are noted in the submitted detailed specifications, the bid may be subject to rejection.

ROADABILITY

The apparatus, when fully equipped and loaded, shall be capable of the following performance while on dry paved roads that are in good condition:

- From a standing start, the apparatus shall be able to attain a speed of 35 mph (55 kmph) within 25 seconds on a level road.
- The apparatus shall be able to attain a minimum top speed of 50 mph (80 kmph) on a level road.
- The apparatus shall be able to maintain a speed of at least 20 mph (30 kmph) on any grade up to and including 6 percent.

The maximum top speed of the apparatus shall not exceed the tire manufacturer's maximum speed rating for the tires installed on the apparatus.

FAILURE TO MEET TESTS

In the event the apparatus fails to meet the test requirements of these specifications on the first trials, second trials may be made at the option of the bidder within 30 days of the date of the first trials.

Smeal Fire Apparatus Co.

Such trials shall be final and conclusive and failure to comply with these requirements shall be cause for rejection. Failure to comply with changes as required to conform to any clause of the specifications within 30 days after notice is given to the bidder of such changes, shall be cause for rejection of the apparatus.

Permission to keep or store the apparatus in any building owned or occupied by the Department during the specified period, with the permission of the bidder, shall not constitute acceptance. No Exceptions

PROPOSAL SEQUENCE

Bid specifications shall be submitted in the same sequence as these specifications for ease of checking compliance. There shall be no exceptions allowed to this requirement. The apparatus committee intends to be thorough during the evaluation of bids process. In order to maximize efficiency and minimize the time it takes to thoroughly evaluate all received bids this requirement must be strictly adhered to.

AWARD OF CONTRACT

All bids submitted shall be good for a minimum of 30 days during which time bid securities submitted with the proposals shall be held by the purchaser. Criteria for the award shall include, but not be limited to, the following:

- Apparatus Performance And Safety Levels / Considerations
- Completeness of proposal
- Accuracy of accompanying data
- Past performance of bidder
- Compliance with the detailed specifications
- Compliance with purchasers request(s) for personnel qualifications or certifications
- Exceptions and clarifications
- Financial stability of bidder
- Local representation of the manufacturer
- Serviceability of the proposed apparatus
- Service capabilities of the bidder's local representative
- Compliance with NFPA 1901
- Any other factor the purchaser deems relevant

After the evaluation and award process is complete, all bidders shall be notified of the results and securities shall be returned.

OVERALL HEIGHT

Smeal Fire Apparatus Co.

The actual overall height of the vehicle shall be approximately 116" from the ground. This measurement shall be taken with the tires properly inflated with the apparatus in the unloaded condition. The actual measurement shall be taken at the highest point of the apparatus.

OVERALL LENGTH

The actual overall length of the vehicle shall be approximately 368".

WHEELBASE

The actual wheelbase of the vehicle shall be approximately 188".

ANGLE OF APPROACH

The actual angle of approach of the vehicle shall be approximately 12 degrees.

ANGLE OF A DEPARTURE

The actual angle of departure of the vehicle shall be approximately 12 degrees.

VEHICLE TOP SPEED

The apparatus Gross Vehicle Weight Rating (GVWR) is over 26,000 lbs. The vehicle's top speed shall be 68 mph.

MISCELLANEOUS EQUIPMENT ALLOWANCE

The Gross Axle Weight Rating (GAWR) and the Gross Combined Weight Rating (GCWR) or Gross Vehicle Weight Rating (GVWR) of the chassis shall be adequate to carry the weight of the unequipped apparatus with the water tank and other tanks full, specified hose load, unequipped personnel weight, ground ladders, and miscellaneous equipment allowance of 2,000 pounds.

MISCELLANEOUS EQUIPMENT

Miscellaneous equipment, as defined by NFPA 1901, sections 5.8.2 and 5.8.3, shall be the responsibility of the customer. The apparatus shall be designed and manufactured in such a manner as to provide ample enclosed space for which to store such equipment.

OWNER'S MANUAL

There shall be an owner's manual containing the construction, operation, and service documentation provided on a USB Drive. There shall be one (1) copy of the USB provided with the apparatus.

ELECTRICAL MANUAL

A complete electrical manual for the apparatus shall also be provided on the USB Drive. This manual shall be specifically prepared for this individual unit rather than a generic schematic manual designed to accommodate all apparatus. The electrical manual shall also include electrical schematics, harness layouts, V-Mux specifications (including Node Input/output Spreadsheet and Node Relationship Spreadsheet), and Master

Smeal Fire Apparatus Co.

Wire Listing. A contact letter shall also be provided by the electrical engineer, who built the manual, with instructions on using the manual and contact information for assistance with electrical manual questions.

ELECTRICAL SCHEMATICS

There shall be a section of the electrical manual that shall include schematics of the electrical system and components on the apparatus. These schematics shall be specifically prepared for this individual unit rather than a generic schematic designed to accommodate all apparatus.

PUMP PLUMBING SCHEMATICS (if applicable)

There shall be a section of the electrical manual that shall include a schematic of the pump plumbing. This schematic shall be specifically prepared for this individual unit rather than a generic schematic designed to accommodate all apparatus.

HYDRAULIC SCHEMATICS (if applicable)

There shall be a section of the electrical manual that shall include schematics of the hydraulic components on the apparatus including but not limited to:

- Ladder Rack(s) and Hose Bed Door(s) (if applicable)
- Aerial – Retraction/Extension (if applicable)
- Aerial – Rotation (if applicable)
- Tiller – HVAC Hydraulics System (if applicable)

PRE-CONSTRUCTION MEETING

There shall be a pre-construction meeting held at a location agreed upon between department officials and the dealership. The pre-construction meeting is the most important meeting during the after-sale production process. The purpose of this meeting is to finalize all aspects of the specifications, discuss and clarify all design details of the apparatus and to share or provide all information so all parties are in agreement on the apparatus being constructed. The ultimate goal of the pre-construction meeting is for the purchaser and dealer representative(s) to discuss and clarify all aspects of the proposed apparatus and to provide all necessary information to the apparatus manufacturer that shall ensure the apparatus is built to the satisfaction of all parties involved.

The apparatus manufacturer shall create and forward to the dealer a "Pre-construction" document containing the following items:

- Complete specifications of the apparatus including the chassis
- Detailed amp draw report
- Listing of clarifications or questions from the manufacturer that require attention (shelf locations, lettering details, etc.)
- A total of six (6) packets of 11" x 17" drawings, each packet complete with a single view drawing for each side of the apparatus shall be supplied

Smeal Fire Apparatus Co.

- All drawings shall be drawn and printed to an appropriate scale to maximize the size of the apparatus on each 11" x 17" sheet of paper.

During this pre-construction meeting, any changes or clarifications must be documented on a manufacturer issued change order. The change order shall be signed by the customer and dealership and ultimately by the apparatus manufacturer. The change order becomes an extension of the contract with the official signatures of all three parties. All change order items resulting from the pre-construction meeting shall be implemented into the official shop order document.

FINAL INSPECTION

The customer and/or dealer representative will inspect the final apparatus prior to it leaving the apparatus body manufacturer's facility. This will allow any changes that may be required, to be done so in a timely and inexpensive manner. After leaving the facility, all repairs or alterations will be performed by either the Dealer or an OEM approved service center.

INSPECTION CERTIFICATE - NFPA 1901 COMPLIANCE

A third party inspection certificate for the apparatus shall be furnished upon delivery. The purpose of this NFPA 1901 compliance inspection shall be to serve as proof to the customer that all applicable standards have been met or exceeded by the responsible manufacturer.

The following objectives shall be achieved as a result (this listing shall not be construed as being all inclusive):

- Ensure that understanding of all parties respective responsibilities have been addressed by the actual referencing of NFPA 1901 and the amendments in these specifications and the purchase contract and documentation.
- Ensure that only structural materials complying with appropriate standards and codes are used for construction.
- Ensure that applicable standards of design and manufacturing have been met or exceeded.
- Ensure that safety factors have been met or exceeded where required.
- Ensure that applicable standards for testing and inspection have been met or exceeded by personnel with the appropriate qualifications, experience, and certifications.
- Ensure that where applicable components, equipment, and loose equipment carry the appropriate characteristics, classifications, and/or certifications.
- Ensure that in general and as a whole, all applicable requirements set forth in NFPA 1901, and those codes, standards, and specifications referenced by said parties are met, exceeded, and/or addressed.

INDEPENDENT THIRD PARTY PUMP CERTIFICATION

The fire pump shall be tested and certified by Underwriter's Laboratories, a nationally recognized independent third party testing company. Tests shall be conducted so that the pump performs as listed below:

- 100% of rated capacity at 150 pounds net pressure

Smeal Fire Apparatus Co.

- 70% of rated capacity at 200 pounds net pressure
- 50% of rated capacity at 250 pounds net pressure
- 100% of rated capacity at 165 pounds net pressure

The entire pump, both suction and discharge passages, shall be hydrostatically tested to a pressure of 600 PSI. The pump shall be fully tested at the pump manufacturer's factory to the performance spots as outlined by NFPA 1901. The pump shall be free from objectionable pulsation and vibration.

PUMP CERTIFICATION

The pump shall be certified in U.S. gallons per minute (GPM).

12 VOLT SYSTEMS TEST

After completion of the unit, the 12 volt electrical system shall undergo a battery of tests as listed in NFPA 1901. These tests shall include, but not be limited to:

- Reserve capacity test
- Alternator performance test at idle
- Alternator performance test at full load
- Low voltage alarm test

Certification of the results shall be supplied with the apparatus at the time of delivery.

TILT TABLE TESTING

The apparatus shall be tested to verify the stability to 26.5 degrees in both directions. The apparatus shall be tested while loaded with fuel, fire fighting agents, hose, ladders, weight of 250 lbs. per seat, and also weight that is equivalent to the miscellaneous equipment that shall be carried. The weight added to the apparatus for testing purposes shall be distributed approximately to the in-service use, yet not to exceed the manufacturer's compartment ratings.

VEHICLE STABILITY

The apparatus shall comply with the requirements of NFPA 1901 as it applies to vehicle stability. The particular apparatus as described in the specification provided within the bid package shall be classified into one of the following categories:

- The apparatus shall go through actual tilt table testing. This shall be determined by the apparatus manufacturer.
- The apparatus shall be equipped with a rollover stability control system as defined in section 4.13.1.2 of NFPA 1901.
- The apparatus shall be deemed a similar apparatus and meeting the intent of section 4.13.1.1.2 of NFPA 1901.

Smeal Fire Apparatus Co.

TEN (10) YEAR WARRANTY BODY STRUCTURAL INTEGRITY

The body shall be free of structural or design failure or workmanship for a period of ten (10) years or 100,000 miles starting thirty (30) days after the original invoice date.

TEN (10) YEAR PAINT LIMITED WARRANTY

The apparatus body and pump house shall be free of blistering, peeling and any other adhesion defect caused by defective manufacturing methods or paint material selection for exterior surfaces for a prorated period of ten (10) years starting thirty (30) days after the original invoice date.

Paint on the undercarriage, body interior (Line-X® coating included) or aerial structure related paint, if applicable, is covered only under the Standard One (1) Year Limited Warranty.

TEN (10) YEAR CORROSION LIMITED WARRANTY

The body exterior paint shall be warranted against corrosion perforation for a prorated period of ten (10) years starting thirty (30) days after the original invoice date.

TEN (10) YEAR STAINLESS STEEL PLUMBING LIMITED WARRANTY

The stainless steel plumbing and piping shall be free from corrosion perforation for a period of ten (10) years starting thirty (30) days after the original invoice date.

PUMP WARRANTY

The fire pump shall be warranted by Waterous for a period of five (5) years from the date of delivery to the fire department or five and one-half (5-1/2) years from the shipment date by Waterous, whichever period shall be first to expire.

WATER TANK WARRANTY

The tank shall be complete with a lifetime warranty. The tank manufacturer shall mark the tank and furnish notice that indicates proof of warranty.

TWENTY (20) YEAR GALVANIZED SUBFRAME WARRANTY

The galvanized subframe shall be free of structural or design failure or workmanship for a period of twenty (20) years starting thirty (30) days after the original invoice date.

ONE (1) YEAR BASIC LIMITED PARTS & LABOR WARRANTY - OEM FABRICATED PARTS

OEM fabricated parts shall be free of defects in material and workmanship for a period of one (1) year starting thirty (30) days after the original invoice date.

ONE (1) YEAR BASIC LIMITED PARTS & LABOR WARRANTY - OEM PURCHASED PARTS

OEM installed purchased parts shall be free of defects in material and workmanship for a period of one (1) year starting thirty (30) days after the original invoice date.

Smeal Fire Apparatus Co.

SMEAL SIRIUS II CHASSIS

The chassis shall be a Smeal Sirius II.

MUD FLAPS

In addition to the chassis supplied front mud flaps, there shall be two (2) mud flaps provided rearward of the rear axles on the apparatus. The mud flaps shall be a minimum of 3/8" thick to prevent "sailing."

CHASSIS SUPPLIED GAUGE CLUSTER INSTALLED AT PUMP PANEL

There shall be a chassis supplied gauge cluster installed on the pump operator's panel.

CHASSIS SUPPLIED EJECT

The charger eject shall be supplied and installed by the chassis manufacturer.

CHASSIS SUPPLIED SWITCH PANEL

The switch panel shall be supplied and installed by the chassis manufacturer.

FRONT BUMPER OVERLAY

There shall be an aluminum anti-slip tread plate overlay installed on the top surface of the front bumper.

CHASSIS SUPPLIED AIR HORNS

The air horns shall be supplied and installed by the chassis manufacturer.

The air horn shall be controlled by the chassis steering wheel button.

There shall be one (1) round red push button located on the officer's side of the chassis cab. The button shall control the air horns.

CHASSIS SUPPLIED SIREN

The siren shall be supplied and installed by the chassis manufacturer.

CHASSIS SUPPLIED SPEAKER(S)

The speaker(s) shall be supplied and installed by the chassis manufacturer.

MIDSHIP MOUNT FIRE PUMP

The fire pump shall be a Waterous CSUC20 1500 U.S. GPM (5678 LPM) single-stage midship mount pump.

PUMP TRANSMISSION

The pump shall have a Waterous model C20 series transmission. The housing of the transmission shall be constructed of high strength, three piece, horizontally split aluminum. The drive line shafts shall be made from alloy steel forgings, hardened and ground to a size 2.350 inch 46 tooth involute spline. The drive and driven

Smeal Fire Apparatus Co.

sprockets shall be made of steel and shall be hardened and have ground bores. The drive chain shall be a Morse HV™ high strength involute form chain. Bearings shall be deep groove, anti friction ball bearings and shall give support and proper alignment to the impeller shaft assembly. Bearings shall be oil splash lubricated, completely separated from the water being pumped, and protected by a V-ring and oil seal. An internal lubrication system shall deliver lubricant directly to the drive chain. This unique design eliminates the need for an external lubrication pump and auxiliary cooling. The pump and transmission shall be easily separable. A two-piece shaft shall be splined allowing for individual repair of either the pump or transmission, to keep down time to a minimum. All drive line components shall have a torque rating equal to or greater than the final net engine torque.

SINGLE STAGE FIRE PUMP

The pump shall be a single stage centrifugal class "A" rated fire pump, designed specifically for the fire service.

The pump shall be rated at 1250 gallons per minute.

PUMP BODY

The pump body shall be cast as two (2) horizontally split pieces. The body shall be made of high tensile, close-grained gray iron with a minimum tensile strength of 40,000 PSI.

FIRE PUMP MOUNTING

The fire pump shall be mounted within a separate body module that is not directly connected to the apparatus body.

The pump shall be frame mounted; therefore minimizing the likelihood of the pump casing cracking should the apparatus be involved in a collision.

The pump module shall be mounted to the frame in four (4) locations and shall be reinforced appropriately in order to carry the expected load for the life of the apparatus.

PUMP PRIMED BLACK BY PUMP MANUFACTURER

The pump shall be primed black by the pump manufacturer.

ZINC ANODES

There shall be four (4) Waterous zinc anodes provided with the fire pump. The anodes shall aid in preventing galvanic corrosion within the water pump and be easily replaceable. The anodes shall be installed as follows:

- Two (2) on the intake side of the pump
- Two (2) in the discharge manifold of the fire pump.

FLAME PLATED IMPELLER HUBS

The pump impellers shall be bronze, specifically designed for the fire service and accurately balanced for vibration free running. The stripping edges shall be located on opposite sides of the impellers to reduce shaft deflection.

Smeal Fire Apparatus Co.

The impeller shaft shall be stainless steel, accurately ground to size and supported at each end by oil or grease lubricated anti-friction ball bearings for rigid, precise support. The bearings used on the impeller shaft shall be automotive type bearings, easily cross-referenced and readily available at normal parts or bearing outlets.

The impeller hubs shall be flame plated with tungsten carbide to hardness approximately twice that of tool steel to assure maximum pump life and efficiency. During the flame plating process the base metal shall not be allowed to exceed a temperature of 300 degrees Fahrenheit to prevent altering the metallurgical properties of the impeller material.

WATEROUS IMPELLER WEAR RINGS

The pump shall be equipped with replaceable bronze wear rings for increased pump life and minimum maintenance cost. The wear rings shall be designed to fit into a groove in the face of the impeller hubs forming a labyrinth that, as the clearance increases with age, directs water from the discharge side in several directions eventually exiting outward, away from the eye of the impeller hub.

PUMP PACKINGS

The stuffing boxes shall be equipped with Waterous Grafoil® two-piece adjustable packing glands.

AIR OPERATED PUMP SHIFT

The pump shift actuating mechanism shall be air operated from a valve in the cab identified as "PUMP SHIFT". Full instructions for shifting the pump shall be inscribed on the valve plate.

There shall be two (2) green pump system shift indicator lights in the chassis cab. The first light shall become energized when the pump has completed its shift into pump gear and shall be labeled "Pump Engaged". The second light shall become energized when the chassis parking brake has been set and when the pump and the chassis transmissions have been shifted completely into the correct gears for pumping, this light shall be labeled "OK to Pump".

There shall be one (1) green pump system shift indicator light located on the operator's panel. This light shall only become engaged when the chassis parking brake has been set and when the pump and the chassis transmissions have been completely shifted into the correct gears. The light shall be located adjacent to the throttle control and shall be labeled "Warning: Do Not Open Throttle Unless Light Is On".

PRIMING PUMP

There shall be a Waterous, model VPO/VPOS priming pump included with the pump. The priming pump shall be an electrically driven rotary vane pump mounted firmly within the pump area. The pump shall be controlled from the pump operator's panel. An indicator light on the pump panel shall show when the primer motor is engaged. The pump shall be capable of creating suction and discharging water from a lift of 10 feet through 20 feet of suction hose of the appropriate size, in not more than 30 seconds starting with the pump dry. It shall be capable of developing a vacuum of 22 inches at an altitude of up to 1000 feet.

WATEROUS VACUUM ACTIVATED PRIMING (VAP) VALVE

Smeal Fire Apparatus Co.

There shall be a Waterous model VAP vacuum activated priming valve supplied with the pump. The valve shall open automatically when the priming system is activated. The valve shall be installed on the pump or mounted remotely.

WATEROUS DISCHARGE RELIEF VALVE

The discharge relief valve system shall be positive and quick acting, with an instantaneous hydraulic lockout that does not require the operator to cancel out or disturb the pressure setting. With the pump operating from draft and delivering its rated capacity at 150 PSI, if lines are shut down, the increase in discharge pressure shall not exceed 20 PSI. The relief valve control (pilot valve) shall be protected from malfunction due to sand or other sediment in the water by a strainer that may be removed, cleaned and replaced from the operator's panel while the pump is operating and without shutting down the continuous flow of water.

Relief valve indicator lights shall be mounted on the panel adjacent to the pilot valve assembly. The indicator lights shall be amber, marked open to indicate the relief valve is bypassing and green, marked closed to indicate the relief valve is fully closed.

ENGINE INFORMATION DISPLAY

There shall be one (1) Class 1 ENFO IV Engine Information Display installed on the pump operator's panel. The ENFO IV shall display engine RPM, engine oil pressure, engine coolant temperature, and voltage. The ENFO IV shall use the SAE J-1939 data bus for its information and shall not require any additional sensors to be mounted. An external alarm shall activate when oil pressure is 10 PSI or less, engine temperature is 250° F or higher, or voltage is 11.9V or less. During a low voltage or low oil pressure condition the corresponding display shall alternate between the current value and "LO". During a high temperature condition the engine temp display shall alternate between the temperature and "HI".

PUMP HOUR METER

There shall be a pump hour meter provided and installed inside the pump compartment. The hour meter shall be activated only when the water pump has been engaged.

INTAKE RELIEF VALVE

There shall be an Elkhart Brass intake relief valve installed on the suction side of the pump. The valve shall be the preset type, adjustable from 75 to 250 PSI, and shall be designed to prevent vibration from altering the setting. The relief outlet shall be directed below the pump with the discharge terminating in a 2-1/2" male NST connection. The discharge shall be away from the pump operator and labeled "Do Not Cap".

VERNIER TYPE HAND THROTTLE

A superior quality, vernier type hand throttle shall be installed on the pump control panel to regulate the fuel supply to the engine driving the fire pump. The throttle shall be equipped with a positive locking, quick-release center.

MASTER DRAIN VALVE

Smeal Fire Apparatus Co.

A Trident manifold drain valve assembly shall be supplied. This drain shall provide the capability to drain the entire pump by turning a single control. The valve assembly shall consist of a stainless steel plate and shaft in a bronze body with multiple ports. The drain valve control shall be mounted on the left side pump panel and labeled "Master Drain".

WATEROUS PUMP LUBRICATION SYSTEM

An internal lubrication system shall deliver lubricant directly to the drive chain. This unique design shall eliminate the need for an external lubrication pump and auxiliary cooling. Oil shall be supplied with the lubrication system.

PUMP AND ENGINE COOLING SYSTEM

There shall be a pump and engine cooling system provided on the apparatus. The cooling system shall keep the engine cool when running for long periods of time and the pump cool during long periods of pumping when water is not being discharged. The cooling system shall also be setup in a way that the cooling system lines can be easily drained through the master pump drain.

The cooling system lines shall consist of high-pressure, high-temperature 3/8" (inside diameter) abraded rubber hose. The engine cooling lines shall be installed with one (1) line going from the discharge side of the water pump through a Class 1, model 38BV, quarter turn ball valve and continuing on to the chassis heat exchanger. The return line from the heat exchanger shall then run into the suction side of the pump. The pump cooling lines shall be installed with one (1) line going from the discharge side of the water pump through a Class 1, model 38BV, quarter-turn ball valve up to the water tank. At the water tank, the pump cooling line shall be plumbed into a 3/8" check valve on the "Tank Fill" valve. The check valve shall prevent tank water from back flowing into the pump when the cooling system is not in use. A return line from the water tank shall be plumbed into the water pump.

The engine cooling system valve shall be controlled on the operators panel, and shall be clearly labeled, "Engine Cooler".

The pump cooling system valve shall be controlled on operators panel, and shall be clearly labeled, "Pump Cooler".

PLUMBING MANIFOLD

The plumbing manifold shall consist of a two (2) part assembly that includes the inlet side manifold and the discharge side manifold. Galvanized Victaulic couplings shall be used wherever possible for ease of maintenance and superior corrosion protection.

The inlet side of the plumbing manifold shall utilize schedule 10, 304 grade stainless steel tubing and preformed elbows for inlets that are larger than 3". Side auxiliary inlets that are 3" or smaller shall utilize schedule 40, 304 grade stainless steel threaded tubing and preformed elbows. The inlet manifold shall thread into the pump auxiliary inlet ports and each inlet valve shall thread onto the inlet manifold.

The discharge side of the plumbing manifold shall utilize schedule 40, 304 grade stainless steel tubing and preformed elbows to ensure the quality of the manifold where welds are required. The discharge manifold shall

Smeal Fire Apparatus Co.

connect to the pump discharge ports using 1/2" stainless steel flanges that shall be machined to seat an O-ring to ensure a leak proof seal. Each discharge shall derive from a port on the manifold assembly connected to a discharge valve with 1/2" 304 grade stainless steel flanges. Discharges that terminate in a location other than the pump module (i.e. rear discharges) that do not require welding shall utilize a combination of high pressure flex hose and schedule 10, 304 grade stainless steel tubing to allow flexibility between the body and the pump module.

3" TANK-TO-PUMP

There shall be a 3" tank-to-pump plumbed with a Class 1 flexible hose from the tank to the suction side of the pump.

An Akron Brass model 8830 3" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall also include a necessary B3-SH pump flange adapter, which shall be specifically used for the tank-to-pump line to properly adjust the plumbing based on the pitch of the pump. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model R1 manual actuator installed on the valve.

The manual actuator shall be controlled by a Trident push/pull T-handle. The handle shall be chrome plated with a recessed ID label.

There shall be a check valve between the pump suction and the booster tank valve. The check valve shall eliminate back flow into the water tank when the pump is connected to a pressurized source.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a black color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

2" TANK FILL

There shall be a 2" tank fill plumbed from the pump to the tank. Installation shall be completed with 2" Class 1 rubber hose and stainless steel hose couplings.

An Akron Brass model 8820 2" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model R1 manual actuator installed on the valve.

Smeal Fire Apparatus Co.

The manual actuator shall be controlled by a Trident push/pull T-handle. The handle shall be chrome plated with a recessed ID label.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a black color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

6" LEFT SIDE STEAMER INLET

There shall be a 6" steamer inlet located on the left side of the pump module. The suction fittings shall include a removable die-cast screen to provide cathodic protection for the pump thus reducing corrosion.

A short steamer barrel shall be installed to accommodate an intake valve without exceeding the legal overall body width.

The intake shall terminate MNST thread.

There shall be one (1) Trident model 01.003.9, 6" NST vented long handle steamer cap provided. The cap shall have a chrome finish.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a chrome color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

6" RIGHT SIDE STEAMER INLET

There shall be a 6" steamer inlet located on the right side of the pump module. The suction fittings shall include a removable die-cast screen to provide cathodic protection for the pump thus reducing corrosion.

A short steamer barrel shall be installed to accommodate an intake valve without exceeding the legal overall body width.

The intake shall terminate MNST thread.

There shall be one (1) Trident model 01.003.9, 6" NST vented long handle steamer cap provided. The cap shall have a chrome finish.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a chrome color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

2-1/2" LEFT SIDE INLET

There shall be a 2-1/2" gated inlet, with 2-1/2" plumbing, provided on the left side of the pump module. The inlet shall be located towards the rear of the pump module and shall be partially recessed behind the panel in order to keep the valve protected from the elements.

Smeal Fire Apparatus Co.

An Akron Brass model 8825 2-1/2" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model TSC manual actuator installed directly on the valve. The handle shall allow the valve to be controlled directly at the valve.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area. The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

The intake shall terminate FNST thread.

There shall be one (1) South Park model HPC3008AC, 2 1/2" NST plug with chain provided. The plug shall be manufactured from high quality brass that shall be polished to remove manufacturing irregularities with a chrome finish applied to the polished surface.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a black color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

2-1/2" LEFT SIDE DISCHARGE

There shall be a 2-1/2" discharge, with 2-1/2" plumbing, located on the left side of the pump module.

An Akron Brass model 8625 2-1/2" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall be manufactured and assembled in the United States. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass rack and sector actuator installed on the valve.

The rack and sector actuator shall be controlled by a Trident push/pull T-handle. The handle shall be chrome plated with a recessed ID label.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area.

Smeal Fire Apparatus Co.

The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

There shall be a Thuemling 2-1/2" water pressure gauge installed. The pressure gauge shall read pressure in PSI and shall be capable of reading 0-400 PSI. The gauge shall be fully filled with pulse and vibration dampening liquid to insure proper operations to minus 40 degrees and to reduce lens condensation. A removable polished, stainless steel trim ring shall be provided with the gauge.

The discharge shall terminate MNST thread.

There shall be one (1) Kochek model KE25R25C, 2-1/2" Female NH swivel rocker lug x 2-1/2" Male NH 30° elbow adapter provided. The adapter shall be light weight aluminum with a K-Chrome finish.

There shall be one (1) South Park model HCC2808AC, 2-1/2" NST vented rocker lug cap with chain provided. The cap shall be manufactured from high quality brass that shall be polished to remove manufacturing irregularities with a chrome finish applied to the polished surface.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a red color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

2-1/2" LEFT SIDE DISCHARGE

There shall be a 2-1/2" discharge, with 2-1/2" plumbing, located on the left side of the pump module.

An Akron Brass model 8625 2-1/2" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall be manufactured and assembled in the United States. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass rack and sector actuator installed on the valve.

The rack and sector actuator shall be controlled by a Trident push/pull T-handle. The handle shall be chrome plated with a recessed ID label.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area. The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

There shall be a Thuemling 2-1/2" water pressure gauge installed. The pressure gauge shall read pressure in PSI and shall be capable of reading 0-400 PSI. The gauge shall be fully filled with pulse and vibration dampening liquid to insure proper operations to minus 40 degrees and to reduce lens condensation. A removable polished, stainless steel trim ring shall be provided with the gauge.

Smeal Fire Apparatus Co.

The discharge shall terminate MNST thread.

There shall be one (1) Kochek model KE25R25C, 2-1/2" Female NH swivel rocker lug x 2-1/2" Male NH 30° elbow adapter provided. The adapter shall be light weight aluminum with a K-Chrome finish.

There shall be one (1) South Park model HCC2808AC, 2-1/2" NST vented rocker lug cap with chain provided. The cap shall be manufactured from high quality brass that shall be polished to remove manufacturing irregularities with a chrome finish applied to the polished surface.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a blue color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

2-1/2" RIGHT SIDE DISCHARGE

There shall be a 2-1/2" discharge, with 2-1/2" plumbing, located on the right side of the pump module.

An Akron Brass model 8825 2-1/2" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model R1 manual actuator installed on the valve.

The manual actuator shall be controlled by a Trident push/pull T-handle. The handle shall be chrome plated with a recessed ID label.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area. The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

There shall be a Thuemling 2-1/2" water pressure gauge installed. The pressure gauge shall read pressure in PSI and shall be capable of reading 0-400 PSI. The gauge shall be fully filled with pulse and vibration dampening liquid to insure proper operations to minus 40 degrees and to reduce lens condensation. A removable polished, stainless steel trim ring shall be provided with the gauge.

The discharge shall terminate MNST thread.

There shall be one (1) Kochek model KE25R25C, 2-1/2" Female NH swivel rocker lug x 2-1/2" Male NH 30° elbow adapter provided. The adapter shall be light weight aluminum with a K-Chrome finish.

Smeal Fire Apparatus Co.

There shall be one (1) South Park model HCC2808AC, 2-1/2" NST vented rocker lug cap with chain provided. The cap shall be manufactured from high quality brass that shall be polished to remove manufacturing irregularities with a chrome finish applied to the polished surface.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a orange color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

2-1/2" RIGHT REAR DISCHARGE

There shall be a 2-1/2" discharge, with 2-1/2" plumbing, located on the right rear of the apparatus.

An Akron Brass model 8825 2-1/2" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model R1 manual actuator installed on the valve.

The manual actuator shall be controlled by a Trident push/pull T-handle. The handle shall be chrome plated with a recessed ID label.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area. The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

There shall be a Thuemling 2-1/2" water pressure gauge installed. The pressure gauge shall read pressure in PSI and shall be capable of reading 0-400 PSI. The gauge shall be fully filled with pulse and vibration dampening liquid to insure proper operations to minus 40 degrees and to reduce lens condensation. A removable polished, stainless steel trim ring shall be provided with the gauge.

The discharge shall terminate MNST thread.

There shall be one (1) Kochek model KE25R25C, 2-1/2" Female NH swivel rocker lug x 2-1/2" Male NH 30° elbow adapter provided. The adapter shall be light weight aluminum with a K-Chrome finish.

There shall be one (1) South Park model HCC2808AC, 2-1/2" NST vented rocker lug cap with chain provided. The cap shall be manufactured from high quality brass that shall be polished to remove manufacturing irregularities with a chrome finish applied to the polished surface.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a burnt orange color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for

Smeal Fire Apparatus Co.

assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

4" RIGHT SIDE DISCHARGE

There shall be a 4" large diameter discharge, with 4" plumbing, located on the right side of the pump module.

An Akron Brass model 8830 3" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model R1 manual actuator installed on the valve.

The valve actuator shall be controlled by an Elkhart Brass model RC-10 handwheel valve controller. The 5" cast aluminum handwheel shall be connected to the remote mounted valve. The actuator housing and push-rod shall be constructed of light weight extruded aluminum. A precision needle thrust bearing and hardened thrust washers shall assure smooth, efficient operation and accurate flow and pressure control capability. Opening and closing speed shall comply with the current NFPA standard to minimize effects of water hammer.

A valve position indicator shall show the position of the ball valve as per NFPA 1901. The valve position indicator shall provide the pump operator with the status of the valve at a glance. Red shall mean fully closed; Green shall mean fully opened; Yellow shall indicate a gated position. LED lamps shall provide a reliable signal with a wide viewing angle even in bright sun light. Reliable solid state valve position sensors shall be water and lubricant resistant. The integrated circuit board and lamp sockets shall be completely encased in epoxy for total protection from the elements.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area. The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

There shall be a Thuemling 2-1/2" water pressure gauge installed. The pressure gauge shall read pressure in PSI and shall be capable of reading 0-400 PSI. The gauge shall be fully filled with pulse and vibration dampening liquid to insure proper operations to minus 40 degrees and to reduce lens condensation. A removable polished, stainless steel trim ring shall be provided with the gauge.

The discharge shall terminate MNST thread.

There shall be one (1) South Park model SE393040AC, 4" Female NST swivel rocker lug x 4" Male NST 30° elbow adapter provided. The adapter shall be manufactured from high quality brass and the swivel shall be attached using ball bearings. The adapter shall be polished to remove manufacturing irregularities with a chrome finish applied to the polished surface.

Smeal Fire Apparatus Co.

There shall be one (1) South Park model HCC2814AC, 4" NST vented rocker lug cap with chain provided. The cap shall be manufactured from high quality brass that shall be polished to remove manufacturing irregularities with a chrome finish applied to the polished surface.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a dark green color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

1-1/2" CROSSLAY PRE-CONNECT

There shall be a 1-1/2" crosslay pre-connect with 2" plumbing.

An Akron Brass model 8820 2" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model R1 manual actuator installed on the valve.

The manual actuator shall be controlled by a Trident push/pull T-handle. The handle shall be chrome plated with a recessed ID label.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area. The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

There shall be a Thuemling 2-1/2" water pressure gauge installed. The pressure gauge shall read pressure in PSI and shall be capable of reading 0-400 PSI. The gauge shall be fully filled with pulse and vibration dampening liquid to insure proper operations to minus 40 degrees and to reduce lens condensation. A removable polished, stainless steel trim ring shall be provided with the gauge.

The discharge shall terminate MNST thread.

The discharge shall be designated as a pre-connect and no cap and chain shall be supplied.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a yellow color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

1-1/2" CROSSLAY PRE-CONNECT

There shall be a 1-1/2" crosslay pre-connect with 2" plumbing.

Smeal Fire Apparatus Co.

An Akron Brass model 8820 2" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model R1 manual actuator installed on the valve.

The manual actuator shall be controlled by a Trident push/pull T-handle. The handle shall be chrome plated with a recessed ID label.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area. The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

There shall be a Thuemling 2-1/2" water pressure gauge installed. The pressure gauge shall read pressure in PSI and shall be capable of reading 0-400 PSI. The gauge shall be fully filled with pulse and vibration dampening liquid to insure proper operations to minus 40 degrees and to reduce lens condensation. A removable polished, stainless steel trim ring shall be provided with the gauge.

The discharge shall terminate MNST thread.

The discharge shall be designated as a pre-connect and no cap and chain shall be supplied.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a white color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

3" DELUGE RISER DISCHARGE

There shall be a 3" discharge for the deluge located above the pump module. The discharge shall be centered in the pump module.

An Akron Brass model 8830 3" Swing-Out™ valve shall be provided. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valve shall be capable of dual directional flow while incorporating a self-locking ball feature using an automatic friction lock design and specially designed flow optimizing stainless steel ball. The valve shall not require lubrication of seats or any other internal waterway parts, and must be capable of swinging out of the waterway for maintenance by the removal of six bolts. The valve shall carry a ten (10) year warranty by the valve manufacturer.

The valve shall be actuated by an Akron Brass model R1 manual actuator installed on the valve.

The valve actuator shall be controlled by an Elkhart Brass model RC-10 handwheel valve controller. The 5" cast aluminum handwheel shall be connected to the remote mounted valve. The actuator housing and push-

Smeal Fire Apparatus Co.

rod shall be constructed of light weight extruded aluminum. A precision needle thrust bearing and hardened thrust washers shall assure smooth, efficient operation and accurate flow and pressure control capability. Opening and closing speed shall comply with the current NFPA standard to minimize effects of water hammer.

A valve position indicator shall show the position of the ball valve as per NFPA 1901. The valve position indicator shall provide the pump operator with the status of the valve at a glance. Red shall mean fully closed; Green shall mean fully opened; Yellow shall indicate a gated position. LED lamps shall provide a reliable signal with a wide viewing angle even in bright sun light. Reliable solid state valve position sensors shall be water and lubricant resistant. The integrated circuit board and lamp sockets shall be completely encased in epoxy for total protection from the elements.

There shall be a Trident Emergency Products 3/4" quarter-turn drain valve included. There shall be a chrome plated rectangular handle provided on the drain valve to facilitate use with a gloved hand. The drain valve shall be located just above the running board and below the pump panel to reduce clutter in the pump panel area. The drain valve shall be connected to the valve with flexible hose that is routed in such a manner as to assure complete drainage to below the apparatus. A matching color coded bezel shall be included.

There shall be a Thuemling 2-1/2" water pressure gauge installed. The pressure gauge shall read pressure in PSI and shall be capable of reading 0-400 PSI. The gauge shall be fully filled with pulse and vibration dampening liquid to insure proper operations to minus 40 degrees and to reduce lens condensation. A removable polished, stainless steel trim ring shall be provided with the gauge.

DECK GUN RISER PIPE

The riser for the deck gun shall terminate 3" NPT.

There shall be a two (2) piece permanent plate installed that includes a verbiage tag and a magenta color coded bezel. The verbiage tag shall be etched on aluminum and have 3M-468 adhesive applied to the back for assembly into the bezel. The bezel shall be die cast aluminum construction and color coded on all visible surfaces with an automotive grade paint. 3M VHB adhesive shall be applied to the back.

WATER TANK

The apparatus shall be equipped with a Pro-Poly® 750 U.S. gallon rectangular water tank. Certification of the tank capacity shall be recorded on the manufacturer's record of construction and shall be provided to the purchaser upon delivery of the apparatus. The Pro-Poly water tank shall be constructed of Polyprene® sheet stock. This material shall be non-corrosive, stress relieved thermoplastic, black in color and U.V. stabilized for maximum protection.

BOOSTER TANK

The tank shall be of a special configuration and is so designed to be completely independent of the body and compartments. All exterior tank joints and seams shall feature Pro Lock™ design, which includes snap-in tank components for a mechanical lock as well as extrusion welding and the Bent Edge®, All joints shall be tested for maximum strength and integrity. The top of the tank is fitted with removable lifting eyes designed with a 3 to 1 safety factor to facilitate easy removal.

Smeal Fire Apparatus Co.

PRO LOCK DESIGN

The Pro Lock™ system is an exclusive and proprietary mechanical locking of all tank and body parts prior to welding. Pro Lock™ incorporates a mechanical lock and Bent Edge® technology into each exterior joint by utilizing a dado to join two parts. This system interlocks the baffle with the tank wall to give superior strength to the tank and body through the entire service life of the tank.

BENT EDGE TECHNOLOGY

This technology is a patented process, exclusive to Pro Poly, of heating and bending sheet stock to form a continuous, seamless corner void of any joints, therefore eliminating the chances of leaks in these areas.

TANK BAFFLES

The transverse and longitudinal swash partitions shall be manufactured of Polyprene® material. All partitions shall be equipped with vent and air holes to permit movement of air and water between compartments. The partitions shall be designed to provide maximum water flow. All swash partitions

TANK SUMP

There shall be one (1) sump standard per tank. The sump shall be constructed of ½" black Polyprene® and be located in the left front corner of the tank, unless specified otherwise. On all tanks that require a front suction, a schedule 40 polypropylene pipe shall be installed that will incorporate a dip tube from the front of the tank to the sump location. The sump shall have a minimum 3" FNPT threaded outlet on the bottom for a drain plug. This shall be used as a combination clean out and drain. All tanks shall have an anti-swirl plate located approximately 2-1/2" above the dip tube.

TANK FILL CONNECTION

All tank fill couplings shall be backed with flow deflectors to break up the stream of water entering the tank, and shall be capable of withstanding sustained fill rates of up to 1,000 GPM at 100 PSI.

TANK LID

The tank cover shall be constructed of recessed and mechanically locked ½" thick black Polyprene® stress relieved, U.V. stabilized material. A minimum of two (2) lifting dowels shall be drilled and tapped 1/2" x 2" to accommodate the lifting eyes.

WATER TANK MOUNTING

The water tank cradle shall be an integral part of the body sub-frame. Please reference the sub-frame section for complete water tank mounting information.

WATER TANK DRAIN

There shall be a 1-1/2" drain valve provided under the sump of the water tank. The valve shall include a locking lever to prevent accidental draining of the water tank.

WATER TANK FILL TOWER

Smeal Fire Apparatus Co.

The tank shall have a combination vent and fill tower. The fill tower shall be constructed of 1/2" thick Polyprene® and shall be a minimum dimension of 12"x 12" outer perimeter. The tower shall be located in the left front corner of the tank unless otherwise specified by the purchaser. The tower shall have a 1/4" thick removable Polyprene® screen and a Polyprene® hinged-type cover.

4" WATER TANK OVERFLOW

Inside the fill tower, there shall be a combination vent overflow pipe. The vent overflow shall be a minimum of schedule 40 pipe with a minimum I.D. of 4" that is designed to run through the tank, and shall be piped behind the rear wheels where specified by the purchaser so as to maximize traction.

WATER TANK LEVEL GAUGE

There shall be one (1) Class 1 Intelli-Tank™ water tank level gauge provided on the pump operator's control panel. The water tank level gauge shall indicate the water level on an easy to read LED display and show increments of 1/8 of a tank. The water tank level gauge shall include:

- A pressure transducer that is mounted on the outside of the tank in an easily accessible area.
- A super bright LED 4-light display with a visual indication at nine accurate levels.
- A set of weather resistant connectors to connect to the digital display, to the pressure transducer and to the apparatus power.

INDEPENDENT ALUMINUM PUMP MODULE

The pump module shall be fabricated from 1/8" 5052-H32, smooth aluminum sheet. The module shall be fabricated as an individual unit, independent from the body. The module shall be fabricated utilizing the break and bend technique in order to form a strong, yet flexible, structure. The pump module shall be fabricated using precision holding fixtures to ensure proper dimensions and all attachment points shall be heavily reinforced.

PUMP MODULE LIGHTS

There shall be two (2) Truck-Lite model 9185-40003 incandescent lights installed in the pump module. The lights shall be activated by an automatic switch in the right side pump module access door and shall be located in a manner that will provide maximum lighting.

CONTROL PANEL

The left side of the pump enclosure shall be divided into two sections. The lower section shall be where all valve controls, the primer control, the discharge relief valve controls (pilot valve), and other mechanical controls are located. This surface shall be referred to as the "control panel".

All valve controls shall be the self-locking type, activated by either direct control or with a direct linkage utilizing friction locking bell cranks and universal ball swivels. The primary valve handles shall have color coded tags installed in a recessed area to clearly denote the purpose of each control.

INSTRUMENT PANEL

Smeal Fire Apparatus Co.

The surface above the control panel shall contain all instruments, gauges, test fittings, and optional controls. This surface shall be referred to as the "instrument panel". The instrument panel shall be independent and hinged and latched so that it may be opened. All instruments, gauges, and other equipment shall be installed with sufficient slack in any cabling, tubing, or plumbing to allow the panel to swivel to the fully open position.

The instrument and gauge panel shall be vertically hinged "swing out" to provide access for service.

RIGHT SIDE PUMP PANEL

A single panel shall be installed on the right side of the pump enclosure. This shall be the area where any right side discharges, inlets, steamers, and other pump associated equipment are located. This panel shall be easily removable and held in place with quick release push latches. It shall be fully removable for pump and plumbing access without the need to use hand tools. Any electrical equipment that may be installed shall be equipped with connectors so they may be easily separated from the opening created when the below described front access panel is removed.

PANEL SURFACES

The control panel, instrument panel, and right side pump panel shall be coated with black Line-X® for maximum resistance to abrasion and to minimize glare. The material shall be capable of withstanding the effects of extreme temperatures and weather.

PUMP PANEL LIGHTS

The pump operator's control panel and the right side pump panel shall each be illuminated by On-Scene LED Night Axe lighting. The pump panel lights shall become energized upon setting the parking brake so the gauge information provided may be consulted at any time the apparatus is parked. A stainless steel shield shall be installed over the pump panel lights to further protect them from the elements and to act as a reflector for additional illumination.

MASTER PUMP GAUGES

The pump vacuum and pressure gauges shall be supplied by Thuemling. Each gauge shall be fully filled with pulse and vibration dampening Interlube to insure proper operations to minus 40 degrees and to reduce lens condensation. The gauge shall read -30-0-400 PSI and shall be a minimum of 4-1/2" in diameter.

PRESSURE AND VACUUM TEST PORT

There shall be a Class1 model 121384 pressure and vacuum test port provided on the pump panel.

DISCHARGE TRIM PLATES

Each gated discharge shall have a chrome plated die cast zinc trim plate around the discharge valve and fitting. The trim plate shall be easily removable without the need to disturb the valve.

LEFT SIDE RUNNING BOARD

A modular bolt-on running board shall be installed on the side of the pump module. The running board shall be constructed of anti-slip tread plate. The outside edge of the running board shall be flush with the rub rail that is

Smeal Fire Apparatus Co.

installed on the body to maintain a uniform appearance. The running board shall be installed with sufficient support to form a sturdy, non-deflecting step area for personnel.

RIGHT SIDE RUNNING BOARD

A modular bolt-on running board shall be installed on the side of the pump module. The running board shall be constructed of anti-slip tread plate. There shall be a soft suction hose well compartment recessed in the running board. The floor of the compartment shall be covered with Dri-Dek flooring. The outside edge of the running board shall be flush with the rub rail that is installed on the body to maintain a uniform appearance. The running board shall be installed with sufficient support to form a sturdy, non-deflecting step area for personnel.

STORAGE WELL STRAPS

There shall be two (2) Pac Trac model 1008 straps provided with the storage well. The straps shall be installed over the top of the compartment to retain the hose.

CROSSLAY CONFIGURATION

There shall be two (2) 1-1/2" crosslay pre-connects located above the pump module. Class 1 high-pressure flex hose with stainless steel couplings shall be used in the plumbing.

A Trident 90° swivel elbow shall be utilized to keep the hose from kinking when pulled from either side of the apparatus. The swivel for each crosslay shall be located outboard for ease of making connections while changing hose.

The pre-connect hose beds shall be sized to accommodate the following hose load:

The 1-1/2" crosslay pre-connect shall have a capacity of 200' of 1-3/4" double jacket fire hose.

The hose shall be single stack.

The 1-1/2" crosslay pre-connect shall have a capacity of 200' of 1-3/4" double jacket fire hose.

The hose shall be single stack.

There shall be a webbing restraint located on each end of the pre-connected crosslays. The webbing shall be a two-piece design and one (1) side of each piece shall be wrapped around the crosslay rollers. Each piece shall be attached to each other in the center of the crosslays using Velcro.

CROSSLAY COVER

There shall be an aluminum non-slip tread plate cover installed on the crosslay hose bed. The cover shall not interfere with hose loading when in the open position. When in the open position, the cover shall remain open due to automatically engaging mechanisms that require no type of latch operation to engage or release. The cover shall be provided with one full length stainless steel piano style hinge that shall attach the cover to the body. The cover shall be light yet rigid. Opening of the cover may be performed by one person on one side of the apparatus and yet the cover shall be rigid enough to support weight without deformation.

Smeal Fire Apparatus Co.

Stainless steel rollers shall be provided at each end of the crosslay hose bed to facilitate deployment of hose. Vertical rollers shall be installed on each side of the hose bed opening, and a horizontal roller shall be installed under the opening.

The floor of the crosslay shall be covered with Dura-Dek fiber reinforced material. The Dura-Dek shall have "T" beams in parallel connected with cross slats that are first mechanically bonded and then epoxied. The "T" sections shall be spaced 3/4" apart to allow for drainage and ventilation.

The interior of the crosslay hose bed shall have a maintenance free abraded finish.

There shall be one (1) divider in the crosslay area. The divider shall be fabricated of 3/16" aluminum and be mounted in a channel on each end for adjustability.

The crosslay dividers shall have maintenance free abraded finish.

FRONT PUMP ACCESS PANEL

There shall be a tread plate access panel provided on the front of the pump compartment. The panel shall be of the single pan design and shall be positively latched in the closed position utilizing a push button latch. An aluminum sill protector shall be installed on the bottom of the door opening to protect the paint from chipping and scratching. This area shall be accessible when the cab is tilted.

RIGHT SIDE PUMP ACCESS PANEL

There shall be a tread plate door above the right hand side pump panel to allow access to the pump compartment. The vertically hinged panel shall be of the single pan design and shall be positively latched in the closed position utilizing a push button latch. A gas strut shall be provided on the door. An aluminum sill protector shall be installed on the bottom of the door opening to protect the paint from chipping and scratching. The door shall be wired into the door open warning light circuit.

ALUMINUM BODY CONSTRUCTION

The apparatus body shall be fabricated from 1/8" 5052-H32, smooth aluminum sheet. The total outside width of the apparatus body shall not exceed 100 inches (2.54 meters). The width measurement of the sidewalls shall be made from the outside wall of the two opposite sides of the body.

The complete apparatus body shall be fabricated utilizing the break and bend techniques in order to form a strong, yet flexible, uni-body structure. The body shall be constructed with holding fixtures to ensure proper dimensioning. Each apparatus body is specific in design in order to meet the unique requirements of the purchasing fire department.

The main body compartments on each side, as well as the rear center compartment if applicable, shall contain a sweep out floor design. Each compartment shall be made to the most practical dimensions in order to provide maximum storage capacity for the fire department's equipment. The door opening threshold shall be positioned lower than the compartment floor permitting easy cleaning of the compartments.

Continuous, solid welded seams shall be located at the upper front and upper rear corners of the apparatus body. The flooring of all lower, main body compartmentation shall also have solid weld seams. All door jams,

Smeal Fire Apparatus Co.

on both the top and the bottom, shall be solid welded as well. Each main door jam shall consist of a double jam design; this is comparable to a double struck frame design, which provides superior strength and durability. All double door jams are to be welded together utilizing the plug weld technique. All remaining compartment walls shall be stitch welded.

The compartment floors, specifically L1 and R1, shall have a minimum of two (2) 2" x 1/4" angles welded to the entire width of the compartment floor. The two (2) rear side compartments as well as the rear center compartment, if applicable, shall be welded to the rear deck support structure. This rear deck support structure is specially designed for the galvanized apparatus body substructure. A minimum of two (2) angles, which are 1/4" x 3" x 3", shall run the entire width of the body from sidewall to sidewall. Each lower, rear compartment shall be adequately stitch welded to the cross angles providing strength and durability to the entire apparatus body.

The body design shall include a "false wall" design in the lower portion of each lower, rear compartment. This "false wall" is required in order to allow for easy accessibility to the rear electrical components found in the rear tail light cluster area.

On the upper area of the apparatus body, directly above the side compartment door openings, a header is to be fabricated from smooth, aluminum sheet. This area shall be free from any body seams and shall be painted the same color as the apparatus body. The height of the header may vary depending on the following factors: apparatus design, lettering requirements, scene lights and warning light requirements as well as various other options. A "J" channel shall be incorporated into the body design in order to provide a rain gutter to further assist in preventing excessive moisture from getting into the compartments.

ULTRA STAINLESS™ STEEL FASTENERS

Ultra Stainless™ steel fasteners shall be provided for all exposed and unpainted fasteners throughout the body in locations such as overlays, pump panels, and other numerous hardware mounting locations. The special ingredient in Ultra Stainless™ is Marutex®, which adds 2% molybdenum (moly) to 410 stainless. Moly is the significant component of 316 stainless that provides extra corrosion resistance. The moly is now added to 410 self drilling screws to produce Ultra Stainless™. This combination provides for unprecedented corrosion resistance combined with hardness for drilling.

ADDITIONAL HARDWARE

There shall be a bag of stainless steel nuts, bolts, and washers supplied with the apparatus for mounting of equipment.

GS-36 BODY SUB FRAME

To assure proper body alignment and clearance, the body sub frame shall be constructed in a jig and fitted directly on the chassis. The sub frame shall be constructed of 36,000 PSI galvanized steel.

The chassis frame rails shall be fitted with fiber reinforced rubber to isolate the body frame members from direct contact with chassis frame rails.

Smeal Fire Apparatus Co.

The main body sub frame shall be constructed from steel tubing. The sub frame shall run the full length of the body and shall be spaced the same width as the chassis frame rails. The main sub frame shall also be the integral support for the water tank. Vertical drop tubes shall be welded to the sub frame. From these vertical drop tubes shall extend cross members constructed of steel angle. These cross members shall extend out to support the compartments. Cross members shall be located at the front and rear of the body and in front and rear of the wheel well opening.

A drop frame, fabricated of steel tube and steel angles, shall support the compartment area behind the rear. The rear drop frame shall be constructed using vertical drop tubes, welded to the main sub frame. All drop frame structures shall be welded directly to the body sub frame to allow the body to be a completely separate structure from the chassis.

After fabrication the sub frame shall be hot dip galvanized for maximum protection against corrosion.

BODY MOUNTING

The body sub frame shall be fastened to the chassis frame with a minimum of six (6) spring loaded body mounts. Each mount shall be configured using a two-piece bracket. The two (2) brackets shall be fabricated of steel plates. The plates shall be galvanized to prevent any corrosion. Each mounting assembly shall utilize two (2) plated bolts and two (2) heavy duty springs. The assembly design shall allow the body and sub frame to act as one (1) component, separate from the chassis. As the chassis frame twists under driving conditions, the spring mounting system shall limit any stress from being transferred into the body. The spring loaded body mounts shall also prevent frame side rail or body damage caused by unevenly distributed stress and strains due to load and chassis movement.

Body mountings that do not allow relief from chassis movement shall not be acceptable.

TANK MOUNTING

The water tank shall rest on the sub frame cross members which are spaced as required by the tank manufacturer.

The tank shall be isolated from the cross members through the use of hard rubber strips with a minimum Rockwell hardness of 60 durometer. Additionally, the tank shall be supported around the entire perimeter and captured front and rear as well as side to side to prevent the tank from shifting during vehicle operations.

Although the tank shall be designed on a free floating suspension principle, it shall be required that the tank have adequate hold down restrains to minimize movement during vehicle operations.

The tank shall be completely removable without disturbing or dismantling the apparatus structure.

EXHAUST HEAT DEFLECTOR SHIELD

There shall be a 5" heat deflector shield installed over the exhaust to aid in dissipating the heat to prevent exhaust heat from adversely affecting anything stored in the body.

LEFT SIDE BODY CONFIGURATION

Smeal Fire Apparatus Co.

COMPARTMENT L1

There shall be a full height compartment located ahead of the rear wheels on the left side of the apparatus body. This compartment shall be designated as L1 within these specifications and any ensuing paperwork or drawings after contract execution.

- Door Opening 43.00" wide x 556.50" high
- Usable Depth 25.75"
- Intermediate divide height 56.50"

There shall be one (1) ROM rollup door installed on the compartment face. The door shall be a shutter type with 34 millimeter slats that roll onto a spool at the top of the compartment. Each slat shall be equipped with nylon end shoes to assure operation without the need of constant lubrication. The rollup door shall have a satin finish.

The ROM rollup door shall be supplied with a full width lift bar and finger pull handle integrated into the bottom rail for easy one hand operation.

The compartment shall have two (2), 66" ROM V4 LED compartment lights installed. Each light shall feature solid state construction and be waterproof to IPX7 rating. Each V4 LED light shall offer 250 lumens per foot of lighting.

There shall be four (4) aluminum strut channels, two (2) per side, welded in the full depth, full height compartment.

There shall be two (2), aluminum adjustable shelves installed on the apparatus in the full depth compartment. The shelves shall be constructed of 3/16" aluminum sheet with 2" lips. The shelves shall have an abraded finish, and shall be designed in such a manner that will allow liquids to readily drain when spilled.

There shall be one (1) roll out equipment tray installed on the floor of the compartment. The tray shall be equipped with an Austin Hardware drawer slide. The roller assembly shall have a rated capacity of 300 lbs. distributed load and shall have 100% extension capability. The tray shall be constructed of 3/16" aluminum sheet with 3" lips to prevent items from being shifted during transportation. The tray shall have an abraded finish and be equipped with a gas spring in order to hold the tray in either a fully extended or closed position.

COMPARTMENT L2

There shall be a standard height compartment located above the rear wheels on the left side of the apparatus body. This compartment shall be designated as L2 within these specifications and any ensuing paperwork or drawings after contract execution.

- Door Opening 57.00" wide x 27.00" high
- Usable Depth 25.75"

There shall be one (1) ROM rollup door installed on the compartment face. The door shall be a shutter type with 34 millimeter slats that roll onto a spool at the top of the compartment. Each slat shall be equipped with nylon end shoes to assure operation without the need of constant lubrication. The rollup door shall have a satin finish.

Smeal Fire Apparatus Co.

The ROM rollup door shall be supplied with a full width lift bar and finger pull handle integrated into the bottom rail for easy one hand operation.

The compartment shall have two (2), 18" ROM V4 LED compartment lights installed. Each light shall feature solid state construction and be waterproof to IPX7 rating. Each V4 LED light shall offer 250 lumens per foot of lighting.

COMPARTMENT L3

There shall be a full height compartment located behind the rear wheels on the left side of the apparatus body. This compartment shall be designated as L3 within these specifications and any ensuing paperwork or drawings after contract execution.

- Door Opening 39.00" wide x 56.50" high
- Usable Depth 25.75"

There shall be one (1) ROM rollup door installed on the compartment face. The door shall be a shutter type with 34 millimeter slats that roll onto a spool at the top of the compartment. Each slat shall be equipped with nylon end shoes to assure operation without the need of constant lubrication. The rollup door shall have a satin finish.

The ROM rollup door shall be supplied with a full width lift bar and finger pull handle integrated into the bottom rail for easy one hand operation.

The compartment shall have one (1), 48" ROM V4 LED compartment light installed. The light shall feature solid state construction and be waterproof to IPX7 rating. The V4 LED light shall offer 250 lumens per foot of lighting.

There shall be four (4) aluminum strut channels, two (2) per side, welded in the full depth, full height compartment.

There shall be two (2), aluminum adjustable shelves installed on the apparatus in the full depth compartment. The shelves shall be constructed of 3/16" aluminum sheet with 2" lips. The shelves shall have an abraded finish, and shall be designed in such a manner that will allow liquids to readily drain when spilled.

There shall be one (1) roll out equipment tray installed on the floor of the compartment. The tray shall be equipped with an Austin Hardware drawer slide. The roller assembly shall have a rated capacity of 300 lbs. distributed load and shall have 100% extension capability. The tray shall be constructed of 3/16" aluminum sheet with 3" lips to prevent items from being shifted during transportation. The tray shall have an abraded finish and be equipped with a gas spring in order to hold the tray in either a fully extended or closed position.

RIGHT SIDE BODY CONFIGURATION

COMPARTMENT R1

There shall be a full height compartment located ahead of the rear wheels on the right side of the apparatus body. This compartment shall be designated as R1 within these specifications and any ensuing paperwork or drawings after contract execution.

Smeal Fire Apparatus Co.

- Door Opening 43.00" wide x 56.50" high
- Usable Depth 25.75" lower and 15.25" upper
- Intermediate divide height 26.50"

There shall be one (1) ROM rollup door installed on the compartment face. The door shall be a shutter type with 34 millimeter slats that roll onto a spool at the top of the compartment. Each slat shall be equipped with nylon end shoes to assure operation without the need of constant lubrication. The rollup door shall have a satin finish.

The ROM rollup door shall be supplied with a full width lift bar and finger pull handle integrated into the bottom rail for easy one hand operation.

The compartment shall have two (2), 48" ROM V4 LED compartment lights installed. Each light shall feature solid state construction and be waterproof to IPX7 rating. Each V4 LED light shall offer 250 lumens per foot of lighting.

COMPARTMENT R2

There shall be a standard height compartment located above the rear wheels on the right side of the apparatus body. This compartment shall be designated as R2 within these specifications and any ensuing paperwork or drawings after contract execution.

- Door Opening 57.00" wide x 27.00" high
- Usable Depth 15.25"

There shall be one (1) ROM rollup door installed on the compartment face. The door shall be a shutter type with 34 millimeter slats that roll onto a spool at the top of the compartment. Each slat shall be equipped with nylon end shoes to assure operation without the need of constant lubrication. The rollup door shall have a satin finish.

The ROM rollup door shall be supplied with a full width lift bar and finger pull handle integrated into the bottom rail for easy one hand operation.

The compartment shall have two (2), 18" ROM V4 LED compartment lights installed. Each light shall feature solid state construction and be waterproof to IPX7 rating. Each V4 LED light shall offer 250 lumens per foot of lighting.

COMPARTMENT R3

There shall be a full height compartment located behind the rear wheels on the right side of the apparatus body. This compartment shall be designated as R3 within these specifications and any ensuing paperwork or drawings after contract execution.

- Door Opening 39.00" wide x 56.50" high
- Usable Depth 25.75" lower and 15.25" upper
- Intermediate divide height 26.50"

Smeal Fire Apparatus Co.

There shall be one (1) ROM rollup door installed on the compartment face. The door shall be a shutter type with 34 millimeter slats that roll onto a spool at the top of the compartment. Each slat shall be equipped with nylon end shoes to assure operation without the need of constant lubrication. The rollup door shall have a satin finish.

The ROM rollup door shall be supplied with a full width lift bar and finger pull handle integrated into the bottom rail for easy one hand operation.

The compartment shall have one (1), 48" ROM V4 LED compartment light installed. The light shall feature solid state construction and be waterproof to IPX7 rating. The V4 LED light shall offer 250 lumens per foot of lighting.

REAR BODY CONFIGURATION

COMPARTMENT T1

There shall be a full height compartment located at the rear of the apparatus body. This compartment shall be designated as T1 within these specifications and any ensuing paperwork or drawings after contract execution.

- Door Opening 41.00" wide x 37.00" high
- Usable Depth 33.00"

There shall be one (1) ROM rollup door installed on the compartment face. The door shall be a shutter type with 34 millimeter slats that roll onto a spool at the top of the compartment. Each slat shall be equipped with nylon end shoes to assure operation without the need of constant lubrication. The rollup door shall have a satin finish.

The ROM rollup door shall be supplied with a full width lift bar and finger pull handle integrated into the bottom rail for easy one hand operation.

The compartment shall have one (1), 30" ROM V4 LED compartment light installed. The light shall feature solid state construction and be waterproof to IPX7 rating. The V4 LED light shall offer 250 lumens per foot of lighting.

COMPARTMENT AIR RELEASE

Each compartment shall be vented to help remove trapped air when closing a compartment door. The vent shall be a rubber gasket in the area of the outboard corners of the compartment. Wiring may also be run through these areas.

COMPARTMENT DRAIN HOLES

Each body compartment shall be equipped with drain holes to allow standing water to exit to underneath the apparatus.

WALKWAYS AND OVERLAYS

All exterior surfaces designated by the manufacturer as stepping, standing, or walking areas shall be overlaid with 3003 H22 Bright Tread Plate to provide a slip resistant surface, even when the surface is wet. All interior

Smeal Fire Apparatus Co.

surfaces designated by the manufacturer as stepping, standing, or walking areas shall be slip resistant when the surface is dry. The degree of slip resistance shall be in compliance with the intent of NFPA 1901.

Horizontal walkways shall have .080" aluminum tread plate overlays installed and vertical surfaces shall have .125" aluminum overlays. Overlays shall be installed that are totally insulated from the apparatus with nylon shoulder washers that extend into holes in the body. Stainless steel cap nuts shall be employed where bolt ends may damage equipment or cause injury. After the apparatus is painted and the overlays are reinstalled, they shall be additionally sealed at the edges with a caulking compound. The exterior top tread plate overlay shall be mounted flush with the outer edges of the apparatus body.

STEPPING SURFACES

All steps shall have a surface area of at least 35 square inches and shall be able to withstand a load of at least 500 pounds. Steps shall be provided at any area that personnel may need to climb and shall be adequately lighted.

REAR DECK

A modular bolt-on deck shall be installed on the rear of the apparatus to form a full width step area. The rear deck shall be constructed of anti-slip bright tread plate. The outside edge of the rear deck shall be flush with the rub rail that is installed on the body to maintain a uniform appearance. The depth of the rear deck shall be 13.25". The rear deck shall be installed with sufficient support to form a sturdy, non-deflecting step area for personnel.

REAR STEPS

There shall be eight (8) Cast Products bolt-on steps installed on the rear of the apparatus. Each step shall have large open slots to prevent buildup of ice or mud and to provide a handhold when necessary. Steps shall be provided in the following locations:

- Four (4) bolt-on steps on the left rear of the apparatus.
- Four (4) bolt-on steps on the right rear of the apparatus.

The steps shall be adequately lit with LED lighting. There shall be one (1) light located above each set of steps on the rear face of the body, for a total of two (2) lights. Each light shall be located in a manner that shall light all of the steps on its respective side.

REAR WHEEL WELLS

The fenders shall be integral with the body sides and compartments with a seamless appearance. The fenders shall be fitted with bolt-in removable full circular inner liners in the wheel well area for ease of cleaning and maintenance. There shall be sufficient clearance provided in the wheel well to allow the use of tire chains when the apparatus fully loaded.

STAINLESS STEEL REAR FENDERETTES

Two (2) stainless steel fenderettes shall be installed at the outboard edge of the rear wheel well area, one on each side. The fenderettes shall be bolted to the apparatus body using nylon washers to space them slightly

Smeal Fire Apparatus Co.

away from the body to reduce build-up of road grime. The fenderettes shall be constructed of stainless steel that has been polished to a high quality finish.

LEFT SIDE REAR WHEEL WELL POSITION - WL1

There shall be a single air bottle compartment installed in the rear wheel well area. The compartment door, hinges and frame shall all be constructed out of stainless steel material. The door shall have a rubber gasket in order to create a 100% seal to protect the interior of the compartment. The storage compartment shall be a rotational, molded component that is assembled to the door and frame. This assembly process shall prevent the air bottle from making contact with the stainless steel frame while loading and unloading the air bottle. The door shall have a brushed stainless steel finish.

LEFT SIDE REAR WHEEL WELL POSITION - WL3

There shall be a single air bottle compartment installed in the rear wheel well area. The compartment door, hinges and frame shall all be constructed out of stainless steel material. The door shall have a rubber gasket in order to create a 100% seal to protect the interior of the compartment. The storage compartment shall be a rotational, molded component that is assembled to the door and frame. This assembly process shall prevent the air bottle from making contact with the stainless steel frame while loading and unloading the air bottle. The door shall have a brushed stainless steel finish.

FUEL FILL

The fuel fill pocket shall be located in the left rear wheel well area. The fuel fill shall utilize a stainless steel Fire Shopp door with a brushed finish. The hinge and frame shall all be constructed out of stainless steel material.

RIGHT SIDE REAR WHEEL WELL POSITION - WR1

There shall be a single air bottle compartment installed in the rear wheel well area. The compartment door, hinges and frame shall all be constructed out of stainless steel material. The door shall have a rubber gasket in order to create a 100% seal to protect the interior of the compartment. The storage compartment shall be a rotational, molded component that is assembled to the door and frame. This assembly process shall prevent the air bottle from making contact with the stainless steel frame while loading and unloading the air bottle. The door shall have a brushed stainless steel finish.

RIGHT SIDE REAR WHEEL WELL POSITION - WR3

There shall be a single air bottle compartment installed in the rear wheel well area. The compartment door, hinges and frame shall all be constructed out of stainless steel material. The door shall have a rubber gasket in order to create a 100% seal to protect the interior of the compartment. The storage compartment shall be a rotational, molded component that is assembled to the door and frame. This assembly process shall prevent the air bottle from making contact with the stainless steel frame while loading and unloading the air bottle. The door shall have a brushed stainless steel finish.

BODY RUB RAILS

Smeal Fire Apparatus Co.

Rub rails shall be installed beneath the compartment doors to protect them from damage should the body be brushed or rubbed against another object. The rub rails shall be 3/16" aluminum channel, 2-1/2" x 1". The rub rails shall be highly polished and then bright dip anodized.

The rub rails shall be installed on the body utilizing non-corrosive nylon spacers and secured with stainless steel bolts. The outside edge of the rub rails shall be even with the fenderettes and bolt-on steps to prevent snagging.

REAR TOW HOOK

One (1) rear tow hook shall be installed directly below the rear of the chassis frame rails. The tow hook shall be capable of a 15,000 lb. straight pull rating.

HOSE BED

The hose bed shall be located above the water tank and have a minimum capacity of 30 cubic feet in accordance with the latest NFPA regulations. The inside of the hose bed shall be smooth aluminum. The hose bed shall exit at the rear of the apparatus through a single access opening. The opening shall be free of obstructions that might interfere with the deployment and loading of hose.

The floor of the hose bed compartment shall be constructed of Dura-Dek fiber reinforced plastic material. The flooring shall be fabricated of "T" beam pultrusions in parallel connected with cross slats that are first mechanically bonded and then epoxied, forming a large sheet. The top portion of each "T" cross section shall measure 1-1/4" wide and 3/16" thick with beaded ends. The vertical portion shall be 3/8" thick, beading out at the bottom to a thickness of 1/2" and tall enough to result in an overall height of 1". The "T" sections shall be spaced 3/4" apart to allow for drainage and ventilation.

Each "T" beam shall be constructed utilizing a core of 250,000 continuous glass fiber strands that are high in resistance to tension, compression and bending. An outer sheath consisting of a continuous strand mat to prevent lineal splitting and slipping shall surround the core. The sheath shall also serve to draw the protective resin to the bar surface. Both reinforcements shall be pulled through an isophthalic polyester resin, treated with antimony trioxide for fire resistance, to form a solid length.

The flooring shall then be protected with a polyurethane coating to screen out ultraviolet rays. This bright white coating shall be baked on and shall provide a pleasing contrast when installed in the apparatus.

The hose bed shall contain the following hose load:

800' of 4" double jacket hose

The interior of the hose bed shall be painted the primary body color.

HOSE BED COVER

There shall be a heavy-duty 22 oz. hypalon vinyl-coated nylon hose bed cover installed on the apparatus. The front edge of the cover shall be retained in a "C" channel to prevent wind from lifting it. The sides of the cover shall be attached to the sides of the hose bed using button snap fasteners. The rear of the cover shall be connected using footman loop and J-Hooks with an adjustable buckle.

Smeal Fire Apparatus Co.

The color of the vinyl restraint shall be red.

HOSE BED DIVIDER

There shall be one (1) hose bed divider installed in the hose bed. The divider shall be fabricated from 1/4" smooth aluminum plate and an aluminum extrusion. The divider shall have an abraded finish and mounted on hot-dipped galvanized slide rails at the front and rear of the hose bed. Where no obstruction such as a fill tower is present, the slide rails shall allow full movement of the divider along the width of the hose bed. The hose bed divider shall have an oval shaped hand hold slot to assist in moving the divider. This shall provide the capability for variable hose load configurations and capacities.

GROUND LADDER STORAGE

The ground ladders shall be stored beneath the hose bed, to the right of the water tank. The ladders shall be stored vertically on their beam in an aluminum rack with poly scuff strips. The ladders shall be accessible through a hinged tread plate door on the rear of the body.

The following ground ladders shall be supplied with the apparatus:

One (1), Alco-Lite model FL-10 folding aluminum ladder with bracket shall be provided. The ladder shall be equipped with heavy cast aluminum swivel safety shoes and carrying handles. The closed dimensions of the ladder shall be 11' 5" long x 5.25" wide. The bracket shall be a high tensile aluminum alloy spring loaded bracket that will hold the ladder in place when the vehicle is in motion. The ladder shall include a heat sensor label to warn if the ladder has been exposed to excessive heat.

One (1), Alco-Lite model PRL-14, 14' aluminum roof ladder shall be provided. The ladder shall be equipped with high strength steel rotating roof hooks with reinforcing brace and steel butt spurs and rounded aluminum top caps for increased durability. The ladder shall include a heat sensor label to warn if the ladder has been exposed to excessive heat.

One (1), Alco-Lite model PEL-24, 24' two section aluminum ladder shall be provided. The ladder shall be equipped with steel butt spurs and rounded aluminum top caps for increased durability, and an oversized 2 1/4" pulley for ease of operation. The ladder shall include a heat sensor label to warn if the ladder has been exposed to excessive heat.

PIKE POLE STORAGE

There shall be two (2) aluminum tubes for the storage of pike poles installed in the ground ladder storage compartment.

The following pike poles shall be supplied with the apparatus:

Two (2), Akron Brass model UL-10, 10' fiberglass pike poles shall be provided. Each light weight heavy duty pole shall be constructed of one and one quarter inch round fiberglass with a rubber bumper butt style handle.

WHEEL CHOCKS

Smeal Fire Apparatus Co.

There shall be one (1) pair of Cast Products model TMC1008-4 wheel chocks provided with the apparatus. The wheel chocks shall be mounted in Cast Products model TMC 1010 mounting brackets.

The wheel chocks shall be stored in locations that are easily accessible under the front of the body on the left side of the apparatus.

HANDRAILS

All handrails, unless otherwise stated, shall be constructed of knurled aluminum of not less than 1-1/4" in diameter. All railing shields and brackets shall be chrome plated, and shall be bolted to the body with stainless steel bolts. The lower bracket on all vertical handrails shall have a drain hole drilled in it at the lowest point.

The following handrails shall be provided on the apparatus:

There shall be a vertical handrail installed at the left rear of the apparatus.

There shall be a vertical handrail installed on the right rear of the apparatus.

There shall be a horizontal handrail installed above the rear compartment below the hose bed.

LICENSE PLATE BRACKET

There shall be a license plate bracket mounted on the rear of the apparatus. A clear LED light shall be incorporated into the bracket.

FUEL TANK GAUGE ACCESS PANEL

There shall be a removable panel provided in the rear compartment to allow for access to the fuel tank gauge without removing the fuel tank.

QL-12 ELECTRICAL SYSTEM

Wiring harnesses shall be the automotive type, engineered specifically for the builder's apparatus, and shall meet the following criteria. Under no circumstances shall diodes, resistors, or fusible links be located within the wiring harness. All such components shall be located in an easy to access wiring junction box or the main circuit breaker area. All wiring shall meet white book, baseline advanced design transit coach specification and Society of Automotive Engineers recommended practices. It shall be stranded copper wire core with cross linked polyethylene insulation complying with SAE specification J1128. Each wire shall be hot stamp function coded every three inches starting one inch from the end and continuing throughout the entire harness. In addition to function coding, each wire shall be number, color, and gauge coded.

Wire harnesses shall be wrapped with a high abrasion and chemical resistant thermoplastic polyester elastomer coated polyester yarn for braiding constructions of electrical wiring systems. The braid yarn shall have a minimum tensile strength of 15 lbs. before breaking and have a maximum of 20% elongation before breaking. Temperature properties for the yarn shall range from a minimum 280°F (138°C) service temperature to a maximum -112°F (-80°C) brittleness temperature with a cold flex tolerance of at least -49°F (-45°C).

Harnesses shall be modular in design; a main harness system subdivided into several smaller sub-harnesses. The harness subsections shall be connected using Deutsch branded, heavy duty, environmentally sealed,

Smeal Fire Apparatus Co.

connectors with silicone seals and a rear insertion/removal contact system. For isolation of electrical "zones" the harness subsections shall consist of a main harness, a pump harness with a separate pump gauge panel harness, a left body harness with a separate left compartment harness, a right body harness with a separate right compartment harness, and a rear body harness with two separate rear compartment harnesses.

The main harness and three body harnesses shall interconnect at a central, easy to reach location and their connectors shall not be obstructed by other harnesses or fuel/air lines. In addition, the main and body harness connectors shall be color coded for ease of identification with their respective colors noted on the accompanying electrical diagrams.

Where connectors are not provided by the electrical component manufacturer, all 12 volt lights and other electrical components (excluding rocker and toggle switches) shall connect to the harnesses using Deutsch brand connectors; butt connectors are considered unacceptable.

All Deutsch connectors shall meet the following criteria:

- All connectors shall have a minimum IP67 rating.
- Temperature range from -67°F (-55°C) to 257°F (125°C) continuous at rated current.
- Only solid contacts will be used. Stamped and formed contacts are unacceptable.
- All contacts shall be soldered unless a crimping tool or machine is used that gives an even and precise pressure for the terminal being used.
- All contacts shall be pull-tested to insure their integrity.

V-MUX ELECTRICAL MANAGEMENT SYSTEM

The apparatus shall be equipped with a V-MUX Multiplex System. There are several key benefits to multiplexing, one is to reduce the number of connections in a vehicles electrical system, because of this it is important to limit the amount of modules that control certain functions of the vehicle.

Outputs:

The outputs shall perform all the following items without added modules to perform any of the tasks:

1. Load Shedding: The System shall have the capability to Load Shed with 8 levels any output. This means you can specify which outputs (barring NFPA restrictions) you would like Load Shed. Level 1 12.9v, Level 2 12.5V, Level 3 - 12.1V, Level 4 - 11.7V, Level 5 11.3V, Level 6 10.9V, Level 7 10.5, Level 8 10.1. Unlike conventional load shedding devices you can assign a level to any or all outputs. No add-on modules shall be acceptable; the module with the outputs must perform this function.
2. Load Sequencing: The System shall be able to sequence from 0 8 levels any output. With 0 being no delay and 1 being a 1 second delay, 2 being a 2 second delay and so on. Sequencing reduces the amount of voltage spikes and drops on your vehicle, and can help limit damage to your charging system. No add-on modules shall be acceptable; the module with the outputs must perform this function.
3. Output Device: The System shall have solid-state output devices. Each solid-state output shall be a MOS-FET (Metal Oxide Semiconductor - Field Effect Transistors); MOS-FETs are solid-state devices

Smeal Fire Apparatus Co.

with no moving parts to wear out. A typical relay when loaded to spec has a life of 100,000 cycles. The life of a FET is more than 100 times that of a relay. No add-on modules shall be acceptable; the module with the outputs must perform this function.

4. Flashing Outputs: The System shall be able to flash any output in either A or B phase, and logic is used to shut down needed outputs in park, or any one of several combined interlocks. The flash rate can be selected at either 80, or 160 FPM. This means any light can be specified with a multiplex truck with no need to add flashers. Flashing outputs can also be used to warn of problems. No add-on modules shall be acceptable; the module with the outputs must perform this function.
5. PWM: The modules shall have the ability to PWM at some outputs so that a Headlight PWM module is not needed. No add-on modules shall be acceptable; the module with the outputs must perform this function.
6. Diagnostics: An output shall be able to detect either a short or open circuit.

Inputs:

1. The inputs shall have the ability to switch by a ground or battery signal.
2. The inputs shall be filtered for noise suppression via hardware and software so that RF or dirty power will not trick an input into changing its status.

System Network:

The Multiplex system shall contain a Peer-to-Peer network. A Master Slave Type network is not suitable for the Fire/Rescue industry. A Peer-to-Peer network means that all the modules are equal on the network; a Master is not needed to tell other nodes when to talk.

System Reliability:

The Multiplex system shall be able to perform in extreme temperature conditions, from -40° to +85° C (-40° to +185° F.) The system shall be sealed against the environment, moisture, humidity, salt or fluids such as diesel fuel, motor oil or brake fluid. The enclosures shall be rugged to withstand being mounted in various locations or compartments around the vehicle. The modules shall be protected from over voltage and reverse polarity.

WEATHERPROOF DOOR SWITCHES

Due the harsh environment and susceptibility to moisture on the fire ground, the fire apparatus compartment doors shall utilize weatherproof switches. Two different types of switches shall be used. Weatherproof proximity switches shall be utilized. **No Exceptions.**

The switches shall be used for activation of the compartment lights and to provide a signal to the door open circuit in the cab.

TAIL LIGHTS

There shall be a Whelen 600 series LED tail light assembly installed on each side of the rear of the apparatus. Each assembly shall include one (1) red LED stop/tail light model number 60BTT, one (1) amber LED model 60A00TAR turn light with arrow and one (1) clear halogen backup light model 60F000CR. The lights shall be

Smeal Fire Apparatus Co.

mounted in a chrome plated four (4) light composite housing. The remaining slot in the housing shall be filled with a warning light specified in the warning light section.

MIDSHIP TURN SIGNALS

There shall be two (2) Truck-Lite model 21 LED midship auxiliary/turn signal lights installed. One (1) light shall be located in the rub rail on each side of the body.

BODY GROUND LIGHTING

Four (4) Truck-Lite model 40, 4" round lights shall be installed beneath the apparatus in areas where personnel may be expected to climb on and off of the apparatus. The lights shall illuminate the ground within 30" of the apparatus to provide visibility of any obstructions or hazards. These areas shall include, but shall not be limited to, side running boards and the rear step area.

There shall be four (4) aluminum ground light brackets provided to position each ground light so as to illuminate the ground within 30" of the apparatus.

CLEARANCE LIGHTS

Grote model 65282 red LED clearance lights shall be installed in the rear tailboard as necessary to be in full compliance with applicable ICC and DOT codes and regulations. Clearance reflectors shall be placed on the apparatus to be in full compliance with applicable ICC and DOT codes and regulations.

HOSE BED LOADING LIGHT

There shall be one (1) Unity, model AG-R hose bed loading light provided on the rear of the apparatus. The light shall be a 6" round light in a chrome housing. The hose bed lighting circuit shall be deactivated when the park brake is disengaged. The light shall include a switch at the lighthouse.

REAR WORK LIGHT SWITCH

A switch shall be installed above the tail light bezel on the left side of the rear of the apparatus. The switch shall be wired to the backup lights to provide additional work lighting. The rear work light circuit shall be deactivated when the park brake is disengaged. In addition to the lights being activated by the above switch, the lights shall also come on when the transmission is placed in reverse.

GENERATOR

There shall be a Cummins Onan, model 8RBAB, 8000 watt hydraulic driven generator set installed on the apparatus. The generator shall be rated at 8,000 watts, 66.6/33.3 amps at 120/240 volts. Current frequency shall be stable at 60 hertz. The generator shall include a variable displacement piston pump, gear motor drive, and digital control for minimal voltage and frequency variation.

Hydraulic details

Cooling:

- High efficiency forward-inclined blade, plug fan

Smeal Fire Apparatus Co.

- Pressurized box with distribution volutes for optimum air velocity across heat exchanger
- Welded blades, 4 brace rods and epoxy powder coated for best fan durability
- Heat exchanger sized relative to kW

Hydraulic power:

- Operating flow and pressure range 14 gal/min, 350-3000 psi
- Pump control is pressure compensated load sense system
- Solenoid PWM controls flow and closes fully when generator set is switched off
- Required pump speed 850-3200 r/min maximum
- Generator set requires 26 hp from drive engine at full load
- Generator set drive motor - fixed displacement gear

Alternator details

- **Design:** Cummins Onan AC, 2-pole self-excited revolving field, permanently aligned to hydraulic motor by a splined shaft

Cooling: Direct drive blower wheel

Rotor: Laminated electrical steel assembly press-fitted to shaft, balanced; heavy insulated, Class 200 copper wire windings, optimized air gap for improved wave form and motor starting

Stator: Laminated electrical steel assembly, skewed for improved waveform; heavy insulated, Class 200 copper wire windings

DC brushes: Electrographic; long life

Bearing: Double-sealed pre-lubricated ball bearing

Exciter: Power Scan® regulator and bridge rectifier supply field current through slip rings Fluid Dexron III or 10 wt. antiwear hydraulic oil ~5 Gal

The power-generating unit shall be a modular unit contained in a silver powder coat steel housing with single side serviceability and shall include a four-point vibration isolated mounting system.

The generator set shall be factory tested for proper starting and operations at extreme temperatures from -20 degrees F to +120 degrees F. The generator shall be manufactured and designed in facilities certified to ISO 9001.

The Cummins Onan generator set shall carry a 5 year, 1000 hour limited warranty from Onan.

There shall be a remote start switch installed in the chassis cab for the generator.

Smeal Fire Apparatus Co.

GENERATOR PTO CONNECTION

The hydraulic pump for the generator shall be connected to the chassis transmission through a "Hot Shift", electrically engaged power-takeoff system. The control to engage and disengage the power-takeoff system shall be installed in the chassis cab.

GENERATOR DISPLAY

There shall be a LED generator display meter provided with the generator. The display meter shall automatically sense a generator signal and begin displaying information. The digital meter display shall constantly monitor and display voltage, frequency and amps. The display shall be capable of displaying total accumulated run time hours when the MODE button is pressed once. Press the MODE button twice to display the temperature of the oil returning to the oil reservoir.

The Onan generator shall be located above the pump module.

8 CIRCUIT NON-GFI LOAD CENTER

There shall be a 120/240 volt load center incorporated into the 120/240 volt wiring system. The load center shall include adequate circuit breakers to protect the loads specified on the apparatus. The entire 120/240 volt electrical system shall be installed in strict compliance with NFPA 1901. This shall include all testing, labeling, wiring methodology, and dimensional requirements. Certification of compliance shall accompany the apparatus at the time of delivery. All 120/240 volt A.C. Wiring shall be done in accordance with NFPA 1901 as well as nationally accepted electrical codes.

BRANCH CIRCUIT OVERCURRENT PROTECTION

Over current protection devices shall be provided for circuits in accordance with NFPA 1901. The load center shall be equipped with a non-GFI two pole main breaker when the six or more individual branch circuits are present. Over current protection devices shall be marked with labels to identify the function of the circuit they protect.

The load center shall be located on the back wall of the L1 compartment.

There shall be one (1) splash guard/drip pan installed inside the compartment. The aluminum drip pan shall catch drops of water that accumulate on the shutter and drip into the shutter compartment when the door is being rolled up. The plastic splash guard shall act to keep water from being splashed throughout the interior of the compartment while the door is being rolled up. The pan shall also serve to protect the shutter from damage due to impact from behind or below.

UPPER ZONE A

There shall be one (1) Whelen Engineering Freedom, model FN55VLED, 55" LED lightbar installed on the chassis cab roof. The lightbar shall be equipped with two (2) forward facing linear red LED, two (2) forward facing linear white LED, two (2) corner forward facing red LED, and two (2) corner rear facing red LED lights.

The lightbar shall be equipped with clear lenses. All clear LED lights in the lightbar shall be deactivated in the Blocking Right of Way mode.

Smeal Fire Apparatus Co.

UPPER ZONE C

There shall be two (2) Whelen, model RB6 rotating beacon installed high at the rear of the apparatus. One (1) shall have an amber lens; model RB6PAP and one (1) shall have a red lens, model RB6PRP.

LOWER ZONE A

The warning lights shall be supplied and installed by the chassis manufacturer.

LOWER ZONE B

There shall be two (2) Whelen, model 60R02FRR Super-LED® lights with flanges installed. Each light shall have red LEDs and a red lens.

LOWER ZONE C

There shall be two (2) Whelen, model 60R02FRR Super-LED® lights with flanges installed. Each light shall have red LEDs and a red lens.

LOWER ZONE D

There shall be two (2) Whelen, model 60R02FRR Super-LED® lights with flanges installed. Each light shall have red LEDs and a red lens.

FIRE RESEARCH 120V TELESCOPING LIGHT

There shall be one (1) Fire Research, model FCA530-S50, Focus side mount push up telescopic light installed on the apparatus. The light pole shall be anodized aluminum and have a knurled twist lock mechanism to secure the extension pole in position. The extension pole rotate 360 degrees. The outer pole shall be a grooved aluminum extrusion and qualify as an NFPA compliant handrail. The pole mounting brackets shall have a 3 ½" offset. Wiring shall extend from the pole bottom with a 4' retractile cord.

The lamp head shall have one (1) quartz halogen 750 watt 120 volt bulb. The bulb draw 6.3 amps and generate 19,600 lumens. The bulb shall be accessible through the front. The lamp head shall direct 50 percent of the light onto the action area while providing 50 percent to illuminate the working area. The lamp head angle of elevation shall be adjustable at a pivot in the mounting arm and the position locked with a round knurled locking knob. The lamp head shall incorporate heat-dissipating fins and be no more than 5" deep by 3 3/8" high by 10" wide. Lamp head and mounting arm shall be powder coated white. The floodlight shall be UL listed as a scene light for fire service use.

The 120 volt light shall be controlled by a switch located in the chassis cab. The switch shall have an indicator that shall illuminate when the switch is in the "ON" position.

The light shall be located on the front face of the body on the left side.

FIRE RESEARCH 120V TELESCOPING LIGHT

There shall be one (1) Fire Research, model FCA530-S50, Focus side mount push up telescopic light installed on the apparatus. The light pole shall be anodized aluminum and have a knurled twist lock mechanism to

Smeal Fire Apparatus Co.

secure the extension pole in position. The extension pole rotate 360 degrees. The outer pole shall be a grooved aluminum extrusion and qualify as an NFPA compliant handrail. The pole mounting brackets shall have a 3 ½" offset. Wiring shall extend from the pole bottom with a 4' retractile cord.

The lamp head shall have one (1) quartz halogen 750 watt 120 volt bulb. The bulb draw 6.3 amps and generate 19,600 lumens. The bulb shall be accessible through the front. The lamp head shall direct 50 percent of the light onto the action area while providing 50 percent to illuminate the working area. The lamp head angle of elevation shall be adjustable at a pivot in the mounting arm and the position locked with a round knurled locking knob. The lamp head shall incorporate heat-dissipating fins and be no more than 5" deep by 3 3/8" high by 10" wide. Lamp head and mounting arm shall be powder coated white. The floodlight shall be UL listed as a scene light for fire service use.

The 120 volt light shall be controlled by a switch located in the chassis cab. The switch shall have an indicator that shall illuminate when the switch is in the "ON" position.

The light shall be located on the front face of the body on the right side.

BODY PAINT PREPARATION

After the body and components have been fabricated and assembled they then shall be disassembled prior to painting so when the apparatus is completed there shall be finish paint beneath the removable components. The apparatus body and components shall be metal finished as follows to provide a superior substrate for painting.

All aluminum sections of the body shall undergo a thorough cleaning process starting with a phosphoric acid solution to begin the etching process followed by a complete rinse. The next step shall consist of a chemical conversion coating applied to seal the metal substrate and become part of the aluminum surface for greater film adhesion.

After the cleaning process, the body and its components shall be primed with a High Solids primer and the seams be caulked.

All bright metal fittings, if unavailable in stainless steel or polished aluminum, shall be heavily chrome plated. Iron fittings shall be copper under plated prior to chrome plating.

PAINT PROCESS

The paint process shall follow the strict standards as set forth by PPG Fleet Finish Guidelines.

The body shall go through a three-stage paint process: primer coat, base coat (color), and clear coat. In the first stage of the paint process the body shall be coated with PPG F3980 Low VOC / High Solids primer to achieve a total thickness of 2-4 mills. In the second stage of the paint process the body shall be painted with PPG FBCH Delfleet™ High Solids Polyurethane Base Coat. A minimum of two to three coats of paint shall be applied to achieve hiding. In the final stage of the paint process the body shall be painted with PPG DCU-2002 Clear Coat. A minimum of two to three coats shall be applied to achieve a total dry film thickness of 2-3 mills.

Smeal Fire Apparatus Co.

As part of the curing process the painted body shall go through a Force Dry / Bake Cycle process. The painted components shall be baked at 185 degrees for 3 hours to achieve a complete coating cure on the finished product.

HAND POLISHED

After the Force Dry / Bake Cycle and ample cool down time, the coated surface shall be sanded using 3M 1000, 1200, and or 1500 grit sandpaper to remove surface defects. In the final step, the surface shall be buffed with 3M super-duty compound to add extra shine to coated surface. No more than .5 mil of clear shall be removed in this process.

BODY COLOR

The body shall be painted with PPG High Solids Polyurethane Base Coat. The single tone body shall be painted (RED) PPG# FBCH-71096-ALT.

UNDERCOATING

The apparatus shall undergo a two (2) step undercoating process. The first step shall be a rubberized polyurethane base compound that is applied after the body has been primed. The materials used incorporate unused paint products to reduce the amount of waste released into the environment. This coat shall be applied to all hidden pockets and surfaces that shall not be visible after completion.

As a final step, the entire underside of the body shall be coated with a bituminous based automotive type undercoating when the apparatus is completed. During this application, special care shall be taken to avoid spraying the product on air lines, cables, or other items that would cause normal maintenance to be hindered.

COMPARTMENT COATING

The interior of the body compartments shall be painted off white with Amerlock®/400, a self-priming epoxy. Amerlock's low solvent level meets VOC requirements, reduces the chances for film pin holing and solvent entrapment at the substrate-coating interface. The superior wetting action permits excellent adhesion, thoroughly soaking in and tightly bonding to the underlying metal. Amerlock®/400 provides an excellent resistance to high humidity and moisture.

LINE-X® THERMOPLASTIC COATING

In designated areas, Line-X® XS-350, a two component spray-in-place thermoplastic polyurethane system shall be used for maximum protection of the body and equipment. Line-X® XS-350 is a 100% high performance aromatic solids pure Polyurea elastomeric membrane. The coating shall be a fast cure, textured surface, multi-purpose material designed for commercial and industrial applications. It shall exhibit excellent adhesion to the body and serve as a protective, abrasion resistant liner where applied.

The coating shall exhibit the following minimum typical physical properties:

- Tensile strength - 3,432 PSI (ASTM D-412)
- Elongation - 162% (ASTM D-412)

Smeal Fire Apparatus Co.

- Tear Strength - 783 PLI (ASTM D-624)
- Shore D Hardness - 60 +/-1 (ASTM D-2240)

TOUCH UP PAINT

One (1) two ounce bottle of acrylic enamel touch-up paint or two (2) touch up paint pens, if color is available, shall be supplied.

CORROSION PREVENTION

One (1) 3.75 ounce tube of Electrolysis Corrosion Kontrol (ECK) shall be provided to use whenever additional items are mounted to the apparatus.

ECK protects aluminum and stainless steel against electrolytic reaction, isolates dissimilar metals and gives bedding protection for hardware and fasteners. ECK contains anti-seizing lubricant for threads. ECK is dielectric and perfect for use with electrical connectors.

NFPA COMPLIANT REFLECTIVE STRIPING

Reflective striping shall be applied to the exterior of the apparatus in a manner consistent with NFPA 1901. It shall consist of a straight, 4" wide stripe along the front of the chassis and along the sides, staying below the tops of the wheel well areas.

REFLECTIVE STRIPE TERMINATION

The NFPA reflective stripe located on the side of the apparatus shall terminate at the side of the front bumper.

There shall also be reflective striping provided on the front face of the bumper.

The color of the main reflective striping on the apparatus shall be white.

RUB RAIL REFLECTIVE STRIPING

There shall be 2" reflective striping installed in the rub rail channel. The reflective striping shall be diamond grade quality material for increased visibility. The reflective shall be silver in color.

CAB DOOR REFLECTIVE STRIPING

The reflective striping on the inside of the chassis door shall be provided by the chassis manufacturer.

CHEVRON REFLECTIVE STRIPING ON REAR

In addition to the custom striping pattern supplied on the apparatus, there shall be additional reflective striping applied to the entire rear of the unit. The reflective striping shall cover at least 50% of the rear facing vertical surface per NFPA 1901. The striping shall consist of alternating reflective stripes. Each stripe shall be a minimum of 6" in width and shall be applied to the apparatus at 45° angle.

The chevron pattern shall include the any other painted storage compartment doors. The T1 Compartment shall be excluded from the chevron pattern.

Smeal Fire Apparatus Co.

CHEVRON REFLECTIVE STRIPING, RED/FLUORESCENT YELLOW-GREEN

The chevron striping shall consist of 3M part numbers 1172 EC, red and 3983, fluorescent yellow-green.

Only 3M Diamond Grade™ VIP Reflective Striping shall be used. 3M Diamond Grade™ VIP Reflective Striping is a wide angle prismatic lens reflective sheeting designed for the production of durable traffic control signs and delineators that are exposed vertically in service. This sheeting is designed to provide higher sign brightness than sheetings that use glass bead lenses. It is intended to also provide high sign brightness in the legibility distance where other sheetings do not.