SPRAYON PRODUCT GUIDE

PRESERVE. PROTECT. PREVENT.®





CLEANERS & DEGREASERS

| General Purpose | 8-9 |
|--------------------|-------|
| Glass Cleaners | 10-11 |
| Heavy Duty | 12-15 |
| Specialty Cleaners | 16-17 |

ELECTRICAL & ELECTRONIC CLEANERS

| Electrical Degreasers | 20-22 |
|---------------------------------------|-------|
| Electronic Precision Contact Cleaners | 22-25 |
| Insulating Varnish | 26-27 |
| Other | 28-29 |

LUBRICANTS

| 32-33 |
|-------|
| 34-35 |
| 36-4 |
| 42-44 |
| 45-46 |
| 47-49 |
| |

MOLD RELEASE

| Wet Film Release Agents | 52-53 |
|-------------------------|-------|
| Dry Film Release Agents | |
| Mold Maintenance | |



SPECIALTY

| Brake CleanersPaint & Vandal Mark RemoversStencil Inks & Layout DyesInsecticides | 60-61 62 63 |
|--|-------------------|
| | 04-00 |
| WELDING | |
| Anti-Spatters | 68-69 |
| Silver Galvanizing | 70 |
| Zinc Rich Galvanizing | 71 |
| Stainless Steel Coatings | 72 |
| Other | 73 |
| OTHER | |
| Aerosolv | 74 |
| 5S Tools | |





CLEANERS & DEGREASERS

General Purpose Glass Cleaners Heavy Duty Specialty Cleaners





ELECTRICAL & ELECTRONIC

Electrical Degreasers
Electronic Precision Contact Cleaners
Insulating Varnish





LUBRICANTS

Anti-Seize
Dry Lubricants
Wet Film Lubricants
Greases
Long-Term Metal Protectants
Silicone Lubricants











MOLD RELEASE

Dry Film Release Agents Mold Maintenance Wet Film Release Agents



SPECIALTY

Brake Cleaners
Insecticides
Paint & Vandal Mark Removers
Stencil Inks & Layout Dyes



WELDING

Anti-Spatters Silver Galvanizing Stainless Steel Coatings Zinc Rich Galvanizing



CD

CLEANERS & DEGREASERS

| General Purpose | 8–9 |
|--------------------|-------|
| Glass Cleaners | 10-1 |
| Heavy Duty | 12-15 |
| Snecialty Cleaners | 16-17 |

SPRAYON PRODUCT GUIDE PRESERVE. PROTECT. PREVENT.®

GENERAL PURPOSE CLEANERS PERFORMANCE

| DESCRIPTION | TYPE | APPEARANCE | SCENT | DILUTE | BULK | RESIDUE | FLAMMABLE |
|------------------------------------|---------------|--------------|---------|--------|------|---------|-----------|
| CD880 General Purpose Cleaner | Butyl/Ammonia | Foamy White | Ammonia | 8 | • | None | 8 |
| CD1087 Neutral All-Purpose Cleaner | Synthetic | Clear Yellow | Lemon | • | • | None | 8 |





| рН | FLASH POINT | PLASTIC SAFE | EVAPORATION SPEED | VOC AS PACKAGED & BY WT. | NSF REGISTRATION |
|------------|-------------|--------------|-------------------|--------------------------|------------------|
| 11.0–11.05 | N/A | * | 0.09 | 8% | C1 |
| 7.0-8.0 | N/A | * | 0.09 | 0.2% | N/A |

*Always test on a small hidden area before use.



CD 880









GENERAL PURPOSE CLEANER

An excellent cleaner for hard surfaces not ordinarily damaged by water. Cuts through dirt, grease, soil, surface smears and finger marks with ease.

APPLICATION & PERFORMANCE

Countertops, finished wood, copy machines, windows, vinyl, metal fixtures, chrome, leather, truck and car interiors, laminates

- Works on all surfaces
- VOC compliant
- Streak-proof formula

| SKU | SIZE |
|-----------|--|
| SC0880000 | 19 oz/538 g Aerosol ◆ |
| SC0880LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S88005000 | 5 gl/18.9 L Bulk * |



CD 1087











NEUTRAL ALL-PURPOSE CLEANER

Specially formulated no-rinse neutral cleaner with a citrus fragrance. Contains non-ionic surfactants, water-soluble degreasing agents, water softeners and buffering agents. Effectively removes soil from coated floors without affecting the finish.

APPLICATION & PERFORMANCE

Damp mop, automatic scrubber, spray bottle, wall washer, sponge, general light to moderate duty cleaning

- Requires no rinsing
- Works effectively in both hard and soft water
- Contains no harsh alkalis, phosphates, solvents or abrasives

| SKU | SIZE |
|------------|--------------------|
| SC1087010 | 1 gl/3.78 L Bulk ◆ |
| S010870005 | 5 gl/18.9 L Bulk * |

GLASS CLEANERS PERFORMANCE

| DESCRIPTION | ТҮРЕ | APPEARANCE | SCENT | DILUTE | BULK |
|-------------------------------------|---------------|-------------|---------|--------|------|
| CD888 Glass Cleaner | Butyl/Alcohol | Foamy White | Alcohol | 8 | 8 |
| CD1100 Ammoniated Glass Cleaner | Ammonia | Clear Blue | Ammonia | 8 | • |
| CD1106 Non-Ammoniated Glass Cleaner | Alcohol | Clear Blue | Fresh | 8 | • |





GLASS CLEANER

Foaming, streak-proof formula removes smoke, grease and grime. Fingerprints, smudges, dust, road film and surface smears can be wiped away easily. Fast-acting and can be used on any hard surface not normally harmed by water.

APPLICATION & PERFORMANCE

Windows, mirrors, showcases, countertops, painted walls, windshields, chrome, tile, vinyl upholstery

- Non-ammoniated
- Removes heavy smoke build-up
- VOC compliant
- Foaming action eliminates runs on vertical surfaces

| SKU | SIZE |
|-----------|-----------------------|
| SC0888000 | 18 oz/510 g Aerosol ❖ |

















AMMONIATED GLASS CLEANER

Efficient cleaner for glass and other hard surfaces. Leaves surfaces sparkling clean without leaving a film.

APPLICATION & PERFORMANCE

Glass, plastic, mirrors, windows, ceramic and porcelain surfaces, chrome, stainless steel

- For all glass, windows, and other hard surfaces
- pH 10.5
- Ammoniated

| SKU | SIZE | | | |
|------------|--|--|--|--|
| S1100T1232 | 32 fl oz/946 mL Liqui-Sol™ Non-Aerosol Trigger Spray | | | |
| S011000401 | 1 gl/3.78 L Bulk | | | |



| pH | FLASH POINT | VOC AS PACKAGED & BY WT. | NSF REGISTRATION |
|---------|-------------|--------------------------|------------------|
| 7.0 | N/A | 12% | C1 |
| 11–11.2 | 135°F | 4% | N/A |
| 7.5–8.0 | 132°F | 4.1% | N/A |



CD1106













NON-AMMONIATED GLASS CLEANER

Ready-to-use neutral cleaner with a fresh scent. Leaves surfaces sparkling clean and streak free.

APPLICATION & PERFORMANCE

Glass, plastic, mirrors, windows, computer screens, stoves, appliances, laminate, countertops, chrome, windshields, marble, ceramic tile

- Ready-to-use formulation
- Neutral pH
- Ideal for use on glass, chrome, appliance, laminates, etc.

| SKU | SIZE |
|------------|--|
| S1106T1232 | 32 fl oz/946 mL Liqui-Sol™ Non-Aerosol Trigger Spray |
| S011060401 | 1 gl/3.78 L Bulk |

VERTICAL OR
HORIZONTAL
SURFACE, OPEN
OR CLOSED
ENVIRONMENT,
SPRAYON HAS
THE GLASS
CLEANER YOU
NEED TO TURN
THE HEAVIEST
SOILS TO A
STREAK-FREE
SHINE.



HEAVY DUTY DEGREASERS PERFORMANCE

| DESCRIPTION | ТҮРЕ | APPEARANCE | SCENT | DILUTE | BULK |
|--|----------------------|----------------------------------|--------------------------|--------|------|
| CD757 Heavy Duty Citrus Degreaser | d-Limonene | Clear | Orange | 8 | • |
| CD1201 Neutra-Force™ Heavy Duty Degreaser | Proprietary Blend | A: Foamy White B: Clear Green | A: Low Odor B: Floral | • | • |
| CD1202 Industrial Cleaner & Degreaser | Butyl/ Synthetic | Clear Blue | Fresh | • | • |
| CD1216 Multi-Purpose Cleaner | Butoxy Cellosolve | Colorless | Sweet | 8 | 8 |
| CD1219 Water-Based Citrus Degreaser | d-Limonene | Clear Orange | Orange | • | • |
| CD1228 High Performance Citrus Cleaner & Degreaser | d-Limonene | Clear Orange | Orange | • | • |
| CD1275 Ready to Use Heavy Duty Degreaser | Butyl/ Synthetic | Clear Green | Lemon | 8 | • |











HEAVY DUTY CITRUS DEGREASER

Non-chlorinated formula has the cleaning power of solvents to remove grime, dirt, grease and oil. An outstanding, biodegradable cleaner for many applications, including prior to painting. Leaves a refreshing, citrus scent.

APPLICATION & PERFORMANCE

Tools, equipment, concrete floors, walls, formica, fiber glass, wood, ceramic tile, aluminum, glass, some plastics

- Biodegradable, non-toxic
- No chlorinated solvents
- Citrus scent
- Dielectric strength 40.4 KV

| SKU | SIZE |
|-----------|--|
| SC0757000 | 16 oz/454 g Aerosol ◆ |
| SC0757LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S75705000 | 5 gl/18.9 L Bulk * |
| S75755000 | 55 gl/208 L Bulk * |



| FLAMMABLE | рН | FLASH POINT | PLASTIC SAFE | EVAPORATION SPEED | VOC AS PACKAGED & BY WT. | NSF REGISTRATION |
|-----------|----------------------|-------------------|----------------|----------------------|-----------------------------|---------------------|
| • | N/A | 99°F | Some Plastics* | 1.5 | 97.5%** | C1 |
| 8 | A: 117 B: 7.0–8.0 | A: <0°F B: N/A | * | 0.8 | A: 3.1% B: 14.6% | A: A1 B: N/A |
| 8 | 12.5–13.0 | N/A | * | 0.09 | 15% | N/A |
| 8 | 12.0–13.0 | N/A | * | 0.09 | 3.8% | C1 |
| 8 | 9.5 - 10.5 | N/A | * | 0.09 | 4% | N/A |
| • | 8.0–8.5 | 115°F | * | 0.192 | 77% | N/A |
| 8 | 13.0–13.5 | N/A | * | 0.09 | 3.8% | C1 |

*Always test on a small hidden area before use. **Not regulated "For Use in Manufacturing Only".



MULTI-PURPOSE

Multisurface cleaner that is readyto-use and is ideal for interior and exterior all-purpose cleaning projects. Removes dirt, grease, grime, soap scum, heel marks and fingerprints from most washable surfaces. NOTE: Not recommended for glass, non-urethane finishes or aluminum.



Appliances, counter tops, cabinets, tubs, basins, ceramic tile, woodwork, doors, cars, boats

- Rust inhibitor
- · Leaves a clean, sweet scent
- Non-flammable













READY TO USE HEAVY DUTY DEGREASER

Can be used in any no-rinse and wipe operation. Efficiently removes solvent marker stains, pen ink, soap scum, smoke and carbon films, food stains and residue, black heel marks and other difficult to remove greasy soils.

APPLICATION & PERFORMANCE

Most washable surfaces including floors, walls, stainless steel. fiberglass, chrome, porcelain, plastic, laminate, vinyl enamel

- Lemon scented
- Removes many difficult and persistent stains, dirt, and grime

| SKU | SIZE |
|------------|--|
| S1275T1232 | 32 fl oz/948 mL Liqui-Sol™ Non-Aerosol Trigger Spray |
| S012750401 | 1 gl/3.78 L Bulk |
| S012750005 | 5 gl/18.9 L Bulk * |
| S012750055 | 55 gl/208 L Bulk * |

INDUSTRIAL CLEANING STRENGTH FOR YOUR INDUSTRIAL ENVIRONMENT.



CD1201















NEUTRA-FORCE™ HEAVY DUTY FOAMING DEGREASER

Delivers fast and effective cleaning on a variety of industrial soils. Contains no caustics, alkali, phosphates or silicates. Powerful foaming action clings to surface and effectively breaks down contaminants for effortless removal.

APPLICATION & PERFORMANCE

Heavily soiled machinery, heavy equipment, motors and tools, removes hand prints, scuff marks, grease spots, soot stains, smoke film

- Fast and effective removal of heavy soils
- No rinsing necessary
- Safe for use on metals, finishes, plastic, rubber and other surfaces

| SKU | SIZE | | |
|------------|--|--|--|
| SC1201000 | 19 oz/539 g Aerosol ◆ | | |
| SC1201TL0 | 32 fl oz/976 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ | | |
| SC1201010 | 1 gl/3.78 L Bulk ❖ | | |
| S012010005 | 5 gl/18.9 L Bulk * | | |
| S012010055 | 55 gl/208 L Bulk * | | |

















INDUSTRIAL CLEANER & DEGREASER

Non-ionic cleaner and degreaser with corrosion inhibitors, grease cutting materials, and water softening agents for outstanding soil removal and exceptional hard water stability. Wetting and penetrating properties of this buffered cleaner enhance the removal of difficult soils.

APPLICATION & PERFORMANCE

Resilient tile, terrazzo, marble, ceramic tile, slate, cement, leather, plastic, upholstery, painted walls, woodwork, dumpsters

- · Removes heavy grease and soils
- Effective for use in pressure washers and steamers

| SKU | SIZE |
|------------|------------------|
| S012020401 | 1 gl/3.78 L Bulk |
| S012020005 | 5 gl/18.9 L Bulk |
| S012020055 | 55 gl/208 L Bulk |



CD1219



WATER-BASED **CITRUS DEGREASER**

Dilutable with water. Suitable for removing grease, soap films, ink, adhesives, oil, tar and tar stains. Safe to use on hard surfaces such as metal, vinyl, formica, fiberglass, finished wood, porcelain, and painted surfaces.

APPLICATION & PERFORMANCE

Machinery, sinks, toilets, dumpsters, lockers, garbage disposals, tubs, showers, exhaust fans, tools, chrome fixtures, painted wall, carpets, upholstery

- Water-based d'Limonene cleaner and degreaser
- Powerful cleaning with a orange fragrance
- · Contains no caustics, acids or harsh chemicals

| SKU | SIZE |
|-----------|---|
| SC1219TL0 | 32 fl oz/946 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ * |
| SC1219010 | 1 gl/3.78 L Bulk ◆ |



CD 1228











HIGH PERFORMANCE CITRUS CLEANER & DEGREASER

Non-acid, non-caustic, 100% active cleaner, degreaser and deodorizer; chemically derived from orange oil, providing a citrus scent. Multi-purpose formulation removes soils which are normally cleaned by high pH cleaners or dangerous solvents.

APPLICATION & PERFORMANCE

Drains, machinery, equipment, engines, carpet, hard surface, restroom, ceramic tile, dumpsters, septic tanks, sewage plants

- Natural d'Limonene degreaser
- Non-acid, non-caustic, cleaner, degreaser and deodorizer
- · Unclogs drains, degreases machines, removes adhesives and gum

| SKU | SIZE |
|------------|--------------------|
| S012280401 | 1 gl/3.78 L Bulk |
| S012280055 | 55 gl/208 L Bulk * |

SPECIALTY CLEANERS PERFORMANCE

| DESCRIPTION | ТҮРЕ | APPEARANCE | SCENT |
|-------------------------------------|-------------------|-------------------|---------|
| CD885 Stainless Steel Cleaner | Water Emulsion | Translucent White | Lemon |
| CD887 Coil & Fin Cleaner | Butyl | Foamy White | Ammonia |
| CD889 Cleaning Wax & Soil Repellant | Carnauba | Translucent White | Ammonia |

FROM LIGHT DUTY
CLEAN UP JOBS TO
ALL-PURPOSE FLOOR
CLEANERS, FROM POWER
WASHERS TO HEAVY
GREASE BUILD-UP,
THERE IS A SPRAYON
CLEANER THAT WILL
MAKE YOUR JOB EASIER.





STAINLESS STEEL CLEANER

Cleans, polishes, brightens and protects stainless steel and other metal surfaces, such as chrome and aluminum. Water spots, spills, food soils, and oil-based stains are easily removed. Polishes to a non-greasy film. Invisible coating resists further soiling, fingerprints, watermarks and rusting.

APPLICATION & PERFORMANCE

Restaurant and food processing equipment, hospital, dental and medical equipment, elevators, counters and displays, laundry equipment, drinking fountains, autos, trucks, trailers

- · Cleans, shines, and protects
- Good for aluminum, porcelain and ceramic tile
- Water based emulsion formula
- Resists fingerprints, water marks, corrosion and rusting

| SKU | SIZE |
|-----------|--|
| SC0885000 | 17 oz/482 g Aerosol ❖ |
| SC0885LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S88505000 | 5 gl/18.9 L Bulk * |



| DILUTE | VOC AS PACKAGED & BY WT. | NSF REGISTRATION | BULK |
|----------|--------------------------|------------------|------|
| ⊗ | 8.30% | C1 | • |
| 8 | 9.23% | N/A | 8 |
| 8 | 38.1% | A1 | 8 |





COIL & FIN CLEANER

Heavy duty, water-based foaming coil cleaner designed to remove stubborn grease, grime and chloride buildup that accumulates on refrigeration and A/C coils. Foaming and penetrating action ensures proper coverage and cleaning of finned areas. Routine cleaning of coil surfaces will aid in maximizing operating efficiency.

APPLICATION & PERFORMANCE

Refrigeration coils, coolers, A/C condenser coils, freezer engines, HVAC units, motors, other machinery

- Foaming and penetrating cleaning action
- Removes chloride build-up
- Non-flammable and non-corrosive
- Safe on all types of metal

| SKU | SIZE |
|-----------|-----------------------|
| SC0887000 | 18 oz/510 g Aerosol 🍁 |



CD 889













CLEANING WAX & SOIL REPELLANT


Lifts debris from any non-porous surface by utilizing an array of cleaning lubricants. After use, the surface is left with a highly polished coat of Carnauba wax that repels oxidation and other contaminants. Saves time while minimizing the use of water and other resources.

APPLICATION & PERFORMANCE

Can be used for/on automobiles, trucks, RV's, boats, airplanes, all metal surfaces, fiberglass, painted surfaces, stainless steel

- One step clean and polish with a special blend of Carnauba wax and cleaning lubricants
- Repels and prevents build up of industrial soils
- Minimizes water use
- Safe on painted and metal and surfaces

| SKU | SIZE |
|-----------|--------------------------|
| S00889000 | 15.25 oz/432 g Aerosol * |

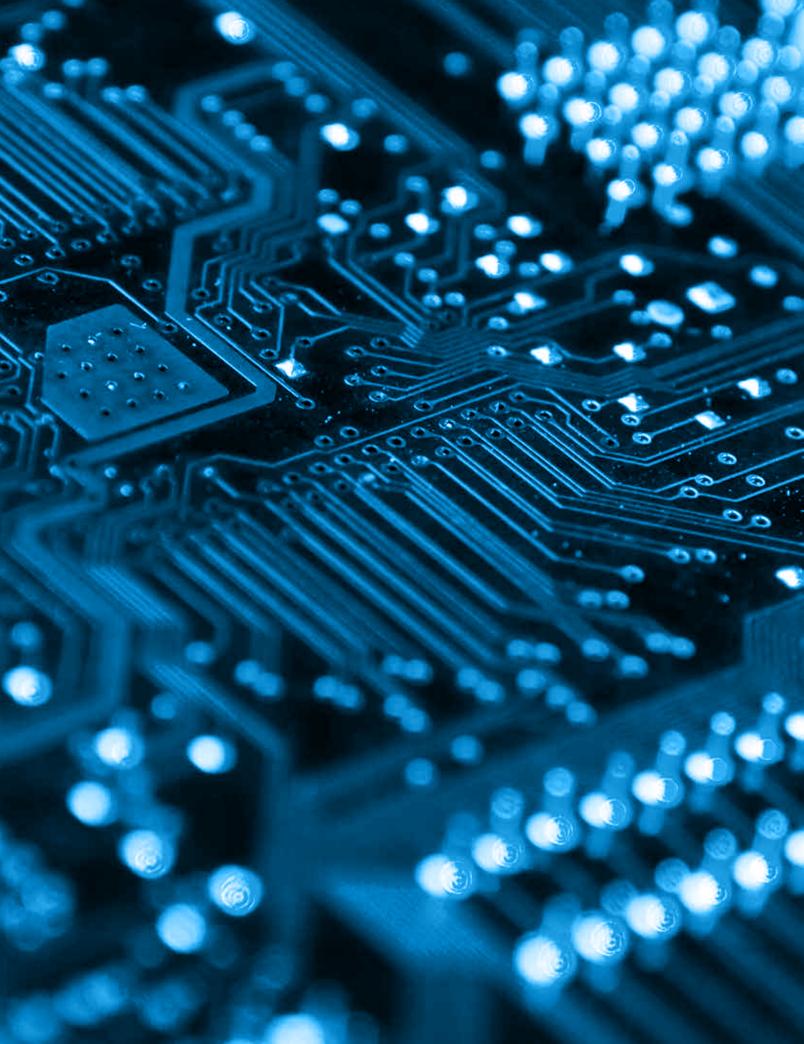



ELECTRICAL & ELECTRONIC CLEANERS

| Electrical Degreasers | 20- | -22 |
|---------------------------------------|-----|-----|
| Electronic Precision Contact Cleaners | 22- | -25 |
| Insulating Varnish | 26- | -27 |
| Other | 28- | -29 |

SPRAYON PRODUCT GUIDE PRESERVE, PROTECT, PREVENT.®

ELECTRICAL DEGREASERS PERFORMANCE

| DESCRIPTION | CHLORINATED | DIELECTRIC STRENGTH* | BULK |
|---|-------------|----------------------|------|
| EL703 Electric Motor Degreaser | • | 39,500 | 8 |
| EL749 Electrical Degreaser | 8 | 16,800 | • |
| EL848 Flash Free® Electrical Degreaser | • | 37,000 | • |
| EL2846 Non-Chlorinated Electrical Degreaser | 8 | 15,000 | • |
| EL2208 Electro Wizard™ Non-Brominated Degreaser | N/A | 6,800 | 8 |

*Dielectric Strength is the maximum electric field that a material can withstand without breaking down, at which time it would strike an arc. Measured in kilovolts (KV). It important to consider when spraying on live circuits.



ELECTRIC MOTOR DEGREASER

Instantly penetrates and removes dirt, oil, grease, wax and moisture from electrical equipment and machinery. Formulated to clean and degrease electrical equipment that is energized or when there is a residual electrical potential from a component such as a capacitor. Evaporates completely, leaving no residual film. Equipped with an extension tube for hard-to-reach areas.



APPLICATION & PERFORMANCE

Switches, relays, communicators, transmitters, tooling, antenna insulators, molds, motors, machinery and equipment, controls, printed circuits, gold and silver, fuse holders, oscillators, radar equipment

- Leaves no residue
- Dielectric strength: 39,500 volts
- Non-flammable, non-chlorinated

| SKU | SIZE |
|-----------|---------------------|
| S00703000 | 19 oz/539 g Aerosol |











ELECTRICAL DEGREASER

Penetrates fast to remove dirt, oil, grease, wax and tar, leaving no residue. Equipped with a high delivery valve for cleaning efficiency and an extension tube for hard-toreach areas. Contains no Class I or Class II compounds.

APPLICATION & PERFORMANCE

Relays, air tools, wire rope, gears, molds, sprockets, clutches, brakes, dies, locks, generators, chains, radar equipment, air conditioners, electric motors, material handling equipment

- Leaves no residue
- Use on non-energized equipment
- Replaces 1,1,1 trichloroethene

| SKU | SIZE |
|-----------|--|
| SC0749000 | 15 oz/425 g Aerosol ❖ |
| SC0749LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S74905000 | 5 gl/18.9 L Bulk * |
| S74955000 | 55 gl/208 L Bulk * |



| PLASTIC SAFE | FLAMMABLE | Kb SOLVENCY VALUE*** | VOC % BY WT / AS PACKAGED | NSF REGISTRATION |
|--------------|-----------|----------------------|---------------------------|------------------|
| * ** | 8 | 92 | 0% | K2 |
| * ** | • | 85 | 45% | K2 |
| * ** | 8 | 129 | Exempt | K2 |
| * ** | 8 | 129 | Exempt | K2 |
| ⊗ ** | © | 56 | 23.7% | K2 |

**Always test on a small hidden area before use.

***Heavy soils and grease on non-sensitive equipment require a degreaser with a higher solvency for ultimate cleaning power. Solvency is measured by Kb value. The higher the number value, the stronger the dissolving power of the cleaner. Degreasers usually have a higher Kb value than Electronic Precision Contact Cleaners.



EL848





FLASH FREE® **ELECTRICAL** DEGREASER

Non-flammable, fast-evaporating cleaner that penetrates instantly to remove dirt, oil, grease, and wax. Increases the life of electrical components by removing foreign materials that can cause costly downtime. Degreases more thoroughly and several times faster than alkaline cleaners. Excellent for degreasing aluminum and cleaning sheet and strip steel prior to galvanizing.

APPLICATION & PERFORMANCE

Electric motors, generators, air tools, brakes, clutches, chains, sprockets, wire rope, dies, molds, relays, radar equipment, material handling equipment, air conditioners

- Leaves no residue
- Non-flammable, non-corrosive
- Replaces 1,1,1 trichloroethlene

| SKU | SIZE |
|-----------|--|
| SC0848000 | 13 oz/369 g Aerosol 🌞 |
| SC0848T00 | 20 oz /566 g Aerosol 🌞 |
| SC0848LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S84801000 | 1 gl/3.78 L Bulk |
| S84805000 | 5 gl/18.9 L Bulk * |
| S84855000 | 55 gl/208 L Bulk * |











NON-CHLORINATED **ELECTRICAL** DEGREASER

Non-chlorinated, non-flammable, fast-evaporating cleaner that penetrates instantly to remove dirt, oil, grease and wax. Increases the life of electrical components by removing foreign materials that can cause costly downtime. Degreases more thoroughly and several times faster than alkaline cleaners. Excellent for degreasing aluminum and cleaning sheet and strip steel prior to galvanizing.

APPLICATION & PERFORMANCE

Electric motors, generators, air tools, brakes, clutches, chains, sprockets, wire rope, dies, molds, relays, radar equipment, material handling equipment, air conditioners

- Non-flammable, non-chlorinated
- · Fast evaporating
- No hazardous air pollutants
- Dielectric strength 15,000 volts

| SKU | SIZE |
|-----------|--|
| S20846000 | 18 oz/510 g Aerosol |
| S20846050 | 5 gl/18.9 L Bulk * |
| S20846550 | 55 gl/208 L Bulk * |
| SC2846LQ0 | 14fl oz/414 ml Liqui-Sol Non-Aerosol Trigger Spray * |

ELECTRONIC PRECISION CONTACT CLEANERS PERFORMANCE

| DESCRIPTION | CHLORINATED | DIELECTRIC STRENGTH* | BULK |
|--|-------------|----------------------|------|
| EL2001 Electronic Contact Cleaner & Protectant | • | 36,700 | 8 |
| EL2020 Plastics Safe Contact Cleaner | 8 | 19,000 | 8 |
| EL2206 Electro Wizard™ Electronic Contact Cleaner | 8 | 12,500 | 8 |
| EL2207 Electro Wizard Non-Brominated Precision Cleaner | 8 | 19,000 | 8 |
| EL2302 Electronic Contact Cleaner | 8 | N/D | • |

*Dielectric Strength is the maximum electric field that a material can withstand without breaking down, at which time it would strike an arc. Measured in kilovolts (KV). It important to consider when spraying on live circuits.




ELECTRO WIZARD™ NON-BROMINATED DEGREASER

Designed for superior worker safety. Non-flammable, plastic-safe, and fast-evaporating. Penetrates instantly to remove dirt, oil, grease, and wax. Equipped with a high-delivery valve for cleaning efficiency and an extension tube for hard-to-reach areas.



Cables, bearings, air compressors, cranes, electric motors, gears

- nPB and TCE free
- Heavy-duty use
- Dielectric strength 6,800





ELECTRONIC CONTACT CLEANER & PROTECTANT

Designed to clean and degrease electrical equipment that is energized or when there is a residual electrical potential from a component, such as a capacitor. Instant solvent and cleaning action quickly removes greases, dust, and oxidation.

Restores and maintains precision and original efficiency of electronic instruments and electrical equipment. Penetrates pores of surface, leaving a fine, microscopic film for protection against corrosion.

APPLICATION & PERFORMANCE

Switches, relays, timers, signals, transmitters, condensers, transistors, microphones, panel boards, circuit breakers, contacts, meters, receivers, speakers, coils

- Protects against corrosion
- Low-conductivity for use on energized equipment
- Eliminates noise due to dust and dirt

| SKU | SIZE |
|-----------|---------------------|
| S02001000 | 16 oz/453 g Aerosol |



| PLASTIC SAFE | FLAMMABLE | Kb SOLVENCY VALUE** | VOC % BY WT / AS PACKAGED | NSF REGISTRATION |
|--------------|-----------|---------------------|---------------------------|------------------|
| * ** | 8 | 129 | Exempt | K2 |
| * ** | 8 | 56 | 5% | K2 |
| * ** | 8 | 11.4 | 1.5% | K2 |
| * ** | 8 | 66 | 40% | K2 |
| * ** | • | 34 | 75% | K2 |

**Always test on a small hidden area before use.

**Heavy soils and grease on non-sensitive equipment require a degreaser with a higher solvency for ultimate cleaning power. Solvency is measured by Kb value. The higher the number value, the stronger the dissolving power of the cleaner. Degreasers usually have a higher Kb value than Electronic Precision Contact Cleaners.





PLASTICS SAFE CONTACT CLEANER

Fast-evaporating, non-flammable electronic and electrical cleaner that leaves no residue. This TF113 alternative is safe on all metals and most plastics. May be applied while equipment is operating. Equipped with an extension tube for pinpoint application.

APPLICATION & PERFORMANCE

Computer systems and memory devices, printed circuits, meters, vacuum tube parts, hydraulic and missile fuel systems, relays and switches, office machines, electronic games, TV, radio, precision instruments, timing devices, telephone switch gears, radar equipment

- Alternative to TF113
- Leaves no residue
- Very fast evaporation rate

| SKU | SIZE |
|-----------|---------------------|
| S02020000 | 12 oz/340 g Aerosol |





ELECTRO WIZARD™ ELECTRONIC CONTACT CLEANER

Patented formula instantly removes, dissolves and rinses away foreign contaminants from sensitive equipment and precision instruments. Eliminates trapping of airborne contaminants and allows parts to be handled immediately.

APPLICATION & PERFORMANCE

Printed circuits, relavs & switches. meters, radar equipment, precision instruments, office machines, timing devices, hydraulic & missile fuel systems, satellite communication equipment, video equipment, computer systems, memory devices


- Residue free
- Alternative to HCFC 141B
- Equipped with an extension tube for hard-to-reach areas

| SKU | SIZE |
|-----------|-----------------------|
| SC2206000 | 10 oz/283 g Aerosol ◆ |

PRESERVE, PROTECT, PREVENT.® * AVAILABLE IN CANADA

23

OUR EXTENSIVE LINE INCLUDES PLASTIC SAFE CONTACT CLEANERS FOR YOUR MOST SENSITIVE APPLICATIONS AND DEGREASERS.

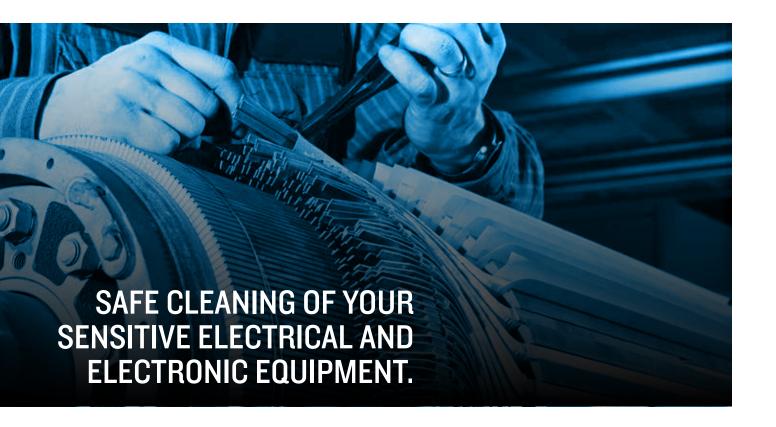





EL2207











ELECTRO WIZARD™ NON-BROMINATED PRECISION CLEANER

Designed for superior worker safety. Non-flammable, plastic-safe, and fast-evaporating. Penetrates to remove dirt, oil, grease, and wax. Equipped with a high-delivery valve for cleaning efficiency and an extension tube for hard-to-reach areas.

APPLICATION & PERFORMANCE

- Non-flammable
- Plastic safe
- Leaves no residue
- nPB and TCE free
- Dielectric strength: 19,000kV

| SKU | SIZE |
|-----------|----------------------|
| SC2207000 | 14 oz/397g Aerosol ◆ |



EL2302















ELECTRONIC CONTACT CLEANER

Quick-drying cleaner that removes dirt, oil, and grease from sensitive equipment and precision instruments without leaving any residue. Safe on most plastics and is packaged with an extension tube for hard-to-reach areas.

APPLICATION & PERFORMANCE

Printed circuits, TV & video equipment, precision instruments, telephone switch gears, vacuum tube parts, relays & switches, meters, office machines, timing devices, hydraulic and fuel systems, computer systems, memory devices

- Alternative to freon TF113
- For use on non-energized equipment
- Safe on most plastics
- · Leaves no residue

| SKU | SIZE |
|-----------|--|
| SC2302000 | 11 oz/312 g Aerosol ◆ |
| SC2302LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S23020500 | 5 gl/18.9 L Bulk ∗ |

INSULATING VARNISH PERFORMANCE

| ATTRIBUTE | EL600 CLEAR | EL601 RED | EL609 GREEN |
|---|---|---------------------------------------|-----------------|
| Base | | Epoxy/Phenolic | |
| Air Dry | | Yes | |
| Sheen | | Semi-Gloss | |
| % Solids | Aerosol: 22.83% | Aerosol: 22.83% Bulk: 61.7% | Aerosol: 22.83% |
| VOC* | Aerosol: 55.17% | Aerosol: 55.17% Bulk: 418.31 g/L | Aerosol: 55.17% |
| Performance ASTM D 115-07 | | Pass | |
| 4.2.1 Drainage | | 22% | |
| 4.2.2 Dry Time (@ 70°F/RH 50%) | Aerosol: To Touch: 10 Minutes To Handle (Tack free): 15-30 minutes Full Cure: 7 days Bulk: (@ 1mil WFT): To Touch: 10 minutes To Handle (Tack free): 1 hour Full Cure: 7 days NOTE: Curing can be accelerated by baking for 1 hour @ 300°F Recoat: Anytime | | |
| 4.2.3. Build | | 2.9 mm | |
| 4.2.8 Oil Resistance | | Pass | |
| Dielectric Strength | 2,300 VPM | 2,600 VPM | 2,890 VPM |
| Temperature Class | | Class°F (155°C / 310°F) | |
| Dry Heat Resistance | | Constant: 310°F Intermittently: 400°F | |
| One Week Hardness (ASTM D 3363 SHORE A 24 hr/1 wk) | | 6B | |
| Flexibility (ASTM D 522) | | Pass | |

^{*} Electrical Aerosol Coatings are Exempt





EL600













Fast-drying, clear insulating enamel, characterized by outstanding oil, chemical, and abrasion resistance. This enamel provides a smooth, glossy surface which sheds dirt readily. May also be used for treating windings and mechanical components, used as an oil proof finish for field coils and stator windings and the inside walls of control boxes. Excellent flexibility and water resistance.

APPLICATION & PERFORMANCE

Motor windings, sealing electrical and electronic components, switchboards, commutator ends, field coils, transformers. armatures, stator windings, rings and frames, bus bars

- Air dries in 10 minutes or less
- · Resists oil, moisture, acids and alkalis

| SKU | SIZE |
|-----------|--------------------------|
| SC0600000 | 15.25 oz/432 g Aerosol 🌞 |



EL601









RED INSULATING VARNISH

Insulating spray for general coating, impregnating and insulating electrical and electronic work. Excellent adhesion to metals including windings and coils. Air dries faster than most insulating materials. Protects surface against oils, moisture, acid, and alkalis. Perfect for small field and magnet coils as it penetrates oil and new windings and has excellent flexibility and water resistance.

APPLICATION & PERFORMANCE

Motor windings, sealing electrical and electronic components, switchboards, commutator ends, field coils, transformers, armatures, stator windings, rings and frames, bus bars

- · Air dries in 10 minutes or less
- · Resists oil, moisture, acids and alkalis

| SKU | SIZE |
|-----------|--------------------------|
| SC0601000 | 15.25 oz/432 g Aerosol 🌞 |
| S60110000 | 1 gl/3.78 L Bulk |



EL609













Creates an extra hard, tough surface that is oil-resistant and waterproof. Has high arc resistance and is non-tracking. A superior spray insulation for motor windings and electric components.

APPLICATION & PERFORMANCE

Motor windings, sealing electrical and electronic components, switchboards, commutator ends, field coils, transformers, armatures, stator windings, rings and frames, bus bars

- Air dries in 10 minutes or less
- · Resists oil, moisture, acids and alkalis

| SKU | SIZE |
|-----------|--------------------------|
| SC0609000 | 15.25 oz/432 g Aerosol 🌞 |

HIGH Kb VALUES, FAST EVAPORATION RATES, AND NON/LOW FLAMMABILITY RATINGS MAKE OUR PRODUCTS EASY AND SAFE TO USE.



EL2007



NON-FLAMMARIE DIISTER

Pressurized, non-flammable gas that removes microscopic particles of lint, dust, ferrous oxide and other contaminants. Useful on delicate components and instruments where residual fluid entrapment could be a problem. Because there are no harmful solvents, it is safe on plastic.

APPLICATION & PERFORMANCE

Electronic equipment, optical equipment, photographic equipment, printers, laboratory equipment, computers, data equipment, mechanical assemblies

- Gently removes microscopic particles
- High delivery rate

| SKU | SIZE |
|-----------|-----------------------|
| SC2007000 | 10 oz/284 g Aerosol ◆ |





CIRCUIT COOLER

Instantly freezes small areas to -15.7°F to isolate thermal intermittent electronic components. Permits immediate detection of bad capacitator, transistors, oxidized joints and junctions.

APPLICATION & PERFORMANCE

Solidifying molten solder, locating hairline cracks in printed circuit boards, shrink-fit assemblies, as a quick-freeze for laboratory, technical uses

- Detects hot spots
- Non-flammable
- Leaves no residue, high delivery valve





| SKU | SIZE |
|-----------|---------------------|
| S02003000 | 12 oz/340 g Aerosol |







CLEAR ELECTRICAL LACQUER SEALER

Seals electrical and electronic parts drying to a clear, flexible, removable film. Protects against rust, corrosion and tarnish. Resists fungus, chemicals, dirt and grease and has exceptional resistance to vegetable oils, mineral oils, greases, and chemical fumes. Dried film will withstand temperatures up to 150°F.

APPLICATION & PERFORMANCE

Wiring installations, printed circuit boards, batteries, chrome and bright work, metal, wood and leather surfaces, ignition sealer

- Durable and removable film
- Fast drying
- Protects against rust, corrosion, tarnish, and abrasion

| SKU | SIZE |
|-----------|---------------------|
| S02000000 | 11 oz/312 g Aerosol |







LUBRICANTS

| Anti-Seize | 32-33 |
|-----------------------------|-------|
| Dry Lubricants | 34-35 |
| Wet Film Lubricants | 36-41 |
| Greases | 42-44 |
| Long-Term Metal Protectants | 45-46 |
| Silicone Lubricants | 47-49 |

SPRAYON PRODUCT GUIDE PRESERVE. PROTECT. PREVENT.®







ANTI-SEIZE COMPOUND

Combination of finely powdered metals that serve to protect against corrosion, seizure, galling, rust carbon fusion and galvanic pitting. This homogenized semi-synthetic lubricating grease will not melt and run out after application. Does not contain clay or soap base thickeners. Designed for preventative maintenance in marine, metal working, automotive, oil field, construction, mining, farm equipment and wastewater and sewage. Helps to reduce friction of metal surfaces.

APPLICATION & PERFORMANCE

Threaded fittings, sprockets and chains, splines and worm gears, manifold studs and bolts, brake cams and pins, rig drives, casting equipment, winches, conveyors, valve shafts. Note: Not to be used with oxygen systems.

- Prevents seizure, galling, fusion
- Prevents corrosion

| SKU | SIZE |
|-----------|-----------------------------|
| SC0620000 | 11.25 oz/318 g Aerosol ◆ |
| S62008000 | 8 oz/226 g Brush Top Jar |
| SC0620TB0 | 16 oz/453 g Brush Top Jar ❖ |







FOOD GRADE ANTI-SEIZE COMPOUND

Premium synthetic, food grade, non-drying thread sealant and anti-seize compound formulated with a balanced blend of P.T.F.E. and other lubricating solids. Engineered to provide a superior leak-proof seal for the life of the connection; while at the same time maintaining its anti-seize capabilities, allowing for easy disassembly without thread damage.

APPLICATION & PERFORMANCE

Threaded fittings, sprockets and chains, splines and worm gears, manifold studs and bolts, brake cams and pins, rig drives, casting equipment, winches, conveyors, valve shafts, food processing equipment. Note: Not to be used with oxygen systems.

- Water & steam resistant
- Superior leak-proof seal
- Effective to 1800°F

| SKU | SIZE |
|-----------|---------------------|
| S00621000 | 15 oz/425 g Aerosol |

33



KEEP YOUR EQUIPMENT RUNNING AT PEAK PERFORMANCE AND PREVENT COSTLY BREAKDOWNS.



* AVAILABLE IN CANADA PRESERVE. PROTECT. PREVENT.®

DRY LUBRICANTS PERFORMANCE

| DESCRIPTION | ТҮРЕ | BULK | FLASH POINT |
|--------------------------------------|------------|------|------------------------------|
| LU200 Dry Film Moly Lubricant | Molybdenum | • | Aerosol: <0°F |
| LU204 Dry Film Graphite Lubricant | Graphite | • | Aerosol: <0°F Bulk: 15°F" |
| LU708 High Performance Dry Lubricant | PTFE | • | Aerosol: <0°F Bulk: 15°F |



DRY FILM MOLY LUBRICANT

High solids, molybdenum disulfide coating that withstands high pressures. Bonds to all clean surfaces that are not alcohol or aromatic hydrocarbons, such as toluene or xylene. Results in a high performance, dry film lubricant that will perform when you need it.

APPLICATION & PERFORMANCE

Assembly and run-in lubrication, automotive and industrial gaskets, machine tool sliding surfaces and gears, tumbler locks, intricate mechanisms, mating surfaces or business machine parts, chutes and bins, bearings, chain drives, intricate mechanisms, roller chains, conveyor belts

- Withstands extreme pressures up To 50K PSI
- Non-conductive
- · Low coefficient of friction

| SKU | SIZE |
|-----------|-----------------------|
| SC0200000 | 11 oz/311 g Aerosol * |
| SC0200050 | 5 gl/18.9 L Bulk • * |
| S20055000 | 55 gl/208 L * |











DRY FILM GRAPHITE LUBRICANT

High-lubricity graphite that adheres to most surfaces with minimum surface preparation. Air dries rapidly at room temperature to provide clean, longwearing lubrication. Conductive and may be used where lubrication and electrical properties are both required.

APPLICATION & PERFORMANCE

Pre-assembly lubrication of moving parts, mechanisms, automotive & industrial gaskets, bearings, locks, springs, hinges, mating surfaces on machines, plating nonconductors, curing ovens

- Dries rapidly
- Reduces friction and wear
- High temperature
- Conductive

| SKU | SIZE |
|-----------|--|
| SC0204000 | 10 oz/284 g Aerosol ◆ |
| S00204INV | 13 oz/369 g Inverted Aerosol - Upside Down Delivery |
| SC0204LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ◆ |
| S20405000 | 5 gl/18.9 L Bulk * |



| TEMPERATURE RANGE | LOAD CAPACITY | PLASTIC SAFE | NSF REGISTRATION |
|-------------------|---------------|---------------|------------------|
| -30°-650°F | Extreme | 8 | H2 |
| -40°-850°F | Medium | 8 | H2 |
| -40°-572°F | Extreme | > * | H2 |

*Always test on a small hidden area before use.



LU708



HIGH PERFORMANCE DRY LUBRICANT

Clean, non-oily, non-staining, versatile dry lubricant that functions from -40°F to 572°F. Chemically inert formula that dries quickly to a white film to show coverage. Does not contain silicone or chlorinated solvents. Extremely low static coefficient of friction makes it a superb lubricant where low speeds and light loads are involved. Great anti-stick properties for use as an effective release agent.

APPLICATION & PERFORMANCE

Metal extrusions, locks and catches, window guides, machine parts, cord, twine or rope, hinges, glass, elastomers

- Safe on most plastics
- Lowest coefficient of friction

| SKU | SIZE |
|-----------|--|
| SC0708000 | 10 oz/283 g Aerosol ◆ |
| SC0708LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S70805000 | 5 gl/18.9 L Bulk * |

SPECIALLY
FORMULATED FOR
MANUFACTURING
AND INDUSTRIAL USE,
OUR LUBRICANTS AND
RUST PREVENTATIVES
ARE ALL PROVEN
PERFORMERS.



WET FILM LUBRICANTS PERFORMANCE

| DESCRIPTION | ТҮРЕ | DIELECTRIC STRENGTH | TYPE OF FILM | BULK |
|--|----------------|---------------------|--------------|------|
| LU103 Rust Breaker® Penetrant | Petroleum | 47,400 | Non-Drying | • |
| LU104 Food Grade Penetrating Oil | Synthetic | 39,000 | Wet | 8 |
| LU202 Moly Chain Lubricant | Molybdenum | N/A | Non-Drying | • |
| LU205 Food Grade Chain Lubricant | Vegetable/PTFE | 46,500 | Wet | 8 |
| LU207 Food Grade Synthetic Grease | Synthetic/PTFE | 10,100 | Grease-Like | 8 |
| LU208 Cutting Oil | Mineral Oil | 10,000 | Wet | • |
| LU209 Food Grade Synthetic Oil | Synthetic | 32,100 | Wet | 8 |
| LU213 Food Grade High Temp Lubricant | Vegetable/PTFE | 46,500 | Wet | 8 |
| LU214 Food Grade Low Temp Lubricant | Synthetic | N/A | Wet | 8 |
| LU402 Eco-Grade™ General Purpose Lubricant & Penetrant | Rapeseed | 46,700 | Non-Drying | 8 |
| LU700 Food Grade Machinery Oil | Mineral Oil | 27,500 | Wet | 8 |
| LU701 Food Grade Machinery Oil | Mineral Oil | 27,500 | Wet | • |
| LU711 The Protector™ All-Purpose Lubricant | Petroleum | 47,000 | Ultra Thin | • |
| LU727 High Performance Wet Lubricant | PTFE | 47,000 | Non-Drying | 8 |
| LU728 Non-Flammable Synthetic Lubricant | Synthetic/PTFE | 39,000 | Non-Drying | 8 |



| FLASH POINT | TEMPERATURE RANGE | LOAD CAPACITY | PLASTIC SAFE | NSF REGISTRATION |
|-------------------------------|-------------------|---------------|--------------|------------------|
| Aerosol: 205°F Bulk: 205°F | -20°–550°F | Light | * | H2 |
| Aerosol: >200°F | -40°–475°F | Extreme | * | H1 |
| Aerosol: <0°F Bulk: 50°F | -20°–300°F | Extreme | * | H2 |
| Aerosol: <0°F | 12°-450°F | Extreme | * | H1 |
| Aerosol: <0°F | -10°–325°F | Extreme | * | H1 |
| Aerosol: -20.2°F | -20°-500°F | Light | * | P1 |
| Aerosol: <0°F | -45°–280°F | Extreme | * | H1 |
| Aerosol: <0°F | 12°-635°F | Extreme | ⊘ * | H1 |
| Aerosol: <0°F | -78°–478°F | Extreme | * | H1 |
| Aerosol: <0°F | 5°-370°F | Light | * | H1 |
| Aerosol: >200°F | -40°–450°F | Light | * | H1 |
| Aerosol: >200°F | -20°–500°F | Light | ⊘ * | H1 |
| Aerosol: 140°F Bulk: 140°F | -20°–500°F | Light | ⊘ * | H2 |
| Aerosol: 320°F | -40°–475°F | Extreme | * | H1 |
| Aerosol: 140°F Bulk: 140°F | -20°–500°F | Light | * | H2 |

^{*}Always test on a small hidden area before use.

SEE FOLLOWING PAGES FOR PRODUCT DETAILS













Quickly loosens rust while penetrating grease and dirt. Fast-acting, transparent, non-staining oil, its light film displaces moisture and acts as a corrosion preventative. Vanilla scented.

APPLICATION & PERFORMANCE

Rusted or frozen lugs and bolts, lubricating tight-fitting parts, repair work, general overhaul, phosphated and non-phosphated machined parts, automotive parts, crank shafts, other metal components

- Quickly loosens rust
- · Will not harm painted surfaces
- Non-flammable
- · Penetrant, water-displacer and rust inhibitor all-in-one



MOLY CHAIN LUBRICANT

High viscosity oil that clings to moving parts. Foaming action penetrates close tolerances of chain drive bushings and pins to provide long-lasting lubrication. Reduces friction wear on moving parts and metal-to-metal applications. Molv additive improves capacity to handle greater pressure requirements of start up stress.

APPLICATION & PERFORMANCE

Chain drives & pins, forklift trucks. link & roller assemblies, tractors, machinery, rollers, conveyors, motorcycle & bicycle chains, sprockets, clippers, cutter bars, chain saws

- · Moly additive improves load capability
- Works under extreme pressure
- · Penetrating foaming action
- · Long-lasting and non-drying

| SKU | SIZE |
|-----------|--|
| SC0202000 | 11 oz/312 g Aerosol * |
| SC0202LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| SC0202050 | 5 gl/18.9 L ◆ * |





FOOD GRADE PENETRATING OIL Quickly penetrates nuts and bolts.

Accelerated action loosens rust while penetrating grease, dirt and corrosion.

APPLICATION & PERFORMANCE

Fasteners, hose fittings on food processing, industrial equipment

- Quick penetration
- Non-flammable
- Use to loosen rust, scale and corrosion



| SKU | SIZE |
|-----------|--------------------------------------|
| S00104000 | 11.75 oz/333 g Spray Anyway™ Aerosol |



LU205





FOOD GRADE CHAIN LUBRICANT

Treated with the most effective anti-oxidants, extreme-pressure. anti-wear, and corrosion protecting additives. P.T.F.E. is added to further enhance load capacity, and reduce friction. Offers excellent extremepressure lubricity, water resistance and high temperature performance on chains and much more. Foaming action allows for pinpoint application and deep penetrations.

APPLICATION & PERFORMANCE

Lift trucks, conveyors, packaging equipment, roller chains, hoist chains

- Extreme-pressure lubricity
- Foaming action for deep penetration
- · Excellent water resistance and anti-wear properties

| SKU | SIZE |
|-----------|-----------------------------------|
| S00205000 | 15 oz/425 g Spray Anyway™ Aerosol |





FOOD GRADE **SYNTHETIC GREASE**

Pure synthetic multi-service, nonmelting, waterproof grease fortified with P.T.F.E. Designed specifically to lubricate, seal out water, and resist chemical attack under the most demanding conditions. With its excellent film strength and extreme pressure qualities, forms a tough, durable film of lubrication that prevents metal-to-metal contact.

APPLICATION & PERFORMANCE

- · Non-melting and waterproof
- Extreme pressure performance
- · Resists corrosion and chemical attack



| SKU | SIZE |
|-----------|------------------------|
| S00207000 | 14.25 oz/403 g Aerosol |











CUTTING OIL

Specifically formulated for all ferrous and nonferrous machining operations. Extends tool life, reducing tool sharpening and downtime. Recommended for all metals, including stainless steel and soft metals such as aluminum, brass and copper. Utilizes a unique combination of friction reducing triglycerides, which aids in a high degree of fluid film protection.

APPLICATION & PERFORMANCE

Drilling, cutting, threading, sawing, reaming, broaching, grinding

- Works on ferrous and soft metals
- Clings to surfaces
- Reduces friction and wear









FOOD GRADE SYNTHETIC OIL

Waterproof, synthetic lubricating fluid that does not emulsify with water and has excellent extreme pressure characteristics. Approved for use in food processing, water and wastewater treatment plants where you need excellent anti-wear and anti-rust properties.

APPLICATION & PERFORMANCE

- · Does not emulsify with water
- Extreme-pressure performance
- · Resists corrosion and chemical attack

| SKU | SIZE |
|-----------|------------------------|
| S00209000 | 14.25 oz/403 g Aerosol |



LU213





FOOD GRADE HIGH TEMP LUBRICANT

Treated with the most effective anti-oxidants, extreme-pressure. anti-wear, and corrosion-protecting additives. P.T.F.E. is added to further enhance load capacity and reduce friction. Excellent extreme pressure lubricity, water resistance and high temperature (12°F to 635°F) performance on chains and much more. Foaming action allows for pinpoint application and penetration.

APPLICATION & PERFORMANCE

- High-temperature performance
- Fortified with extreme-pressure and anti-wear additives
- Foaming action for excellent cling penetration

| SKU | SIZE |
|-----------|--|
| S00213000 | 15 oz /425 g Spray Anyway [™] Aerosol |













Multi-service lubricant for extended service under extremely low temperature conditions (as low as -78°F). Treated with the most effective extreme-pressure, corrosion inhibitors, anti-oxidant, anti-foam and anti-wear additives. Provides maximum equipment protection in extremely low temperature applications.

APPLICATION & PERFORMANCE

- Excellent low temperature performance
- Reduces friction and wear
- Non-staining

| SKU | SIZE |
|-----------|---------------------|
| 600214000 | 15 oz/425 g Aerosol |













FOOD GRADE MACHINERY OIL

General purpose lubricant that penetrates and loosens dirt, scale, and corrosion. Non-silicone formula is excellent for use in areas where silicone overspray might interfere with carton sealing or capping operations. Virtually odorless, tasteless, and colorless.

APPLICATION & PERFORMANCE

Mixers, conveyors, valves, pistons, rollers, slides, cams, bottle and carton filling machinery, stainless steel pumps, chain drive belts

- · Works on paint, metal, plastic and wood
- Silicone free formula

FOOD GRADE

MACHINERY OIL Recommended to lubricate food

and beverage processing equipment. High-purity white

mineral oil penetrates and

loosens rust, dirt, scale and

corrosion. Provides effective

lubrication to free up rusted or

corroded parts. Will not harm

paint, plastic, or wood surfaces.

| SKU | SIZE |
|-----------|--|
| SC0700000 | 10 oz/283 g Aerosol ❖ |
| SC0700LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S70005000 | 5 gl/18.9 L Bulk * |



LU 402





ECO-GRADE™ GENERAL PURPOSE LUBRICANT & PENETRANT

Biodegradable 3-in-1 penetrant and lubricant that quickly penetrates and dissolves rust, gum and corrosion. Loosens stuck parts, lubricates and prevents rust and corrosion. Formulated with renewable resources.

APPLICATION & PERFORMANCE

Release or rusted or frozen lugs and bolts, lubrication and tight-fitting parts, general overhaul, repair work

- Rapidly biodegradable
- · Formulated with rapeseed oil
- Prevents rust
- Quick penetration

| SKU | SIZE |
|-----------|-----------------------|
| SC0402000 | 12 oz/340 g Aerosol 🌞 |



LU701











| SKU | SIZE |
|-----------|--|
| S00701000 | 13.25 oz/375 g Wide Delivery Aerosol - Big Button Actuator |





LU711



THE PROTECTOR™ ALL-PURPOSE LUBRICANT

Transparent blend of high quality petroleum distillates specifically formulated to ensure maximum moisture displacement. Ultra-thin film resists the collection of abrasive particles on delicate contacts and connectors. Known as The Protector, it's the choice of industry to penetrate, lubricate, demoisturize and inhibit corrosion.

APPLICATION & PERFORMANCE

All metal surfaces, nuts and bolts, operating controls, electrical wiring, ignition systems, circuitry, connectors

- Penetrates and prevents rust
- Displaces moisture and lubricates
- Contains no silicone

| SKU | SIZE |
|-----------|--|
| SC0711000 | 11 oz/311 g Aerosol 🌞 |
| SC0711LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S71101000 | 1 gl/3.78 L Bulk |
| S71105000 | 5 gl/18.9 L Bulk |
| S71155000 | 55 gl/208 L Bulk |





HIGH PERFORMANCE WET LUBRICANT

Penetrates deep into corroded areas to clean and dissolve rust, grease and dirt, even in the tightest tolerances. Displaces moisture, lubricates and provides a protective film to guard against humidity and corrosion over a wide temperature range. An excellent choice for electrical applications. Ensures maximum protection against extreme pressure, friction and wear on all moving parts.

APPLICATION & PERFORMANCE

Metal extrusions, locks and catches, window guides, machine parts, cord, twine or rope, hinges, glass, elastomers and some plastics

- Works from -40°F to +450°F
- Dielectric strength: 47,000 volts
- High flash point

| SKU | SIZE |
|-----------|-------------------------|
| SC0727000 | 9.25 oz/262 g Aerosol ◆ |



LU728





NON-FLAMMABLE SYNTHETIC LUBRICANT

Specifically developed to meet the demands for a safe, low HMIS rating, non-flammable lubricant that has all the performance characteristics of a premium, high load capable, synthetic lubricant.

APPLICATION & PERFORMANCE

Hinges, cables, nuts & bolts, linkages, conveyors, chains

- Low HMIS rating
- Extreme pressure performance
- Formulated with P.T.F.E.

| SKU | SIZE |
|-----------|---------------------------|
| SC0728000 | 8.75 oz/262 g Aerosol 🔹 🗱 |



GREASES PERFORMANCE

| DESCRIPTION | CONSISTENCY | PLASTIC SAFE | FLASH POINT | FLAMMABLE | BULK |
|---|--|--------------|-----------------------------|-----------|------|
| LU100 White Lithium Grease | NLGI 2 | * | Aerosol: <0°F Bulk: 85°F | • | • |
| LU101 Food Grade White Grease | NLGI 2 | * | Aerosol: <0°F | • | 8 |
| LU102 Multi-Purpose Red Grease | NLGI 2 | 8 | Aerosol: -20°F | • | 8 |
| LU201 Open Gear & Wire Rope Lubricant | N/A | 0 | Aerosol: <0°F | • | 8 |
| LU510 Food Grade Synthetic High Temperature Grease | LU510 - NLGI 0 LU511 - NLGI 1 LU512 - NLGI 2 | 0 | 510°F | 0 | • |
| LU520 Food Grade Multi-Purpose Semi-Synthetic Grease | LU520 - NLGI 0 LU521 - NLGI 1 LU522 - NLGI 2 | 0 | 399°F | 0 | • |

*Always test on a small hidden area before use.

FOOD GRADE

WHITE GREASE

High solids, high-purity complex, white grease with superior metal-

to-metal characteristics. Effective from -20°F to 285°F, the high solids

lubrication and assures it will not

drip or run, even on vertical surfaces.

Serves as an excellent water displacer and corrosion inhibitor for unpainted

metal and comes equipped with an

extension tube for hard-to-reach areas.

content provides long-lasting



WHITE LITHIUM **GREASE**

High solids, white grease, that provides excellent lubrication for metal-to-metal applications. Excellent corrosion inhibitor for unpainted metal.

APPLICATION & PERFORMANCE

Chains, gears, drives, hinges, garage door guides

- Inhibits corrosion
- Non-melting
- Excellent cling for overhead applications























APPLICATION & PERFORMANCE

Bakeries, bottlers, breweries, canneries, dairies, egg processors, meat, poultry processors

- High viscosity & build for vertical surfaces
- Long-lasting lubrication
- Water-displacer
- Rust inhibitor

| SKU | SIZE |
|-----------|------------------------|
| S00101000 | 13.75 oz/389 g Aerosol |



| MELTING POINT | INHIBITS CORROSION | TEMPERATURE RANGE | LOAD CAPACITY | CONTAINS P.T.F.E. | NSF REGISTRATION | APPEARANCE |
|---------------|--------------------|-------------------|---------------|-------------------|------------------|-----------------------|
| Nonmelting | • | 20°-275°F | Medium | 8 | H2 | Off-White Opaque |
| N/A | • | -20°–285°F | Medium | 8 | H1 | White |
| N/A | • | 10°-480°F | Medium | 8 | N/A | Red |
| N/A | • | 0°-450°F | Extreme | 0 | H2 | Viscous Black Film |
| N/A | • | -75°–500°F | Extreme | • | Н1 | White |
| N/A | • | -75°–500°F | Extreme | 0 | H1 | White |



LU102



MULTI-PURPOSE RED GREASE

Delivers superior metal-to-metal characteristics by coating, penetrating, and then curing to a semi-solid film. Multi-purpose aluminum complex red grease. Effective from 10°F to 480°F. High solids content provides long-lasting lubrication and assures that it will not drip or run, even on vertical surfaces. An excellent corrosion inhibitor for unpainted metal. Equipped with an extension tube for hard-to-reach areas.

APPLICATION & PERFORMANCE

Gears, valves, chains, winches, conveyors, fittings, linkages, wire ropes, hoists, rollers, cams, slide bearings, o-rings, drives, hinges

- Will not run or drip
- Excellent metal-to-metal characteristics
- Water-displacer and rust inhibitor

| SKU | SIZE |
|-----------|------------------------|
| S00102000 | 13.75 oz/389 g Aerosol |







OPEN GEAR & WIRE ROPE LUBRICANT

High performance lubricant that penetrates metal surfaces to reach the core of the wire rope. Heavy duty lubricant performs at high temperatures while adhering extremely well to surfaces. Displaces water for excellent rust protection. Can be used while equipment is in operation.

APPLICATION & PERFORMANCE

Open or exposed gears, gear boxes, wire rope, winches, cables, metal forming presses, roller chains, machine tools

- Contrasting black color assists in achieving complete coverage
- Prevents rust and corrosion
- Withstands extreme pressure
- Will not become brittle or break-down while working

| SKU | SIZE |
|-----------|--|
| SC0201000 | 12 oz/340 g Aerosol * |
| SC0201LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |





LU510 SERIES













FOOD GRADE SYNTHETIC HIGH TEMPERATURE GREASE

Versatile, premium quality, synthetic grease fortified with P.T.F.E. Representing some of the most advanced lubricant technology, it is a blend of pure synthetic base oils, additives and shear stable thickeners, to provide maximum equipment protection in extremely high and low temperatures (-75°F to over 500°F).

APPLICATION & PERFORMANCE

Freezer bearings, oven bearings, chains, pumps, kilns, conveyors, and more

- Extreme temperature range allows use in freezers and ovens
- LU510 NLGI 0 / LU511 NLGI 1 / LU512 NLGI 2

| SKU | SIZE |
|-----------|--|
| S00510005 | NLGI 0 - 5 gl/18.9 L Bulk (LU 510) * |
| S00510015 | NLGI 0 - 15 gl/56.7 L Bulk (LU 510) * |
| S00510055 | NLGI 0 - 55 gl/208 L Bulk (LU 510) * |
| S00511005 | NLGI 1 - 5 gl/18.9 L Bulk (LU 511) * |
| S00511015 | NLGI 1 - 15 gl/56.7 L Bulk (LU 511) * |
| S00511055 | NLGI 1 - 55 gl/208 L Bulk (LU 511) * |
| S00512014 | NLGI 2 - 14 oz/414 mL Cartridge (LU 512) * |
| S00512005 | NLGI 2 - 5 gl/18.9 L Bulk (LU 512) * |
| S00512015 | NLGI 2 - 15 gl/56.7 L Bulk (LU 512) * |
| S00512055 | NLGI 2 - 55 gl/208 L Bulk (LU 512) * |



LU520 SERIES













FOOD GRADE MULTI-PURPOSE SEMI-SYNTHETIC GREASE

Specifically designed for general lubrication in food processing facilities. Excellent film-forming characteristics and anti-wear qualities. Will stay on metal surfaces much longer than conventional greases, resulting in longer-lasting application and fewer lubrication intervals. With semi-synthetic base oils and polymer additives, it is completely resistant to water washout, friction and chemical attack. White, odorless and tasteless.

APPLICATION & PERFORMANCE

Conveyor bearings, ball bearings, journal bearings, roller bearings, universal joints, any lubrication point having sliding or rolling friction

- Resistant to water washout
- LU520 NLGI 0 / LU521 NLGI 1 / LU522 NLGI 2

| SKU | SIZE |
|-----------|---|
| S00520005 | NLGI 0 - 5 gl/18.9 L Bulk (LU520) * |
| S00520015 | NLGI 0 - 15 gl/56.7 L Bulk (LU520) * |
| S00520055 | NLGI 0 - 55 gl/208 L Bulk (LU520) * |
| S00521005 | NLGI 1 - 5 gl/18.9 L Bulk (LU521) * |
| S00521015 | NLGI 1 - 15 gl/56.7 L Bulk (LU521) * |
| S00521055 | NLGI 1 - 55 gl/208 L Bulk (LU521) * |
| S00522014 | NLGI 2 - 14 oz/414 mL Cartridge (LU522) * |
| S00522005 | NLGI 2 - 5 gl/18.9 L Bulk (LU522) * |
| S00522015 | NLGI 2 - 15 gl/56.7 L Bulk (LU522) * |
| S00522055 | NLGI 2 - 55 gl/208 L Bulk (LU522) * |



LONG-TERM METAL PROTECTANTS PERFORMANCE

| DESCRIPTION | TYPE OF FILM | INDOOR / OUTDOOR | CORROSION PROTECTION | LONGEVITY | FLASH POINT | DIELECTRIC Strength | NSF REGISTRATION | TEMPERATURE RANGE | BULK |
|-----------------------------------|--------------|---------------------|----------------------|------------|----------------|------------------------|---------------------|-------------------|------|
| LU710 Waxy Film Protectant | Waxy | Both | Moderate | 24 mths | -20°F | 2,000 | N/A | -20–300°F | 8 |
| LU737 Synthetic Dry Protectant | Dry | Indoor | Light | 6-12 mths | 145°F | 55,600 | H2 | -20–355°F | • |
| LU767 Indoor Metal Protectant | Ultra Thin | Indoor | Moderate | 12-15 mths | 188°F | 48,200 | H2 | -20–302°F | • |
| LU777 Outdoor Metal Protectant | Waxy | Both | Heavy | 24 mths | 121°F | 30,600 | H2 | -20–300°F | • |



WAXY FILM PROTECTANT

High solids, corrosion preventative compound suitable for a wide range of applications. Provides long term protection of all metal surfaces. including crevice locations. Pliable, firm coating has a polar attraction to metal surfaces and does not crack, age or harden. Dried coating is not flammable and protects electrical connections and wiring. Not harmful to paints and prevents galvanic corrosion. Guards against fretting corrosion. Heavy duty, water displacing film allows greater protection for machinery or parts stored outdoors, especially in salt water or a high humidity atmosphere. Easily removed with petroleum solvents, kerosene or perchloroethylene.

APPLICATION & PERFORMANCE

Chemical plant valves, farm machinery, industrial machinery/equipment, electrical/electronic equipment, steel mills, cable cars, conveyor belts, motorcycles, lugnuts, anywhere wire rope is used.

| SKU | SIZE |
|-----------|-----------------------|
| SC0710000 | 12 oz/340 g Aerosol ❖ |









SYNTHETIC DRY PROTECTANT

A transparent non-staining dry film that cleans, penetrates, lubricates and displaces moisture. Formulated with synthetic additives to assure maximum penetration and protection against rust and corrosion. Resists dust, dirt and oil. Non-staining, waterproof, chemical resistant, and non-conductive. An excellent lubricant for bearings and sliding surfaces, as well as moisture displacement in electrical applications.

APPLICATION & PERFORMANCE

Excellent for bearings and sliding surfaces; displaces moisture in electrical applications.

- Penetrating, greaseless lubricant
- Resists dust and dirt buildup
- Non-flammable propellant
- No chlorinated solvents

| SKU | SIZE |
|-----------|-----------------------|
| SC0737000 | 11 oz/312 g Aerosol 🍁 |
| S73701000 | 1 gl/3.78 L Bulk * |
| S73705000 | 5 gl/18.9 L Bulk * |





LU767



INDOOR METAL PROTECTANT

A medium weight oil formulated for excellent lubrication. Superior corrosion protection, moisture displacement, and penetration properties. Non-staining and non-conductive; works up to 15 months against humidity and corrosion damage. Ideal for storage of items indoor and items to be shipped. Leaves an amber film showing total coverage of the object sprayed. Safe on metals, rubber, plastic, and painted surfaces.

APPLICATION & PERFORMANCE

Protects equipment stored indoors and items waiting to be shipped.

- Penetrates and prevents rust
- Displaces moisture
- 15 month durability
- · Lubricant and corrosion inhibitor

| SKU | SIZE |
|-----------|-----------------------|
| SC0767000 | 10 oz/311 g Aerosol ◆ |
| S76701000 | 1 gl/3.78 L Bulk |
| S76705000 | 5 gl/18.9 L Bulk |





OUTDOOR METAL PROTECTANT

A waxy corrosion preventative that offers excellent lubrication and long term outdoor protection. Tacky film provides an excellent barrier to salt spray and high humidity.

APPLICATION & PERFORMANCE

Bodies and frames of vehicles and machines, storage tanks and containers, castings, industrial parts and machines, molds cables, generators, marine engines and parts, electrical equipment, sheet steel, oil field equipment, threads, locks dies, gears

- Penetrates and prevents rust
- Displaces moisture
- Protects from salt water
- 24 month durability

| SKU | SIZE |
|------------|--|
| SC0777000 | 11 oz/312 g Aerosol * |
| SC0777LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| \$77701000 | 1 gl/3.78 L Bulk * |
| S77705000 | 5 gl/18.9 L Bulk * |



SILICONE LUBRICANTS PERFORMANCE

| DESCRIPTION | PLASTIC SAFE | NSF REGISTRATION | TEMPERATURE RANGE | PAINTABLE | VISCOSITY | % ACTIVE | BULK | ACTUATOR |
|---|-----------------|---------------------|----------------------|-----------|-----------|----------|----------|--|
| LU1324 High Performance Silicone Lubricant | * | N/A | -40°-400°F | • | Medium | 6.6% | 0 | Standard |
| LU206 All-Purpose Silicone Lubricant | * | N/A | -50°–550°F | • | Medium | 5% | • | Spray Anyway™ and Trigger |
| LU211 Food Grade Dry Silicone Lubricant | * | H1 | -40°-450°F | 8 | Low | 5% | 8 | Standard |
| LU212 Food Grade Silicone Lubricant | * | H1 | -40°–450°F | 0 | Low | 5% | 8 | Big Button |
| LU905 Heavy Duty Silicone Lubricant | 0 | N/A | -40°–450°F | 0 | Low | 6% | 8 | Spray Anyway [™] |
| LU910 Food Grade Silicone Lubricant | 0 | H2 | -58°–575°F | 0 | Low | 3.5% | © | Spray Anyway™ |
| LU210 Food Grade Silicone Lubricant | * | H1 | -40°–450°F | 8 | Low | 5% | • | Spray Anyway [™] and Trigger |

*Always test on a small hidden area before use.



HIGH PERFORMANCE SILICONE LUBRICANT


A silicone-rich formula that lubricates and protects in a variety of applications. Can be used on wood, metal, rubber, most plastics, leather, vinyl, canvas, or painted surfaces. Polishes to a shine to shed dirt and water.

APPLICATION & PERFORMANCE

Rubber mountings, weather-strip insulation, doors, locks, trunk lids, windows, slitter knives, any sliding surface

- Water displacer
- Rust inhibitor













ALL-PURPOSE SILICONE LUBRICANT

A 5% low-viscosity silicone formula that is compatible with most surfaces. Repels water and is non-corrosive to metals. An excellent lubricant on plastic, fiber gears extruded parts, wood-to-wood sliding applications, and on rubber.

APPLICATION & PERFORMANCE

Rubber components, windows. doors, plastic assemblies, drawers, sliding wood surfaces, sliding racks, dissimilar metals, springs, doors, hinges, weather-stripping, plastic assemblies

- Improves high-speed production
- Paintable
- Retards oxidation and corrosion
- 5% silicone

| SKU | SIZE |
|-----------|--|
| SC0206000 | 10 oz/283 g Aerosol ❖ |
| SC0206LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S20605000 | 5 gl/18.9 L Bulk * |



FOOD GRADE **DRY SILICONE**

A low-viscosity silicone formula compatible with most surfaces. Ultra-thin film will not attract dust or dirt and will create a barrier to prevent rust and corrosion.

APPLICATION & PERFORMANCE

Plastic fiber gears, extruded parts, wood-to-wood sliding applications, rubber

- Extra-dry formula for surfaces requiring no transfer
- Improves performance of slide surfaces & sorting chutes
- Will not attract dust, dirt or other contaminants

| SKU | SIZE |
|-----------|------------------------|
| S00211000 | 13.25 oz/375 g Aerosol |



FOOD GRADE SILICONE LUBRICANT

A 5% low-viscosity silicone formula compatible with most surfaces. Effective from -40°F to 450°F. Repels water and is non-corrosive to metals.

APPLICATION & PERFORMANCE

Plastic fiber gears, extruded parts, wood-to-wood sliding applications, rubber

- Features Big Button Actuator for wide coverage and comfort
- · Resists corrosion and chemical attack













APPLICATION & PERFORMANCE

HEAVY DUTY

SILICONE

LUBRICANT

repels dust and dirt.

Contains a heavy concentration

of high-viscosity silicone which

will withstand medium loads and

pressures. Reduces wear and friction in applications from -40°F to 450°F.

Penetrates the surface and provides

a continuous non-staining film that

Slitters, bushings, knives, guides. slides, locks, conveyors, moving parts, dissimilar metals, air tables, rubber items, high wear areas

- Formulated without methylene chloride
- Non-staining
- Works from -40°F to +450°F
- · Reduces friction and wear

| SKU | SIZE |
|-----------|-----------------------|
| SC0905000 | 12 oz/340 g Aerosol ◆ |



A low-viscosity silicone lubricant that

SILICONE

FOOD GRADE

is colorless, odorless, and tasteless. Effective from -58°F to 575°F. Prevents sticking without transferring to end products. Can be used in proximity to foods where petroleum products and other organics would contaminate.

APPLICATION & PERFORMANCE

Slides, guide rails, knives, slicers, saws, grinders, dough mixers, guards, heat sealing equipment, conveyors, food racks, ovens, bottling machines

- Formulated without methylene chloride
- Works from -58°F to +575°F
- · Low viscosity no buildup

| SKU | SIZE |
|-----------|-----------------------|
| SC0910000 | 12 oz/340 g Aerosol ◆ |



SPRAYON OFFERS WIDE TEMPERATURE RANGES, EXTREME PRESSURE CAPABILITY AND OTHER HIGH-PERFORMANCE PROPERTIES.



LU210



FOOD GRADE SILICONE LUBRICANT

A 5% low-viscosity silicone formula that is compatible with most surfaces. Repels water and is non-corrosive to metals. An excellent lubricant on plastic, fiber gears, extruded parts, wood-to-wood sliding applications, and on rubber.

APPLICATION & PERFORMANCE

Slides, food and drug processing, knives, food racks, slicers, saws, grinders, mixers, guards, conveyors, ovens, bottling machines, heat sealing equipment

- Safe on styrenes and urethanes
- Stops sticking without transfer

| SKU | SIZE |
|-----------|---|
| SC0210000 | 12 oz/340 g Aerosol ◆ |
| SC0210LQ0 | 14 fl oz/414mL Liqui-Sol™ Non-Aerosol Trigger Spray ❖ |
| S21005000 | 5 gl/18.9 L Bulk * |
| S21055000 | 55 gl/208 L Bulk * |



MR

MOLD RELEASE

| Wet Film Release Agents | 52- | -53 |
|-------------------------|-----|-----|
| Dry Film Release Agents | | 5/ |
| Mold Maintenance | | 5! |

SPRAYON PRODUCT GUIDE PRESERVE. PROTECT. PREVENT.®



WET FILM RELEASE AGENTS PERFORMANCE

| DESCRIPTION | ТҮРЕ | NSF REGISTRATION | CAN BE POST DECORATED | TEMPERATURE RANGE | PLASTIC SAFE | % ACTIVE | BULK |
|--|----------|---------------------|--------------------------|-------------------|----------------|----------|------|
| MR302 General Purpose Release Agent | Silicone | H2 | N/A | 40°F–550°F | Most Plastics* | 2% | 8 |
| MR303 Food Grade Release Agent | Silicone | H2 | N/A | 40°F–550°F | Most Plastics* | 3% | • |
| MR305 Heavy Duty Silicone Release Agent | Silicone | N/A | N/A | 40°F–550°F | * | 4.8% | 8 |
| MR307 Heavy Duty Paintable Release Agent | Silicone | N/A | N/A | 550°F (Max) | Most Plastics* | 2.5% | 8 |
| MR309 Paintable Release Agent | Silicone | N/A | • | 550°F (Max) | * | 1.2% | 8 |
| MR314 Paintable Lecithin Release Agent | Lecithin | H2 | • | 350°F (Max) | Most Plastics* | 2.5% | 8 |
| MR315 Urethane & Styrene Silicone Release Agent | Silicone | N/A | N/A | 550°F (Max) | * | 2% | 8 |





MR 302













Contains a light duty silicone that is ideal for cold molds and is a multipurpose mold release.

APPLICATION & PERFORMANCE

Plastics, injection molders, compression molders, candle molders, investment castings, extruders, blow molders

- 2% silicone, non-staining, non-corrosive
- Works from 40°F to 550°F

| SKU | SIZE |
|-----------|------------------------|
| SC0302000 | 12 oz/340 g Aerosol ** |



MR 303









FOOD GRADE RELEASE AGENT

An effective mold release for all types of materials, including wax, rubbers, P.T.F.E. ceramics and plastics.

APPLICATION & PERFORMANCE

Plastic injection molders, compression molders, investment castings, extruders, blow molders, foundries, lost wax process

- 3% silicone, non-staining, non-corrosive
- Works from 40°F to 550°F

| SKU | SIZE |
|-----------|-----------------------|
| SC0303000 | 12 oz/340 g Aerosol * |
| S30305000 | 5 gl/18.9 L Bulk * |
| SC0303550 | 55 gl/208 L Bulk * |



MR 305





HEAVY DUTY SILICONE RELEASE AGENT

Contains an extra heavy concentration of high-viscosity silicone that provides maximum release under the most severe molding conditions. Heat stable to 550°F.

APPLICATION & PERFORMANCE

Rubber, plastics, elastomeric materials, polystyrenes, polyurethane foams, metal coatings

- 4.8% silicone, stops crazing, spotting, sticking
- Works from 40°F to 550°F

| SKU | SIZE |
|-----------|---------------------|
| S00305000 | 12 oz/340 g Aerosol |





MR 307



HEAVY DUTY PAINTABLE RELEASE AGENT

Specifically formulated for large, intricate or difficult to release parts. Allows the part to be painted, plated, stenciled, hot stamped, glued or otherwise decorated. Compatible with plastic, rubber, wax, most moldable resins, and elastic compounds. Recommended for injection molding and hot or cold molding processes.

APPLICATION & PERFORMANCE

Appliances, housewares, furniture, sporting goods, tires (green carcass), automotive, electronic components

- Works up to 550°F
- Fast evaporating

| SKU | AMOUNT |
|-----------|---------------------|
| S00307000 | 12 oz/340 g Aerosol |



MR 309







PAINTABLE RELEASE AGENT

Specially formulated paintable co-polymer for applications where a minimum amount of silicone is required. Finished parts can be painted, stenciled, glued, hot stamped, or otherwise decorated. Compatible with plastic, elastomeric compounds, and most moldable resins.

APPLICATION & PERFORMANCE

Appliances, housewares, furniture, sporting goods, tires (green carcass), automotive, electronic components

- Will not harm most plastics
- Low odor
- · Ideal for post decorating

| SKU | SIZE |
|-----------|---------------------|
| S00309000 | 12 oz/340 g Aerosol |











PAINTABLE **LECITHIN** RELEASE AGENT

A universal paintable, non-silicone mold release which delivers a clear soybean fluid. Made of hydroxylated lecithin derived from soybean, it is designed for a quick, clean release for thermosets and thermoplastics. It will not interfere with post-finishing.

APPLICATION & PERFORMANCE

Food, beverage, meat, poultry, and pharmaceutical plants: breweries; and on many types of plastics including polypropylene, polyethylene, nylon

- For gasket and seal closures
- Excellent release properties

| SKU | AMOUNT |
|-----------|-------------------------|
| SC0314000 | 12 oz/340 g Aerosol ◆ * |



MR315





URETHANE & STYRENE SILICONE **RELEASE AGENT**

A high-viscosity silicone that eliminates the common problem of chemical attacks on ultra-sensitive materials. Compatible with most moldable resins and elastomeric compounds. High purity minimizes crazing, spotting, sticking, and other causes for rejection.

APPLICATION & PERFORMANCE

Polystyrenes, elastomeric materials. plastics, polyurethanes

- 2% silicone
- Non-corrosive
- · Stops crazing, spotting, sticking

| SKU | SIZE |
|-----------|---------------------|
| S00315000 | 12 oz/340 g Aerosol |

53



DRY FILM RELEASE AGENTS PERFORMANCE

| DESCRIPTION | ТҮРЕ | NSF REGISTRATION | CAN BE POST DECORATED | TEMPERATURE RANGE | PLASTIC SAFE | % ACTIVE |
|---------------------------------------|------------------|---------------------|--------------------------|-------------------|----------------|----------|
| MR311 Dry Film Release Agent | P.T.F.E | N/A | • | 575°F (Max) | Most Plastics* | 5% |
| MR312 Dry Zinc Stearate Release Agent | Zinc Stearate | N/A | • | 450°F (Max) | Most Plastics* | 3% |

*Always test on a small hidden area before use.



DRY FILM RELEASE AGENT

Contains fluoropolymer, which provides an extremely thin, dry film that does not transfer to finished parts. Allows multiple releases per application and is compatible with most moldable resins and elastomeric compounds, as well as delicate urethanes. Will not interfere with post-finishing operations.

APPLICATION & PERFORMANCE

Polystyrenes, polypropylenes, nylon, rubber, foams, metals, filament windings, polyurethanes, epoxy potting and encapsulating, phenolic resins

- Does not contain silicone
- Made with P.T.F.E. dry film
- Excellent for post decorating

| SKU | SIZE |
|-----------|-----------------------|
| SC0311000 | 12 oz/340 g Aerosol 🌞 |



MR312



DRY ZINC STEARATE RELEASE AGENT

A high-grade, finely milled, dry zinc-powder release agent that is effective up to 450°F. Gobbing and hot spots are controlled, reducing rejected parts. Excellent for thermosetting and thermoplastic applications. Will not interfere with post-finishing operations such as painting, plating, stenciling, hot stamping, or gluing.

APPLICATION & PERFORMANCE

Clear styrenes and acrylics, reflex lenses, polypropylenes, polycarbonates, polystyrenes, polysulfonates, plastic molds, molding ceramics

- Will not harm most plastics
- Repels dust
- Non-silicone

| SKU | SIZE |
|-----------|---------------------|
| S00312000 | 12 oz/340 g Aerosol |



MOLD MAINTENANCE PERFORMANCE

| DESCRIPTION | ТҮРЕ | NSF REGISTRATION | SCENT | APPEARANCE | PLASTIC SAFE |
|-----------------------------------|-------------|---------------------|---------------|--------------|--------------|
| MR351 Mold Cleaner | Chlorinated | N/A | Fresh Linen | Clear Liquid | 8 |
| MR353 Foaming Citrus Mold Cleaner | d-Limonene | C1 | Citrus | Foamy | * |
| MR361 Mold Protectant | Petroleum | H2 | Light Solvent | Clear Film | * |

*Always test on a small hidden area before use.







MOLD CLEANER

A non-abrasive cleaner for all types of metal molds that also leaves a fine, microscopic inhibitor for short-term protection against corrosion. Surface moisture, dirt, oils, release agent residues, and other contaminants are quickly eliminated without the necessity of removing the mold from the machine.

APPLICATION & PERFORMANCE

Metal molds, machinery, electrical and electronic equipment, pins, mechanical equipment.

- Non-abrasive
- Neutralizes fingerprints
- Equipped with SPRAY ANYWAY[™] valve
- Removes resin residual, oils and, grease deposits

| SKU | SIZE |
|-----------|---------------------|
| S00351000 | 16 oz/453 g Aerosol |
| A35155000 | 55 gl/208 L Bulk * |







MOLD CLEANER Non-chlorinated and safe to use on

plastics and painted surfaces.

APPLICATION & PERFORMANCE

Cold molds, warm molds, mechanical equipment

- High foaming action and cling
- d-Limonene based
- Safe on all molds and plastic surfaces
- Neutral pH

| SKU | SIZE |
|-----------|--|
| S00353000 | 15.25 oz/432 g Foaming Action Aerosol |



MOLD PROTECTANT

A firm, non-tacky corrosion inhibitor. Provides long-term protection against rust and contamination. Wax-based protectant will not penetrate into pin areas and cause part rejections. Clear opaque-like color helps determine coverage.

APPLICATION & PERFORMANCE

All metal molds, pins, dies, machinery

- Prevents rust and contamination
- Non-staining formula
- Excellent humidity resistance
- Excellent for outdoor storage

| SKU | SIZE |
|-----------|---------------------|
| S00361000 | 13 oz/368 g Aerosol |



SP

SPECIALTY

| Brake Cleaners | . 58–59 |
|------------------------------|---------|
| Paint & Vandal Mark Removers | 60-61 |
| Stencil Inks & Layout Dyes | 62 |
| Insecticides | 63 |
| Other | . 64–65 |

SPRAYON PRODUCT GUIDE PRESERVE. PROTECT. PREVENT.®



BRAKE CLEANERS PERFORMANCE

| DESCRIPTION | CHLORINATED | VOC | CA VOC COMPLIANT | ACCUFORCE NOZZLE | FLAMMABLE | BULK |
|---|-------------|--------|---------------------|---------------------|-----------|------|
| SP705 Non-Chlorinated Brake & Parts Cleaner | © | 20% | 8 | 8 | • | • |
| SP706 Low VOC Brake & Parts Cleaner | • | 3% | • | 8 | • | 8 |
| SP707 Non-Chlorinated Brake & Metal Parts Cleaner | • | 10% | • | • | • | 0 |
| SP709 Chlorinated Brake & Parts Cleaner | • | 97.50% | 8 | • | 8 | 8 |





NON-CHLORINATED BRAKE & PARTS CLEANER

Instantly flushes away brake fluids, grease and dirt to ensure accurate adjustments and smooth brake operations. Non-chlorinated; also recommended as an all-purpose cleaner for metal parts.

APPLICATION & PERFORMANCE

Drums, calipers, discs, shoes, pads, springs, linings, cylinders

- High delivery spray
- Non-chlorinated
- Fast evaporating
- Leaves no residue

| SKU | SIZE |
|-----------|--|
| SC0705000 | 14 oz/397 g Aerosol * |
| S000705LQ | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray |
| SC0705050 | 5 gl/18.9 L Bulk ◆ * |



SP706



LOW VOC BRAKE & PARTS CLEANER

Instantly flushes away brake fluids, grease, and dirt to ensure accurate adjustments and smooth brake operations. Recommended as a cleaner for metal parts.

APPLICATION & PERFORMANCE

Drums, calipers, discs, shoes, pads, springs, linings, cylinders

- Methylene-chloride free
- Meets stringent VOC laws
- Leaves no residue

| SKU | SIZE |
|-----------|---------------------|
| S20706000 | 14 oz/396 g Aerosol |





SP707











NON-CHLORINATED BRAKE & METAL PARTS CLEANER

Combining an efficient cleaning solvent system with a high output spray system, you can ensure your job gets done fast. Ultra-low VOC ensures compliance in all 50 states.

APPLICATION & PERFORMANCE

Cylinders, brake drums, brake linings, brake shoes, calipers, clutch discs, disk brake pads, discs

- VOC compliant nationally
- Improves productivity with high output spray delivery
- Safe to use on all brake systems
- Effective in the removal of brake fluid, oils, and grease

| SKU | SIZE |
|-----------|---------------------------------|
| S00707000 | 16.5 oz/467 g Accuforce Aerosol |



SP709









CHLORINATED BRAKE & METAL PARTS CLEANER

Combining an efficient cleaning solvent system with a high output spray system, you can ensure your job gets done fast.

APPLICATION & PERFORMANCE

Cylinders, brake drums, brake linings, brake shoes, calipers, clutch discs, disk brake pads, discs

- Improves productivity with high output spray delivery
- Safe to use on all brake systems
- Effective in the removal of brake fluid, oils, and grease
- Not compliant in CA & NJ

| SKU | SIZE |
|-----------|----------------------------------|
| S00709000 | 14.25 oz/404 g Accuforce Aerosol |



PAINT & VANDAL MARK REMOVERS PERFORMANCE

| DESCRIPTION | BASE | CONTAINS METHYLENE CHLORIDE | PLASTIC SAFE | NSF REGISTRATION | voc | FAST ACTING |
|---|-----------------------|-----------------------------|----------------|---------------------|--------|----------------|
| SP404 Eco-Grade™ Vandal Mark Remover | Soy | 8 | Some Plastics* | N/A | 23% | 8 |
| SP405 Eco-Grade [™] Paint & Adhesive Remover | Soy | 8 | Some Plastics* | N/A | 19% | 8 |
| SP615 Heavy Duty Paint Remover | Methylene Chloride | • | 8 | C3 | 33% | • |
| SP915 Methylene Chloride Free Paint Remover | Solvent | 0 | 0 | N/A | 48.40% | • |

*Always test on a small hidden area before use.



SP 404



ECO-GRADE™ VANDAL MARK REMOVER

A highly effective, soy-based vandal mark remover that replaces terpene or petrochemical-based products. Specially formulated to be user friendly and contain natural, biodegradable ingredients that quickly and easily remove graffiti marks.

APPLICATION & PERFORMANCE

Wood, brick, stone, metal, graphite, steel

- Contains natural, biodegradable ingredients
- Quickly and easily removes paint, ink, magic marker, and adhesive residue
- Sprays and clings to vertical surfaces

| SKU | SIZE |
|-----------|-----------------------|
| SC0404000 | 12 oz/340 g Aerosol ❖ |







ECO-GRADE™ PAINT & ADHESIVE REMOVER

Premium coating stripper formulated to remove multiple layers of oil and latex paints. Removes many other coatings like epoxies, urethanes, elastomerics, and chlorinated rubber. Designed without methylene chlorine, MEK, or other harsh flammable chemicals. Has long dwell times and excellent ability to stick to vertical surfaces.

APPLICATION & PERFORMANCE

Wood, brick, stone, metal, graphite, glass, brick, ceramic tile, concrete, steel

- Made from renewable resources
- Removes coatings in minutes
- Excellent ability to stick to vertical surfaces.

| SKU | SIZE |
|-----------|-----------------------|
| SC0405000 | 12 oz/340 g Aerosol 🌞 |

61









HEAVY DUTY PAINT REMOVER (WITH METHYLENE CHLORIDE)

À fast-acting remover that cuts through all paint finishes. Removes urethanes, varnishes, and shellacs. Penetrates through gasket cements, decals, sealants, adhesives, tape residue, and carbon deposits.

APPLICATION & PERFORMANCE

Metal, stone, wood, brick, glass, ceramic tile, concrete, road signs, trucks, bridges, transportation and construction equipment, all types of general maintenance

- Leaves surfaces clean and ready-to-paint
- Fast acting paint remover
- Removes baked finishes
- \bullet Cuts through all paint finishes, ure thanes, varnishes, and shellacs

| SKU | SIZE |
|-----------|-----------------------|
| SC0615000 | 15 oz/425 g Aerosol 🌞 |









METHYLENE CHLORIDE FREE PAINT REMOVER

Developed for use in the removal of coatings, varnishes, epoxies, and urethanes. Allows for rapid penetration and removal of many common coatings.

APPLICATION & PERFORMANCE

Metal, stone, wood , brick, glass, ceramic tile, concrete, road signs, trucks, bridges

- Fast penetration, cuts through all paint finishes, urethanes, varnishes and shellacs
- Leaves surface clean and ready to repaint
- No chlorinated solvents, caustics, or acids

| SKU | SIZE |
|-----------|-----------------------|
| SC0915000 | 16 oz/454 g Aerosol ❖ |

❖ AVAILABLE IN CANADA PRESERVE. PROTECT. PREVENT.®

SP SPECIALTY



SP 3100 SERIES



CARTON STENCIL INKS

Highly opaque and fast drying. Formulated for stenciling and marking a wide variety of surfaces. Bold, high-contrast colors leave a sharp, clean edge without smearing, smudging or rippling. Excellent durability and adhesion to hot surfaces. Ideal for color-coding and marking of steel coils.

APPLICATION & PERFORMANCE

Cartons, corrugated boxes, fiber drums, lumber, wood crates, metals, plaster, stone, glass, concrete, porous/non-porous surfaces

- Waterproof
- Weather resistant

| SKU | SIZE |
|-----------|---------------------------------|
| SC3105000 | 12 oz/340 g Aerosol (White) * |
| S03106000 | 12 oz/340 g Aerosol (Red) |
| SC3108000 | 12 oz/340 g Aerosol (Black) * |
| S03109000 | 12 oz/340 g Aerosol (Dark Blue) |
| S03111000 | 12 oz/340 g Aerosol (Green) |
| S03112000 | 12 oz/340 g Aerosol (Orange) |
| SC3127000 | 12 oz/340 g Aerosol (Yellow) * |
| SC3119000 | 12 oz/340 g Aerosol (Tan) * |







Applies a smooth, even coat for all layout work. Dark blue color provides sharp contrast of scribed lines against clean surface. Dries instantly and will not rub off. Fine, clean lines can be drawn on this non-glaring, non-flaking coating. Adheres to all metals, aluminum or glass. Removes easily with Sprayon SP606 Layout Dye Remover.

APPLICATION & PERFORMANCE

Tool and die-making, machining, pattern-making and maintenance mechanicals

- Does not contain methlylene chloride
- Dries quickly; will not rub off
- Sticks to metal and glass
- Non-etching

| SKU | SIZE |
|-----------|-----------------------|
| SC0603000 | 12 oz/340 g Aerosol 🌞 |



SP 606



LAYOUT DYE

Specially formulated to remove SP603 Blue Layout Fluid or other layout fluids quickly and efficiently. May also be used to remove light oils, grease, many types of paint, and other markings on metal or glass. Eliminates the use of daubers and brushes. Does not contain methylene chloride.

APPLICATION & PERFORMANCE

For the quick and easy removal of layout fluids, other markings

- Removes old inks, oils and greases
- Fast acting
- Leaves no residue
- No chlorinated solvents

| SKU | SIZE |
|-----------|--------------------------|
| SC0606000 | 12.75 oz/361 g Aerosol 🍁 |



INSECTICIDES PERFORMANCE

| DESCRIPTION | EPA REG NO. | FEATURES | CONTAINER SIZE |
|---|-----------------|---|----------------------------|
| SP856 Insect Repellant II | 10900-72-64695 | Protects up to 4 Hours | Aerosol - 6 oz |
| SP857 Blast 'em™ Wasp & Hornet Killer | 67603-11-64695 | Sprays up to 20 ft with Accu-Sol™ Ergonomic Trigger | Aerosol - 20 oz. and 16 oz |
| SP859 Hit Squad™ Industrial Insecticide | 1021-1615-64695 | Indoor/Outdoor Use | Aerosol - 11.75 oz |



SP 856



INSECT REPELLANT II

Contains a combination of active ingredients to protect against insect bites up to eight hours under normal use. Frequent applications and saturation is unnecessary for effectiveness.

APPLICATION & PERFORMANCE

Effectively repels mosquitoes, black flies, chiggers, deer flies, ticks, gnats, stable flies, fleas

- EPA REg. No. 10900-72-64695
- 25.0% DEET

| SKU | SIZE |
|-----------|--------------------|
| S00856000 | 6 oz/170 g Aerosol |



SP 857



BLAST 'EM™ WASP & HORNET KILLER

Residual deposit will kill returning wasps and hornets.

APPLICATION & PERFORMANCE

Ideal on utility meters and boxes; nesting areas in eaves and shrubs; outside surfaces of screens, doors, and window frames; porch lighting fixtures; also for use in outdoor public areas

- Sprays up to 20 feet
- EPA REg. No. 67603-11-64695

| SKU | SIZE |
|-----------|---|
| S00857000 | 16 oz/454 g Aerosol |
| S02085700 | 20 oz/566 g Aerosol |
| S03085700 | 14 oz/396 g Aerosol - Accu-Sol Trigger |



SP 859



HIT SQUAD™ INDUSTRIAL INSECTICIDE

A insecticide for use in institutions, food processing plants, apartments, garages, hotels, and motels.

APPLICATION & PERFORMANCE

Works on houseflies, mosquitoes, gnats, wasps, small moths, ants, roaches, waterbugs, silverfish, centipedes, spiders, crickets

- Industrial-strength insecticide designed to kill common insects
- Flushing action and fast knockdown
- For indoor or outdoor use
- EPA REg. No. 1021-1615-64695

| SKU | SIZE |
|-----------|------------------------|
| S00859000 | 11.75 oz/333 g Aerosol |

◆ AVAILABLE IN CANADA PRESERVE. PROTECT. PREVENT.®











Specially formulated to protect a variety of nonporous surfaces against abrasion, scratches, moisture, rust, and corrosionduring shipping and in storage. An easy way to keep spray booth clean.

APPLICATION & PERFORMANCE

Precision tools, stainless steel, anodized aluminum, unpainted metal, paint booths, glass, castings, baked enamel surfaces, mirrors, chrome dies, masking

- Protects non-porous surfaces
- · Resists mild acids
- · Protects against paint overspray
- Works up to 150°F

| SKU | SIZE |
|-----------|-----------------------|
| SC0322000 | 12 oz/340 g Aerosol 🌞 |











ANTI-STATIC SPRAY

Neutralizes static electricity generated by friction and low humidity conditions. A light coating eliminates static charges immediately. Remains on the surface to suppress static accumulation. Repels lint and dust.

APPLICATION & PERFORMANCE

Printing and bindery equipment, sheet cutters, textile equipment, rewinders, paper and packing machinery, production feeders, slitters

- Neutralizes static electricity
- Safe on plastic, paper and fabric
- Dries instantly
- · Clear non-staining film

| SKU | SIZE |
|-----------|-------------------------|
| SC0610000 | 11.5 oz/326 g Aerosol ◆ |



BELT DRESSING

Effective performer, even when subjected to wet or outdoor conditions. Will not glaze, collect dirt or dust. Conditions belts while increasing pulling power up to 50%. Equipped with a Spray Anyway™ valve. Reduces squeaky noise, caused by old "V" belts.

APPLICATION & PERFORMANCE

Leather, rubber, canvas, fabric; flat, round or "V" belts, auto fan belts, farm machinery belting; all industrial belt drives including generators, fans

- Increases pulling power
- · Contains no asphalt or rosin

| NSF ASPHALT #12 E-4 FREE R.O | Does not glaze or collect dirt |
|------------------------------|--|
| SKU | SIZE |
| SC0607000 | 11 oz/312 g Aerosol 🍁 |
| SC0607LQ0 | 14 fl oz/414 mL Liqui-Sol™ Non-Aerosol Trigger Spray 🍁 🗱 |
| S60705000 | 5 gl/18.9 L Bulk * |



SP 608





FOOD GRADE BELT DRESSING Ideal for industrial, automotive and

food processing applications. Highly-processed ingredients to ensure increased RPM and horsepower, while reducing slippage. Will not glaze, collect dirt, or dust. Effective in the prevention of dry rot and air rot. Conditions belts while increasing pulling power.

APPLICATION & PERFORMANCE

- · Colorless and water resistant
- · Rosin and asphalt free
- Increases pulling power

| SKU | SIZE |
|-----------|------------------------|
| S00608000 | 13.25 oz/375 g Aerosol |





ENGINE DEGREASER

Specially formulated to clean all mechanical engines, machinery, and tools. Biodegradable formula removes dirt, grease, and varnish deposits by simply spraying it on and flushing the surface with water. Emulsifies so that the contaminants are carried away, leaving the surface clean. The high-velocity valve delivers the cleaning agent to intricate mechanical parts.

APPLICATION & PERFORMANCE

Automotive and marine engines, mechanical equipment, shop equipment, machinery, tools

- Removes dirt, grease and varnish
- Contains d-Limonene
- High delivery valve

| SKU | SIZE |
|-----------|---------------------|
| S00702000 | 12 oz/340 g Aerosol |





Lightweight foams, cardboard, fabric, plastic, wood, foil, (un) painted metals, paper, cartons, carpets, metal, fiberglass, felt, cloth

MULTI-PURPOSE

SPRAY ADHESIVE

Great for bonding a variety of

lightweight materials. Provides

high coverage and has low soak-in

whether your project is simple or


factor. For long lasting, secure bonds

Dries auickly

complex.

- Controlled mist spray pattern
- Tack Range: 10-30 seconds







SP 000 SERIES

RTV SILICONE SEALANTS

Provides a tough, flexible bond between wood, metal, glass, plastic, ceramic, masonry, and more. Bonds and seals cracks, holes and pores against water, dust, air, leakage, chemicals, oils, and greases. Paints do not adhere well to this sealant. Complete painting before applying. Not recommended for exterior, below the-waterline marine applications. Not for use in direct contact with gasoline, kerosene, or other liquid solvents.

APPLICATION & PERFORMANCE

- Mildew-resistant
- · Long work life or tooling time of 5-10 minutes
- Dielectric strength 500 volts per mil
- No cartridge mess or squeeze tubes

| SKU | SIZE |
|-----------|------------------------------|
| SC0010000 | 8 oz/226 g Aerosol (Clear) 🌞 |
| SC0020000 | 8 oz/226 g Aerosol (White) * |
| SC0030000 | 8 oz/226 g Aerosol (Blue) * |
| SC0040000 | 8 oz/226 g Aerosol (Black) * |
| SC0050000 | 8 oz/226 g Aerosol (Red) ◆ |



SP 9000





HEAVY-DUTY SPRAY ADHESIVE

Can be used to bond plastic, glass, and laminates to tables, cabinets, and shelving. Has a variable, volume controlled, lace spray pattern for stronger bonds and spray control.

APPLICATION & PERFORMANCE

Laminates, cardboard, ceramics, paper, plastic, metal, particle board, wood

- Heat resistant up to 170°F
- · Controlled lace spray pattern
- Tack Range: 10-30 seconds

| SKU | SIZE |
|-----------|-----------------------------------|
| S0900000A | 16.25 oz/460 g Lace Spray Aerosol |



WL

WELDING

| Anti-Spatters | 68-69 |
|--------------------------|-------|
| Silver Galvanizing | 70 |
| Zinc Rich Galvanizing | 7 |
| Stainless Steel Coatings | 72 |
| Other | 73 |

SPRAYON PRODUCT GUIDE PRESERVE. PROTECT. PREVENT.®



ANTI-SPATTERS PERFORMANCE

| DESCRIPTION | CONTAINS METHYLENE CHLORIDE | BASE | voc | QUICK DRY | PAINTABLE |
|-----------------------------------|-----------------------------|----------|--------|-----------|-----------|
| WL541 Dry Weld Spatter Protectant | • | Talc | 0% | • | • |
| WL542 Wet Weld Spatter Protectant | • | Lecithin | 0% | • | • |
| WL941 Dry Weld Spatter Protectant | 0 | Talc | 27.24% | • | • |
| WL942 Wet Weld Spatter Protectant | 0 | Lecithin | 15% | • | • |













DRY WELD SPATTER **PROTECTANT** (WITH METHYLENE CHLORIDE)

A powder formula that dries to a white film. Prevents spatter from sticking to metal surfaces during welding. Just brush or wipe off residue after welding. Surface may be painted after use.

APPLICATION & PERFORMANCE

All types of maintenance and production welding, construction, body shops

- Reveals weld cracks
- Does not contain silicone
- Prevents base metal spatter
- Brushes off easily

| SKU | SIZE |
|-----------|-----------------------|
| SC0541000 | 16 oz/454 g Aerosol ◆ |















WET WELD SPATTER PROTECTANT (WITH METHYLENE CHLORIDE)

A liquid anti-spatter that keeps welding tips and nozzles clean and prevents weld spatter adhesion. Does not contain silicone and will not interfere with post-decorating.

APPLICATION & PERFORMANCE

Contact tips, weldments, electrode holders, fixtures, resistance welding tips, wheels

- · Works on mig and tig tips
- Does not contain silicone
- Prevents base metal spatter
- Soy based and will not interfere with painting

| SKU | SIZE |
|-----------|-----------------------|
| SC0542000 | 16 oz/454 g Aerosol ❖ |













DRY WELD SPATTER **PROTECTANT** (NO METHYLENE CHLORIDE)

A powder formula that dries to a white film. Prevents spatter from sticking to metal surfaces during welding. Just brush or wipe off residue after welding. Does not contain silicone. Surface may be painted after use. Does not contain Methylene Chloride.

APPLICATION & PERFORMANCE

All types of maintenance and production welding, construction, body shops

- Does not contain silicone
- Prevents base metal spatter
- Talc based

| SKU | SIZE |
|-----------|-------------------------|
| SC0941000 | 12 oz/340 g Aerosol ◆ * |





WET WELD SPATTER PROTECTANT (NO METHYLENE CHLORIDE)

A liquid anti-spatter that keeps welding tips and nozzles clean and prevents weld spatter adhesion. Does not contain silicone and will not interfere with post decorating. Does not contain Methylene Chloride.

APPLICATION & PERFORMANCE

Contact tips, weldments, electrode holders, fixtures, resistance welding tips, wheels

- Works on mig and tig tips
- · Non greasy lecithin formula

| SKU | SIZE |
|-----------|-------------------------|
| SC0942000 | 15.5 oz/439 g Aerosol 🌞 |



SILVER GALVANIZING PERFORMANCE

| DESCRIPTION | BASE TYPE | FORMAT | APPEARANCE | % ZINC DRY FILM | TEMPERATURE RANGE |
|--|-----------|---------|---------------|--------------------|-------------------|
| WL739 Silver Galvanizing Compound | Alkyd | Aerosol | Silver Gray | 69% | 400°F (Max) |
| WL839 High Performance Silver Galvanizing Compound | Alkyd | Aerosol | Bright Silver | 69% | 400°F (Max) |





SILVER GALVANIZING COMPOUND

A sacrificial coating that inhibits rust and corrosion to ferrous metals. An excellent fast drying touch-up for repair of galvanized substrates. Has the bright finish of hot-dip galvanized coating.

APPLICATION & PERFORMANCE

Refineries, ornamental iron, welds, power plants, fences, farm equipment, gutters, automotive, bridges, highway maintenance, structural steel, transmission towers, damaged galvanized surfaces

- Hot-dip appearance
- Dry to touch in 30 minutes
- Dry heat and chemical resistant

| SKU | SIZE |
|-----------|-----------------------|
| SC0739000 | 14 oz/396 g Aerosol ❖ |



HIGH-PERFORMANCE SILVER GALVANIZING COMPOUND

A metallic zinc sacrificial coating that inhibits rust and corrosion on ferrous and non-ferrous metals. An excellent touch-up for the repair of galvanized substrates that have been damaged by abrasion, scratching, cutting, or welding. Brilliant finish and premium performance. Excellent touch-up of welds and can be used as a weld-through primer.

APPLICATION & PERFORMANCE

Damaged galvanized surfaces, structural steel, transmission towers, welds, heavy equipment, pipes, metal chain fences, bridges, railroad equipment, guard rails, oil field equipments, anywhere a bright look hot dipped surface is desired

• Brilliant hot-dip appearance

| SKU | SIZE |
|-----------|---------------------|
| S00839000 | 14 oz/396 g Aerosol |

71



ZINC RICH GALVANIZING PERFORMANCE

| DESCRIPTION | ТҮРЕ | FORMAT | APPEARANCE | % ZINC DRY FILM | TEMPERATURE RANGE |
|--------------------------------------|-------|--------------------------------------|-------------|-----------------|-------------------|
| WL740 Zinc Rich Galvanizing Compound | Ероху | Aerosol (Upright & Inverted) Bulk | Medium Gray | 92% | 600°F (Max) |



WL740



ZINC-RICH GALVANIZING COMPOUND

A high performance primer containing 97% pure zinc dust pigment blended with epoxy resin. Stops rust by electro-chemical action on steel or galvanized coatings. Self-sacrificing zinc protects the base metal, preserves strength, and prevents rust creepage when the area is penetrated or scratched. Delivers protection against corrosion equal to or better than hot dipped galvanizing.

APPLICATION & PERFORMANCE

Automotive, power plants and refineries, industrial tanks, piping, welded joints, bridges, farm equipment, fences, ornamental iron, gutters, structural steel, transmission towers, galvanized surfaces

- 92% Zinc Dry Film
- Stops rust
- Low VOC
- Non sagging formula

| SKU | SIZE |
|-----------|--------------------------------|
| SC0740000 | 14 oz/396 g Aerosol ❖ |
| SC0740INV | 14 oz/396 g Inverted Aerosol ◆ |
| SC0740Q00 | 1 qt/946 mL Bulk 🌞 |
| SC0740010 | 1 gl/3.78 L Bulk ◆ |

AVAILABLE IN BULK!



◆ AVAILABLE IN CANADA PRESERVE. PROTECT. PREVENT.®



OUR FORMULAS MEET TOUGH INDUSTRY SPECIFICATIONS AND OFFER HIGH CORROSION RESISTANCE ACROSS A MULTITUDE OF APPLICATIONS.



STAINLESS STEEL COATING

Formulated with 100% type 316L stainless steel pigment for maximum corrosion resistance on stainless steel, copper and other metals. Dries quickly to a satin sheen. Hardens overnight and cures to optimum strength in several days. Withstands temperatures up to 400°F.

APPLICATION & PERFORMANCE

Exhaust and steam pipes, mufflers, radiators, production equipment, engines, furnaces, plumbing fixtures, chemical processing equipment

- Contains stainless steel
- Covers weld discoloration
- Works up to 400°F
- Quick dry formula

| SKU | SIZE |
|-----------|-----------------------|
| SC0738000 | 12 oz/340 g Aerosol ◆ |







WL744/745 SYSTEM





WELDING DEFECT DETECTION SYSTEM - PENETRANT & DEVELOPER

A two-part quality assurance system that detects cracks and defects in metals and non-porous, non-metal parts. Detect and clearly mark even the finest faults in welds, casts and other nonporous materials before they cause product failure or costly breakdowns. Ideal for short run applications or spot-testing large parts, welds, assemblies and more.

APPLICATION & PERFORMANCE

Turbine blades, molds, structural beams, pipes

- Easy-to-use 2-step system ensures quality inspections
- Detects and locates cracks and defects in welds, metals, and more
- Requires both Penetrant (WL744) and Developer (WL745)

| SKU | SIZE |
|-----------|-------------------------------|
| SC0744000 | 9 oz/255 g Aerosol - Step 1 🌞 |
| SC0745000 | 7 oz/198 g Aerosol - Step 2 🌞 |

DESIGNED FOR THE MOST SPECIALIZED WELDING MAINTENANCE NEEDS.



5000

MODEL 5000 AEROSOLV SYSTEM

INCLUDES

- Puncturing device
- #6163 combination coalescing activated carbon filter
- #5129 standard gasket
- #5132 gasket
- Anti-static wire
- · Safety goggles

| ALGIN ON THE PROPERTY OF | 鲈 | <u>Z</u> | |
|-----------------------------|---|----------|----|
| | | St. | 31 |
| | 1 | | |
| | | | |

7000XL

MODEL 7000XL AEROSOLV SYSTEM

INCLUDES

- Advanced puncturing device-Teflon® coated with counter and automatic shutoff valve
- #7163XL combination colormetric carbon filter with automatic check valve
- #5129 standard gasket
- #5132 gasket, anti-static wire
- · Safety goggles
- Drum cover
- Drum under containment

| SKU | ТҮРЕ | CASE PACK | SKU | ТҮРЕ | CASE PACK |
|--------|-----------------|-----------|---------|---------------------|-----------|
| ACPU03 | Complete System | 1 | CPU7000 | OCA Complete System | 1 |



MODEL 5000 REPLACEMENT CARBON CARTRIDGE

INCLUDES

- Replacement activated carbon cartridge (pkg of 2)
- Replace after 750 cans are punctured

6363

| SKU | ТҮРЕ | CASE PACK |
|--------|------------------|-----------|
| ACPF05 | Replacement Part | 2 |



MODEL 5000 TWO STAGE COALESCING FILTER

INCLUDES

- Combination coalescing filter with replaceable activated carbon cartridge
- Replace after 9 months or 2250 cans are punctured

6163

| SKU | ТҮРЕ | CASE PACK |
|--------|------------------|-----------|
| ACPF04 | Replacement Part | 1 |



MODEL 7000XL COLORMETRIC CARBON CARTRIDGES

INCLUDES

- Replacement colormetric carbon cartridges with automatic check valves (pkg of 2)
- Replace after 750 cans are punctured

7363XL

| SKU | ТҮРЕ | CASE PACK |
|-----------|------------------|-----------|
| CPF7363CA | Replacement Part | 2 |



MODEL 7000XL COLORMETRIC FILTER

INCLUDES

- Combination coalescing filter with replaceable colormetric carbon cartridge with automatic check valve
- Replace after 9 months or 2250 cans are punctured

7163XL

| SKU | ТҮРЕ | CASE PACK |
|-----------|------------------|-----------|
| CPF7163CA | Replacement Part | 1 |

75








EDUCATIONAL POSTERS

Easily located throughout your facility, these posters not only help reinforce and explain the elements of the Sprayon packaging, but they also serve as a reference point for the product attributes that your workforce should consider when applying any product to a piece of equipment.



KANBAN TAGS

For years, industrial and MRO facilities have been using Kanban to manage their inventory. Kanban Tags indicate when it's time to re-order a product based on lead time so you can effectively manage your inventory levels.



PRODUCT ID TAGS

Available with adhesive or magnetic backing, these tags adhere to any piece of equipment to identify the specific Sprayon product to be used, eliminating the guesswork that can ruin productivity and ensuring the safety of your workforce.

CONTACT YOUR SALES REPRESENTATIVES FOR MORE INFORMATION.

VISIT US ONLINE SPRAYON.COM PRESERVE. PROTECT. PREVENT.®

| CATEGORY | FAMILY | NAME | SKU | PAGE |
|---|----------------|--|--------------------|----------|
| Cleaners & Degreasers | CD880 | General Purpose Cleaner | SC0880000 * | 9 |
| Cleaners & Degreasers | CD880 | General Purpose Cleaner | SC0880LQ0 🍁 | 9 |
| Cleaners & Degreasers | CD880 | General Purpose Cleaner | S88005000 * | 9 |
| Cleaners & Degreasers | CD1087 | Neutral All-Purpose Cleaner | SC1087010 🍁 | 9 |
| Cleaners & Degreasers | CD1087 | Neutral All-Purpose Cleaner | S010870005 * | 9 |
| Cleaners & Degreasers | CD888 | Glass Cleaner | SC0888000 🌞 | 10 |
| Cleaners & Degreasers | CD1100 | Ammoniated Glass Cleaner | S1106T1232 | 10 |
| Cleaners & Degreasers | CD1100 | Ammoniated Glass Cleaner | S011000401 | 10 |
| Cleaners & Degreasers | CD1106 | Non-Ammoniated Glass Cleaner | S1100T1232 | 11 |
| Cleaners & Degreasers | CD1106 | Non-Ammoniated Glass Cleaner | \$011060401 | 11 |
| Cleaners & Degreasers | CD757 | Heavy Duty Citrus Degreaser | SC0757000 🍁 | 12 |
| Cleaners & Degreasers | CD757 | Heavy Duty Citrus Degreaser | SC0757LQ0 🌞 | 12 |
| Cleaners & Degreasers | CD757 | Heavy Duty Citrus Degreaser | S75705000 * | 12 |
| Cleaners & Degreasers | CD757 | Heavy Duty Citrus Degreaser | S75755000 * | 12 |
| Cleaners & Degreasers | CD1216 | Multi-purpose Cleaner | SC1216TL0 🌞 | 13 |
| Cleaners & Degreasers | CD1275 | Ready to Use Heavy Duty Degreaser | S1275T1232 | 13 |
| Cleaners & Degreasers | CD1275 | Ready to Use Heavy Duty Degreaser | | 13 |
| Cleaners & Degreasers | CD1275 | Ready to Use Heavy Duty Degreaser | | 13 |
| Cleaners & Degreasers | CD1275 | Ready to Use Heavy Duty Degreaser | | 13 |
| Cleaners & Degreasers | CD1201 | Neutra-Force [™] Heavy Duty Foaming Degreaser | | 14 |
| Cleaners & Degreasers | CD1201 | Neutra-Force [™] Heavy Duty Foaming Degreaser | | 14 |
| Cleaners & Degreasers | CD1201 | Neutra-Force [™] Heavy Duty Foaming Degreaser | | 14 |
| Cleaners & Degreasers | CD1201 | Neutra-Force [™] Heavy Duty Foaming Degreaser | | 14 |
| Cleaners & Degreasers | CD1201 | Neutra-Force [™] Heavy Duty Foaming Degreaser | | 14 |
| Cleaners & Degreasers | CD1202 | Industrial Cleaner & Degreaser | | 15 |
| Cleaners & Degreasers | CD1202 | Industrial Cleaner & Degreaser | | 15 |
| Cleaners & Degreasers | CD1202 | Industrial Cleaner & Degreaser | | 15 |
| Cleaners & Degreasers | CD1219 | Water-Based Citrus Degreaser | | 15 |
| Cleaners & Degreasers | CD1219 | Water-Based Citrus Degreaser | | 15 |
| Cleaners & Degreasers | CD1228 | High Performance Citrus Cleaner & Degreaser | | 15 |
| Cleaners & Degreasers | CD1228 | High Performance Citrus Cleaner & Degreaser | | 15 |
| Cleaners & Degreasers | CD885 CD885 | Stainless Steel Cleaner | | 16 16 |
| Cleaners & Degreasers Cleaners & Degreasers | CD885 | Stainless Steel Cleaner | | 16 |
| Cleaners & Degreasers | CD887 | Coil & Fin Cleaner | | 17 |
| Cleaners & Degreasers | CD889 | Cleaning Wax & Soil Repellant | | 17 |
| Electrical & Electronic Cleaners | EL703 | Electric Motor Degreaser | | 20 |
| Electrical & Electronic Cleaners | EL749 | Electrical Degreaser | | 20 |
| Electrical & Electronic Cleaners | EL749 | Electrical Degreaser | | 20 |
| Electrical & Electronic Cleaners | EL749 | Electrical Degreaser | | 20 |
| Electrical & Electronic Cleaners | EL749 | Electrical Degreaser | | 20 |
| Electrical & Electronic Cleaners | EL848 | Flash Free® Electrical Degreaser | | 21 |
| Electrical & Electronic Cleaners | EL848 | Flash Free® Electrical Degreaser | | 21 |
| Electrical & Electronic Cleaners | EL848 | Flash Free® Electrical Degreaser | SC0848LQ0 🌞 | 21 |
| Electrical & Electronic Cleaners | EL848 | Flash Free® Electrical Degreaser | S84801000 | 21 |
| Electrical & Electronic Cleaners | EL848 | Flash Free® Electrical Degreaser | S84805000 * | 21 |
| Electrical & Electronic Cleaners | EL848 | Flash Free® Electrical Degreaser | S84855000 * | 21 |
| Electrical & Electronic Cleaners | EL2846 | Non-Chlorinated Electrical Degreaser | \$20846000 | 21 |
| Electrical & Electronic Cleaners | EL2846 | Non-Chlorinated Electrical Degreaser | S20846050 * | 21 |
| Electrical & Electronic Cleaners | EL2846 | Non-Chlorinated Electrical Degreaser | | 21 |
| Electrical & Electronic Cleaners | EL2846 | Non-Chlorinated Electrical Degreaser | | 21 |
| Electrical & Electronic Cleaners | EL2208 | Electro Wizard™ Non-Brominated Degreaser | | 22 |
| Electrical & Electronic Cleaners | EL2001 | Electronic Contact Cleaner & Protectant | | 22 |
| Electrical & Electronic Cleaners | EL2020 | Plastics Safe Contact Cleaner | | 23 |
| Electrical & Electronic Cleaners | EL2206 | Electro Wizard™ Electronic Contact Cleaner | | 23 |
| Electrical & Electronic Cleaners | EL2207 | Electro Wizard™ Non-Brominated Precision Cleaner | | 25 |
| Electrical & Electronic Cleaners | EL2302 | Electronic Contact Cleaner | | 25 |
| Electrical & Electronic Cleaners | EL2302 | Electronic Contact Cleaner | | 25 |
| Electrical & Electronic Cleaners | EL2302 | Electronic Contact Cleaner | S23020500 * | 25 |



| CATEGORY | FAMILY | NAME | SKU | PAGE |
|----------------------------------|----------------|--|--------------------|----------|
| Electrical & Electronic Cleaners | EL600 | Clear Insulating Varnish | SC0600000 * | 27 |
| Electrical & Electronic Cleaners | EL601 | Red Insulating Varnish | SC0601000 * | 27 |
| Electrical & Electronic Cleaners | EL601 | Red Insulating Varnish | S60110000 | 27 |
| Electrical & Electronic Cleaners | EL609 | Green Insulating Varnish | SC0609000 * | 27 |
| Electrical & Electronic Cleaners | EL2007 | Non-Flammable Duster | SC2007000 🌞 | 28 |
| Electrical & Electronic Cleaners | EL2003 | Circuit Cooler | S02003000 | 29 |
| Electrical & Electronic Cleaners | EL2000 | Clear Electrical Lacquer Sealer | S02000000 | 29 |
| Lubricants | LU620 | Anti-Seize Compound | SC0620000 * | 32 |
| Lubricants | LU620 | Anti-Seize Compound | | 32 |
| Lubricants | LU620 | Anti-Seize Compound | | 32 |
| Lubricants | LU621 | Food Grade Anti-Seize Compound | | 32 |
| Lubricants | LU200 | Dry Film Moly Lubricant | | 34 |
| Lubricants | LU200 | Dry Film Moly Lubricant | | 34 |
| Lubricants | LU200 | Dry Film Moly Lubricant | | 34 |
| Lubricants | LU204 | Dry Film Graphite Lubricant | | 34 |
| Lubricants | LU204 | Dry Film Graphite Lubricant | | 34 |
| Lubricants | LU204 | Dry Film Graphite Lubricant | | 34 |
| Lubricants | LU204 | Dry Film Graphite Lubricant | | 34 |
| Lubricants | LU708 | High Performance Dry Lubricant | | 35 |
| Lubricants | LU708 | High Performance Dry Lubricant | | 35 |
| Lubricants | LU708 | High Performance Dry Lubricant | | 35 |
| Lubricants | LU103 | Rust Breaker Penetrant | | 38 |
| Lubricants | LU103 | Rust Breaker Penetrant | | 38 |
| Lubricants | LU103 | Rust Breaker Penetrant | | 38 |
| Lubricants | LU103 | Rust Breaker Penetrant | | 38 |
| Lubricants | LU104 | Food Grade Penetrating Oil | | 38 |
| Lubricants | LU202 | Moly Chain Lubricant | | 38 |
| Lubricants | LU202 | Moly Chain Lubricant | | 38 |
| Lubricants | LU202 | Moly Chain Lubricant | | 38 |
| Lubricants | LU205 LU207 | Food Grade Chain Lubricant | | 38 |
| Lubricants | | Food Grade Synthetic Grease | | 39 |
| Lubricants Lubricants | LU208 LU208 | Cutting Oil Cutting Oil | | 39 39 |
| Lubricants | LU208 | Cutting Oil | | 39 |
| Lubricants | LU209 | Food Grade Synthetic Oil | | 39 |
| Lubricants | LU213 | Food Grade High Temp Lubricant | | 39 |
| Lubricants | LU214 | Food Grade Low Temp Lubricant | | 40 |
| Lubricants | LU402 | Eco-Grade™ General Purpose Lubricant & Penetrant | | 40 |
| Lubricants | LU700 | Food Grade Machinery Oil | | 40 |
| Lubricants | LU700 | Food Grade Machinery Oil | | 40 |
| Lubricants | LU700 | Food Grade Machinery Oil | | 40 |
| Lubricants | LU701 | Food Grade Machinery Oil | | 40 |
| Lubricants | LU711 | The Protector™ All-Purpose Lubricant | | 41 |
| Lubricants | LU711 | The Protector™ All-Purpose Lubricant | | 41 |
| Lubricants | LU711 | The Protector™ All-Purpose Lubricant | | 41 |
| Lubricants | LU711 | The Protector™ All-Purpose Lubricant | | 41 |
| Lubricants | LU711 | The Protector™ All-Purpose Lubricant | S71155000 | 41 |
| Lubricants | LU727 | High Performance Wet Lubricant | SC0727000 * | 41 |
| Lubricants | LU728 | Non-Flammable Synthetic Lubricant | SC0728000 ** | 41 |
| Lubricants | LU100 | White Lithium Grease | SC0100000 * | 42 |
| Lubricants | LU100 | White Lithium Grease | SC0100LQ0 * | 42 |
| Lubricants | LU100 | White Lithium Grease | S10005000 * | 42 |
| Lubricants | LU101 | Food Grade White Grease | S00101000 | 42 |
| Lubricants | LU102 | Multi-Purpose Red Grease | S00102000 | 43 |
| Lubricants | LU201 | Open Gear & Wire Rope Lubricant | SC0201000 * | 43 |
| Lubricants | LU201 | Open Gear & Wire Rope Lubricant | SC0201LQ0 🍁 | 43 |
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00510005 * | 44 |
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00510015 * | 44 |
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00510055 * | 44 |

| CATEGORY | FAMILY | NAME | SKU | PAGE |
|------------------------------|----------------|--|--------------------|----------|
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00511005 * | 44 |
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00511015 * | 44 |
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00511055 * | 44 |
| \Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00512014 * | 44 |
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00512005 * | 44 |
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | S00512015 * | 44 |
| Lubricants | LU510 Series | Food Grade Synthetic High Temperature Grease | | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | S00520005 * | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | S00520055 * | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | S00521005 * | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | S00521015 * | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | S00522014 * | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | S00522005 * | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | | 44 |
| Lubricants | LU520 Series | Food Grade Multi-Purpose Semi-Synthetic Grease | | 44 |
| Lubricants | LU710 | Waxy Film Protectant | SC0710000 🌞 | 45 |
| Lubricants | LU737 | Synthetic Dry Protectant | | 45 |
| Lubricants | LU737 | Synthetic Dry Protectant | | 45 |
| Lubricants | LU737 | Synthetic Dry Protectant | S73705000 * | 45 |
| Lubricants | LU767 | Indoor Metal Protectant | SC0767000 🌞 | 46 |
| Lubricants | LU767 | Indoor Metal Protectant | S76701000 | 46 |
| Lubricants | LU767 | Indoor Metal Protectant | S76705000 | 46 |
| Lubricants | LU777 | Outdoor Metal Protectant | SC0777000 🌞 | 46 |
| Lubricants | LU777 | Outdoor Metal Protectant | SC0777LQ0 🌞 | 46 |
| Lubricants | LU777 | Outdoor Metal Protectant | S77701000 * | 46 |
| Lubricants | LU777 | Outdoor Metal Protectant | S77705000 * | 46 |
| Lubricants | LU1324 | High Performace Silicone Lubricant | | 47 |
| Lubricants | LU206 | All-Purpose Sillicone Lubricant | | 47 |
| Lubricants | LU206 | All-Purpose Sillicone Lubricant | | 47 |
| Lubricants | LU206 | All-Purpose Sillicone Lubricant | | 47 |
| Lubricants | LU211 | Food Grade Dry Silicone | | 48 |
| Lubricants | LU212 | Food Grade Silicone Lubricant | | 48 |
| Lubricants | LU905 | Heavy Duty Silicone Lubricant | | 48 |
| Lubricants | LU910 | Food Grade Silicone Lubricant | | 48 |
| Lubricants | LU210 | Food Grade Silicone Lubricant | | 49 |
| Lubricants | LU210 | Food Grade Silicone Lubricant | | 49 |
| Lubricants | LU210 | Food Grade Silicone Lubricant | | 49 |
| Lubricants | LU210 | Food Grade Silicone Lubricant | | 49 |
| Mold Release | MR302 | General Purpose Release Agent | | 52 |
| Mold Release | MR303 | Food Grade Release Agent | | 52 |
| Mold Release | MR303 | Food Grade Release Agent | | 52 |
| Mold Release | MR303 | Food Grade Release Agent | | 52 52 |
| Mold Release | MR305 | Heavy Duty Silicone Release Agent | | 52 52 |
| Mold Release | MR307 MR309 | Heavy Duty Paintable Release Agent | | 53 53 |
| Mold Release Mold Release | | Paintable Release Agent | | |
| Mold Release | MR314 MR315 | Paintable Lecithin Release Agent | | 53 53 |
| Mold Release | MR311 | Dry Film Release Agent | | 54 |
| Mold Release | MR312 | Dry Zinc Stearate Release Agent | | 54 |
| Mold Release | MR351 | Mold Cleaner | | 55 |
| Mold Release | MR351 | Mold Cleaner | | 55 55 |
| Mold Release | MR353 | Foaming Citrus Mold Cleaner | | 55 55 |
| Mold Release | MR361 | Mold Protectant | | 55 55 |
| Specialty | SP705 | Non-Chlorinated Brake & Parts Cleaner | | 58 |
| Specialty | SP705 | Non-Chlorinated Brake & Parts Cleaner | | 58 |
| Specialty | SP705 | Non-Chlorinated Brake & Parts Cleaner | | 58 |
| Specialty | SP705 | Low VOC Brake & Parts Cleaner | | 58 |
| Spoolarty | 01700 | 2525 51410 4 1410 5104101 | | 50 |



| CATEGORY | FAMILY | NAME | SKU | PAGE |
|--------------------|------------------|--|-------------|-----------|
| Specialty | SP707 | Non-Chlorinated Brake & Metal Parts Cleaner | S00707000 | 59 |
| Specialty | SP709 | Chlorinated Brake & Metal Parts Cleaner | S00709000 | 59 |
| Specialty | SP404 | Eco-Grade™ Vandal Mark Remover | SC0404000 🍁 | 60 |
| Specialty | SP405 | Eco-Grade™ Paint & Adhesive Remover | SC0405000 🌞 | 60 |
| Specialty | SP615 | Heavy Duty Paint Remover (With Methylene Chloride) | SC0615000 🌞 | 61 |
| Specialty | SP915 | Methylene Chloride Free Paint Remover | SC0915000 🌞 | 61 |
| Specialty | SP3100 Series | Carton Stencil Inks | SC3105000 🌞 | 62 |
| Specialty | SP3100 Series | Carton Stencil Inks | S03106000 | 62 |
| Specialty | SP3100 Series | Carton Stencil Inks | SC3108000 🌞 | 62 |
| Specialty | SP3100 Series | Carton Stencil Inks | S03109000 | 62 |
| Specialty | SP3100 Series | Carton Stencil Inks | S03111000 | 62 |
| Specialty | SP3100 Series | Carton Stencil Inks | S03112000 | 62 |
| Specialty | SP3100 Series | Carton Stencil Inks | SC3127000 🍁 | 62 |
| Specialty | SP3100 Series | Carton Stencil Inks | SC3119000 🍁 | 62 |
| Specialty | SP603 | Blue Layout Dye | SC0603000 🍁 | 62 |
| Specialty | SP606 | Layout Dye Remover | | 62 |
| Specialty | SP856 | Insect Repellant II | | 63 |
| Specialty | SP857 | Blast 'Em™ Wasp & Hornet Killer | | 63 |
| Specialty | SP857 | Blast 'Em™ Wasp & Hornet Killer | | 63 |
| Specialty | SP857 | Blast 'Em™ Wasp & Hornet Killer | | 63 |
| Specialty | SP859 | Hit Squad™ Industrial Insecticide | | 63 |
| Specialty | SP322 | Vinyl Removable Coating | | 64 |
| Specialty | SP607 | Belt Dressing | | 64 |
| Specialty | SP607 | Belt Dressing | | 64 |
| Specialty | SP607 | Belt Dressing | | 64 |
| Specialty | SP610 | Anti-Static Spray | | 64 |
| Specialty | SP608 | Food Grade Belt Dressing | | 64 |
| Specialty | SP702 | Engine Degreaser | | 65 |
| Specialty | SP 000 Series | RTV Silicone Sealants | | 65 |
| Specialty | SP 000 Series | RTV Silicone Sealants | | 65 |
| Specialty | SP 000 Series | RTV Silicone Sealants | | 65 |
| Specialty | SP 000 Series | RTV Silicone Sealants | | 65 |
| Specialty | SP 000 Series | RTV Silicone Sealants | | 65 |
| Specialty | SP7000 | Multi-Purpose Spray Adhesive | | 65 |
| Specialty | SP9000 | Heavy-Duty Spray Adhesive | | 65 |
| Welding | WL541 | Dry Weld Spatter Protectant (With Methylene Chloride) | | 69 |
| Welding | WL542 | Wet Weld Spatter Protectant (With Methylene Chloride) | | 69 |
| Welding | WL941 | Dry Weld Spatter Protectant (No Methylene Chloride) | | 69 |
| Welding | WL942 | Wet Weld Spatter Protectant (No Methylene Chloride) | | 69 |
| Welding | WL739 | Silver Galvanizing Compound | | 70 70 |
| Welding | WL839 WL740 | High Performance Silver Galvanizing Compound Zinc Rich Galvanizing Compound | | 70 |
| Welding | WL740 WL740 | Zinc Rich Galvanizing Compound | | 71 71 |
| Welding | WL740 WL740 | | | 7 1 71 |
| Welding | WL740 WL740 | Zinc Rich Galvanizing Compound | | 71 |
| Welding Welding | WL740 WL738 | Zinc Rich Galvanizing Compound | | 71 |
| Welding | WL744/745 System | Welding Defect Detection System - Penetrant & Developer | | 73 |
| Welding | WL744/745 System | Welding Defect Detection System - Penetrant & Developer | | 73 |
| Aerosolv | 5000 | Model 5000 Aerosolv System | | 74 |
| Aerosolv | 6363 | Model 5000 Replacement Carbon Cartridge | | 74 |
| Aerosolv | 6163 | Model 5000 Two Stage Coalescing Filter | | 74 |
| Aerosolv | 7000XL | Model 7000XL Aerosolv System | | 74 |
| Aerosolv | 7363XL | Model 7000XL Acrosolv System | | 74 |
| Aerosolv | 7363XL 7163XL | Model 7000XL Colormetric Carbon Cartriages | | 74 |
| 5S Tools | N/A | Sprayon® System Magnetic Can Holders | | 74 75 |
| 5S Tools | N/A N/A | Educational Posters | | 75 75 |
| 5S Tools | N/A | Kanban Tags | | 75 75 |
| 5S Tools | N/A | Product ID Tags | | 75 75 |
| 23 10010 | 14/73 | | т | , , |



PRESERVE. PROTECT. PREVENT.®

101 W. PROSPECT AVENUE CLEVELAND, OH 44115

CUSTOMER SERVICE 800-SPRAYON TECHNICAL SERVICE 800-251-2486 TECHSERVICE@SPRAYON.COM

SPRAYON.COM (C) KRYLON PRODUCTS GROUP 310-CAT-2018 PRINTED IN USA SPRA 408/18