www.general.ca





from March 1st to August 31st 2012

Excalibui Aluminum T-fence with 50" rails

50-275RLK M1

reg. \$2,635.00

12" x 17" variable speed "Maxi-Lathe VS+"

MAK-LAYBE





10" 3 HP cabinet saw (left tilt) Powerful 3 HP motor with multi-groove

Combination riving style splitter and see-through blade guard with anti-kickback pawls, and a second European style riving knife also included. Large precision-ground 44" x 27" cast-iron table with two extension wings. Magnetic safety switch with large stop button.



SR 99

25' (7.5 M) Measuring tape

25-200 M1

reg. \$1,116.00

5 pc hi-speed steel wood turning mini-chisel set (Item #25-250)

Free'

A \$126.00 value *With the purchase of 25-200 M1 only,

Pivoting head

Digital spindle speed display. Quick lock control levers easily position 10" tool rest. Maximum distance of 17 5/16" between centers. 3 variable speed ranges: 300 to 900, 600 to 1800 & 1200 to 3600 RPM. 3/4 HP motor.



10" jointer with helical cutter head .


Magnum helical cutter head

Large surface, precision ground cast-iron tables with built-in rabbeting ledge. Two way tilting fence with positive stops at 45° and 90°. 5500 rpm cutter head speed. 3 HP motor.

75-500 M1 reg. \$1,270.00

22" drill press 3/4" chuck with key, laser line marker & see-through chuck

Cast-iron pulleys reduce vibration. Large front mounted paddle style stop switch with lock-out safety feature to prevent unwanted or unintentional start-up. Industrial 1 HP motor.



FREE*

*Receive a 40 tooth 10" carbide blade free with the purchase of any 10" table saw listed in this flyer.

A \$59.99 value

Distributed by:


TABLE SAWS

50-200R M1

\$2,999.99 reg. \$4,100.¹⁰(T50) / \$4,145.¹⁰(\$T52)

350R-T50-M2M / 650R-T50-M2M





Quick release combination riving style splitter and blade guard with antikickback pawls and a second European style riving knife also included. Large 44" x 27" cast-iron table with two extension wings. Cast-iron cabinet mounted trunnions. Equipped with a sturdy, easy adjust, T-fence rip fence system. Dual voltage motor pre-wired for 230 V operation.



10" 3 HP deluxe cabinet saw

(350R right tilt / 650R left tilt)

Magnetic 2-step safety switch with a lock-out key to prevent unwanted or unintentional start-up is equipped with an extra-large easy access stop panel. "T" fence system with 50" rails (F42T50) or sliding fence system (SLT35T52). 36" extension table with adjustable steel support legs. Arbor mounted on heavy-duty, permanently lubricated, sealed bearings. 3 HP motor.





10" job site saw left tilt

Excalibur ST GENERAL INTERNATIONAL

Aluminum T-fence

combination riving style splitter and see through blade guard with antikickback pawls, and a second European style riving knife also included. Heavy-duty, precision cast-iron ribbed table, with miter gauge T-slots, & stamped steel extension wings. Deluxe, quick adjusting miter gauge. Folding stand with wheels. 2 HP motor.

10" scoring saw with built-in sliding table

Can be used as a regular saw, but includes a built-in sliding table for stable effortless crosscuts & a separate scoring blade for chip-free cuts in melamine & laminates.

Anodized European style sliding table. Separate safety lock out switch for main motor & scoring motor. Solid cast-iron table with anodized aluminum coating. Heavy-duty cabinet mounted cast-iron trunnions. Precision-built rip fence system with 50" guide rails. 3 HP motor.



2





50-300CE, 50-305, 50-305CE





Heavy-duty cast-iron construction.

Large handles for better operator

control





Head tilts 45° left and right, tilting the blade not the table, keeping the workpiece level. 2" cutting thickness capacity. Variable speed of 400 to 1400 strokes/minute (EX-16) and 400 to 1550 strokes/minute (EX-21 & EX-30).



EX-16





Fits on most 10" to 14" table saws.

Easy to adjust, extruded aluminum miter fence for accurate miters from 0° to 50°. Cut up to 49"* with the crosscut fence positioned at the rear of the table. Crosscut and miter up to 28"* with the fence at the front of table.

#50-SLT60P (not shown)

Fits on most 10" to 14" table saws.

Easy to adjust, extruded aluminum miter fence for accurate miters from 0° to 45°. Cut up to 72"* with the crosscut fence positioned at the rear of the table. Crosscut or miter up to 49"* with the fence at the front of the table.

* Depending on the positioning of the main mounting bracket on your saw.



Free*

Hold-down clamp (Item #50-EXHDC) A \$127.25 value

*With the purchase of 50-SLT40P or 50-SLT60P only.

JOINTERS

8" parallelogram jointer Large surface 82 %" cast-iron tables Heavy-duty center-mounted cast-iron fence

with 45°, 90° and 135° positive stops. Precision four point parallelogram table adjustment system. Magnetic safety switch mounted above the in-feed table for quick, easy access. 5000 rpm cutter head speed. 3 HP motor.

Included

Magnum helical cutter head

(4 rows, total: 22 inserts)



easy knife adjustment. Independent in-feed and

cutter head speed. 1 HP motor.

out-feed table adjustment handwheels. 5000 rpm

80-100L M1 S894.99

6" closed base jointer 55 1/4" long tables

Large surface, ground cast-iron tables. Cast-iron fence with 90° & 45° positive stops. Independent in-feed and out-feed table adjustment handwheels. 5000 rpm cutter head speed. 1 HP motor.

80-100LHC M1

\$1,379.99 reg. \$1,800.00

80-200L M1

6" closed base jointer with Magnum helical head

Same features as model 80-100L M1 + Magnum helical head.

Included Magnum helical cutter head (item #100H) (4 rows, total: 16 inserts)

80-225HC M1



out-feed adjustment handwheels. 5000 rpm cutter

head speed. 1 HP motor.

8" jointer 74 1/8" extra long tables Large surface, ground cast-iron

tables. Independent in-feed & outfeed table adjustment handwheels. Magnetic switch for added safety. 5500 rpm cutter head speed. 2 HP motor.

8" jointer with **Byrd** style helical head

Same features as model 80-200L M1 + Byrd style helical head.



cutter head (item #200H) (4 rows, total: 36 inserts)



30-005HC M1

13" planer with helical head Helical cutter head with 26 reversible two-sided high speed steel inserts.

Built-in inset lifting handles. Large depth of cut adjustment handle – one full rotation equals $\frac{1}{16}$ ". 2 HP motor.

PLANERS

15" single surface planer 2 feed speeds - 16 & 20 fpm.

Magnetic safety switch. Heavy-duty cast-iron frame reduces vibration. Built-in mobile base. 3 HP motor.

30-115HC M1

15" single surface planer with Magnum helical head

Same features as model 30-115 M1 + Magnum



cutter head (item #125H) (4 rows, total: 42 inserts)

30-300 M1

30-120 M1

Magnetic 2-step safety

Cast-iron table and head.

duty cast-iron dovetailed

variable speed feed motor provides added control.

column. Independent,

7000 rpm cutter head

speed. 2 HP motor.

Precision machined heavy-

switch to prevent unwanted or unintentional start-up is equipped with an extralarge and a lock-out key.

7" molder

20" single surface planer 2 feed speeds - 16 & 20 fpm. Magnetic safety switch.

Built-in mobile base with one-step lock-pedal. 5 HP motor.

30-300HC M1

20" single surface planer with Magnum helical head

base

Same features as model 30-300 M1 + Magnum

ncluded

Elliptical jig

included

Guide fence included

Magnum helical cutter head (item #30300H) (4 rows, total: 58 inserts)

15" single surface planer 2 feed speeds - 16 & 20 fpm. Magnetic safety switch.

Triple V-belt drive for greater power. Built-in mobile base. 3 HP motor mounted in cabinet for protection from dust.

30-125HC M1

15" single surface planer with Magnum helical head

+ Magnum helical head.

Same features as model 30-125CE M1

Included With 30-125HC M

Magnum helical cutter head (item #125H) (4 rows, total: 42 inserts)

30-360 M1, M2, M3

20" single surface planer 2 feed speeds - 22 & 28 fpm. Magnetic safety switch. Built-in table rollers reduce friction. Positive gear design for guick and accurate table adjustments. 7 ½ HP motor.

30-360HC M1, M2, M3

reg. \$8,700.00

20" single surface planer with Magnum helical head

Magnum helical cutter head (item #360H) (4 rows, total: 58 inserts)

Included

SANDERS

13" horizontal single drum sander



15-155 M1

\$1,329.⁹⁹

g. \$1,600.00

Heavy-duty open steel stand.

Heavy-duty open steel stand. Independent switches with removable safety key for both conveyor motor and main motor. 6 to 20 fpm variable feeding speed (conveyor belt).

1 ½ HP motor.

15-005 M1

\$959.99

6" x 89" edge belt sander Sanding belt operates at any angle from horizontal to vertical.

Graphite covered steel platen for reduced friction and extended belt life. 1 ½ HP motor.

15-005S M1

\$1,059.99 reg. \$1,319.00

6" x 89" **oscillating** edge belt sander

Same features as model 15-005 M1 + oscillating feature.

15-005 M1 shown

Oscillating spindle sander



15-220 M1

\$464.99

reg. \$585.00

Bench top model
Precision ground
cast-iron tilting table.
29 oscillations per
minute. 1720 rpm
spindle speed. 5 interchangeable spindles
including ¼", ½", 5%",
1 ½" & 2". ½ HP motor.

15-010 M1

\$1,899.99 reg. \$2,375.00

6" x 108" vertical edge belt sander Tables can be adjusted up or down for full belt use.

Graphite backing reduces belt friction for longer belt life. Dynamically balanced 7" rubber drive roller and crowned 3" idler roller to ensure solid belt tracking. 2 HP motor.

15-010S M1

\$2,199.⁹⁹

6" x 108" oscillating vertical edge belt sander

Same features as model 15-010 M1 + oscillating feature.

Oscillating spindle sander



Floor model
Heavy-duty oil bath
gearbox.

75 oscillations per minute. 1725 rpm spindle speed. 10 interchangeable spindles from ¼" to 4" including ¼", ¾", ½", 5%", ¾", 1", 1 ½", 2", 3" & 4". 1 HP motor.

15-275 M1

\$5,999.99

reg. \$7,200.00

37" horizontal double drum sander

- 7 ½ HP

Heavy cast-iron table with four solid jackscrews with chain drive to keep the table level at all times.

Two (2) magnetic safety switches - one for main motor and one for conveyor motor. Rear drum adjustment lever with convenient reference scale, no tools or gauge blocks required. 3.7 to 14.2 fpm variable feeding speed (conveyor belt). $7 \frac{1}{2}$ HP motor.





Optional heavyduty 34" stand for 6", 8" and 10" bench grinders

Heavy-duty cast-iron table & base, tubular steel column with water tray included.



\$199.99 reg. \$245.00 Belt sander / grinder

4900 fpm belt speed. ⅓ HP motor.

3450 RPM grinding speed.

15-625 M1 \$109.99 reg. \$140.00

6" low speed bench grinder
Double sealed ball-bearing construction.
Adjustable aluminum tool rests. Low
1725 rpm. 1/3 HP motor.

GRINDERS

15-825 M1

\$184.99

reg. \$215.00

8" low speed bench grinder

8" low speed bench grinder Double sealed ball-bearing construction. Ajustable cast tool rests. Low 1725 rpm. ½ HP motor.

#15-035 M1 (shown) **Q1 100 99**

reg \$1.550 ºº

6" x 48" belt & 12" disc sander Two large surface, cast-iron, tilting tables for unlimited sanding operations. Sanding belt operates at any angle from horizontal to vertical with positive stops at 90° and 45°. 2250 FPM belt speed. 1750 rpm disc speed. Heavy-duty model (365 lb). 1 ½ HP, 110/220 V motor.

Safety switch with key (15-035DC M1 only)

#15-035DC (not shown)

\$1,299,99

6" x 48" belt & 12" disc sander with built-in dust collector

Same features as model 15-035 M1.

\$2,399.99

15" open type wide belt sander

Conveyor motor equipped with independant safety switch with removable key. Magnetic safety switch on main motor. Side and rear extension tables for easier stock handling. 3 to 20 fpm variable feeding speed (conveyor belt). 3 HP motor.

New and improved

New and improved oscillation system

Two 5" diameter aluminum drums

15-250 M1

\$2,299.99

Included

reg. \$2,900.00

24" horizontal double drum sander - 3 HP Two 5" diameter aluminum drums.

High quality conveyor belt for long service life. Magnetic safety switch. 3 to 20 fpm variable feeding speed (conveyor belt). 3 HP motor. \$4,599.⁹⁹

25" horizontal double drum sander - 5 HP Steel frame and heavy-duty base for greater stability. Includes dual access doors.

Two (2) magnetic safety switches for main motor and conveyor motor. Amp meter for motor load indicator. 3.7 to 14.2 fpm variable feeding speed (conveyor belt). 5 HP motor.



BANDSAWS



90-290 M1

\$3,089.99

reg. \$3,600.00

Excalibur

Deluxe rip fence system included

Safety feed device



Upper and lower dual bakelite block and 5 bearing, deluxe blade guide system, with 10 points of contact

Deluxe 18" heavy-duty wood cutting bandsaw Laser line marker & 3/4" blade included. Heavy-duty one piece frame. Safety foot brake simultaneously stops blade and motor. 2 cutting speeds: 2820 & 3936 fpm. 3 HP motor.



90-380 M1, M2, M3 \$3,999.99 reg. \$4,650.00

Excalibur

Deluxe rip fence system included

Safety feed device



22" heavy-duty wood cutting bandsaw Laser line marker & ¾" blade included. Solid ribbed cast-iron table with heavy-duty one-piece trunnion and 0° to 45° right tilting action. Safety foot brake simultaneously stops blade and motor. Cutting speed: 4590 fpm. 5 HP (M1) & 7 ½ HP motor (M2 & M3).

14" wood cutting bandsaw

90-140 M1

\$679.⁹⁹

reg. \$775.00

3/8" blade included

Cast-iron frame & precision-balanced aluminum wheels with replaceable rubber tires. Rip fence & miter gauge included. 2 blade speeds: 1800 & 3000 fpm. Blower device. 1 HP motor.

Optional riser attachment for 90-140 M1 (Item #90-130A)

\$87.99 reg. \$140.00





Excalibur

Deluxe rip fence

system included

14" wood cutting bandsaw

90-125 M1

SQAQ 99

reg. \$1,200.00

3/8" blade included

Cast-iron frame and precision-balanced aluminum wheels. Safety lock-out switch with removable key. 2 blade speeds: 1630 & 2730 fpm. 1 HP motor.

Optional riser attachment for 90-125 M1 (Item #90-130)

\$87.99 reg. \$140.00





17" wood cutting bandsaw Laser line marker & ½" blade included.

Solid, high quality, precision-machined, ribbed cast-iron table. 2 blade speeds: 1560 & 3190 fpm. Wide blade selection (1/6" to 1"). 2 HP motor.



Deluxe 14" wood cutting bandsaw Large 12" resaw capacity. 3/4" blade included.

One-piece molded frame. Dynamically balanced heavy cast-iron wheels. 2 blade speeds: 2300 & 3250 fpm. Safety foot brake stops blade & motor. 1 ½ HP motor.



Universal bandsaw rip fence system

21" fence & 29"(front rail) & 25 ¾" (rear rail). Fits on General International models: 90-100, 90-125, 90-140, 90-170.





Specifically designed and built for professionals who want superior performance. Headstock swivels 360° with positive stops at 0°, 45°, 90°, 135°, 180° & 270° and quick-lock for outboard turning. Electronic inverter for variable speed adjustment between 45-3750 rpm. Digital spindle speed (rpm) readout. Quiet, highly efficient, low power consumption 2 HP motor.





Pen turning mini-lathe

Designed and built specifically for turning pens and other smaller hobby type projects. Quick lock control levers easily position tool rest. Extruded aluminum frame, head and tail-stock. Maximum distance of 12" between centers. 3 speeds: 1350, 2250 & 3500 rpm. Quiet, smooth running ½ HP motor.



WOOD LATHES

Forward / reverse spindle rotation.

Digital spindle speed display. Maximum of 17" between centers. 3 variable speed ranges; 250-800, 550-1700 & 1200-3600 rpm. Heavy-duty 1" diameter tool rest post. 3/4 HP motor.









DRILL PRESSES



Mortising attachment kit

Convert almost any drill press into a mortiser in

CONTENTS: Mounting hardware. Cast-iron chisel holder. Guide fence with workpiece hold down. 4 of the most commonly used mortising chisel and bit sets with 5/8" bit shank x 1/4", 1/16", 3/8" & 1/2". Includes 52, 55, 58, 60, 65 and 66 mm adapter bushings





Self-centering pen drilling vise



3/4" chuck with key. Laser line marker & see-through chuck guard included. Extra long quill stroke drills deeper than most drill presses. Large front mounted paddle style stop switch with lock-out safety feature to prevent unwanted or unintentional start-up. 12 spindle speeds: 255 to 2750 rpm. 1 HP motor.





14" drill presses

#75-030 M1 (bench top model) / #75-150 M1 (floor model)

%" chuck with key, laser line marker & see-through chuck guard included.

Rotating, 45° tilting, crank-operated worktable with quick release clamp. Forced opening switch need a re-start in case of power failure. Built-in lamp illuminates the drilling area (bulb not included). 12 spindle speeds: 280 to 3000 rpm. ½ HP motor.



opening switch need a re-start in case of

power failure. Table extension provides

additional support. 1/2 HP motor.



worktable with quick release clamp. Forced opening switch need a re-start in case of power failure. 12 spindle speeds: 340 to 2800 rpm. 3/4 HP motor.



5/16" hollow chisel mortiser 1/4", 5/16, 3/4", & 1/2" chisel & bit sets included.

Features a tilting head (30° left & right) with a 180° swivel. Includes sleeves for both $\frac{5}{6}$ " and $\frac{3}{4}$ " chisel shanks. $\frac{1}{2}$ HP motor.

75-070 \$290.99

Optional closed stand for mortiser Fits on models 75-050T & 75-075 only.

1/4", 3/8", 1/2", & 3/4" chisel

& bit sets included.

Heavy-duty cast-iron construction.

Lateral and longitudinal table

movement. Tilting head and swivel
fence. 1 HP motor.

mortiser



MORTISERS

Included

4 Chisel & bit sets



5/16" hollow chisel mortiser

 $\frac{1}{4}$ ", $\frac{3}{8}$ ", $\frac{1}{2}$ ", & $\frac{3}{4}$ " chisel & bit sets included.

Heavy-duty cast-iron construction. Adjustable workpiece stop & fence-mounted hold-down. Includes sleeves for both 5/8" and 3/4" chisel shanks. 1/2 HP TEFC motor.





SHAPERS



3/4" spindle shaper
1/4" & 1/2" router bit adapters included.
2 spindle speeds with reverse: 8000 &
10,000 rpm. Magnetic switch with thermal overload protection. 3 HP motor.

40-350 M1



1 1/4" production shaper 4 spindle speeds with reverse: 4000, 6000, 8000 & 10,000 rpm. Magnetic switch with thermal

Magnetic switch with thermal overload protection. Built-in retractable castor system. 5 HP motor.

40-450 M1



1 1/4" heavy-duty production shaper 5 spindle speeds with reverse: 3000, 4000, 6000, 8000 & 10,000 rpm. Magnetic switch with thermal overload protection. 2 emergency stop buttons. 5 HP motor.

CHC CARUING MACHINES The next generation *L*-Carver™

1-Carver™ 15" x 20" CNC carving machine

i-Picture™ & ArtCam Express software

With






bench top CNC market.

- New "Pause" function for added flexibility!
- New "Bordering" feature for added security!

make it the best value in the

- Variable logging speed for more critical positioning!
- Improved ball screws for more
- for smoother cutting operation!



offers many new features that



All 40-915X M1 ℓ -Carver $^{\text{TM}}$ now comes complete with:

ArtCAM Express CAD design software with training DVD! ArtCAM Express adds a whole new level of functionality to your i-Carver™. Easy-to-learn design software with powerful CAD/CAM functions. Import virtually any graphic file (JPG, PNG, BMP, DXF, DWG) and easily create tool paths. Create a variety of tool paths (texturing, carving, profiling, pocketing). Customize your own textures. Over 500 3D images included that can be imported into your design and machined. ArtCAM Express software is fully supported by General CNC's technical support team.

Optional stand for 40-915X (Item #40-905) \$244.99 reg. \$285.00

Optional safety enclosure for 40-915X (Item #40-919X)

Ideal for educational users. Impact resistant *Lexan™*. Safety inter-lock door (auto-shut-off).



Û-Carver™ 13" x 18" CNC carving machine

40-913 M1

With & *Û-Picture*™ software

Controller & *i-Picture*™ software included. 15,000 rpm spindle with brushless motor. Cutting speeds up to 118" per minute. Positional accuracy up to 0.001". 1/4" collet, tool kit and starter tools included. 1 year limited warranty.

Optional stand for 40-913 (Item #40-903) \$219.99 reg. \$270.00



Optional safety enclosure for 40-913 (Item #40-918)

Ideal for educational users. Impact resistant Lexan™. Safety inter-lock door (auto-shut-off).



24" x 36" Junior series **CNC Routers**

With V-Carve Pro software



Easy start-up procedure and unrivalled technical support. Highly accurate pre-loaded linear bearing construction. 2 1/4 HP variable speed (8,000 to 25,000 rpm) name brand router included (router bits not included). Cutting speeds up to 200 inches per minute. Integrated on-board computer operating system with pre-loaded operating software included.

Shown with safety enclosure installed.



Free*

Safety enclosure (Item #40-926) A \$1,200.00 value

*With the purchase of 40-924 M1 only.







Deluxe router table kits

#40-100 Bench top / #40-200 Floor model

Heavy-duty massive router lift with 9 1/4" x 11 3/4" aluminum top plate, stable 4 post/lift screw design & chain drive lifting system controlling all 4 corners simultaneously. Fits all fixed base router motors*. Smooth above-the-table adjustment mechanism for fast tool changes & precision bit setting. Two table sizes available in either cast-iron, MDF or Phenolic. Sturdy steel stands include easy access on/off safety switch with removable lock-out key. Floor model made of tubular steel, includes, mobility kit & adjustable levelling feet. Fence has 2 1/4" dust collection outlet & adjustable scales. Under table steel dust enclosure with access door, adjustable air vent, power cord grommet & 4" dust port with 2 1/4" branch inlet to the fence including 2 1/4" dust hose & 2 hose clamps.

*some router models may require reducer collars/adaptors.

Bench top model kits

40-100C (shown)

reg. \$1,110.00

With cast-iron table

Complete table kit includes: (1) 40-060, (1) 40-065, (1) **40-070**, (1) 40-125 & (1) 40-130.

reg. \$990.00

With MDF table

Complete table kit includes: 1) 40-060, (1) 40-065, (1) **40-047**, (1) 40-125 & (1) 40-130.

reg. \$1,055.0

With phenolic table

Complete table kit includes: 1) 40-060, (1) 40-065, (1) **40-043**, (1) 40-125 & (1) 40-130.

Floor model kits

40-200C (shown)

reg. \$1,380.00

With cast-iron table

Complete table kit includes: (1) 40-080, (1) 40-085, (1) **40-075**,

(1) 40-125 & (1) 40-130.

40-200M

reg. \$1,115.00

With MDF table

Complete table kit includes: (1) 40-080, (1) 40-085, (1) **40-049**,

(1) 40-125 & (1) 40-130.

reg. \$1.275 °C

With phenolic table

Complete table kit includes: (1) 40-080, (1) 40-085, (1) **40-045**,

(1) 40-125 & (1) 40-130.

\$9.99



Floor model with



phenolic table



(fits 3 1/2" motor)



\$114.99

reg. \$130.00

























Leveler bars for 9 1/4" x 11 3/4" plates or lifts









\$66.99



Router lift

DUST COLLECTORS



Dust hood rotates 360°. Support arm extends to 12". Airflow capacity of 700 cfm*. 1 HP motor.

Portable cyclone dust collector - 1 1/2 HP 10-800CF M1

Airflow capacity 611 cfm*. restricted. Equipped with 1 micron canister filter. Caster mounted for portability. Remote controller included. 1 1/2 HP industrial rated motor.

"Super Turbo" air cleaning system Airflow Capacity of 700, 900, 1250 cfm. 2 stage filtration. 5 pre-

programmed timer settings (2, 4, 6,

8 hours & continuous). 1/3 HP motor.

10-210CF M1

S1.329.99

Dust collector with canister filter - 3 HP Air flow capacity 2280 cfm*. Sound rating 85 to 95 dB. Equipped with 1 micron canister filters.



Dust collector

Same features as #10-210CF M1 with washable, extra fine 2 micron filter bags replacing 1 micron canister filters.

10-005SCF M1

Dust collector with canister filter

- 1 HP

Air flow capacity 647 cfm*. Sound rating 75 to 80 dB. Equipped with 1 micron canister filter.



Dust collector

Same features as #10-005SCF M1 with washable, extra fine 2 micron filter bags replacing 1 micron canister filters.

10-510CF M1

Dust collector with canister filter - 5 HP

Air flow capacity

3980 cfm*. Sound rating 93 dB. Equipped with 1 micron canister filter.



Carlotten.

Dust collector

Same features as #10-510CF M1 with washable, extra fine 2 micron filter bags replacing 1 micron canister filters.

10-105CF M1

Dust collector with canister filter

- 1 ½ HP

Air flow capacity 1100 cfm*. Sound rating 80 to 85 dB. Equipped with 1 micron canister



10-105 M1

Dust collector

Same features as #10-105CF M1 with washable, extra fine 2 micron filter bags replacing 1 micron canister filters.



10-110CF M1

Dust collector with canister filter

- 2 HP

Air flow capacity 1550 cfm*. Sound rating 80 to 90 dB. Equipped with 1 micron canister filter.

Dust collector

Same features as #10-110CF M1 with washable, extra fine 2 micron filter bags replacing 1 micron canister filters.

*Note: All CFM ratings tested under resistance to simulate typical shop usage.

SAFETY IN THE WORK PLACE

DOITE

100 M1

20-200 M1

20-220 M1

Power feeders

#20-100 M1

Fully adjustable. Variable speeds 6.5 to 40 fpm in forward or reverse. 1/8 HP motor.

#20-200 M1

S649.99

reg. \$800.00

3 rollers. 4 speeds: 20, 26, 33 & 43 fpm (6, 8,10 &13 mpm). 1/4 HP motor.

#20-220 M1

3 rollers. 4 speeds: 9.5, 15, 25 & 38 fpm (2.9, 4.5, 7.5, 11.5 mpm). ½ HP motor.



Overarm blade cover system with dust collection capability

Unique design mounting bracket: pivots arm away or removes completely in seconds. 4" main boom and 3" inner boom. Flexible 3" hose connects the blade cover to the boom.

#50-EXBC10 (10")

#50-EXBC14 (12" - 14")



Wood lathe guard

This Wood Lathe Guard is easily installed on the lathe bed and the height of its support column can be adjusted to suit the clearance needed for the shield depending on the size of your lathe. This device ensures complete safety against the following risks: wood chips, broken tools, dust, or any other object. Fits most wood turning lathes. does not interfere with normal lathe use.

#25-160



Set of 2 8" plastic push sticks



Grounding kit for dust collectors



4 piece safety kit



Electronic earmuffs



Heavy-duty drill press chuck guard

#70-152 - 52 mm

(for 34-01, 34-02, 34-10, 34-111 & 34-121)

#70-155 - 55 mm

(for 75-025, 75-030, 75-125, 75-150,

75-160 & 75-550)

#70-165 - 65 mm

(for 75-100 & 75-200)

#70-175 - 75 mm (for 75-260, 75-500 & 75-700)



Drill press chuck guard

#70-115 A - 55 mm

#70-115 B - 65 mm

#70-115 C - 75 mm



15.99

19 99

Magnetic switch with emergency stop & lock

#85-110 (110 volt, 1ph,1 HP, 8 to 11 A) #85-115 (110 volt, 1ph, ½ HP, 4.5 to 6.5 A)

#85-120 (110 volt, 1ph, 3/4 HP, 10 to 15 A) #85-125 (110 volt, 1ph, 1 HP, 11 to 14 A)

#85-210 (220 volt, 1 ph, 2 to 3 HP, 8 to 11 A)

#85-215 (208 / 230 volt, 1 ph, 11/2 HP, 8 to 11 A) #85-220 (220 volt,1 ph, 2 HP, 11 to 14 A)

#85-225 (220 volt, 1 ph, 2 to 3 HP, 14 to 17 A) **#85-230** (220 volt,3 ph, 2 HP, 4.5 to 6.5 A)

#85-235 (220 volt,1 ph, 2 to 3 HP, 11 to 14 A)

#85-240 (208 / 230 volt, 1 ph, 3 HP, 10 to 15 A) #85-245 (220 volt, 1 ph, 3 HP, 14 to 17 A)

#85-255 (220 volt, 3 ph, 5 HP, 11 to 14 A)

#85-260 (220 volt, 1 ph, 3.5 to 5 HP, 14 to 17 A) #85-265 (220 volt, 1 ph, 6 HP, 21 to 25 A)

#85-270 (220 volt, 3 ph, 5 1/2 HP, 14 to 17 A) #85-275 (220 volt, 3 ph, 7 1/2 HP, 17 to 21 A) #85-280 (220 volt, 3 ph, 3 HP, 8 to 11 A)

#85-285 (220 volt, 1 ph, 5 HP, 21 to 25 A) #85-610 (600 volt, 3 ph, 3 HP, 4.5 to 6.5 A)

#85-615 (600 volt, 3 ph, 2 to 3 HP, 2.9 to 4 A) #85-620 (600 volt, 3 ph, 5 to 5 ½ HP, 4.5 to 6.5 A)

#85-625 (600 volt, 3 ph, 7 ½ HP, 6 to 8 A)



Dust collection fire protection cage

Modular panel design for ease of assembly. All steel construction -100% non flammable. Open top for easy hose access.

#10-420

54 1/8" x 59 1/4" x 95"

#10-430

80 ³/₁₆" x 59 ¹/₄" x 95"

reg. \$2,050.00



\$189.99 reg. \$229.00

Flexible expandible roller stand

Maximum load capacity of 200 lb. Adjustable height from 23" to 36". 9 nickel-plated 1 ½" × 13 ¾" rollers. 50" maximum expanded length. 14 ¾" compacted length. 4" wheels with locking foot levers.







Added value

60" x 30" oak workbench with steel legs

Solid 1" thick table top with 3" apron. Includes both front and end vises with a double row of bench dog holes in the table for each vise. Large storage drawer. Sturdy adjustable height (33"- 39") steel legs.



99-300 **\$5**/1

(Item #95-082)

A \$49.00 value

of 95-060 only.

*With the purchase

The lumber store

Lumber shelving and storage system. Easy installation. 6 level multipurpose racking. Sturdy steel construction. For use in garages, workshops, storage sheds, on walls or on fences. Load capacity of 110 lbs (50 kg) per level.



Universal mobile base


500 lb capacity Strong 3" wheels. Rubber levelling feet (2). Adjustment in 1" increments.



Wet / dry vacuum cleaner Stainless steel tank

10 gallon capacity. 2 speed motor. Rated for heavy-duty maintenance and janitorial use. 2 stage air filtration. 1 ½ HP motor.



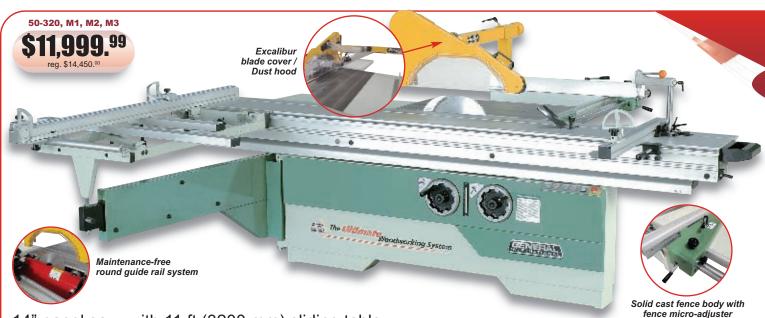

14" panel saw, with 11 ft (3200 mm) sliding table Independent motor for main blade and scoring blade.

Large sliding table with anodized aluminum parts for longer life. 0° to 45° left or right crosscut fence adjustment with easy-read degree scale for accurate miter cuts. Magnetic switch with thermal overload protection. Heavy-duty rip fence system with cast-iron main body and all steel guide rail for rock solid positioning. 5 HP (M1) or 7 ½ HP (M2, M3) main motor.