





An Italian tile made in the USA

Available in five different sophisticated colors, Stratos is the jewel of Florim USA. This strong and amazing porcelain is designed to out-perform all expectations. Made with high definition graphics, it is a perfect choice for both walls and floors in the kitchen, the living room, and the bathroom. In commercial projects, it conveys a marvelous touch of contemporaneity





corda

18"x36" rectified 6"x24" avorio on wa






antracite

6"x24"





Silver 6"x24"

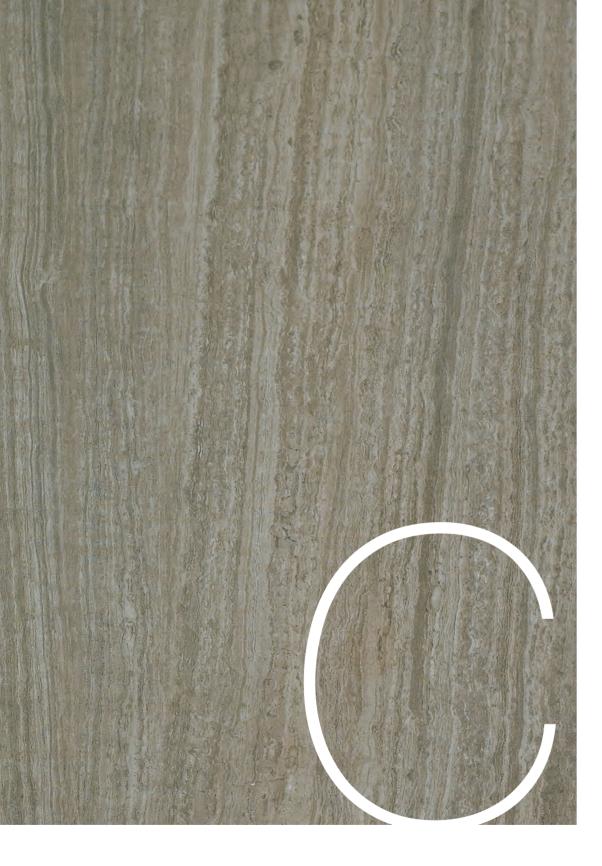



Cenere
12"x12"






avorio

18"x18" 6"x24" 2"x2" mosai

corda avorio cenere silver antracite

STRATOS

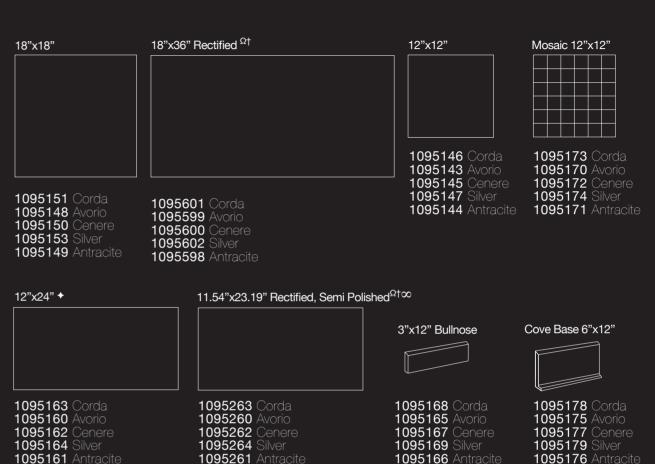

6"x24"+

1095223 Corda 1095220 Avorio 1095222 Cenere 1095224 Silver 1095221 Antracite Outside Corner 1"x6" Inside Corner 1"x6"

1095183 Corda **1095180** Avorio 1095182 Cenere **1095184** Silver **1095181** Antracite

- **1095188** Corda **1095185** Avorio 1095187 Cenere 1095189 Silver 1095186 Antracite
- ◆ MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").
- † RECTIFIED MATERIAL IS NOT MODULAR WITH NOMINAL PRESSED MATERIAL
- $^{\Omega}$ FOR STAGGERED APPLICATIONS, WE RECOMMEND 30% OFFSET.

∞THE SEMI-POLISHED IS NOT RECOMMENDED FOR EXTERIOR HORIZONTAL APPLICATIONS OR FOR WET AREAS OR WHERE STANDING WATER MAY ACCUMULATE.





UNIFORM APPEARANCE





MODERATE VARIATION



SUBSTANTIAL VARIATION

PACKAGING							
NOMINAL SIZE	METRIC (CM)	THICKNESS _{PI} (MM)	IECES PER BOX	SQ. FT PER BOX	WEIGHT PER BOX	BOXES PER PALLET	WEIGHT PER PALLET
12"x24" ♦	30x60	9 mm	7	14	57.4	48	2755
11 $\frac{11}{8}$ x 23 $\frac{7}{16}$ Semi-Polished/Rectified $\Omega^{\uparrow \infty}$	29.6x59.5	9 mm	7	14	57.4	48	2755
18" x 36" Rectified Ω [†]	45x90	10 mm	3	13.5	59.4	27	1653.8
6"x24" ◆	15x60	9 mm	14	14	57.4	48	2755
18"x18"	45x45	9 mm	7	15.75	64.5	32	2066
12"x12"	30x30	9 mm	14	14	57.4	48	2755
2"x2" Mosaic (12"x12")	30x30	9 mm	10	10	40.6	45	1877
3"x12"Bullnose	7.5x30	9 mm	12	3	12.7	168	2184
6"x12" Cove Base .	15x30	8 mm	10	5	17.5	48	890
1"x6" Inside Corner .	2.5x15	8 mm	4	-	1	-	-
1"x6" Outside Corner .	2.5x15	8 mm	4	-	1	-	-

ALL OTHER SIZES WILL BE PACKAGED AS ORDERED

PLEASE CONTACT FLORIM CUSTOMER SERVICE AT 877-FLORIM1 FOR PACKAGING INFORMATION.

◆ MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

 \dagger RECTIFIED MATERIAL IS NOT MODULAR WITH NOMINAL PRESSED MATERIAL.

 $^{\Omega}$ FOR STAGGERED APPLICATIONS, WE RECOMMEND 30% OFFSET.

∞THE SEMI-POLISHED IS NOT RECOMMENDED FOR EXTERIOR HORIZONTAL APPLICATIONS OR FOR WET AREAS OR WHERE STANDING WATER MAY ACCUMULATE.

TECHNICAL SPECIFICATIONS - COLOR BODY PORCELAIN									
		Natural	Semi-Polished	ASTM C1027					
Surface Abrasion	PEI	IV	IV	ASTM C1027					
Water Absorption		≤ 0.5%	≤ 0.5%	ASTM C373					
Chemical Resistance		NOT AFFECTED	NOT AFFECTED	ASTM 650					
Dynamic Coefficient of Friction		≥ 0.42 •	≥ 0.35 •	ANSI 137.1					
Stain Resistance		NOT AFFECTED	NOT AFFECTED	ASTM C1378					
Breaking Strength		≥ 400 (9mm), ≥ 300 (8mm)	≥ 400 (9mm), ≥ 300 (8mm)	ASTM C648					
Resistance to Freeze		RESISTANT	RESISTANT	ASTM C1026					
Scratch Hardness		≥7	≥7	MOHS					

ALL FLORIM USA PRODUCTS MEET OR EXCEED ALL STANDARDS IN ANSI A137.1.

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT BUNS













WHY PORCELAIN?

There are many reasons to choose impervious porcelain tile over other floor coverings. It offers the largest array of design options and holds its

Benefits of Porcelain Tile

- Impervious to water
 Easy to maintain
 Variety of design options
 Environmentally friendly
 Resistant to germs and bacteria

- Fire resistantDurable best long-term value vs.

HOW TO MAINTAIN YOUR PORCELAIN TILE

- Sweep or vacuum regularly.Wash with a household cleaner






PROGRESS THAT TOUCHES AND INVESTS IN THE **ENTIRE SOCIETY**

Florim products for project implementation, will positively

(Leadership in Energy and Environmental Design).

A COMMITMENT TO THE DEVELOPMENT OF PRODUCTS FOR A CONSCIOUS BUILDING TRADE

TECHNICAL DEVELOPMENT THAT CONSIDERS THE NATURAL ENVIRONMENT

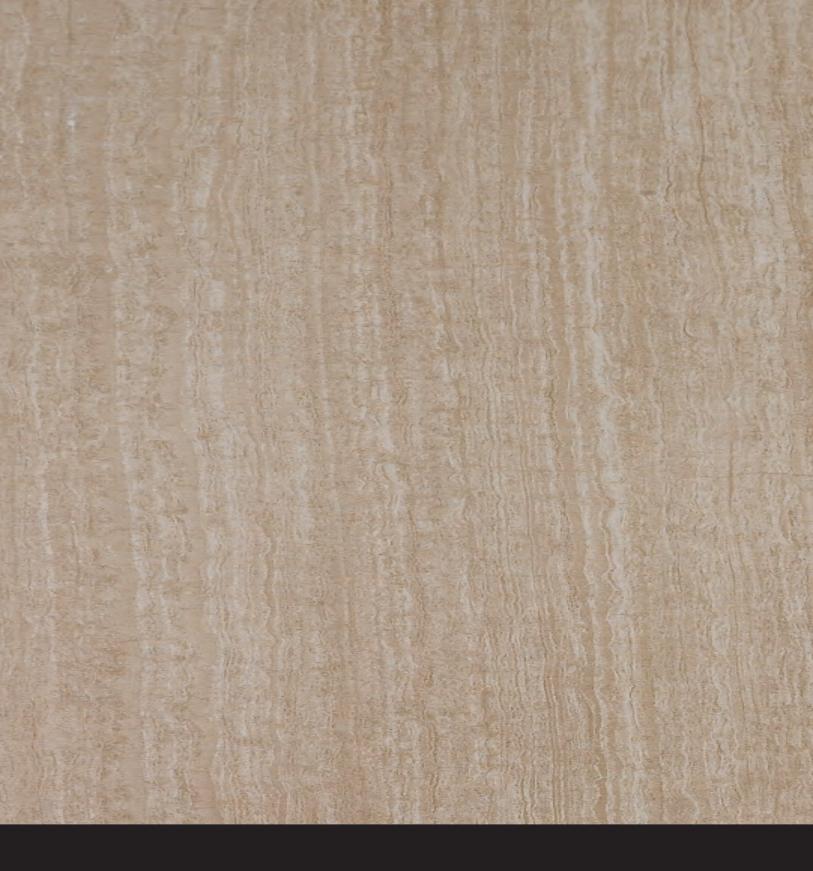





300 International Blvd. Clarksville, TN 37040 toll free 877 - Florim1 (356-7461) tel. 931 645 5100 www.florimusa.com



Scan this barcode with your smart phone for more care, maintenance, and installation tips at www.florimusa.com