# STYLED IN ITALY. PROUDLY AMERICAN.

# RIFT





Gravel

### COLORED BODY PORCELAIN TILE







Chalk



Portland

# Industrial and urban

Inspired by industrial flooring and characterized by lively graphics, RIFT gives any room the realistic details of cement, enhancing its metropolitan look. Inserts, cracks and variations of light and shade fit together to create decorative patterns. Available in four different colors for a contemporary look in all environments.

- Cement look
- Multiple graphics and brilliance
- Versatility of grayscale
- 2 sizes: 12"x24", 18"x36"
- Decorative pattern with multicolored Mosaics
- Residential and commercial spaces



RIFT

# COLORED BODY PORCELAIN TILE

RIFT



Chalk



Gravel




Portland



Blacktop

4

### COLORED BODY PORCELAIN TILE

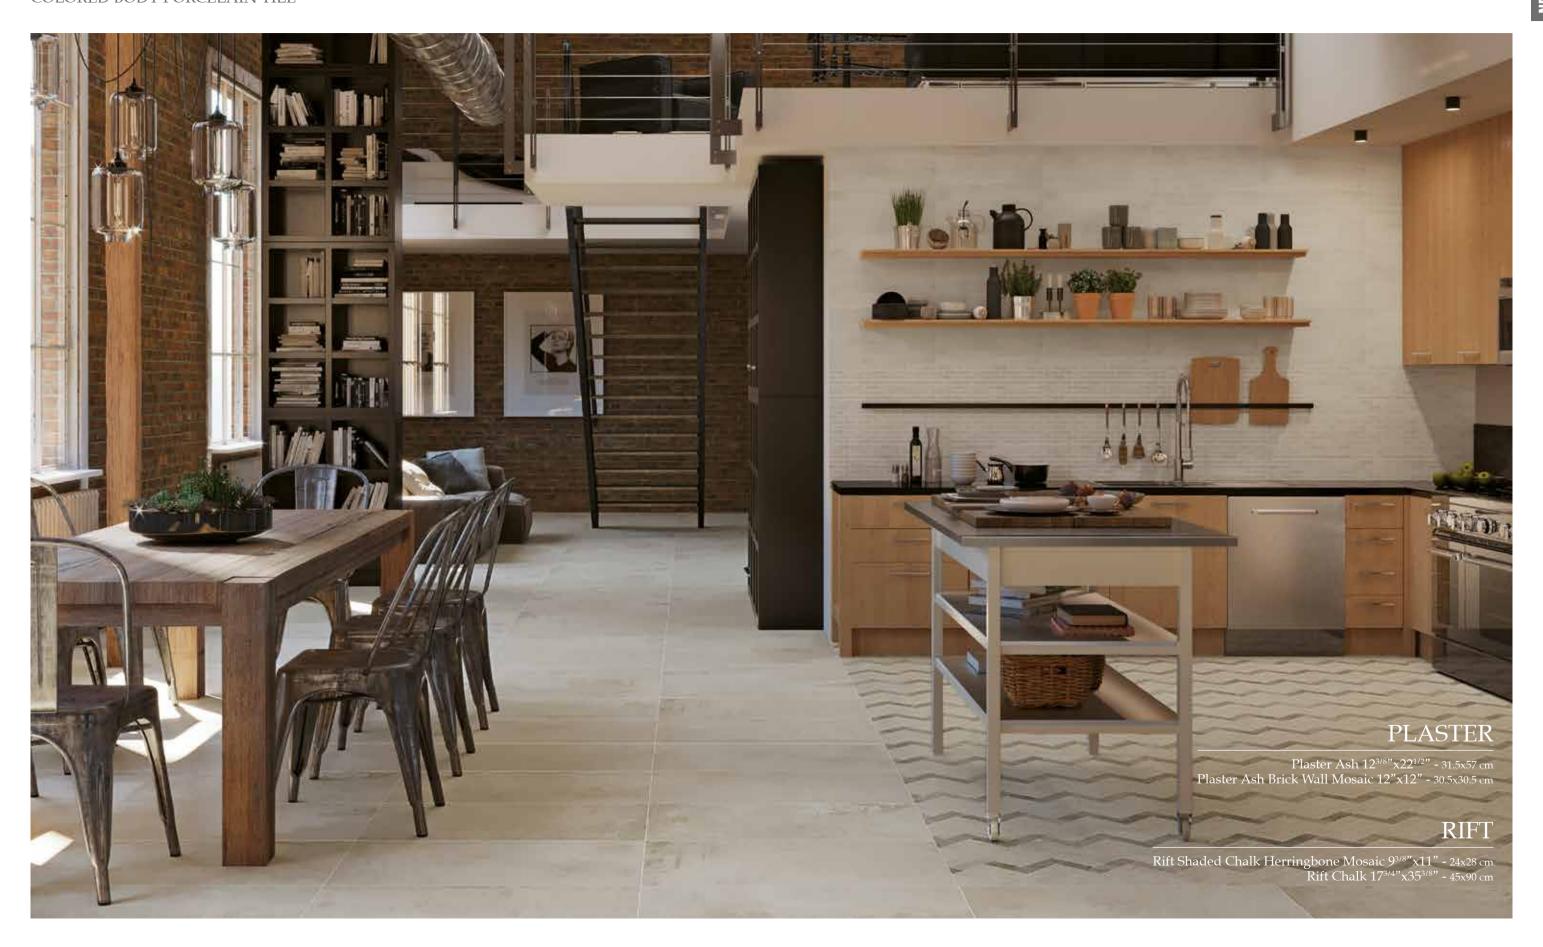

V3 MODERATE VARIATION


# COLORED BODY PORCELAIN TILE

# REDEEM

Redeem Ash 76/8"x393/8" - 20x100 cm

# RIFT

Rift Blacktop 17<sup>3/4</sup>"x35<sup>3/8</sup>" - 45x90 cm Rift Blacktop Cove Base 6"x12" - 15x30 cm

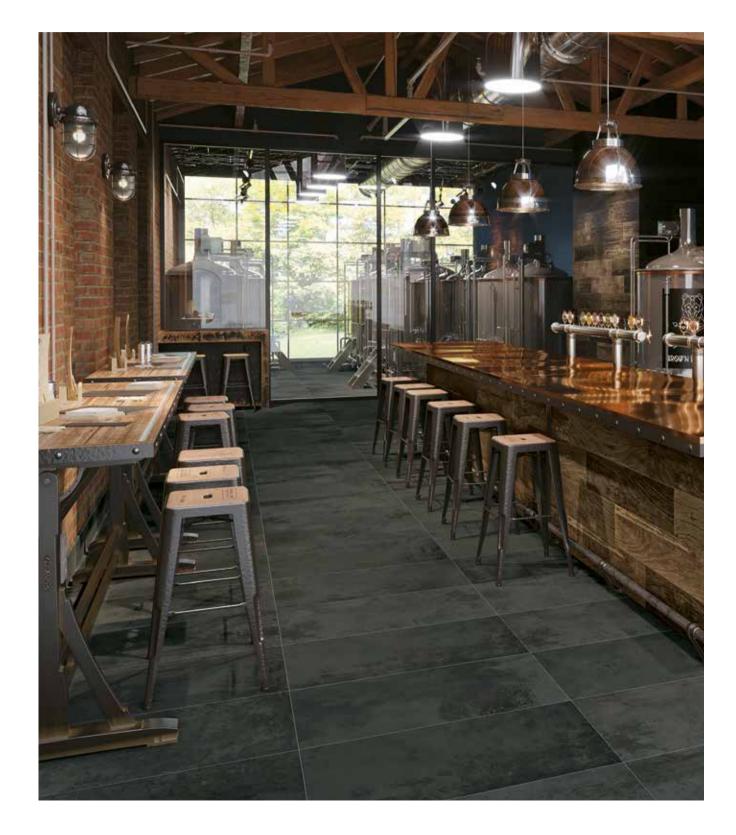



# RIFT

Rift Portland 11<sup>3/4</sup>"x23<sup>5/8</sup>" - 30x60 cm Rift Portland Cove Base 6"x12" - 15x30 cm

V3 MODERATE VARIATION



PORCELAIN PROBLEM



RIFT Chalk 17<sup>3/4</sup>"x35<sup>3/8</sup>" - 45x90 cm - Rectified 600010002008



RIFT Gravel 17<sup>3/4</sup>"x35<sup>3/8</sup>" - 45x90 cm - Rectified 600010002009



RIFT Portland 17<sup>3/4</sup>"x35<sup>3/8</sup>" - 45x90 cm - Rectified 600010002010



RIFT Blacktop 17<sup>3/4</sup>"x35<sup>3/8</sup>" - 45x90 cm - Rectified 600010002011



RIFT Chalk 11<sup>3/4</sup>"x23<sup>5/8</sup>" - 30x60 cm 600010002004



RIFT Gravel 11<sup>3/4</sup>"x23<sup>5/8</sup>" - 30x60 cm 600010002005



RIFT Portland 11<sup>3/4</sup>"x23<sup>5/8</sup>" - 30x60 cm 600010002006



RIFT Blacktop 11<sup>3/4</sup>"x23<sup>5/8</sup>" - 30x60 cm 600010002007

### MOSAICS & DECORS

V3 MODERATE VARIATION



RIFT Chalk Mosaic 11<sup>3/4</sup>"x11<sup>3/4</sup>" - 30x30 cm (Mosaic 2"x2") 600110000805



RIFT Chalk Herringbone 9<sup>3/8</sup>"x11<sup>3/4</sup>" - 24x28 cm (Herrigbone Mosaic 2"x6") 600110000818



RIFT Shaded Chalk Herringbone 93/87 x113/47 - 24x28 cm (Herrigbone Mosaic 2"x6") 600110000822



RIFT Gravel Mosaic 11<sup>3/4</sup>"x11<sup>3/4</sup>" - 30x30 cm (Mosaic 2"x2") 600110000806



RIFT Gravel Herringbone 9<sup>3/8</sup>"x11<sup>3/4</sup>" - 24x28 cm (Herrigbone Mosaic 2"x6") 600110000819



RIFT Light Gravel Herringbone 9<sup>3/8</sup>"x11<sup>3/4</sup>" - 24x28 cm (Herrigbone Mosaic 2"x6") 600110000823



RIFT Portland Mosaic 11<sup>3/4</sup>"x11<sup>3/4</sup>" - 30x30 cm (Mosaic 2"x2") 600110000807



RIFT Portland Herringbone 9<sup>3/8</sup>"x11<sup>3/4</sup>" - 24x28 cm (Herrigbone Mosaic 2"x6") 600110000820



RIFT Dark Portland Herringbone 9<sup>3/8</sup>"x11<sup>3/4</sup>" - 24x28 cm (Herrigbone Mosaic 2"x6") 600110000824



RIFT Blacktop Mosaic 11<sup>3/4</sup>"x11<sup>3/4</sup>" - 30x30 cm (Mosaic 2"x2") 600110000798



RIFT Blacktop Herringbone 9<sup>3/8</sup>"x11<sup>3/4</sup>" - 24x28 cm (Herrigbone Mosaic 2"x6") 600110000821

# COORDINATING TRIMS

	Bullnose	Cove base		
RIFT Chalk	610130000500	600130000500		
RIFT Gravel	610130000501	600130000501		
RIFT Portland	610130000502	600130000502		
RIFT Blacktop	610130000503	600130000503		



Bullnose 3"x 24" - 7.2x60 cm



Cove base 6"x12" - 15x30 cm - ₹8,5mm

11

10

# Sustainability



Every Atlas Concorde USA porcelain tile collection is PTCA Certified. Under the program, established jointly by the Porcelain Tile Certification Agency (PTCA) and the Ceramic Tile Distributors Association (CTDA), manufacturers can "prove" their product is really porcelain (meeting the water absorption criteria of the American national standard - ASTM C373).



LEED (Leadership in Energy and Environmental Design) is a rating system created to encourage the construction of "green" buildings. Developed by the US Green Building Council and internationally recognized, it points out the necessary requirements to build eco-compatible projects, capable of functioning in sustainable and autonomous way in terms of energy consumption as well as having a low environmental impact throughout their entire life-cycle. Atlas Concorde USA is a member of the US Green Building Council.



Atlas Concorde USA products are low-emitting materials with zero emission of volatile organic compounds (VOC). This can contribute to the awarding of 1 LEED credit.



Atlas Concorde USA is a member of TCNA, a trade association representing manufacturers of ceramic tile, tile installation materials, tile equipment, raw materials, and other tile-related products. The Tile Council is recognized for its leadership role in facilitating the development of North American and international industry quality standards to benefit tile consumers.



The Ceramic Tile Distributors Association (CTDA) is an international association of distributors, manufacturers and allied professionals of ceramic tile and related products. CTDA connects, educates and strengthens tile and stone distributors. Atlas Concorde USA is a member of CTDA.



The Health Product Declaration (HPD) Open Standard provides for the disclosure of product contents and potential associated human and environmental health hazards. The HPD Open Standard was created and is maintained and evolved by the HPD Collaborative, a customer-led organization committed to the continuous improvement of building products through transparency, openness, and innovation throughout the product supply chain. Atlas Concorde USA adheres with its own HPD.



An Environmental Product Declaration (EPD) is an independently verified and registered document that communicates transparent and comparable information about the life-cycle environmental impact of products. It is a transparent declaration of the life-cycle environmental impact, which Atlas Concorde USA makes available to customers.



Atlas Concorde USA can provide a Product Environmental Footprint (PEF), a multi-criteria measure of the environmental performance of a good or service throughout its life cycle. PEF information is produced for the overarching purpose of seeking to reduce the environmental impacts of goods and services taking into account supply chain activities.



The Health Product Declaration® logo is a registered trademark of HPD Collaborative.













Compliant with standards ANSI A137.1-2012

**SIZE - THICKNESS** 

17<sup>3/4</sup>" x 35<sup>3/8</sup>"- 45x90 cm ₹ 9 mm

**FINISH** 

MATTE

# 

While the colors and/or texture present on a single piece of tille will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

### FIELD TILES - Available in all colors

Commercial size (in)	Nominal size (in)	Thickness (mm)	Finish	Rectified edge
12"x24"	11 3/4" x 23 5/8"	9 mm	Matte	-
18"x36"	17 3/4" x 35 3/8"	9 mm	Matte	Yes

### MOSAICS AND COORDINATING TRIMS - Available in all colors

Commercial size (in)	Nominal size (in)	Thickness (mm)	Finish
Mosaic 2"x2"	11 3/4" x 11 3/4"	9 mm	Matte
Herrigbone Mosaic 2"x6"	9 3/8" x 11 3/4"	9 mm	Matte
Bullnose 3"x24"	2 7/8" x 23 5/8"	9 mm	Matte
Cove Base 6"x12"	5 7/8" x 11 3/4"	8.5 mm (*)	Matte

Please refer to caliber chart for work sizes. Close joints are not recommended.
(\*): Cove Base thickness is 7 mm on flat top part.

### **PERFORMANCE & FEATURES**

			Porcelain Tile Specification					
RIFT		PROPERTY	ASTM TEST METHOD	Calibrated		Rectified		RIFT
				Minimum	Maximum	Minimum	Maximum	
		Nominal Size	ASTM C499	-3.00%	3.00%	-3.00%	2.00%	Compliant
		Caliber Range (Variation from average facial dimension of sample)		-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant
REGULARITY		Thickness (1)		N/A	Range: 0.40 in (1.02 mm)	N/A	Range: 0.40 in (1.02 mm)	Compliant
CHARACTERISTICS		Wedging	ASTM C502	-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant
	1 1	Warpage Edge	ASTM C485	-0.75% or -0.09 in (-2.3 mm) (*)	0.75% or 0.09 in (2.3 mm) (*)	-0.40% or -0.05 in (-1.3 mm) $^{(2)}$ or -1.8 mm $^{(3)}$ (*)	0.40% or 0.05 in (1.3 mm) <sup>(2)</sup> or 1.8 mm <sup>(3)</sup> (*)	Compliant
		Warpage Diagonal		-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.40% or -0.07 in (-1.8 mm) (*)	0.40% or 0.07 in (1.8 mm) (*)	Compliant
				All Porce	elain Tiles			
STRUCTURAL CHARACTERISTICS		Water Absorption	ASTM C373	≤ 0.5%				≤ 0.5%
BULK MECHANICAL CHARACTERISTICS	<u>↓</u>	Breaking Strength	ASTM C648	Average ≥ 250 lbf. (1.11 kN) Individual ≥ 225 lbf. (1.00 kN)			≥ 350 lbf. avg	
PHYSICAL PROPERTIES		Bond Strength	ASTM C482	≥ 50 psi (0.34 Mpa)				≥ 100 psi
THERMAL AND IGROMETRIC CHARACTERISTICS	紫	Resistance to Freeze/ Thaw Cycling	ASTM C1026	As Reported				Resistant
CHEMICAL		Chemical Resistance	ASTM C650	As Reported				Unaffected
CHARACTERISTICS		Stain Resistance	ASTM C1378	As Reported				Unaffected
SAFETY CHARACTERISTICS		Dynamic coefficient of friction	DCOF	Requires a minimum value of 0.42 for commercial areas that are likely to be wet				> 0.42 Wet

- (\*) Whichever is less
  (1) May not apply to textured surfaces or tiles with uneven back patterns.
  (2) Whichever is less, for tiles up to 24"x24" (610 mm x 610 mm).
  (3) Applies to tiles larger than 24"x24" (610 mm x 610 mm).

The Health Product Declaration® logo is a registered trademark of HPD Collaborative.

Atlas Concorde reserves the right to modify any product without notice and will not be liable for any direct or indirect damage resulting from such modifications. Colors and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. For information and details relating to codes, packaging and weight it is recommended to refer to the latest pricelist.

© Copyright Atlas Concorde USA, Inc. 2017

The reproduction of the work, fully or in part, is strictly forbidden.

