


Technical Data

Luffing Capacities

298


HSL

Luffing Attachment

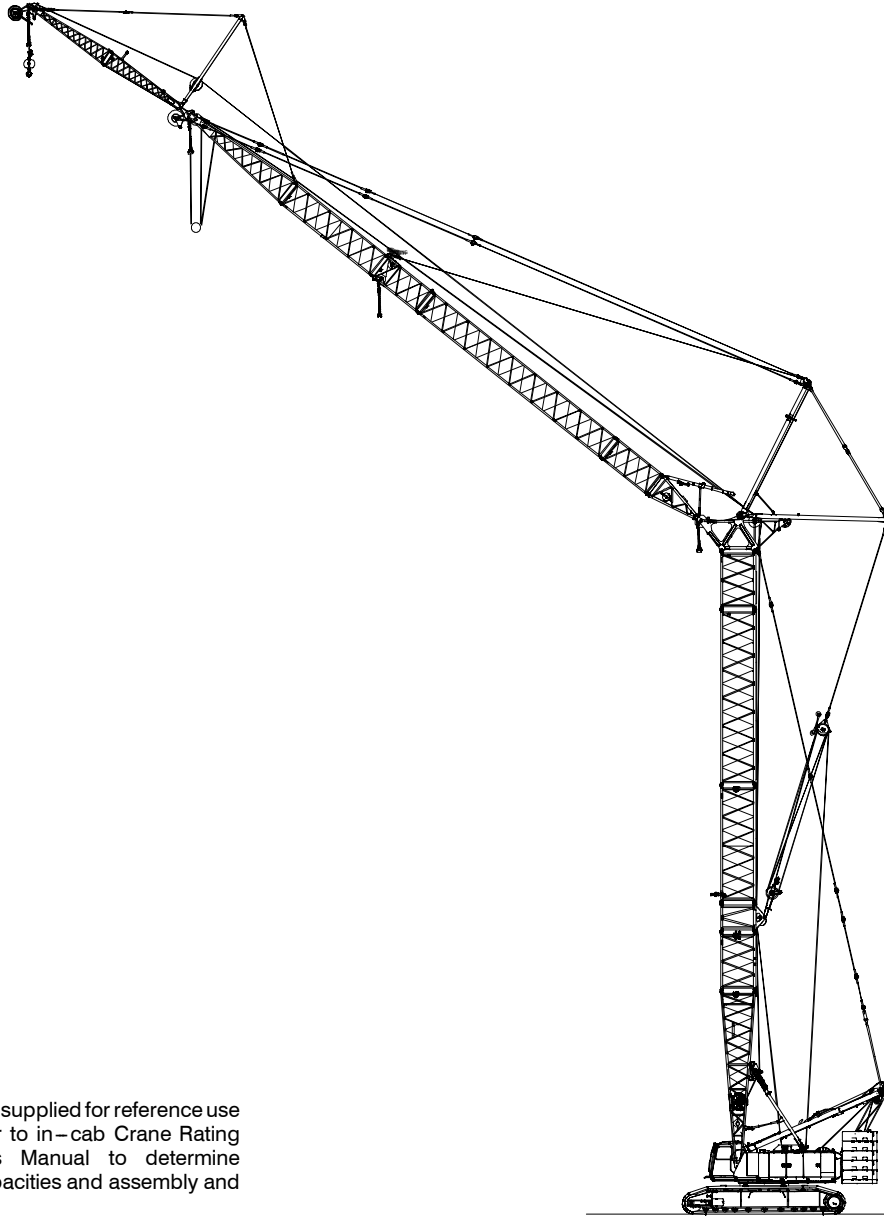

CAUTION: This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Luffing Attachment

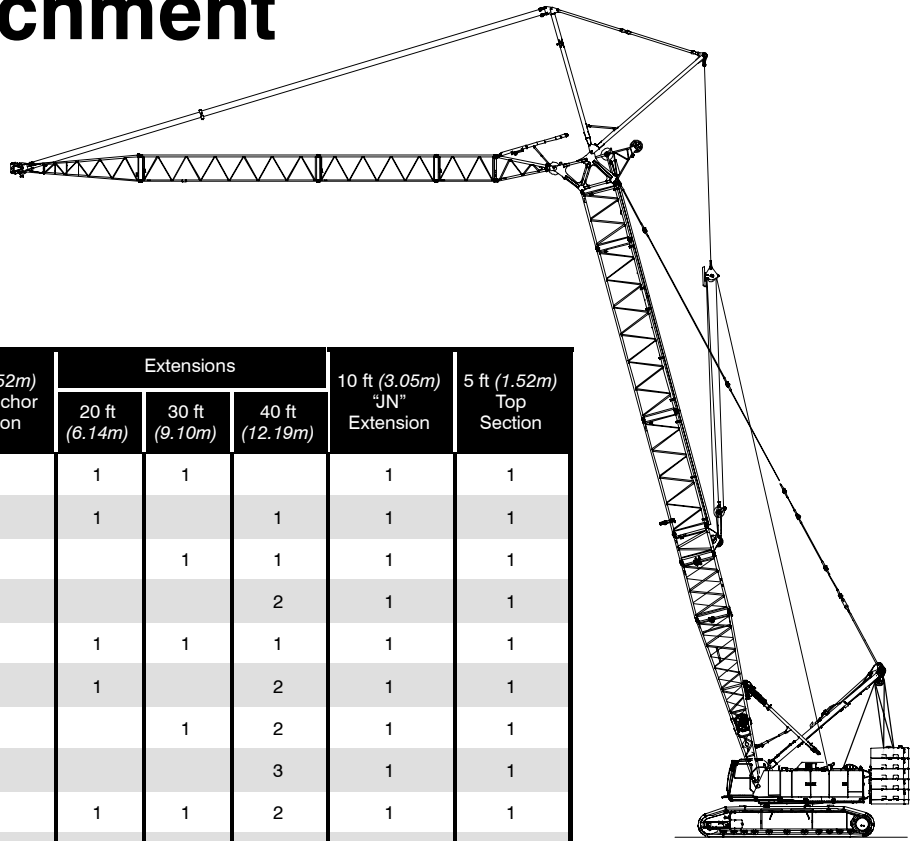

Luffing Boom Make-up


Luffing Boom Length ft (m)	30 ft (9.10m) Base Section	10 ft (3.05m) "JN" Extension	5 ft (1.52m) Bail Anchor Section	Extensions			10 ft (3.05m) "JN" Extension	5 ft (1.52m) Top Section
				20 ft (6.14m)	30 ft (9.10m)	40 ft (12.19m)		
110 (33.5)	1	1	1	1	1		1	1
120 (36.6)	1	1	1	1		1	1	1
130 (39.6)	1	1	1		1	1	1	1
140 (42.7)	1	1	1			2	1	1
150 (45.7)	1	1	1	1	1	1	1	1
160 (48.8)	1	1	1	1		2	1	1
170 (51.8)	1	1	1		1	2	1	1
180 (54.9)	1	1	1			3	1	1
190 (57.9)	1	1	1	1	1	2	1	1
200 (61.0)	1	1	1	1		3	1	1


Luffing Jib Make-up

Luffing Jib Length ft (m)	10 ft (3.05m) Base Section	Luffing Jib Extensions				20 ft (6.14m) Top Section
		10 ft (3.05m)	20 ft (6.14m)	30 ft (9.10m)	40 ft (12.19m)	
90 (27.4)	1	1	1	1		1
100 (30.5)	1	1	1		1	1
110 (33.5)	1	1		1	1	1
120 (36.6)	1	1			2	1
130 (39.6)	1	1	1	1	1	1
140 (42.7)	1	1	1		2	1
150 (45.7)	1	1		1	2	1
160 (48.8)	1	1	1	2	1	1
170 (51.8)	1	1	1	1	2	1
180 (54.9)	1	1		2	2	1
190 (57.9)	1		1	2	2	1
200 (61.0)	1	1	1	2	2	1

Notes:

1. Capacities shown are in kips/metric tons (1 kip = 1,000 lb / 1 metric ton = 0.45 kips) and are not more than 75% of the tipping loads with the crane standing level on a firm supporting surface. A deduction must be made from these capacities for the weight of the hook block, hook ball, sling, grapple, load weighing devices, etc. When lifting from the luffing jib with the fixed jib installed, reduce capacities by values shown in the Crane Rating Manual. See Operator's Manual for all limitations when raising or lowering attachment.
 2. The capacities in the shaded areas are based on structural strength. The capacities in the non-shaded areas are based on stability ratings.
 3. All luffing attachment combinations require the maximum counterweight combination "ABCDE".
 4. Load ratings are based on freely suspended loads and make no allowances for such factors as the effect of the wind on load, ground conditions, and operating speeds. The operator shall therefore reduce load ratings in order to take these conditions into account. Refer to the Crane Rating Manual for Wind Speed Restrictions.
 5. Refer to the Crane Rating Manual for allowable attachment liftoff lengths and allowable working lengths at the various luffing boom angles.
 6. The fixed jib has only one length [30 ft (9.14m)] and only one offset with respect to the luffing jib (5°).
 7. These capacities are in compliance with ASME/ANSI B30.5 at date of manufacture.
 8. These capacities apply only to the crane as originally manufactured and normally equipped by Link-Belt Construction Equipment Company.
- * See Link-Belt® website, www.linkbelt.com, for complete luffing attachment working range details and capacities including fixed jib and midfall.

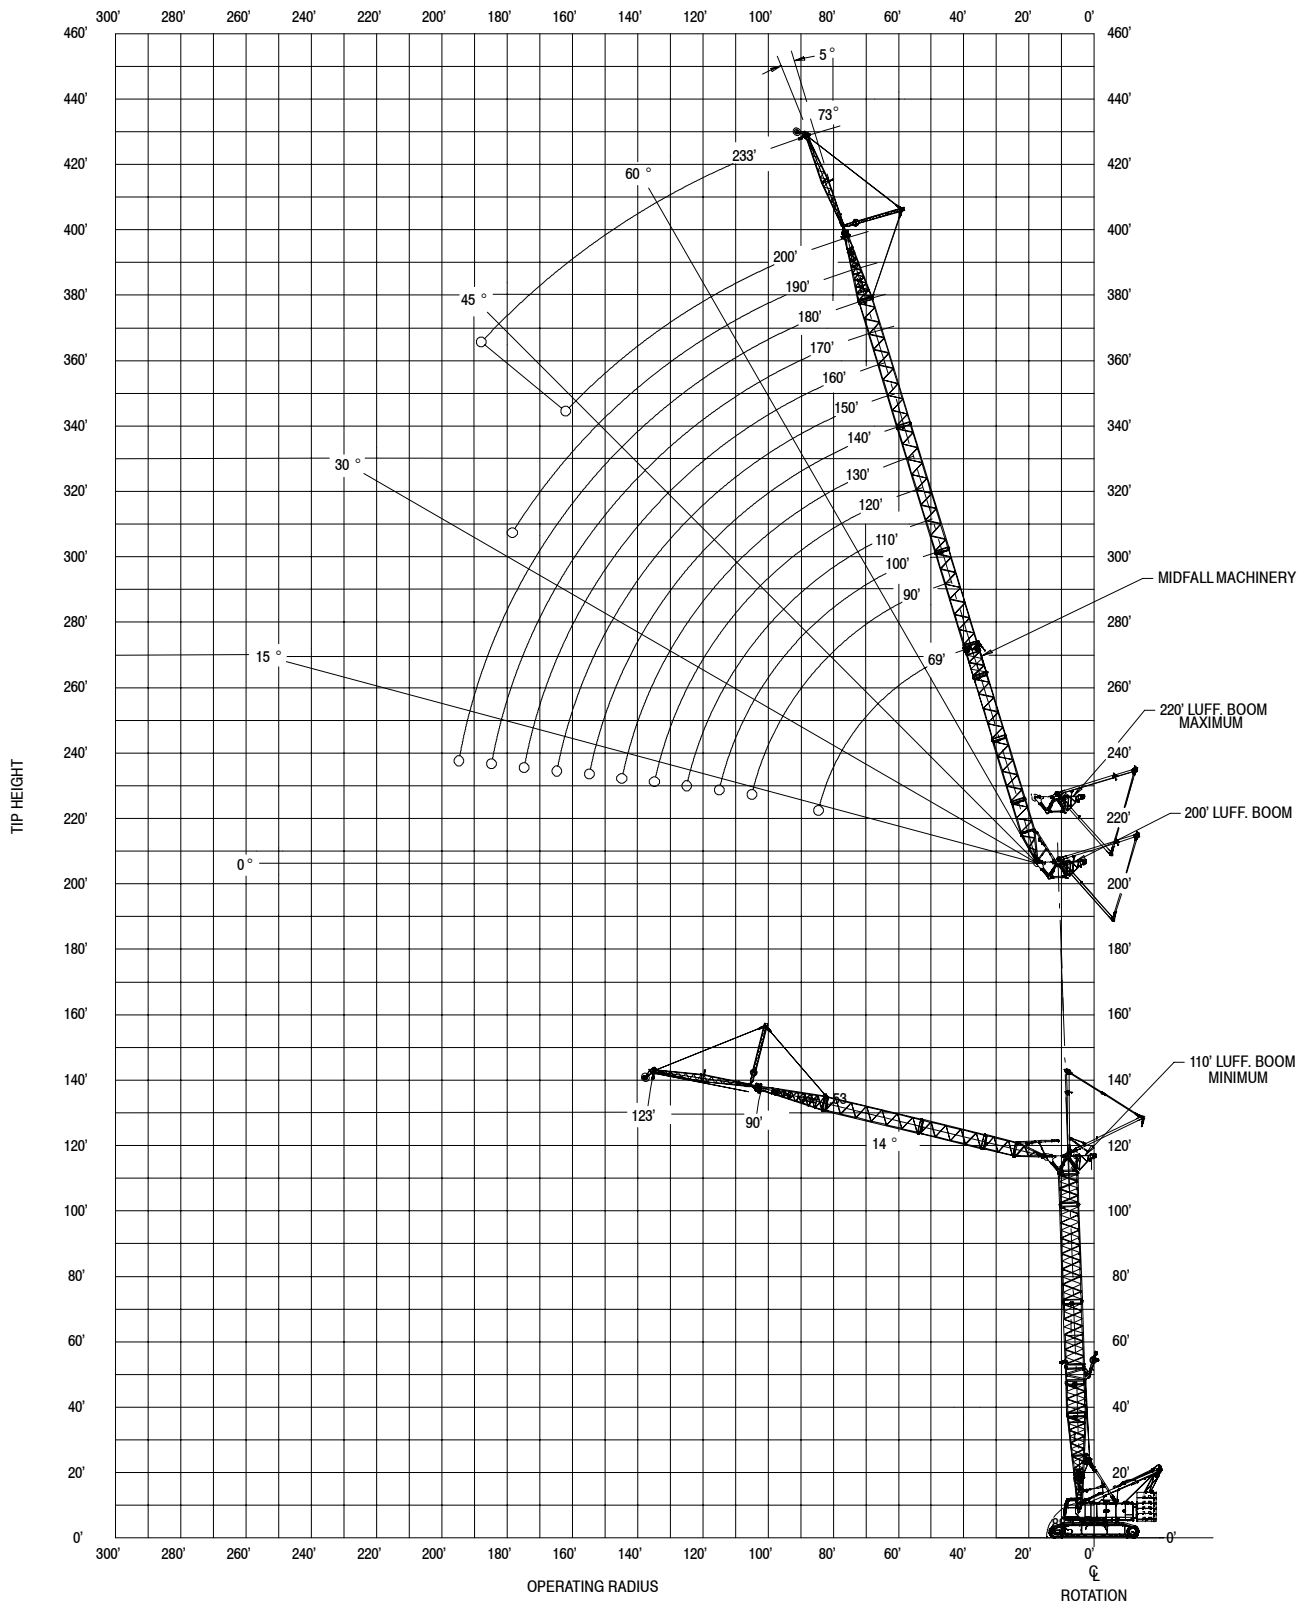

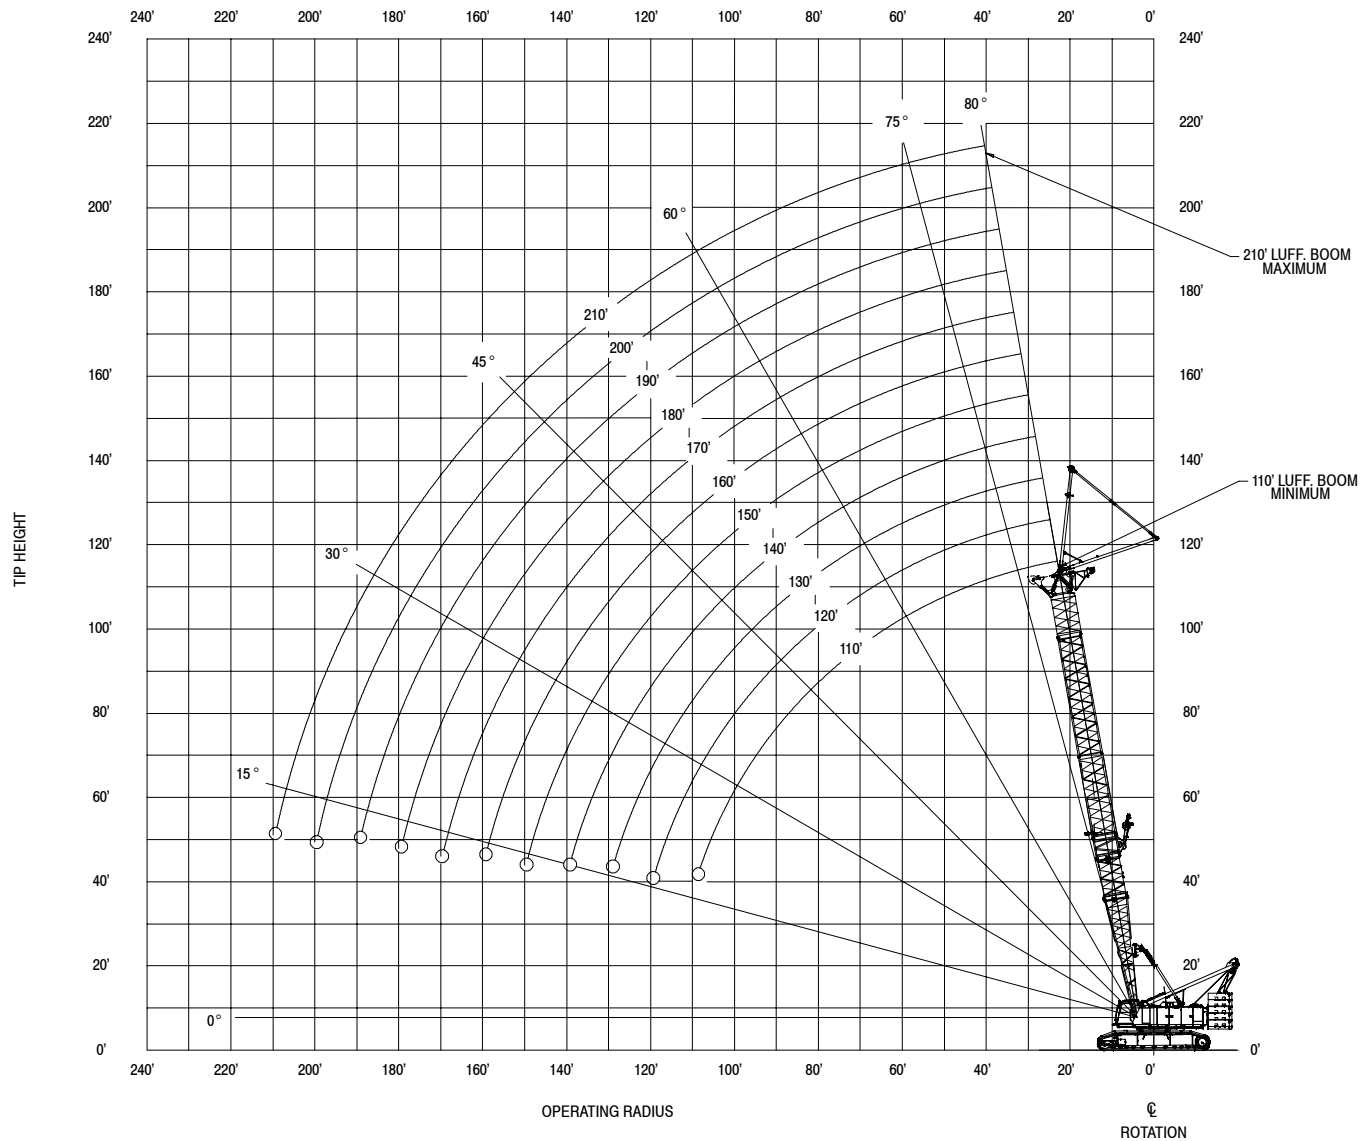

298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)	
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees				
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)		
110	90	41	73.0	203.8	98.0*																	41
110	90	50	66.9	200.5	80.3*																	50
110	90	51				70.0	201.7	89.3*														51
110	90	60	59.7	195.5	65.5*	63.9	197.9	78.4*														60
110	90	68							65.0	196.9	75.4											68
110	90	70	52.0	188.7	55.6*	56.5	192.2	63.9*	63.5	195.8	72.5											70
110	90	80	43.4	179.6	48.6*	48.5	184.5	54.2*	56.1	190.0	61.5											80
110	90	84							60.0	190.6	55.5											84
110	90	90	33.1	167.0	43.8*	39.3	174.1	47.5*	48.0	182.2	53.2	55.5	186.9	51.0								90
110	90	100	18.5	146.3	40.6*	27.8	159.0	43.0*	38.7	171.6	47.0	47.4	178.9	45.1	55.0	183.0	43.5					100
110	90	105	0.0	117.8	32.3*																	105
110	90	110				5.1	125.1	36.9*	27.0	156.1	41.6*	38.0	168.1	40.1	46.5	174.5	38.5					110
110	90	114																50.0	174.0	35.0		114
110	90	120							0.0	115.3	33.5*	25.9	152.0	36.0	36.9	163.3	34.5	45.3	169.1	33.1		120
110	90	129										0.0	112.7	32.7								129
110	90	130													24.4	146.4	31.2	35.5	157.3	29.9		130
110	90	138													0.0	109.3	28.8					138
110	90	140																22.2	139.1	27.2		140
110	90	147																0.0	105.1	25.4		147
110	100	44	73.0	213.4	88.0*																	44
110	100	50	69.3	211.3	79.2*																	50
110	100	55				70.0	211.1	82.2*														55
110	100	60	63.0	206.9	63.6*	66.6	208.9	76.3*														60
110	100	70	56.4	201.1	53.3*	60.2	203.9	62.4*														70
110	100	72							65.0	205.9	69.6											72
110	100	80	49.2	193.5	44.7*	53.4	197.4	52.2*	59.9	201.8	61.1											80
110	100	89										60.0	199.3	51.3								89
110	100	90	41.1	183.5	39.9*	45.9	188.9	43.8*	53.0	195.1	52.8	59.4	198.7	50.6								90
110	100	100	31.4	169.9	36.9*	37.2	177.6	39.1*	45.4	186.5	46.1*	52.4	192.0	44.8								100
110	100	105													55.0	191.2	40.2					105
110	100	110	17.5	147.9	33.8*	26.3	161.4	36.0*	36.7	175.0	39.7*	44.8	183.2	39.8	51.7	187.8	38.1					110
110	100	115	0.0	117.8	28.7*																	115
110	100	120				4.8	125.5	31.1*	25.6	158.5	34.5*	36.0	171.4	35.7	44.0	178.7	34.2					120
110	100	121																50.0	181.7	32.4		121
110	100	130							0.0	115.3	28.4*	24.6	154.2	32.3	34.9	166.6	30.9	42.9	173.1	29.5		130
110	100	139										0.0	112.7	28.0*								139
110	100	140													23.1	148.5	28.1	33.6	160.4	26.9		140
110	100	148													0.0	109.3	26.0					148
110	100	150																21.1	141.0	24.5		150
110	100	157																0.0	105.1	23.1		157
110	120	50	73.0	232.5	74.9*																	50
110	120	60	67.8	228.9	61.5*																	60
110	120	61				70.0	229.9	69.6*														61
110	120	70	62.5	224.2	50.0*	65.6	226.3	61.3*														70
110	120	80	57.0	218.4	41.0*	60.2	221.2	49.7*	65.0	224.1	59.9											80
110	120	90	51.1	211.2	35.6*	54.5	214.8	40.7*	59.9	219.1	52.1											90
110	120	99										60.0	216.6	44.6								99
110	120	100	44.6	202.1	31.4*	48.4	206.9	35.1*	54.2	212.6	44.6*	59.5	216.1	44.1								100
110	120	110	37.4	190.6	28.3*	41.7	196.9	30.9*	48.1	204.6	37.5*	53.8	209.5	39.1								110
110	120	117													55.0	207.6	34.6					117
110	120	120	28.6	175.2	26.3*	33.9	184.0	27.7*	41.3	194.4	32.0*	47.6	201.3	35.1	53.2	205.3	33.5					120
110	120	130	16.0	150.8	24.0*	24.0	165.9	25.5*	33.4	181.3	27.5*	40.7	191.0	31.7	46.9	196.9	30.2					130
110	120	134																50.0	197.0	27.8		134
110	120	135	0.0	117.8	20.9*																	135
110	120	140				4.4	126.3	22.2*	23.3	162.8	24.1*	32.7	177.6	27.2*	40.0	186.4	27.5	46.0	191.5	26.2		140
110	120	150							0.0	115.3	20.5*	22.4	158.4	23.2*	31.8	172.5	25.1	39.0	180.5	23.9		150

298HSL 360 Degree Capacities - Luffing Jib																					
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight																					
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
110	180	172																			
110	180	180	23.3	188.9	8.7*	27.5	200.2	8.9*	33.4	214.5	10.0*	38.5	224.6	12.3*	42.8	231.7	16.4*	46.8	236.2	16.6	180
110	180	190	13.0	158.3	8.3*	19.5	177.3	8.2*	27.1	197.4	8.7*	33.0	210.7	10.3*	37.9	219.9	13.2*	42.2	226.0	15.3	190
110	180	195	0.0	117.8	7.2*																195
110	180	200				3.6	128.4	7.6*	19.0	173.9	7.7*	26.6	193.3	8.7*	32.4	205.7	10.7*	37.2	214.0	14.1	200
110	180	210							0.0	115.3	7.1*			7.5*	25.9	187.8	8.8*	31.6	199.4	11.3*	210
110	180	219										0.0	112.7	7.0*							219
110	180	220													17.2	162.4	7.3*	24.9	180.8	9.0*	220
110	180	228													0.0	109.3	6.5*				228
110	180	230																15.7	153.7	7.2*	230
110	180	237																0.0	105.1	6.2*	237
110	200	73	73.0	309.0	30.1*																73
110	200	80	70.9	306.8	28.0*																80
110	200	89				70.0	305.0	27.0*													89
110	200	90	67.9	303.0	25.1*	69.6	304.6	26.6*													90
110	200	100	64.7	298.6	22.3*	66.5	300.6	23.8*													100
110	200	110	61.5	293.6	18.5*	63.4	295.9	21.2*													110
110	200	114							65.0	296.6	22.4*										114
110	200	120	58.2	287.8	15.5*	60.1	290.5	18.9*	63.2	293.8	21.0*										120
110	200	130	54.8	281.2	13.0*	56.8	284.4	16.2*	59.9	288.4	18.7*										130
110	200	139										60.0	285.9	18.6*							139
110	200	140	51.2	273.6	11.1*	53.3	277.4	13.6*	56.6	282.2	16.5*	59.7	285.3	18.4*							140
110	200	150	47.4	265.0	9.4*	49.6	269.4	11.4*	53.1	275.1	14.5*	56.3	279.1	16.3*							150
110	200	160	43.4	255.1	8.1*	45.7	260.3	9.7*	49.4	267.1	12.6*	52.8	272.0	14.4*							160
110	200	163													55.0	273.1	15.4*				163
110	200	170	39.0	243.7	7.1*	41.6	249.8	8.2*	45.5	257.9	10.6*	49.1	263.8	12.6*	52.4	267.8	14.1*				170
110	200	180	34.2	230.3	6.2*	37.0	237.6	7.0*	41.3	247.4	8.8*	45.2	254.6	10.8*	48.7	259.6	12.4*				180
110	200	185																50.0	258.3	12.8*	185
110	200	190	28.7	213.9	5.3*	32.0	223.0	6.1*	36.8	235.0	7.3*	41.0	243.9	9.2*	44.8	250.1	10.8*	48.2	254.2	12.1*	190
110	200	200	22.0	192.9	4.0*	26.1	205.0	4.9*	31.7	220.3	6.1*	36.4	231.4	7.7*	40.6	239.3	9.2*	44.2	244.6	10.5*	200
110	200	210	12.4	160.6	2.7*	18.5	180.6	3.6*	25.7	202.1	5.0*	31.3	216.5	6.4*	35.9	226.6	7.7*	40.0	233.5	9.1*	210
110	200	220				3.4	129.0	2.2*	18.0	177.1	3.7*	25.2	197.9	5.1*	30.7	211.4	6.4*	35.3	220.5	7.7*	220
110	200	230							0.0	115.3	2.4*			3.8*	24.5	192.3	5.1*	29.9	204.9	6.3*	230
110	200	239										0.0	112.7	2.6*							239
110	200	240													16.3	165.4	3.9*	23.6	185.1	5.1*	240
110	200	248													0.0	109.3	2.8*				248
110	200	250																14.9	156.4	3.9*	250
110	200	257																0.0	105.1	3.0*	257
120	90	41	73.0	213.8	96.3*																41
120	90	50	67.1	210.7	82.9*																50
120	90	52				70.0	211.6	88.2*													52
120	90	60	60.0	205.7	68.0*	64.5	208.3	79.0*													60
120	90	70	52.3	199.0	57.5*	57.2	202.7	67.2*	65.0	206.7	72.5*										70
120	90	80	43.7	190.0	50.1*	49.2	195.2	56.7*	57.4	201.0	61.0*										80
120	90	87										60.0	200.3	52.8*							87
120	90	90	33.5	177.5	44.8*	40.2	185.1	49.3*	49.5	193.6	52.8*	57.5	198.2	50.4*							90
120	90	100	19.1	157.3	39.3*	28.9	170.6	44.1*	40.5	183.6	46.7*	49.6	190.9	44.6*							100
120	90	103																			103
120	90	105	0.0	127.8	33.1*										55.0	192.4	41.0*				105

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																			
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)	
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)		
120	90	110				9.5	141.9	37.7*	29.3	169.2	41.5	40.6	180.9	39.6	49.4	187.0	37.8				110	
120	90	111				0.0	127.1	33.4*													111	
120	90	119																50.0	183.1	32.7	119	
120	90	120							10.6	141.7	37.1	29.5	166.6	35.5	40.4	177.0	33.9	49.0	182.0	32.3	120	
120	90	122							0.0	125.2	32.4*										122	
120	90	130										10.9	139.4	32.1	29.2	162.6	30.6	39.9	171.8	29.2	130	
120	90	132										0.0	122.4	31.4							132	
120	90	140													10.3	134.8	27.8	28.5	157.1	26.5	140	
120	90	142													0.0	118.7	27.4				142	
120	90	150																8.2	126.9	24.2	150	
120	90	151																0.0	114.2	23.9	151	
120	100	44	73.0	223.4	86.8*																44	
120	100	50	69.5	221.4	79.9*																50	
120	100	55				70.0	221.0	81.1*													55	
120	100	60	63.2	217.1	66.2*																60	
120	100	70	56.6	211.3	55.3*																70	
120	100	74										65.0	215.8	67.0							74	
120	100	80	49.4	203.7	46.2*							61.0	212.6	60.6							80	
120	100	90	41.4	193.9	41.1*							54.2	206.3	52.4							90	
120	100	92													60.0	208.9	48.9				92	
120	100	100	31.8	180.4	37.7*										54.3	203.5	44.2				100	
120	100	109																55.0	200.6	37.9	109	
120	100	110	18.2	158.9	32.6*										54.2	199.7	37.4				110	
120	100	115	0.0	127.8	28.7*																115	
120	100	120				9.0	142.7	31.5*													120	
120	100	121				0.0	127.1	28.2*													121	
120	100	125																	50.0	190.8	30.2	125
120	100	130							10.1	142.6	31.6*								46.3	186.4	28.8	130
120	100	132							0.0	125.2	27.4*										132	
120	100	140													10.4	140.4	28.9				140	
120	100	142													0.0	122.4	26.6*				142	
120	100	150																9.8	135.7	25.1	150	
120	100	152													0.0	118.7	24.8				152	
120	100	160																7.8	127.6	21.9	160	
120	100	161																0.0	114.2	21.7	161	
120	120	50	73.0	242.5	73.7*																50	
120	120	60	68.0	239.0	64.1*																60	
120	120	62				70.0	239.8	68.7*													62	
120	120	70	62.7	234.4	52.0*																70	
120	120	80	57.2	228.6	42.6*																80	
120	120	82										65.0	233.9	57.8							82	
120	120	90	51.3	221.4	36.8*							60.8	229.9	51.7							90	
120	120	100	44.9	212.5	32.4*							55.2	223.7	45.7							100	
120	120	102													60.0	226.3	42.6				102	
120	120	110	37.6	201.1	29.1*										55.3	221.0	38.6				110	
120	120	120	28.9	185.8	26.9*										49.2	213.2	34.6				120	
120	120	130	16.6	162.0	23.0*										42.6	203.5	31.2				130	
120	120	135	0.0	127.8	20.6*																135	
120	120	138																	50.0	206.1	26.0	138
120	120	140																	48.8	204.4	25.5	140
120	120	141																				141
120	120	150																	42.1	194.5	23.3	150
120	120	152																				152
120	120	160																				160
120	120	162																				162
120	120	170																				170
120	120	172																				172
120	120	180																				180
120	120	181																				181

298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																				
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)		
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
120	140	56	73.0	261.7	61.5*																	56	
120	140	60	71.2	260.3	59.5*																		60
120	140	69				70.0	258.6	58.1*															69
120	140	70	66.9	256.5	50.1*	69.6	258.3	57.5*															70
120	140	80	62.3	251.8	40.0*	65.2	254.1	51.4*															80
120	140	90	57.6	246.0	34.0*	60.6	249.0	40.8*															90
120	140	91							65.0	252.0	50.5*												91
120	140	100	52.6	239.0	29.3*	55.8	242.8	34.5**	60.7	247.3	45.1*												100
120	140	110	47.3	230.6	25.6**	50.6	235.3	29.6**	55.9	241.1	39.4**												110
120	140	112										60.0	243.6	37.2*									112
120	140	120	41.4	220.4	22.7**	45.1	226.3	25.7**	50.8	233.7	32.8**	56.0	238.4	33.9**									120
120	140	130	34.8	207.6	20.6**	39.0	215.2	22.6**	45.3	224.7	27.6**	50.9	230.9	30.6**									130
120	140	132													55.0	233.3	28.4**						132
120	140	140	26.7	190.8	18.9**	32.0	201.2	20.2**	39.2	213.7	23.4**	45.4	222.0	27.8**	50.8	227.1	26.2**						140
120	140	150	15.3	164.8	16.4**	23.1	182.0	18.2**	32.2	199.8	20.0**	39.3	211.0	24.2**	45.3	218.1	23.9**						150
120	140	151																50.0	221.4	22.4**			151
120	140	155	0.0	127.8	14.7**																		155
120	140	160				7.6	145.6	16.2**	23.4	180.8	17.4**	32.3	197.1	20.1**	39.2	207.1	21.9**	44.9	213.1	20.6**			160
120	140	161				0.0	127.1	14.5**															161
120	140	170							8.5	145.8	15.7**	23.5	178.2	17.0**	32.1	193.1	20.1**	38.8	201.9	19.0**			170
120	140	172							0.0	125.2	14.1**												172
120	140	180										8.8	143.7	14.7**	23.3	174.1	16.8**	31.7	187.8	17.5**			180
120	140	182										0.0	122.4	13.8**									182
120	140	190												8.3	138.8	13.9**	22.8	168.3	16.1**				190
120	140	192												0.0	118.7	13.5**							192
120	140	200															6.6	130.1	13.2**				200
120	140	201															0.0	114.2	12.7**				201
120	160	62	73.0	280.8	49.6*																		62
120	160	70	69.9	278.0	44.2*																		70
120	160	76				70.0	277.4	44.2**															76
120	160	80	66.0	274.0	38.2*	68.4	275.9	42.6**															80
120	160	90	62.0	269.1	31.8**	64.5	271.5	38.8**															90
120	160	99							65.0	270.2	39.1**												99
120	160	100							64.7	269.8	38.8**												100
120	160	110	57.9	263.3	27.0**	60.5	266.3	32.8**	60.6	264.6	35.3**												110
120	160	112	53.6	256.5	23.2**	56.3	260.2	27.7**															112
120	160	120	49.0	248.5	20.1**	51.9	252.9	23.7**	56.4	258.5	32.2**												120
120	160	122										60.0	260.9	32.6**									122
120	160	130	44.0	239.0	17.7**	47.2	244.4	20.4**	52.0	251.3	26.8**	56.5	255.7	29.9**									130
120	160	140	38.6	227.6	15.8**	42.1	234.3	17.8**	47.3	242.8	22.4**	52.1	248.5	27.1**									140
120	160	143												55.0	249.7	24.7**							143
120	160	150	32.4	213.6	14.3**	36.4	222.0	15.6**	42.2	232.7	18.8**	47.4	240.1	24.6**	52.0	244.7	23.2**						150
120	160	160	25.0	195.4	13.3**	29.9	206.7	13.9**	36.6	220.5	15.9**	42.3	230.0	20.0**	47.3	236.2	21.2**						160
120	160	164													50.0	236.7	19.3**						164
120	160	170	14.3	167.4	11.6**	21.6	185.9	12.5**	30.1	205.3	13.7**	36.7	217.9	16.5**	42.2	226.1	19.5**	47.0	231.2	18.2**			170
120	160	175	0.0	127.8	10.3**																		175
120	160	180				7.1	146.8	11.4**	21.9	184.8	12.0**	30.1	202.7	13.8**	36.5	213.9	17.4**	41.9	221.0	16.8**			180
120	160	181				0.0	127.1	10.2**															181
120	160	190							7.9	147.3	10.9**	22.0	182.2	11.7**	30.0	198.7	14.1**	36.2	208.7	15.5**			190
120	160	192							0.0	125.2	9.9**												192
120	160	200										8.2	145.2	10.2**	21.8	178.1	11.6**	29.6	193.2	14.3**			200
120	160	202										0.0	122.4	9.7**									202
120	160	210												7.7	140.2	9.6**	21.3	172.2	11.7**				210
120	160	212												0.0	118.7	9.4**							212
120	160	220															6.1	131.2	9.2**				220
120	160	221															0.0	114.2	8.8**				221
120	180	68	73.0	299.9	37.9*																		68
120	180	70	72.2	299.2	37.0**																		70
120	180	80	68.8	295.6	33.6**																		80
120	180	83				70.0	296.2	34.6**															83
120	180	90	65.4	291.4	30.1**	67.5	293.4	32.3**															90
120	180	100	61.8	286.4	25.0**	64.0	288.9	29.2**															100
120	180	108							65.0	288.3	29.9**												108
120	180	110	58.1	280.7	21.2**	60.5	283.6	26.2**	64.2	287.1	29.1**												110
120	180	120	54.3	274.0	18.0**	56.7	277.5	22.0**	60.6	281.9	26.3**												120
120	180	130	50.3	266.2	15.5**	52.8	270.5	18.7**	56.8	275.8	23.8**												130

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

			Luffing Boom Angle																			
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)	
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)		
120	180	132																			132	
120	180	140	46.0	257.3	13.5*	48.7	262.3	15.9*	52.9	268.8	21.3*	56.9	273.1	23.7*							140	
120	180	150	41.4	246.8	11.8*	44.3	252.8	13.7*	48.8	260.7	17.9*	53.0	266.1	21.4*							150	
120	180	155													55.0	266.1	21.5				155	
120	180	160	36.3	234.4	10.5*	39.6	241.7	11.9*	44.5	251.2	14.8*	48.9	258.0	19.2*	52.9	262.3	20.5				160	
120	180	170	30.5	219.3	9.5*	34.3	228.4	10.4*	39.7	240.2	12.4*	44.5	248.5	16.3*	48.8	254.1	18.8				170	
120	180	177																50.0	252.0	16.5		177
120	180	180	23.5	199.7	8.8*	28.1	211.9	9.2*	34.4	226.9	10.5*	39.8	237.5	13.3*	44.4	244.7	17.1*	48.6	249.1	16.1	180	
120	180	190	13.5	169.8	8.0*	20.3	189.6	8.3*	28.3	210.5	9.0*	34.5	224.3	11.0*	39.7	233.6	14.5*	44.2	239.6	14.8	190	
120	180	195	0.0	127.8	6.9*																195	
120	180	200				6.7	148.1	7.6*	20.6	188.5	7.9*	28.4	207.9	9.1*	34.4	220.3	11.7*	39.4	228.4	13.6	200	
120	180	201				0.0	127.1	6.8*													201	
120	180	210							7.5	148.6	7.3*	20.7	186.0	7.7*	28.3	203.9	9.4*	34.1	215.0	12.6	210	
120	180	212							0.0	125.2	6.7*										212	
120	180	220										7.7	146.6	6.7*	20.5	181.9	7.7*	27.9	198.4	9.9*	220	
120	180	222										0.0	122.4	6.5*							222	
120	180	230													7.3	141.5	6.4*	20.1	175.9	7.8*	230	
120	180	232													0.0	118.7	6.2*				232	
120	180	240																5.8	132.3	6.1*	240	
120	180	241																0.0	114.2	5.9*	241	
120	200	74	73.0	319.0	29.3*																74	
120	200	80	71.0	316.9	27.7*																80	
120	200	90	68.0	313.2	24.8*	70.0	315.0	26.6*													90	
120	200	100	64.8	308.8	22.2*	66.8	310.9	23.7*													100	
120	200	110	61.6	303.8	19.3*	63.6	306.3	21.2*													110	
120	200	116							65.0	306.4	22.1*										116	
120	200	120	58.3	298.0	16.2*	60.4	301.0	18.8*	63.7	304.5	21.2*										120	
120	200	130	54.9	291.4	13.6*	57.1	294.9	16.6*	60.5	299.2	18.8*										130	
120	200	140	51.3	283.9	11.5*	53.6	288.0	14.3*	57.2	293.2	16.7*										140	
120	200	142										60.0	295.5	18.4*							142	
120	200	150	47.5	275.3	9.8*	49.9	280.1	12.1*	53.7	286.3	14.7*	57.2	290.4	16.6*							150	
120	200	160	43.5	265.5	8.4*	46.1	271.1	10.2*	50.0	278.4	12.8*	53.7	283.6	14.7*							160	
120	200	166																			166	
120	200	170	39.2	254.1	7.3*	41.9	260.7	8.6*	46.2	269.5	11.0*	50.1	275.7	12.9*	53.6	279.7	14.8*				170	
120	200	180	34.4	240.8	6.4*	37.5	248.7	7.4*	42.1	259.2	9.4*	46.2	266.8	11.1*	50.0	271.9	12.8*				180	
120	200	190	28.9	224.6	5.3*	32.4	234.4	6.2*	37.6	247.2	7.7*	42.1	256.5	9.5*	46.2	262.9	11.2*	50.0	267.4	12.7*	190	
120	200	200	22.3	203.7	4.0*	26.6	216.7	4.9*	32.6	232.9	6.4*	37.6	244.5	8.0*	42.0	252.6	9.6*	45.9	257.9	11.0*	200	
120	200	210	12.8	172.1	2.7*	19.3	193.1	3.6*	26.8	215.4	5.1*	32.7	230.3	6.6*	37.6	240.6	8.1*	41.8	247.5	9.6*	210	
120	200	220				6.4	149.2	2.3*	19.6	192.1	3.9*	26.9	212.8	5.3*	32.6	226.3	6.7*	37.3	235.4	8.2*	220	
120	200	221				0.0	127.1	2.1*													221	
120	200	230							7.1	149.9	2.6*	19.6	189.6	4.1*	26.8	208.8	5.4*	32.3	221.0	6.8*	230	
120	200	232							0.0	125.2	2.3*										232	
120	200	240										7.3	147.9	2.8*	19.5	185.4	4.2*	26.4	203.2	5.5*	240	
120	200	242										0.0	122.4	2.5*							242	
120	200	250													6.9	142.7	3.0*	19.0	179.3	4.3*	250	
120	200	252													0.0	118.7	2.8*				252	
120	200	260																5.5	133.3	3.1*	260	
120	200	261																0.0	114.2	3.0*	261	
130	90	42	73.0	223.8	94.7*																42	
130	90	50	67.3	220.8	82.0*																50	
130	90	53				70.0	221.6	86.9*													53	
130	90	60	60.2	215.9	70.2*	65.1	218.7	78.8*													60	
130	90	70	52.6	209.3	59.2*	57.8	213.2	69.9*													70	
130	90	71							65.0	216.6	69.8										71	
130	90	80	44.1	200.4	51.4*	50.0	205.9	58.9*	58.7	211.9	60.5										80	
130	90	89										60.0	209.9	50.2							89	
130	90	90	33.9	188.0	45.7*	41.0	196.1	50.9*	50.9	204.9	52.3	59.4	209.5	49.7							90	
130	90	100	19.8	168.3	38.0*	30.1	182.1	45.1*	42.1	195.4	46.3	51.7	202.6	44.0							100	
130	90	105	0.0	137.8	33.6*										55.0	201.8	38.6				105	
130	90	110				12.4	156.3	37.0*	31.5	182.0	41.1	43.0	193.4	39.1	52.2	199.2	37.1				110	
130	90	112				0.0	137.0	32.8*													112	
130	90	120							15.5	159.0	36.9	32.7	180.6	35.1	43.6	190.2	33.3				120	
130	90	123							0.0	135.0	31.4*							50.0	192.2	30.5	123	

298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
130	90	130																			130
130	90	134																			134
130	90	140																			140
130	90	145																			145
130	90	150																			150
130	90	155																			155
130	100	45	73.0	233.4	85.3*																45
130	100	50	69.7	231.6	79.0*																50
130	100	56				70.0	231.0	79.8*													56
130	100	60	63.5	227.2	68.4*	67.7	229.6	76.0**													60
130	100	70	56.9	221.5	56.9*	61.4	224.8	67.1**													70
130	100	76							65.0	225.6	64.6										76
130	100	80	49.7	214.0	48.7*	54.6	218.6	57.1**	62.1	223.4	60.1										80
130	100	90	41.7	204.3	42.0*	47.2	210.4	48.6**	55.4	217.3	52.0										90
130	100	94							60.0	218.6	46.6										94
130	100	100	32.1	191.0	37.6*	38.8	199.7	41.8**	48.1	209.5	46.0	56.1	215.0	43.7							100
130	100	110	18.8	170.0	31.5*	28.5	184.7	37.7**	39.9	199.1	40.9	48.9	207.3	38.8							110
130	100	112													55.0	210.0	35.8				112
130	100	115	0.0	137.8	28.4*																115
130	100	120				11.8	157.4	30.8*	29.9	184.8	36.7	40.7	197.3	34.8	49.4	203.9	32.9				120
130	100	122				0.0	137.0	27.7*													122
130	100	129																			129
130	100	130							14.7	160.4	31.9*	30.9	183.4	31.4	41.3	194.1	29.7	50.0	199.8	28.2	130
130	100	133							0.0	135.0	26.5**							49.6	199.3	28.1	133
130	100	140										16.7	160.8	28.5	31.7	180.5	27.0	41.5	189.5	25.5	140
130	100	144										0.0	132.0	25.4**							144
130	100	150													18.0	158.9	24.7	31.9	176.1	23.3	150
130	100	155													0.0	128.1	23.6				155
130	100	160																18.5	154.9	21.4	160
130	100	165																0.0	123.2	20.4	165
130	120	50	73.0	252.5	72.3*																50
130	120	60	68.1	249.1	64.1*																60
130	120	63				70.0	249.8	67.5**													63
130	120	70	62.9	244.6	53.7**	66.5	247.0	62.1**													70
130	120	80	57.4	238.9	43.9**	61.2	242.1	54.9**													80
130	120	84							65.0	243.8	55.9										84
130	120	90	51.5	231.7	37.8**	55.5	236.0	44.4**	61.8	240.7	51.2										90
130	120	100	45.1	222.8	33.2**	49.5	228.3	38.1**	56.2	234.7	45.3										100
130	120	104							60.0	235.9	40.7										104
130	120	110	37.9	211.5	29.7**	42.9	218.7	33.2**	50.3	227.3	40.3	56.8	232.4	38.1							110
130	120	120	29.3	196.5	25.8**	35.3	206.4	29.5**	43.7	217.9	35.8**	50.8	225.0	34.1							120
130	120	124													55.0	226.4	30.9				124
130	120	130	17.1	173.1	22.0**	26.0	189.5	26.1**	36.3	206.0	30.3**	44.4	215.9	30.8	51.2	221.6	29.0				130
130	120	135	0.0	137.8	20.3**																135
130	120	140				10.7	159.4	21.8**	27.2	189.8	25.7**	37.0	204.3	28.0	44.8	212.6	26.4				140
130	120	142				0.0	137.0	19.9**													142
130	120	150							13.4	162.8	22.4**	28.2	188.7	25.5**	37.6	201.2	24.1	50.0	215.1	24.3	150
130	120	153							0.0	135.0	19.0**							45.0	208.1	22.6	153
130	120	160										15.2	163.6	21.4**	28.8	185.9	22.1	37.8	196.7	20.7	160
130	120	164										0.0	132.0	18.3**							164
130	120	170													16.4	161.9	20.3	29.1	181.6	19.0	170
130	120	175													0.0	128.1	17.7**				175
130	120	180																16.8	158.0	17.6	180
130	120	185																0.0	123.2	16.8	185
130	140	56	73.0	271.7	59.9*																56
130	140	60	71.4	270.5	58.3*																60
130	140	70	67.0	266.7	51.8**	70.0	268.6	56.8**													70
130	140	80	62.5	261.9	41.3**	65.6	264.5	51.1**													80
130	140	90	57.8	256.2	35.1**	61.0	259.5	42.6**													90
130	140	92							65.0	261.9	48.8										92
130	140	100	52.8	249.3	30.2**	56.2	253.3	35.9**	61.5	258.1	44.7										100
130	140	110	47.4	240.9	26.3**	51.1	246.0	30.7**	56.8	252.1	39.6										110
130	140	114										60.0	253.2	35.6							114
130	140	120	41.6	230.7	23.3**	45.6	237.1	26.6**	51.7	244.9	34.9**	57.2	249.7	33.4							120

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																				
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)		
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
130	140	130	35.0	218.1	21.0*																130		
130	140	135																				135	
130	140	140	27.1	201.5	18.0*	32.6	212.5	20.7*	40.3	225.6	24.6*	46.8	234.1	27.3	55.0	242.7	26.9					140	
130	140	150	15.9	176.0	15.6*	24.0	194.0	18.4*	33.5	212.3	20.8*	40.9	223.7	24.9	47.2	230.8	23.4					150	
130	140	155	0.0	137.8	14.5*													50.0	230.5	20.9		155	
130	140	160				9.9	161.2	15.6*	25.1	194.5	17.9*	34.2	210.7	21.2*	41.3	220.5	21.4	47.3	226.2	20.0		160	
130	140	162				0.0	137.0	14.2*														162	
130	140	170							12.4	165.1	15.7*	26.1	193.5	17.7*	34.7	207.7	19.7	41.5	216.0	18.4		170	
130	140	173							0.0	135.0	13.6*											173	
130	140	180										14.1	166.1	15.0*	26.7	190.9	17.9*	34.9	203.3	16.9		180	
130	140	184										0.0	132.1	13.0*								184	
130	140	190													15.2	164.7	14.6*	26.9	186.5	15.6		190	
130	140	195													0.0	128.1	12.6*					195	
130	140	200																15.6	160.8	14.4*		200	
130	140	205																0.0	123.2	12.2*		205	
130	160	62	73.0	290.8	47.8*																	62	
130	160	70	70.0	288.1	43.7*																	70	
130	160	77				70.0	287.4	43.6*														77	
130	160	80	66.2	284.1	39.6*	68.8	286.2	42.3*														80	
130	160	90	62.2	279.3	32.9*	64.9	281.9	38.6*														90	
130	160	100	58.0	273.5	27.9*	60.9	276.8	34.4*														100	
130	160	101							65.0	280.0	38.5*											101	
130	160	110	53.7	266.8	23.9*	56.7	270.7	28.9*	61.3	275.4	35.4*											110	
130	160	120	49.1	258.8	20.7*	52.3	263.6	24.6*	57.2	269.5	32.3*											120	
130	160	124										60.0	270.6	31.2								124	
130	160	130	44.2	249.3	18.1*	47.6	255.2	21.2*	52.8	262.4	28.5*	57.6	267.1	29.4								130	
130	160	140	38.8	238.1	16.1*	42.5	245.2	18.4*	48.2	254.2	23.7*	53.2	260.2	26.6								140	
130	160	147													55.0	259.1	23.4					147	
130	160	150	32.7	224.2	14.5*	36.9	233.2	16.1*	43.2	244.4	19.8*	48.6	252.0	24.3	53.5	256.7	22.7					150	
130	160	160	25.3	206.1	12.5*	30.5	218.2	14.2*	37.6	232.7	16.6*	43.6	242.4	21.5*	48.9	248.7	20.7					160	
130	160	168																50.0	245.8	17.9		168	
130	160	170	14.8	178.7	10.9*	22.4	198.1	12.7*	31.3	218.1	14.1*	38.2	230.9	17.5*	44.0	239.2	19.0	49.1	244.1	17.6		170	
130	160	175	0.0	137.8	10.1*																	175	
130	160	180				9.3	162.9	11.0*	23.5	198.8	12.2*	31.9	216.6	14.5*	38.6	227.8	17.5	44.1	234.6	16.2		180	
130	160	182				0.0	137.1	9.9*														182	
130	160	190							11.6	167.2	10.8*	24.3	198.0	12.1*	32.4	213.7	15.2*	38.7	223.3	14.9		190	
130	160	193							0.0	135.1	9.4*											193	
130	160	200										13.2	168.5	10.3*	24.9	195.4	12.3*	32.6	209.3	13.8		200	
130	160	204										0.0	132.1	9.1*								204	
130	160	210													14.2	167.3	10.0*	25.1	191.2	12.7*		210	
130	160	215													0.0	128.1	8.8*					215	
130	160	220																14.6	163.4	9.9*		220	
130	160	225																0.0	123.2	8.4*		225	
130	180	68	73.0	309.9	36.7*																	68	
130	180	70	72.3	309.3	36.1*																	70	
130	180	80	68.9	305.7	33.1*																	80	
130	180	84				70.0	306.2	34.1*														84	
130	180	90	65.5	301.5	29.8*	67.8	303.7	32.1*														90	
130	180	100	61.9	296.6	25.9*	64.4	299.3	29.0*														100	
130	180	109							65.0	298.1	29.5*											109	
130	180	110	58.3	290.9	21.9*	60.8	294.1	26.2*	64.8	297.8	29.3*											110	
130	180	120	54.4	284.2	18.6*	57.1	288.1	23.0*	61.2	292.7	26.5*											120	
130	180	130	50.4	276.5	16.0*	53.2	281.1	19.5*	57.5	286.8	23.9*											130	
130	180	134										60.0	287.9	25.5*								134	
130	180	140	46.2	267.6	13.8*	49.1	273.0	16.6*	53.6	279.9	21.5*	57.9	284.4	24.0*								140	
130	180	150	41.6	257.2	12.1*	44.7	263.7	14.2*	49.6	272.0	19.0*	54.0	277.6	21.7*								150	
130	180	158													55.0	275.5	20.3					158	

298HSL 360 Degree Capacities - Luffing Jib																					
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight																					
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
130	180	160	36.5	244.9	10.7*	40.0	252.7	12.3*	45.2	262.8	15.7*	50.0	269.8	19.5*	54.3	274.2	20.0	50.0	261.1	15.4	160
130	180	170	30.8	229.8	9.7*	34.7	239.6	10.7*	40.6	252.1	13.1*	45.7	260.8	17.4*	50.2	266.4	18.3	46.1	252.9	14.2	170
130	180	180	23.8	210.5	8.4*	28.7	223.4	9.3*	35.4	239.3	11.0*	41.0	250.2	14.2*	46.0	257.5	16.8	50.0	261.1	15.4	180
130	180	181																50.0	261.1	15.4	181
130	180	190	14.0	181.2	7.3*	21.1	201.9	8.3*	29.5	223.5	9.3*	35.9	237.6	11.6*	41.3	247.0	15.5	46.1	252.9	14.2	190
130	180	195	0.0	137.8	6.7*													41.5	242.4	13.1	195
130	180	200				8.8	164.4	7.6*	22.1	202.8	8.0*	30.1	222.2	9.6*	36.3	234.5	12.6*	41.5	242.4	13.1	200
130	180	202				0.0	137.1	6.5*													202
130	180	210							10.9	169.2	7.1*	22.9	202.1	8.0*	30.5	219.4	10.1*	36.4	230.1	12.0	210
130	180	213							0.0	135.0	6.2*										213
130	180	220										12.4	170.8	6.7*	23.5	199.7	8.1*	30.6	215.0	10.9*	220
130	180	224										0.0	132.0	6.0*							224
130	180	230													13.4	169.7	6.6*	23.7	195.5	8.5*	230
130	180	235													0.0	128.1	5.8*				235
130	180	240																13.7	165.9	6.5*	240
130	180	245																0.0	123.2	5.5*	245
130	200	74	73.0	329.0	28.1*																74
130	200	80	71.1	327.0	26.8*																80
130	200	90	68.1	323.3	24.5*	70.0	325.0	26.2*													90
130	200	100	65.0	319.0	22.0*	67.1	321.2	23.6*													100
130	200	110	61.7	313.9	19.5*	63.9	316.7	21.1*													110
130	200	118							65.0	316.3	21.8*										118
130	200	120	58.4	308.2	16.7*	60.7	311.4	18.8*	64.3	315.2	21.3*										120
130	200	130	55.0	301.6	14.1*	57.4	305.4	16.6*	61.1	310.0	19.0*										130
130	200	140	51.4	294.2	11.9*	53.9	298.6	14.5*	57.7	304.1	16.8*										140
130	200	144										60.0	305.2	18.2*							144
130	200	150	47.7	285.6	10.1*	50.2	290.8	12.6*	54.3	297.4	14.8*	58.1	301.7	17.0*							150
130	200	160	43.7	275.9	8.7*	46.4	281.9	10.6*	50.7	289.7	12.9*	54.6	295.1	15.0*							160
130	200	170	39.3	264.6	7.5*	42.3	271.7	9.0*	46.9	281.0	11.2*	51.0	287.5	13.2*	55.0	291.9	15.1*				170
130	200	180	34.6	251.3	6.6*	37.9	259.8	7.6*	42.8	270.9	9.5*	47.2	278.9	11.4*	51.3	284.1	13.2*				180
130	200	190	29.1	235.2	5.2*	32.9	245.7	6.3*	38.4	259.2	8.0*	43.2	268.9	9.8*	47.5	275.5	11.6*				190
130	200	194																50.0	276.4	12.6*	194
130	200	200	22.6	214.6	4.0*	27.2	228.4	4.9*	33.5	245.5	6.6*	38.8	257.4	8.3*	43.5	265.7	10.0*	47.6	270.9	11.6*	200
130	200	210	13.3	183.6	2.7*	20.0	205.5	3.7*	27.9	228.6	5.3*	34.0	243.9	6.9*	39.1	254.3	8.5*	43.6	261.1	10.1*	210
130	200	220				8.3	165.9	2.4*	21.0	206.6	4.0*	28.5	227.4	5.6*	34.3	240.9	7.1*	39.3	249.8	8.7*	220
130	200	210																			210
130	200	230							10.4	171.0	2.8*	21.7	206.1	4.3*	28.9	224.7	5.8*	34.5	236.4	7.3*	230
130	200	233							0.0	135.0	2.3*										233
130	200	240										11.8	172.9	3.1*	22.2	203.7	4.6*	29.0	220.3	6.0*	240
130	200	244										0.0	132.0	2.5*							244
130	200	250													12.7	171.9	3.4*	22.4	199.5	4.7*	250
130	200	255													0.0	128.1	2.7*				255
130	200	260																13.0	168.3	3.6*	260
130	200	265																0.0	123.2	2.9*	265
140	90	42	73.0	233.8	90.5*																42
140	90	50	67.6	231.0	81.0*																50
140	90	54				70.0	231.6	84.8*													54

298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																				
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)		
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
140	90	60	60.5	226.1	71.3*	65.7	229.0	78.1*													60		
140	90	70	52.9	219.5	60.5*	58.5	223.7	69.1*													70		
140	90	73							65.0	226.4	67.2										73		
140	90	80	44.4	210.7	52.4*	50.7	216.6	60.9*	60.0	222.8	60.0										80		
140	90	90	34.3	198.5	44.2*	41.9	207.0	52.4*	52.3	216.1	51.9										90		
140	90	92							60.0	219.6	47.8										92		
140	90	100	20.5	179.2	36.8*	31.1	193.5	44.6*	43.8	207.1	45.9	60.0	219.6	47.8							100		
140	90	106	0.0	147.8	33.3*				53.8	214.3	43.4										106		
140	90	110				14.8	169.9	36.3*	33.6	194.6	40.8	45.4	205.7	38.6	55.0	211.2	36.4				110		
140	90	113				0.0	147.0	32.2**													113		
140	90	120							19.2	174.4	36.6	35.6	194.0	34.6	46.7	203.0	32.6				120		
140	90	125							0.0	144.9	30.4**										125		
140	90	127																50.0	201.2	28.5	127		
140	90	130										22.4	176.0	31.2	37.2	191.9	29.5	47.6	198.8	27.7	130		
140	90	137										0.0	141.7	28.7**							137		
140	90	140													24.8	175.2	26.8	38.3	188.1	25.2	140		
140	90	148													0.0	137.5	24.7				148		
140	90	150																26.4	172.3	23.0	150		
140	90	159																0.0	132.3	21.1	159		
140	100	45	73.0	243.4	83.4*																45		
140	100	50	69.9	241.7	77.9**																50		
140	100	57				70.0	241.0	78.1*													57		
140	100	60	63.7	237.4	68.6*	68.3	239.9	75.3*													60		
140	100	70	57.1	231.7	58.3*	61.9	235.2	66.6**													70		
140	100	77							65.0	235.5	62.3										77		
140	100	80	50.0	224.3	49.7*	55.2	229.1	59.1**	63.3	234.2	59.6										80		
140	100	90	42.0	214.7	42.8**	47.9	221.2	50.1**	56.6	228.4	51.5										90		
140	100	97										60.0	228.3	44.8							97		
140	100	100	32.5	201.5	36.2*	39.6	210.8	42.9**	49.5	220.8	45.6	57.9	226.3	43.0							100		
140	100	110	19.4	181.0	30.4**	29.5	196.2	36.7**	41.4	211.0	40.5	50.8	219.2	38.2							110		
140	100	116	0.0	147.8	28.1**										55.0	219.4	33.8				116		
140	100	120				14.0	171.2	30.2**	31.8	197.5	36.3	43.0	209.8	34.3	51.9	216.2	32.2				120		
140	100	123				0.0	147.0	27.2**													123		
140	100	130							18.2	176.1	32.4**	33.7	197.2	31.0	44.2	207.2	29.1				130		
140	100	134							0.0	144.9	25.7**							50.0	208.9	26.3	134		
140	100	135																			135		
140	100	140										21.3	177.9	28.1	35.2	195.1	26.5	45.1	203.1	24.8	140		
140	100	147										0.0	141.7	24.3**							147		
140	100	150													23.5	177.3	24.2	36.3	191.4	22.6	150		
140	100	158													0.0	137.5	22.4				158		
140	100	160																25.0	174.5	20.8	160		
140	100	169																0.0	132.3	19.1	169		
140	120	51	73.0	262.5	70.7*																51		
140	120	60	68.3	259.3	63.2*																60		
140	120	64				70.0	259.7	66.1**													64		
140	120	70	63.1	254.8	55.2*	66.9	257.4	61.6**													70		
140	120	80	57.6	249.1	45.0**	61.6	252.6	55.1**													80		
140	120	86							65.0	253.6	54.0										86		
140	120	90	51.7	242.0	38.7*	56.0	246.5	46.0**	62.7	251.5	50.8										90		
140	120	100	45.4	233.1	33.9**	50.1	239.0	39.4**	57.2	245.7	44.9										100		
140	120	107										60.0	245.6	38.9							107		
140	120	110	38.2	221.9	29.3**	43.5	229.6	34.2**	51.3	238.5	39.9	58.2	243.7	37.5							110		
140	120	120	29.6	207.1	24.8**	36.0	217.6	30.2**	44.9	229.6	35.8	44.9	236.8	33.6							120		
140	120	127													55.0	235.8	29.2				127		
140	120	130	17.7	184.2	21.2**	26.9	201.3	25.4**	37.7	218.2	31.6**	46.1	228.1	30.3	53.3	233.7	28.4				130		
140	120	136	0.0	147.8	19.8**																136		
140	120	140				12.8	173.5	21.2**	29.0	203.0	26.5**	39.1	217.3	27.5	47.1	225.3	25.8				140		
140	120	143				0.0	147.0	19.5**													143		
140	120	146										16.6	179.1	22.6**	30.7	202.9	25.2	40.2	214.9	23.5	146		
140	120	150										0.0	144.9	18.4**				47.8	221.1	21.9	150		
140	120	155													19.4	181.5	22.0**	32.1	201.1	21.5	155		
140	120	160										0.0	141.7	17.4**							160		
140	120	167																41.0	210.9	20.1	167		
140	120	170													21.4	181.3	19.8	33.0	197.6	18.4	170		
140	120	178													0.0	137.5	16.6**				178		
140	120	180																22.8	178.8	17.0	180		
140	120	189																0.0	132.3	15.7	189		

298HSL 360 Degree Capacities - Luffing Jib 68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight																						
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																			
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)	
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)		
140	140	57	73.0	281.6	58.4*																57	
140	140	60	71.5	280.6	56.5*																	60
140	140	70	67.2	276.8	50.0*																	70
140	140	71				70.0	278.5	55.3*														71
140	140	80	62.6	272.1	42.4*	66.0	274.8	50.6*														80
140	140	90	57.9	266.4	36.0*	61.4	269.9	44.3*														90
140	140	94							65.0	271.7	47.2*											94
140	140	100	53.0	259.5	30.9*	56.6	263.9	37.2*	62.3	268.8	44.3*											100
140	140	110	47.6	251.2	26.9*	51.6	256.6	31.8*	57.6	263.1	39.2*											110
140	140	117										60.0	262.9	34.0*								117
140	140	120	41.8	241.1	23.5*	46.1	247.9	27.4*	52.6	256.1	35.1*											120
140	140	130	35.3	228.6	20.0*	40.1	237.2	24.0*	47.3	247.7	30.8*											130
140	140	139										53.5	254.3	29.6*								139
140	140	140	27.4	212.1	17.1*	33.3	223.8	21.0*	41.4	237.5	25.7*	48.3	246.1	26.9*	55.0	252.1	25.4*					140
140	140	150	16.4	187.2	14.8*	24.9	205.8	17.8*	34.8	224.7	21.5*	42.5	236.3	24.5*	54.3	251.1	25.0*					150
140	140	156	0.0	147.8	14.0*										49.1	243.2	22.8*					156
140	140	159																50.0	239.5	19.4*		159
140	140	160				11.8	175.7	15.0*	26.8	207.9	18.3*	36.1	224.1	22.4*	43.4	233.7	20.9*	49.7	239.0	19.3*		160
140	140	163				0.0	147.0	13.8*														163
140	140	170							15.4	182.0	15.8*	28.4	208.2	18.4*	37.1	221.9	19.2*	44.0	229.6	17.7*		170
140	140	175							0.0	144.9	13.1*											175
140	140	180										17.9	184.8	15.4*	29.6	206.7	17.7*	37.8	218.1	16.3*		180
140	140	187										0.0	141.7	12.3*								187
140	140	190													19.8	184.9	15.3*	30.5	203.3	15.1*		190
140	140	198													0.0	137.5	11.8*					198
140	140	200																21.1	182.6	13.9*		200
140	140	209													0.0	132.3	11.3*					209
140	160	62	73.0	300.8	45.4*																	62
140	160	70	70.2	298.3	42.2*																	70
140	160	78				70.0	297.3	42.9*														78
140	160	80	66.3	294.3	37.8*	69.1	296.5	42.0*														80
140	160	90	62.3	289.5	33.4*	65.2	292.3	36.3*														90
140	160	100	58.2	283.7	28.6*	61.2	287.2	34.9*														100
140	160	103							65.0	289.9	37.9*											103
140	160	110	53.9	277.0	24.5*	57.0	281.2	30.0*	62.0	286.2	35.5*											110
140	160	120	49.3	269.1	21.2*	52.7	274.2	25.5*	57.9	280.4	32.4*											120
140	160	127										60.0	280.2	29.9*								127
140	160	130	44.4	259.7	18.5*	48.0	265.9	21.9*	53.6	273.6	29.4*	58.7	278.3	28.9*								130
140	160	140	39.0	248.5	15.9*	43.0	256.1	18.9*	49.0	265.6	25.1*	54.4	271.7	26.2*								140
140	160	150	32.9	234.7	13.6*	37.4	244.3	16.5*	44.1	256.1	20.8*	49.8	263.9	23.8*	55.0	268.5	22.1*					150
140	160	160	25.6	216.8	11.7*	31.1	229.6	14.5*	38.6	244.7	17.3*	45.0	254.7	21.8*	50.5	261.0	20.2*					160
140	160	170	15.3	190.0	10.2*	23.2	210.1	12.3*	32.5	230.7	14.6*	39.7	243.8	18.5*	45.7	252.0	18.5*					170
140	160	172													50.0	254.8	16.7*					172
140	160	176	0.0	147.8	9.8*																	176
140	160	180				11.1	177.7	10.5*	25.0	212.5	12.5*	33.7	230.3	15.2*	40.5	241.3	17.0*	46.3	247.9	15.6*		180
140	160	183				0.0	147.0	9.5*														183
140	160	190							14.4	184.6	10.8*	26.5	213.1	12.6*	34.6	228.3	15.7*	41.1	237.4	14.4*		190
140	160	195							0.0	144.9	9.0*											195
140	160	200										16.8	187.9	10.5*	27.7	211.8	13.0*	35.3	224.7	13.3*		200
140	160	207										0.0	141.7	8.5*								207
140	160	210													18.5	188.3	10.5*	28.5	208.6	12.1*		210
140	160	218													0.0	137.5	8.1*					218
140	160	220																19.7	186.2	10.7*		220
140	160	229													0.0	132.3	7.8*					229
140	180	68	73.0	319.9	35.1*																	68
140	180	70	72.4	319.4	34.6*																	70
140	180	80	69.1	315.9	31.5*																	80
140	180	84				70.0	316.1	33.6*														84
140	180	90	65.6	311.7	28.4*	68.1	314.0	31.9*														90
140	180	100	62.1	306.8	25.2*	64.7	309.7	28.9*														100
140	180	110	58.4	301.1	22.2*	61.1	304.5	26.1*														110
140	180	111							65.0	308.0	29.0*											111
140	180	120	54.6	294.4	19.1*	57.4	298.6	23.5*	61.8	303.5	26.6*											120
140	180	130	50.6	286.8	16.4*	53.5	291.7	20.2*	58.1	297.7	24.0*											130
140	180	137										60.0	297.5	25.2*								137
140	180	140	46.3	277.9	14.1*	49.4	283.7	17.2*	54.3	291.1	21.6*	58.8	295.7	24.4*								140
140	180	150	41.7	267.6	12.3*	45.1	274.5	14.7*	50.3	283.3	19.3*	55.0	289.1	22.0*								150
140	180	160	36.7	255.3	10.5*	40.4	263.7	12.6*	46.0	274.4	16.5*	51.0	281.6	19.8*								160

298HSL 360 Degree Capacities - Luffing Jib 68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight																					
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
140	180	162																			162
140	180	170	31.0	240.4	9.0*	35.2	250.8	10.9*	41.4	263.9	13.6*	46.8	272.9	17.7*	51.6	278.6	17.8				170
140	180	180	24.1	221.2	7.7*	29.3	235.0	9.4*	36.3	251.5	11.3*	42.3	262.7	15.1*	47.5	270.1	16.3				180
140	180	185																			185
140	180	190	14.4	192.6	6.7*	21.9	214.1	8.3*	30.6	236.4	9.5*	37.3	250.7	12.2*	43.0	260.2	15.0	50.0	270.2	14.2	190
140	180	196	0.0	147.8	6.5*													47.9	265.9	13.6*	196
140	180	200				10.4	179.6	7.1*	23.6	216.8	8.1*	31.7	236.2	10.0*	38.1	248.5	13.6*	43.5	256.1	12.3*	200
140	180	203				0.0	147.0	6.2*													203
140	180	210							13.5	187.0	7.1*	25.0	217.6	8.2*	32.6	234.3	10.8*	38.6	244.6	11.1*	210
140	180	215							0.0	144.9	5.8*										215
140	180	220										15.8	190.7	6.8*	26.1	216.5	8.6*	33.2	230.8	10.1*	220
140	180	227										0.0	141.7	5.5*							227
140	180	230													17.5	191.5	6.8*	26.8	213.5	9.2*	230
140	180	238													0.0	137.5	5.2*				238
140	180	240																18.6	189.6	7.0*	240
140	180	249																0.0	132.3	5.1*	249
140	200	74	73.0	339.0	26.8*																74
140	200	80	71.2	337.1	25.6*																80
140	200	90	68.2	333.4	23.3*																90
140	200	91				70.0	334.9	25.8*													91
140	200	100	65.1	329.1	21.0*	67.3	331.6	23.5*													100
140	200	110	61.9	324.1	18.7*	64.2	327.1	21.0*													110
140	200	120	58.6	318.4	16.5*	61.0	321.9	18.7*	65.0	326.1	21.5*										120
140	200	130	55.1	311.9	14.4*	57.6	315.9	16.5*	61.6	320.8	19.1*										130
140	200	140	51.6	304.4	12.2*	54.2	309.2	14.5*	58.3	315.1	17.0*										140
140	200	147							60.0	314.9	17.9*										147
140	200	150	47.8	295.9	10.4*	50.6	301.5	12.6*	54.9	308.5	15.0*	58.9	313.0	17.3*							150
140	200	160	43.8	286.2	8.9*	46.8	292.7	10.8*	51.3	301.0	13.1*	55.5	306.5	15.3*							160
140	200	170	39.5	275.0	7.7*	42.7	282.6	9.2*	47.5	292.4	11.3*	52.0	299.2	13.5*							170
140	200	173													55.0	301.3	14.9*				173
140	200	180	34.8	261.8	6.5*	38.3	270.8	7.7*	43.5	282.6	9.7*	48.2	290.9	11.7*	52.5	296.2	13.7*				180
140	200	190	29.4	245.8	5.2*	33.4	257.0	6.3*	39.2	271.2	8.2*	44.3	281.3	10.1*	48.8	288.0	12.0*				190
140	200	198																50.0	285.5	11.5*	198
140	200	200	22.8	225.4	3.9*	27.7	240.0	5.0*	34.4	257.9	6.7*	40.0	270.2	8.6*	44.9	278.6	10.4*	49.2	283.7	11.3*	200
140	200	210	13.7	195.1	2.7*	20.7	217.8	3.7*	29.0	241.7	5.4*	35.3	257.3	7.1*	40.7	267.8	8.9*	45.3	274.5	10.1*	210
140	200	220				9.9	181.3	2.5*	22.3	220.9	4.1*	30.0	241.7	5.9*	36.0	255.2	7.5*	41.1	263.8	9.1*	220
140	200	230							12.8	189.3	2.9*	23.7	221.9	4.5*	30.8	240.0	6.1*	36.6	251.4	7.7*	230
140	200	235							0.0	144.9	2.2*										235
140	200	240										15.0	193.4	3.3*	24.7	221.0	4.9*	31.4	236.6	6.4*	240
140	200	247										0.0	141.7	2.4*							247
140	200	250													16.6	194.5	3.7*	25.4	218.1	5.2*	250
140	200	258													0.0	137.5	2.6*				258
140	200	260																17.6	192.8	4.0*	260
140	200	269																0.0	132.3	2.8*	269

298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
150	90	42	73.0	243.8	86.5*															42	
150	90	50	67.8	241.1	77.9*															50	
150	90	55				70.0	241.5	81.2*												55	
150	90	60	60.8	236.3	68.8*	66.3	239.4	75.7*												60	
150	90	70	53.1	229.8	61.7*	59.1	234.2	66.9*												70	
150	90	75							65.0	236.3	64.7									75	
150	90	80	44.7	221.1	51.1*	51.4	227.3	60.2*	61.3	233.6	59.5									80	
150	90	90	34.7	209.0	42.6*	42.7	218.0	52.8*	53.7	227.2	51.4									90	
150	90	94							60.0	229.3	45.9									94	
150	90	100	21.1	190.1	35.5*	32.2	204.9	43.4*	45.3	218.7	45.5	55.8	225.7	42.8						100	
150	90	106	0.0	157.8	32.6*															106	
150	90	110				16.8	183.0	35.5*	35.5	207.0	40.5	47.7	217.9	38.0						110	
150	90	113				0.0	157.0	31.7*							55.0	220.6	34.3			113	
150	90	114																		114	
150	90	120							22.3	188.9	36.3	38.3	207.1	34.1	49.6	215.4	31.9			120	
150	90	127							0.0	154.7	29.5*									127	
150	90	130										26.4	191.4	30.8	40.6	205.5	28.8			130	
150	90	131										0.0	151.3	27.4*				50.0	210.3	26.5	131
150	90	139													29.6	191.3	26.2	42.5	202.1	24.4	139
150	90	140													11.2	164.3	23.9	31.9	188.9	22.3	140
150	90	150													0.0	146.9	23.4				150
150	90	152																16.2	166.5	20.4	152
150	90	160																0.0	141.4	19.7	160
150	90	164																			164
150	100	45	73.0	253.4	79.7*																45
150	100	50	70.1	251.8	74.9*																50
150	100	58				70.0	250.9	74.7*													58
150	100	60	63.9	247.6	66.1*	68.8	250.2	72.9*													60
150	100	70	57.3	241.9	59.1*	62.5	245.7	64.5*													70
150	100	79							65.0	245.3	60.0										79
150	100	80	50.2	234.6	49.7*	55.8	239.7	57.8*	64.4	244.9	59.1										80
150	100	90	42.3	225.0	41.7*	48.6	231.9	51.5*	57.8	239.3	51.0										90
150	100	99										60.0	237.9	42.7							99
150	100	100	32.9	212.1	34.8*	40.4	221.8	43.3*	50.8	232.1	45.2	59.6	237.6	42.4							100
150	100	110	20.0	191.9	29.4*	30.5	207.7	35.7*	42.9	222.8	40.2	52.7	230.9	37.7							110
150	100	116	0.0	157.8	27.1*																116
150	100	119													55.0	228.8	31.8				119
150	100	120				15.9	184.4	29.5*	33.6	210.1	36.0	45.1	222.1	33.8	54.3	228.1	31.5				120
150	100	124				0.0	157.0	26.7*													124
150	100	130							21.2	190.8	32.5	36.3	210.5	30.5	46.9	219.9	28.5				130
150	100	137							0.0	154.7	24.9*										137
150	100	138																50.0	217.9	24.5	138
150	100	140										25.0	193.6	27.7	38.5	209.1	25.9	48.4	216.1	24.0	140
150	100	149										0.0	151.3	23.2*							149
150	100	150													28.0	193.8	23.6	40.2	205.9	21.9	150
150	100	160													10.6	165.3	21.6	30.2	191.7	20.1	160
150	100	162													0.0	146.9	21.2				162
150	100	170																15.4	167.9	18.5	170
150	100	174																0.0	141.4	17.9	174
150	120	51	73.0	272.5	67.6*																51
150	120	60	68.5	269.4	60.9*																60
150	120	65				70.0	269.7	63.3*													65
150	120	70	63.3	264.9	54.3*	67.4	267.7	59.7*													70
150	120	80	57.8	259.3	45.9*	62.1	263.0	53.5*													80
150	120	88							65.0	263.4	52.1										88
150	120	90	51.9	252.2	39.3*	56.5	257.1	48.3*	63.7	262.2	50.3										90
150	120	100	45.6	243.5	33.2*	50.6	249.7	40.5*	58.2	256.7	44.5										100
150	120	109										60.0	255.2	37.2							109
150	120	110										59.7	254.9	36.9							110
150	120	120	38.5	232.4	28.0*	44.1	240.5	35.1*	52.4	249.7	39.5	54.0	248.4	33.0							120
150	120	130	29.9	217.7	23.7*	36.7	228.7	29.4*	46.1	241.1	35.4	46.1	241.1	33.0							130
150	120	136	18.2	195.3	20.3*	27.8	212.9	24.6*	39.0	230.2	32.0	47.8	240.2	29.8	55.0	245.2	27.6				136
150	120	136	0.0	157.8	18.9*																136
150	120	140				14.5	187.1	20.6*	30.6	215.8	27.2*	41.0	230.0	27.1	49.3	237.8	25.1				140
150	120	144				0.0	157.0	19.1*													144
150	120	150							19.3	194.4	22.9*	33.0	216.7	24.7	42.6	228.1	22.9				150
150	120	151																50.0	233.3	21.0	151
150	120	157							0.0	154.7	17.8*										157
150	120	160										22.8	197.9	22.7	35.0	215.7	21.0	43.9	224.6	19.4	160
150	120	169										0.0	151.3	16.6*							169
150	120	170													25.5	198.6	19.3	36.5	212.8	17.8	170
150	120	180													9.7	167.1	17.8	27.5	196.8	16.4	180

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)			
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees						
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)				
150	120	182																					182	
150	120	190																						190
150	120	194																						194
150	140	57	73.0	291.6	55.4*																			57
150	140	60	71.7	290.7	53.5*																			60
150	140	70	67.3	286.9	47.3*																			70
150	140	72				70.0	288.5	53.5*																72
150	140	80	62.8	282.3	41.5*				66.4	285.2	49.1*													80
150	140	90	58.1	276.6	35.9*				61.8	280.3	43.8*													90
150	140	96										65.0	281.6	46.2										96
150	140	100	53.1	269.8	30.8*				57.0	274.4	38.4*													100
150	140	110	47.8	261.5	26.2*				52.0	267.3	32.7*													110
150	140	119																						119
150	140	120	42.0	251.5	22.4*				46.6	258.7	28.2*													120
150	140	130	35.5	239.1	19.1*				40.7	248.2	24.0*													130
150	140	140	27.7	222.8	16.3*				33.9	235.1	20.3*													140
150	140	142																						142
150	140	150	16.9	198.4	14.1*				25.7	217.6	17.1*													150
150	140	156	0.0	157.8	13.3*							36.0	237.0	22.2*										156
150	140	160							13.5	189.5	14.4*													160
150	140	164							0.0	157.0	13.5*													164
150	140	170										17.9	197.6	15.9*										170
150	140	177										0.0	154.7	12.6*										177
150	140	180																						180
150	140	189																						189
150	140	190																						190
150	140	200																						200
150	140	202																						202
150	140	210																						210
150	140	214																						214
150	160	63	73.0	310.8	43.0*																			63
150	160	70	70.3	308.4	40.1*																			70
150	160	79				70.0	307.3	42.1*																79
150	160	80	66.4	304.4	35.9*				69.5	306.8	41.5*													80
150	160	90	62.5	299.6	31.7*				65.6	302.6	37.9*													90
150	160	100	58.3	293.9	27.6*				61.6	297.7	34.6*													100
150	160	104										65.0	299.7	37.3*										104
150	160	110	54.0	287.3	23.9*				57.4	291.8	30.4*													110
150	160	120	49.5	279.4	20.5*				53.1	284.8	26.3*													120
150	160	129																						129
150	160	130	44.6	270.0	17.6*				48.4	276.7	22.5*													130
150	160	140	39.2	258.9	15.0*				43.4	267.0	19.3*													140
150	160	150	33.1	245.2	12.9*				38.0	255.4	16.4*													150
150	160	154																						154
150	160	160	25.9	227.6	11.0*				31.7	241.0	13.9*													160
150	160	170	15.8	201.2	9.6*				24.0	222.0	11.8*													170
150	160	176	0.0	157.8	9.2*																			176
150	160	180							12.6	191.8	10.0*													180
150	160	184							0.0	157.0	9.3*													184
150	160	190										16.7	200.7	10.9*										190
150	160	197										0.0	154.7	8.6*										197
150	160	200																						200
150	160	209																						209
150	160	210																						210
150	160	220																						220
150	160	222																						222
150	160	230																						230
150	160	234																						234
150	180	69	73.0	329.9	33.3*																			69
150	180	70	72.6	329.5	32.9*																			70
150	180	80	69.2	326.0	30.0*																			80
150	180	85				70.0	326.1	33.0*																85
150	180	90	65.7	321.9	26.9*				68.4	324.3	31.6*													90
150	180	100	62.2	317.0	23.9*				65.0	320.0	28.6*													100
150	180	110	58.5	311.3	20.9*				61.4	315.0	25.9*													110
150	180	113										65.0	317.8	28.6*										113
150	180	120	54.7	304.7	18.2*				57.7	309.1	23.3*													120
150	180	130	50.7	297.1	15.7*				53.9	302.3	20.5*													130
150	180	139																						139
150	180	140	46.5	288.3	13.5*				49.8	294.5	17.7*													140

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																				
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)		
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
150	180	150	41.9	278.0	11.5*	45.5	285.3	15.1*	51.0	294.6	19.4*	56.0	300.6	22.3*							150		
150	180	160	36.9	265.8	9.8*	40.8	274.7	12.9*	46.8	285.9	17.3*	52.1	293.3	20.1*							160		
150	180	165																				165	
150	180	170	31.2	251.0	8.3*	35.7	262.0	11.0*	42.2	275.7	14.2*	47.9	284.9	18.0*	55.0	294.3	18.0				170		
150	180	180	24.4	232.0	7.1*	29.8	246.5	9.2*	37.3	263.7	11.7*	43.5	275.2	16.0*	53.0	290.6	17.2				180		
150	180	189																				189	
150	180	190	14.9	203.9	6.2*	22.6	226.2	7.8*	31.6	249.1	9.8*	38.6	263.7	12.8*	44.5	273.1	14.5	50.0	279.2	12.7*	189		
150	180	196	0.0	157.8	6.0*										49.7	278.6	12.6*				190		
150	180	200				11.9	193.9	6.6*	24.9	230.5	8.2*	33.2	249.9	10.4*	39.8	262.1	13.3*	45.4	269.5	11.3*	196		
150	180	204				0.0	157.0	6.0*													200		
150	180	210							15.7	203.5	7.0*	26.8	232.6	8.4*	34.5	248.9	11.4*	40.7	258.8	10.2*	204		
150	180	217							0.0	154.7	5.5*										210		
150	180	220										18.6	208.7	6.9*	28.4	232.6	9.0*	35.6	246.1	9.2*	217		
150	180	229										0.0	151.3	5.0*							220		
150	180	230													20.8	210.7	7.1*	29.7	230.4	8.3*	229		
150	180	240													7.9	171.6	5.5*	22.4	210.0	7.5*	230		
150	180	242													0.0	146.9	4.7*				240		
150	180	250																11.5	177.1	5.5*	242		
150	180	254																0.0	141.4	4.4*	250		
150	200	74	73.0	349.0	25.5*																254		
150	200	80	71.3	347.2	24.3*																250		
150	200	90	68.3	343.6	22.1*																242		
150	200	92				70.0	344.9	25.4*													250		
150	200	100	65.2	339.3	19.9*	67.6	341.9	23.4*													240		
150	200	110	62.0	334.3	17.7*	64.5	337.4	20.9*													230		
150	200	120	58.7	328.6	15.5*	61.3	332.3	18.6*													220		
150	200	121							65.0	336.0	21.2*										210		
150	200	130	55.3	322.1	13.5*	57.9	326.4	16.5*	62.2	331.6	19.2*										200		
150	200	140	51.7	314.7	11.6*	54.5	319.8	14.5*	58.9	326.0	17.1*										190		
150	200	149										60.0	324.5	17.7*							180		
150	200	150	47.9	306.3	9.9*	50.9	312.1	12.6*	55.5	319.5	15.1*	59.8	324.2	17.6*							170		
150	200	160	44.0	296.6	8.4*	47.1	303.4	10.8*	52.0	312.2	13.2*	56.4	318.0	15.6*							160		
150	200	170	39.7	285.4	7.0*	43.0	293.5	9.2*	48.2	303.8	11.5*	52.9	310.9	13.7*							150		
150	200	176													55.0	310.7	14.7*				176		
150	200	180	34.9	272.3	5.9*	38.7	281.9	7.7*	44.3	294.3	9.8*	49.2	302.8	12.0*	53.7	308.1	14.1*				180		
150	200	190	29.6	256.4	4.9*	33.8	268.3	6.3*	40.0	283.2	8.3*	45.3	293.6	10.4*	50.1	300.3	12.4*				190		
150	200	200	23.1	236.2	3.9*	28.3	251.6	5.0*	35.3	270.2	6.9*	41.1	282.9	8.8*	46.3	291.3	10.8*				200		
150	200	202																50.0	294.5	10.1*		202	
150	200	210	14.1	206.5	2.7*	21.4	230.1	3.7*	30.0	254.6	5.5*	36.6	270.5	7.4*	42.1	281.1	9.3*	47.0	287.6	9.2*	210		
150	200	220				11.2	196.0	2.5*	23.6	234.8	4.3*	31.5	255.7	6.0*	37.7	269.1	7.8*	42.9	277.6	8.2*	220		
150	200	230							14.9	206.2	3.1*	25.4	237.2	4.8*	32.7	254.9	6.5*	38.6	266.0	7.3*	230		
150	200	237							0.0	154.7	2.1*										237		
150	200	240										17.6	211.9	3.6*	26.9	237.5	5.2*	33.7	252.3	6.5*	240		
150	200	249										0.0	151.3	2.3*							249		
150	200	250													19.7	214.3	4.0*	28.1	235.6	5.6*	250		
150	200	260													7.5	173.0	2.8*	21.2	213.8	4.4*	260		
150	200	262													0.0	146.9	2.4*				262		
150	200	270																10.9	179.1	3.0*	270		
150	200	274																0.0	141.4	2.3*	274		

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																			Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees				
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)		
160	90	43	73.0	253.8	82.5*																43	
160	90	50	68.1	251.2	74.8*																	50
160	90	56				70.0	251.5	77.4*														56
160	90	60	61.0	246.5	66.1*	66.9	249.7	73.1*														60
160	90	70	53.4	240.0	59.0*	59.8	244.7	64.7*														70
160	90	76							65.0	246.1	62.3											76
160	90	80	45.0	231.4	48.8*	52.1	237.9	58.2*														80
160	90	90	35.1	219.5	40.9*	43.5	228.9	51.0*	55.1	238.3	50.9											90
160	90	97							60.0	238.9	43.7											97
160	90	100	21.7	201.0	34.3*	33.2	216.2	42.2*	46.9	230.2	45.1	57.8	237.1	42.1								100
160	90	106	0.0	167.8	31.4*																	106
160	90	110				18.6	195.7	34.7*	37.4	219.2	40.1	49.9	229.8	37.4								110
160	90	115				0.0	166.9	31.0*														115
160	90	117													55.0	230.0	32.3					117
160	90	120							25.1	202.7	35.9	40.9	219.9	33.6	52.4	227.6	31.2					120
160	90	128							0.0	164.6	28.5*											128
160	90	130										29.9	205.9	30.3	43.9	218.6	28.2					130
160	90	136													50.0	219.3	24.6					136
160	90	140										12.1	179.8	27.5	33.7	206.2	25.6	46.3	215.5	23.6		140
160	90	142										0.0	161.0	26.1*								142
160	90	150													19.4	186.2	23.3	36.7	204.2	21.6		150
160	90	155													0.0	156.3	22.2					155
160	90	160																24.1	187.1	19.8		160
160	90	168																0.0	150.4	18.4		168
160	100	46	73.0	263.4	76.0*																	46
160	100	50	70.4	261.9	71.8*																	50
160	100	59				70.0	260.9	71.3*														59
160	100	60	64.1	257.7	63.4*	69.3	260.5	70.3*														60
160	100	70	57.6	252.2	56.8*	63.1	256.1	62.3*														70
160	100	80	50.5	244.9	47.4*	56.4	250.2	55.9*														80
160	100	81							65.0	255.2	57.9											81
160	100	90	42.6	235.4	39.9*	49.2	242.7	50.2*	59.0	250.2	50.5											90
160	100	100	33.3	222.6	33.5*	41.2	232.7	41.9*	52.0	243.4	44.8											100
160	100	102										60.0	247.6	40.7								102
160	100	110	20.6	202.9	28.3*	31.5	219.1	34.7*	44.3	234.4	39.8	54.5	242.4	37.1								110
160	100	116	0.0	167.8	26.1*																	116
160	100	120				17.7	197.3	28.8*	35.4	222.5	35.7	47.1	234.3	33.2								120
160	100	122													55.0	238.2	30.0					122
160	100	125				0.0	166.9	26.2*														125
160	100	130							23.8	204.8	32.2	38.7	223.5	30.0	49.6	232.4	27.8					130
160	100	138							0.0	164.6	24.1*											138
160	100	140													41.5	222.6	25.2					140
160	100	142																50.0	227.0	22.8		142
160	100	150										11.4	180.8	24.9	31.9	209.1	23.0	43.8	219.6	21.2		150
160	100	152										0.0	161.0	22.1*								152
160	100	160													18.4	187.9	21.1	34.7	207.4	19.4		160
160	100	165													0.0	156.3	20.1					165
160	100	170																22.8	189.2	17.9		170
160	100	178																0.0	150.4	16.7		178
160	120	52	73.0	282.5	64.5*																	52
160	120	60	68.7	279.5	58.4*																	60
160	120	66				70.0	279.7	60.4*														66
160	120	70	63.5	275.1	51.3*	67.8	278.0	57.6*														70
160	120	80	58.0	269.5	44.0*	62.6	273.4	51.6*														80
160	120	89							65.0	273.3	50.3											89
160	120	90	52.2	262.5	37.4*	57.0	267.6	45.8*	64.6	272.9	49.8											90
160	120	100	45.8	253.8	31.6*	51.1	260.4	40.2*	59.2	267.6	44.1											100
160	120	110	38.7	242.8	26.8*	44.7	251.3	33.8*	53.4	260.9	39.1											110
160	120	112										60.0	264.9	35.5								112
160	120	120	30.3	228.3	22.7*	37.4	239.9	28.4*	47.2	252.6	35.1	55.5	259.8	32.5								120
160	120	130	18.8	206.3	19.5*	28.7	224.5	23.8*	40.3	242.2	31.6	49.5	252.2	29.3								130
160	120	134													55.0	254.6	26.0					134
160	120	136	0.0	167.8	18.2*																	136
160	120	140				16.1	200.2	20.0*	32.2	228.5	28.0*	42.8	242.6	26.6	51.4	250.0	24.5					140
160	120	145				0.0	166.9	18.4*														145
160	120	150							21.7	208.9	23.2*	35.2	230.2	24.3	45.0	241.1	22.3					150
160	120	155																50.0	242.3	19.5		155
160	120	158							0.0	164.6	17.1*											158
160	120	160										25.8	213.3	22.3	37.8	229.7	20.5	46.8	237.8	18.7		160
160	120	170										10.4	182.7	18.8*	29.1	214.6	18.8	39.8	227.2	17.2		170
160	120	172										0.0	161.0	15.7*								172

298HSL 360 Degree Capacities - Luffing Jib 68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight																					
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
160	180	130	50.9	307.4	14.7*	54.2	312.9	19.5*	59.4	319.5	24.1*										130
160	180	140	46.6	298.6	12.6*	50.2	305.1	16.8*	55.7	313.2	21.8*										140
160	180	142										60.0	316.9	24.0							142
160	180	150	42.1	288.3	10.7*	45.9	296.2	14.4*	51.7	305.8	19.5*	57.0	312.0	22.2							150
160	180	160	37.1	276.2	9.1*	41.3	285.6	12.2*	47.5	297.3	17.4*	53.1	305.0	20.2							160
160	180	168													55.0	303.7	16.9				168
160	180	170	31.4	261.6	7.7*	36.2	273.2	10.3*	43.1	287.4	14.7*	49.0	296.9	18.3*	54.4	302.6	16.6				170
160	180	180	24.6	242.8	6.5*	30.4	257.9	8.7*	38.2	275.8	12.1*	44.7	287.5	16.3*	50.3	294.8	15.2*				180
160	180	190	15.3	215.2	5.6*	23.3	238.2	7.3*	32.7	261.7	10.0*	39.9	276.5	13.4*	46.1	285.9	13.7*				190
160	180	194																50.0	288.3	11.1*	194
160	180	196	0.0	167.8	5.5*																196
160	180	200				13.1	207.8	6.1*	26.2	244.0	8.3*	34.7	263.4	10.8*	41.5	275.5	12.4*	47.3	282.6	10.3*	200
160	180	205				0.0	166.9	5.7*													205
160	180	210							17.7	219.1	7.0*	28.6	247.2	8.7*	36.4	263.1	11.3*	42.7	272.6	9.3*	210
160	180	218							0.0	164.6	5.1*										218
160	180	220										21.0	225.6	7.0*	30.6	248.0	9.4*	37.8	260.8	8.3*	220
160	180	230										8.5	187.7	5.6*	23.7	228.5	7.3*	32.3	246.5	7.5*	230
160	180	232										0.0	161.0	4.6*							232
160	180	240													13.7	198.9	5.6*	25.7	228.5	6.7*	240
160	180	245													0.0	156.3	4.1*				245
160	180	250																16.9	202.9	5.8*	250
160	180	258																0.0	150.4	3.7*	258
160	200	75	73.0	359.0	24.1*																75
160	200	80	71.4	357.4	23.1*																80
160	200	90	68.4	353.7	20.9*																90
160	200	93				70.0	354.8	24.9*													93
160	200	100	65.3	349.4	18.7*	67.9	352.2	23.2*													100
160	200	110	62.1	344.5	16.6*	64.8	347.8	20.8*													110
160	200	120	58.8	338.8	14.5*	61.5	342.8	18.5*													120
160	200	123							65.0	345.8	20.9*										123
160	200	130	55.4	332.3	12.5*	58.2	337.0	16.4*	62.8	342.4	19.3*										130
160	200	140	51.8	325.0	10.7*	54.8	330.3	14.4*	59.5	336.9	17.2*										140
160	200	150	48.1	316.6	9.1*	51.2	322.8	12.6*	56.1	330.6	15.2*										150
160	200	152										60.0	334.2	17.4*							152
160	200	160	44.1	306.9	7.6*	47.4	314.2	10.8*	52.6	323.4	13.3*	57.3	329.3	15.8*							160
160	200	170	39.8	295.8	6.3*	43.4	304.4	9.1*	48.9	315.2	11.6*	53.8	322.5	14.0*							170
160	200	180	35.1	282.8	5.2*	39.1	293.0	7.6*	45.0	305.9	9.9*	50.2	314.6	12.3*	55.0	320.1	14.2*				180
160	200	190	29.8	267.0	4.3*	34.3	279.5	6.3*	40.7	295.1	8.4*	46.4	305.7	10.6*	51.4	312.5	12.7*				190
160	200	200	23.3	247.0	3.5*	28.8	263.2	5.0*	36.1	282.5	7.0*	42.3	295.5	9.1*	47.6	303.9	11.2*				200
160	200	206																50.0	303.6	8.6*	206
160	200	210	14.5	217.8	2.6*	22.1	242.2	3.8*	31.0	267.4	5.7*	37.8	283.6	7.6*	43.6	294.1	9.7*	48.6	300.5	8.2*	210
160	200	220				12.5	210.1	2.6*	24.8	248.5	4.4*	32.9	269.5	6.3*	39.3	282.8	8.2*	44.7	291.1	7.3*	220
160	200	230							16.7	222.2	3.2*	27.1	252.1	5.0*	34.5	269.5	6.8*	40.5	280.2	6.4*	230
160	200	238							0.0	164.6	2.1*										238
160	200	240										19.9	229.2	3.8*	29.0	253.3	5.6*	35.8	267.4	5.7*	240
160	200	250										8.1	189.1	2.6*	22.4	232.6	4.2*	30.6	252.2	5.0*	250
160	200	252										0.0	161.0	2.3*							252
160	200	260													13.0	201.3	3.0*	24.4	232.9	4.3*	260
160	200	270																16.1	205.8	3.2*	270

298HSL 360 Degree Capacities - Luffing Jib 68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight																					
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
170	90	43	73.0	263.8	78.5*																43
170	90	50	68.3	261.4	71.6*																50
170	90	56				70.0	261.4	73.7*													56
170	90	60	61.3	256.7	63.3*	67.5	260.0	70.4*													60
170	90	70	53.7	250.3	56.0*	60.4	255.1	62.4*													70
170	90	78							65.0	256.0	60.0										78
170	90	80	45.3	241.7	46.5*	52.8	248.6	56.1*	63.8	255.1	58.3										80
170	90	90	35.5	230.0	39.2*	44.3	239.7	49.1*	56.4	249.4	50.4										90
170	90	100	22.3	211.9	33.1*	34.2	227.5	40.9*	48.4	241.7	44.7	60.0	248.6	41.6							100
170	90	107	0.0	177.8	30.3*																107
170	90	110				20.3	208.1	33.8*	39.2	231.2	39.7	52.0	241.5	36.8							110
170	90	116				0.0	176.9	30.4*													116
170	90	120							27.6	216.0	35.6	43.4	232.4	33.0	55.0	239.4	30.3				120
170	90	130							4.0	180.6	29.1*	33.1	219.7	29.8	46.9	231.4	27.4				130
170	90	140										18.4	199.0	27.0	37.5	220.4	24.9	50.0	228.4	22.8	140
170	90	145										0.0	170.6	24.8*							145
170	90	150													25.2	203.9	22.8	41.0	218.5	20.8	150
170	90	159													0.0	165.7	21.0				159
170	90	160																30.0	204.4	19.1	160
170	90	170																12.2	178.5	17.5	170
170	90	172																0.0	159.5	17.1	172
170	100	46	73.0	273.4	72.3*																46
170	100	50	70.6	272.0	68.7*																50
170	100	60	64.4	267.9	60.8*	70.0	270.8	67.9*													60
170	100	70	57.8	262.4	53.7*	63.6	266.5	60.1*													70
170	100	80	50.7	255.2	45.4*	57.0	260.8	53.9*													80
170	100	82							65.0	265.0	55.8										82
170	100	90	42.9	245.8	38.1*	49.9	253.4	48.1*	60.1	261.1	50.0										90
170	100	100	33.6	233.1	32.1*	41.9	243.7	40.4*	53.3	254.6	44.3										100
170	100	105										60.0	257.2	38.8							105
170	100	110	21.1	213.8	27.3*	32.4	230.5	33.6*	45.7	246.0	39.4	56.3	253.9	36.4							110
170	100	117	0.0	177.8	25.1*																117
170	100	120				19.2	209.8	28.0*	37.1	234.7	35.3	49.1	246.3	32.6							120
170	100	126				0.0	176.9	25.4*							55.0	247.6	28.2				126
170	100	130							26.1	218.4	31.9	41.0	236.3	29.5	52.1	244.5	27.1				130
170	100	140							3.8	181.0	24.5*	31.3	222.6	26.8	44.4	235.6	24.6				140
170	100	146										17.4	200.5	24.4				50.0	236.1	21.1	146
170	100	150										0.0	170.6	21.0*	35.5	223.7	22.4	47.2	232.8	20.4	150
170	100	155																			155
170	100	160													23.9	206.1	20.5	38.8	222.1	18.7	160
170	100	169													0.0	165.7	19.0				169
170	100	170																28.4	207.0	17.2	170
170	100	180																11.6	179.6	15.8	180
170	100	182																0.0	159.5	15.5	182
170	120	52	73.0	292.5	61.4*																52
170	120	60	68.9	289.7	55.9*																60
170	120	67				70.0	289.6	57.5*													67
170	120	70	63.6	285.3	48.3*	68.3	288.3	55.4*													70
170	120	80	58.2	279.7	41.7*	63.0	283.8	49.7*													80
170	120	90	52.4	272.8	35.5*	57.5	278.1	44.2*													90
170	120	91							65.0	283.1	48.6										91
170	120	100	46.1	264.1	30.1*	51.7	271.0	38.5*	60.1	278.4	43.6										100
170	120	110	39.0	253.2	25.6*	45.3	262.2	32.5*	54.4	272.0	38.7										110
170	120	115										60.0	274.6	33.8							115
170	120	120	30.6	238.8	21.8*	38.1	250.9	27.4*	48.3	264.0	34.7	57.0	271.2	31.9							120
170	120	130	19.3	217.3	18.7*	29.5	236.0	23.0*	41.6	254.0	31.3	51.1	264.0	28.8							130
170	120	137	0.0	177.8	17.4*										55.0	263.9	24.4				137
170	120	140				17.6	213.1	19.4*	33.7	241.0	28.4	44.6	254.9	26.1	53.5	262.1	23.8				140
170	120	146				0.0	176.9	17.7*													146
170	120	150							23.8	222.8	23.5*	37.3	243.4	23.8	47.3	253.8	21.7				150
170	120	159																50.0	251.4	18.1	159
170	120	160							3.4	181.6	17.3*	28.5	228.0	21.8	40.4	243.4	19.9	49.5	250.7	17.9	160
170	120	170										15.9	203.5	19.3*	32.3	229.8	18.3	42.9	241.1	16.4*	170
170	120	175										0.0	170.7	14.9*							175
170	120	180													21.8	210.1	16.8	35.3	228.8	14.9*	180
170	120	189													0.0	165.7	13.5*				189
170	120	190																25.9	211.9	13.6*	190
170	120	200																10.6	181.5	12.4*	200
170	120	202																0.0	159.5	12.1*	202
170	140	58	73.0	311.6	48.8*																58

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																				Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees					
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
170	140	60	72.0	310.9	47.6*																	60	
170	140	70	67.6	307.2	42.4*																	70	
170	140	74				70.0	308.4	48.7*														74	
170	140	80	63.1	302.6	37.2*	67.1	305.9	44.8*														80	
170	140	90	58.4	297.0	32.2*	62.6	301.2	40.7*														90	
170	140	99							65.0	301.3	43.2											99	
170	140	100	53.5	290.3	27.7*	57.9	295.5	35.5*	64.7	301.0	42.9											100	
170	140	110	48.2	282.1	23.6*	52.9	288.6	30.6*	60.1	295.8	38.0											110	
170	140	120	42.5	272.3	20.2*	47.6	280.2	26.1*	55.3	289.4	34.0											120	
170	140	125							60.0	291.9	29.6											125	
170	140	130	36.0	260.0	17.2*	41.8	270.1	22.1*	50.1	281.8	30.6	57.4	288.6	28.0								130	
170	140	140	28.3	244.1	14.7*	35.2	257.6	18.7*	44.5	272.6	27.8	52.4	281.6	25.4								140	
170	140	149													55.0	280.3	21.2					149	
170	140	150	17.8	220.6	12.7*	27.3	241.1	15.8*	38.4	261.3	23.7*	47.0	273.1	23.1	54.4	279.5	20.9					150	
170	140	157	0.0	177.8	12.0*																	157	
170	140	160				16.2	216.0	13.4*	31.2	246.9	19.5*	41.1	262.8	21.2	49.2	271.7	19.1					160	
170	140	166				0.0	176.9	12.3*														166	
170	140	170							22.0	226.9	16.2*	34.5	249.9	19.5	43.6	262.1	17.5					170	
170	140	172																50.0	266.7	15.0*		172	
170	140	180							3.2	182.2	12.1*	26.4	232.8	16.5*	37.2	250.4	16.1	45.6	259.5	13.8*		180	
170	140	190										14.7	206.1	13.3*	29.8	235.3	14.9	39.5	248.6	12.5*		190	
170	140	195										0.0	170.7	10.4*								195	
170	140	200													20.1	213.8	13.6*	32.6	234.9	11.4*		200	
170	140	209													0.0	165.7	9.3*					209	
170	140	210																23.9	216.3	10.4*		210	
170	140	220																9.8	183.3	9.4*		220	
170	140	222																0.0	159.5	8.5*		222	
170	160	64	73.0	330.8	38.4*																	64	
170	160	70	70.5	328.6	35.9*																	70	
170	160	80	66.7	324.7	32.1*	70.0	327.2	39.2*														80	
170	160	90	62.7	320.0	28.3*	66.3	323.3	35.5*														90	
170	160	100	58.6	314.4	24.6*	62.3	318.5	31.6*														100	
170	160	108							65.0	319.4	36.0*											108	
170	160	110	54.3	307.7	21.3*	58.2	312.8	27.7*	64.1	318.4	35.3*											110	
170	160	120	49.8	299.9	18.3*	53.8	306.0	24.0*	60.1	313.1	32.2*											120	
170	160	130	44.9	290.7	15.6*	49.3	298.1	20.6*	55.9	306.8	29.5*											130	
170	160	135										60.0	309.2	26.0								135	
170	160	140	39.6	279.7	13.3*	44.3	288.7	17.6*	51.4	299.5	26.8*	57.7	305.9	24.7								140	
170	160	150	33.6	266.3	11.4*	39.0	277.5	14.9*	46.7	290.8	23.4*	53.4	299.1	22.4								150	
170	160	160	26.4	249.0	9.7*	32.9	263.7	12.6*	41.5	280.5	19.2*	48.8	291.0	20.5	55.0	296.7	18.3					160	
170	160	170	16.7	223.6	8.4*	25.5	245.8	10.6*	35.8	268.0	15.7*	43.8	281.4	18.8	50.7	289.4	16.8					170	
170	160	177	0.0	177.8	8.0*																	177	
170	160	180				15.2	218.8	9.0*	29.1	252.2	13.0*	38.4	270.0	17.1*	45.9	280.5	15.3*					180	
170	160	185																50.0	282.0	12.1*		185	
170	160	186				0.0	176.9	8.3*														186	
170	160	190							20.6	230.6	10.9*	32.2	255.8	13.7*	40.6	269.8	13.8*	47.6	277.6	11.5*		190	
170	160	200							3.0	182.7	8.1*	24.6	237.4	11.1*	34.8	256.9	12.6*	42.5	267.6	10.3*		200	
170	160	210										13.7	208.6	9.0*	27.9	240.4	11.5*	36.9	255.5	9.3*		210	
170	160	215										0.0	170.7	6.9*								215	
170	160	220													18.8	217.3	9.1*	30.4	240.5	8.4*		220	
170	160	229													0.0	165.7	6.1*					229	
170	160	230																22.4	220.4	7.6*		230	
170	160	240																9.2	185.0	6.8*		240	
170	160	242																0.0	159.5	5.5*		242	
170	180	69	73.0	349.9	29.8*																	69	
170	180	70	72.8	349.7	29.6*																	70	
170	180	80	69.4	346.3	26.9*																	80	
170	180	87				70.0	346.0	30.6*														87	
170	180	90	66.0	342.2	24.0*	69.0	345.0	29.8*														90	
170	180	100	62.4	337.3	21.2*	65.6	340.8	27.0*														100	
170	180	110	58.8	331.7	18.5*	62.0	335.8	24.1*														110	
170	180	116							65.0	337.5	27.6*											116	
170	180	120	55.0	325.2	16.0*	58.4	330.1	21.2*	63.7	335.7	26.6*											120	
170	180	130	51.0	317.6	13.7*	54.5	323.5	18.5*	60.1	330.4	24.1*											130	
170	180	140	46.8	308.9	11.7*	50.5	315.8	15.9*	56.3	324.2	21.8*											140	
170	180	145										60.0	326.5	22.9								145	
170	180	150	42.2	298.7	9.9*	46.3	307.0	13.6*	52.4	317.0	19.6*	58.0	323.3	21.7								150	
170	180	160	37.3	286.7	8.4*	41.7	296.6	11.5*	48.3	308.7	17.5*	54.1	316.5	19.8								160	
170	180	170	31.6	272.1	7.0*	36.6	284.3	9.7*	43.9	299.1	15.2*	50.1	308.8	18.1								170	
170	180	172																55.0	313.1	15.5*		172	
170	180	180	24.9	253.5	5.9*	30.9	269.4	8.1*	39.1	287.8	12.4*	45.8	299.7	16.5*	51.7	307.0	14.2*					180	

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																				
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)		
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
170	180	190	15.7	226.5	5.1*	24.0	250.1	6.8*	33.7	274.2	10.1*	41.2	289.2	13.9*	47.6	298.5	12.8*				190		
170	180	197	0.0	177.8	5.0*																197		
170	180	198																	50.0	297.4	9.6*	198	
170	180	200				14.3	221.4	5.6*	27.4	257.3	8.4*	36.1	276.7	11.1*	43.1	288.6	11.6*	49.1	295.4	9.3*	200		
170	180	206				0.0	176.9	5.2*														206	
170	180	210							19.4	234.2	6.9*	30.3	261.4	8.8*	38.2	277.0	10.5*	44.7	286.1	8.3*	210		
170	180	220							2.8	183.2	5.0*				32.7	282.9	9.5*	40.0	275.1	7.4*	220		
170	180	230										12.9	211.0	5.6*	26.2	245.2	7.5*	34.7	262.0	6.6*	230		
170	180	235										0.0	170.7	4.1*								235	
170	180	240													17.7	220.5	5.7*	28.7	245.8	5.8*	240		
170	180	249													0.0	165.7	3.5*				249		
170	180	250																21.1	224.2	5.2*	250		
170	180	260																8.6	186.5	4.2*	260		
170	180	262																0.0	159.5	3.1*	262		
170	200	75	73.0	369.0	22.7*																	75	
170	200	80	71.6	367.5	21.8*																	80	
170	200	90	68.5	363.8	19.7*																	90	
170	200	94				70.0	364.8	23.5*														94	
170	200	100	65.4	359.6	17.6*	68.2	362.5	22.3*														100	
170	200	110	62.2	354.7	15.5*	65.0	358.2	20.2*														110	
170	200	120	58.9	349.0	13.5*	61.8	353.2	18.1*														120	
170	200	125							65.0	355.6	20.5*											125	
170	200	130	55.5	342.6	11.6*	58.5	347.5	15.9*	63.3	353.1	19.3*											130	
170	200	140	51.9	335.2	9.9*	55.1	340.9	13.9*	60.1	347.7	17.2*											140	
170	200	150	48.2	326.9	8.3*	51.5	333.5	11.9*	56.7	341.6	15.3*											150	
170	200	155										60.0	343.8	17.1*								155	
170	200	160	44.2	317.3	6.9*	47.8	325.0	10.1*	53.2	334.6	13.4*	58.2	340.6	16.1*								160	
170	200	170	40.0	306.2	5.7*	43.8	315.2	8.5*	49.5	326.6	11.7*	54.8	334.0	14.2*								170	
170	200	180	35.3	293.2	4.6*	39.5	304.0	7.1*	45.7	317.4	10.1*	51.2	326.4	12.5*								180	
170	200	183													55.0	329.5	12.7*					183	
170	200	190	30.0	277.6	3.8*	34.7	290.7	5.8*	41.5	306.9	8.5*	47.4	317.8	10.9*	52.6	324.6	11.8*					190	
170	200	200	23.6	257.8	3.0*	29.3	274.7	4.7*	37.0	294.7	7.1*	43.4	307.9	9.3*	48.9	316.4	10.6*					200	
170	200	210	14.9	229.2	2.5*	22.8	254.3	3.8*	31.9	280.1	5.8*	39.0	296.5	7.9*	45.0	307.0	9.5*					210	
170	200	211																50.0	312.7	7.2*		211	
170	200	220				13.6	223.8	2.6*	26.0	262.0	4.5*	34.2	283.0	6.5*	40.8	296.3	8.5*	46.4	304.3	6.4*	220		
170	200	230							18.4	237.5	3.3*	28.7	266.7	5.2*	36.2	283.7	7.2*	42.3	294.0	5.5*	230		
170	200	240							2.7	183.7	2.1*	22.0	245.6	3.9*	31.0	268.6	5.8*	37.8	282.1	4.8*	240		
170	200	250										12.3	213.2	2.8*	24.9	249.8	4.3*	32.9	268.1	4.2*	250		
170	200	260													16.8	223.5	3.0*	27.2	250.7	3.6*	260		
170	200	270																20.0	227.8	3.0*	270		

298HSL 360 Degree Capacities - Luffing Jib 68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight																					
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
180	90	43	73.0	273.8	74.5*															43	
180	90	50	68.5	271.5	68.4*															50	
180	90	57				70.0	271.4	70.0*												57	
180	90	60	61.5	266.8	60.6*	68.1	270.3	67.6*												60	
180	90	70	54.0	260.5	52.9*	61.1	265.6	60.0*												70	
180	90	80	45.6	252.1	44.7*	53.5	259.2	54.0*	65.0	265.8	57.7									80	
180	90	90	35.9	240.5	37.6*	45.1	250.6	47.1*	57.7	260.3	49.9									90	
180	90	100	22.9	222.7	31.8*	35.2	238.7	39.5*	49.8	253.0	44.2									100	
180	90	102										60.0	258.2	39.6						102	
180	90	107	0.0	187.8	29.1*															107	
180	90	110				21.8	220.3	32.9*	40.9	243.1	39.3	54.1	253.2	36.1						110	
180	90	116				0.0	186.9	29.4*												116	
180	90	120							29.9	229.1	35.2	45.7	244.7	32.4						120	
180	90	124													55.0	248.8	28.5			124	
180	90	130							12.0	202.9	31.8	36.0	233.2	29.3	49.9	243.8	26.7			130	
180	90	132							0.0	184.2	26.5*									132	
180	90	140										23.0	215.5	26.6	40.9	234.0	24.3			140	
180	90	144													50.0	237.5	21.1			144	
180	90	147										0.0	180.3	23.5*						147	
180	90	150													29.9	219.9	22.1	44.9	232.1	20.0	150
180	90	160													12.0	193.8	20.2	35.0	220.1	18.4	160
180	90	162													0.0	175.1	19.8				162
180	90	170																21.5	201.5	16.8*	170
180	90	176																0.0	168.5	15.7*	176
180	100	46	73.0	283.4	68.7*																46
180	100	50	70.8	282.2	65.6*																50
180	100	60	64.6	278.1	58.1*																60
180	100	61				70.0	280.8	64.5*													61
180	100	70	58.0	272.6	50.7*	64.2	276.9	57.8*													70
180	100	80	51.0	265.5	43.1*	57.6	271.3	51.8*													80
180	100	84							65.0	274.9	53.8										84
180	100	90	43.2	256.2	36.4*	50.5	264.0	46.2*	61.3	271.9	49.5										90
180	100	100	34.0	243.6	30.8*	42.7	254.6	38.9*	54.5	265.7	43.9										100
180	100	107										60.0	266.9	36.9							107
180	100	110	21.7	224.7	26.2*	33.3	241.8	32.5*	47.1	257.5	39.0	58.1	265.2	35.8							110
180	100	117	0.0	187.8	24.1*																117
180	100	120				20.7	222.2	27.2*	38.7	246.8	34.9	51.1	258.1	32.0							120
180	100	126				0.0	186.9	24.4*													126
180	100	129													55.0	257.0	26.5				129
180	100	130							28.3	231.6	31.6	43.3	248.8	28.9	54.5	256.5	26.3				130
180	100	140							11.3	203.9	26.7*	34.1	236.3	26.3	47.1	248.3	23.9				140
180	100	142							0.0	184.2	22.4*										142
180	100	150										21.8	217.5	24.0	38.7	237.6	21.8				150
180	100	151																50.0	245.1	19.5	151
180	100	157										0.0	180.3	19.9*							157
180	100	160													28.3	222.5	20.0	42.5	236.1	17.9*	160
180	100	170													11.4	194.8	18.3	33.1	223.2	16.3*	170
180	100	172													0.0	175.1	17.7*				172
180	100	180																20.4	203.4	14.8*	180
180	100	186																0.0	168.5	13.9*	186
180	120	52	73.0	302.5	57.8*																52
180	120	60	69.0	299.8	52.4*																60
180	120	68				70.0	299.6	54.7*													68
180	120	70	63.8	295.4	45.8*	68.7	298.7	53.2*													70
180	120	80	58.4	289.9	39.4*	63.5	294.2	47.7*													80
180	120	90	52.6	283.0	33.7*	58.0	288.6	42.5*													90
180	120	93							65.0	293.0	46.9										93
180	120	100	46.3	274.5	28.7*	52.2	281.7	36.8*	61.1	289.3	43.2										100
180	120	110	39.2	263.7	24.4*	45.9	273.0	31.2*	55.5	283.1	38.3										110
180	120	117										60.0	284.2	32.2							117
180	120	120	30.9	249.4	20.8*	38.8	262.0	26.4*	49.4	275.4	34.3	58.4	282.5	31.3							120
180	120	130	19.8	228.3	17.9*	30.4	247.5	22.2*	42.8	265.8	30.9	52.6	275.7	28.2							130
180	120	137	0.0	187.8	16.6*																137
180	120	140				18.9	225.7	18.8*	35.2	253.4	28.1*	46.3	267.1	25.6							140
180	120	141													55.0	273.3	22.9				141
180	120	146				0.0	186.9	16.9*													146
180	120	150							25.8	236.4	23.2*	39.3	256.3	23.3	49.4	266.2	21.0				150
180	120	160							10.4	205.8	18.7*	31.0	242.1	21.4	42.8	256.6	19.3				160
180	120	162							0.0	184.2	15.9*										162
180	120	163																50.0	260.5	16.3*	163
180	120	170										19.9	221.1	19.6	35.2	244.3	17.7	45.8	254.5	15.2*	170

**298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight**

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)							
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees										
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)								
180	120	177										0.0	180.3	14.1	*									177				
180	120	180														25.8	227.3	16.3	*	38.6	243.5	13.8	*	180				
180	120	190														10.4	196.7	15.0	*	30.2	228.9	12.5	*	190				
180	120	192														0.0	175.1	12.5	*					192				
180	120	200																	18.6	206.8	11.4	*	200					
180	120	206																	0.0	168.5	10.7	*	206					
180	140	58	73.0	321.6	45.8	*																		58				
180	140	60	72.1	321.0	44.8	*																		60				
180	140	70	67.8	317.3	39.9	*																		70				
180	140	74					70.0	318.4	45.5	*														74				
180	140	80	63.3	312.8	35.1	*	67.5	316.2	43.0	*														80				
180	140	90	58.6	307.2	30.4	*	63.0	311.6	38.8	*														90				
180	140	100	53.7	300.5	26.2	*	58.3	306.0	33.8	*														100				
180	140	101									65.0	311.1	41.4	*										101				
180	140	110	48.4	292.4	22.4	*	53.4	299.2	29.1	*	60.9	306.6	37.6	*										110				
180	140	120	42.7	282.6	19.1	*	48.1	291.0	24.9	*	56.1	300.5	33.6	*										120				
180	140	127													60.0	301.5	28.3	*						127				
180	140	130	36.2	270.5	16.3	*	42.3	281.1	21.2	*	51.0	293.1	30.3	*	58.7	299.9	27.4	*						130				
180	140	140	28.6	254.7	14.0	*	35.8	268.7	17.9	*	45.5	284.2	27.5	*	53.7	293.2	24.9	*						140				
180	140	150	18.3	231.7	12.1	*	28.1	252.7	15.2	*	39.5	273.3	23.5	*	48.5	285.1	22.6	*						150				
180	140	152														55.0	289.7	19.8	*						152			
180	140	157	0.0	187.8	11.3	*																		157				
180	140	160					17.5	228.9	12.9	*	32.5	259.5	19.6	*	42.7	275.3	20.7	*	51.0	283.9	18.5	*		160				
180	140	166					0.0	186.9	11.7	*														166				
180	140	170									23.8	240.8	16.2	*	36.3	263.2	19.0	*	45.6	275.0	16.9	*		170				
180	140	176									9.6	207.5	12.9	*	28.7	247.5	16.9	*	39.5	264.1	15.4	*	50.0	275.8	13.2	*	176	
180	140	180									0.0	184.2	11.0	*					48.0	272.5	12.7	*	48.0	272.5	12.7	*	180	
180	140	182																							182			
180	140	190												18.4	224.5	13.5	*	32.5	250.3	14.0	*	42.2	262.6	11.5	*	190		
180	140	197												0.0	180.3	9.7	*								197			
180	140	200														23.9	231.7	12.7	*	35.7	250.2	10.4	*	35.7	250.2	10.4	*	200
180	140	210														9.6	198.5	10.4	*	27.9	234.0	9.4	*	27.9	234.0	9.4	*	210
180	140	212														0.0	175.1	8.5	*							212		
180	140	220																							220			
180	140	226																		17.2	210.0	8.5	*	0.0	168.5	7.5	*	226
180	160	64	73.0	340.7	36.0	*																			64			
180	160	70	70.7	338.7	33.8	*																			70			
180	160	80	66.8	334.8	30.2	*																			80			
180	160	81					70.0	337.2	36.9	*															81			
180	160	90	62.9	330.2	26.6	*	66.6	333.7	33.7	*															90			
180	160	100	58.8	324.6	23.2	*	62.6	328.9	30.0	*															100			
180	160	110	54.5	318.0	20.0	*	58.5	323.3	26.3	*	65.0	329.2	35.1	*											110			
180	160	120	50.0	310.2	17.2	*	54.2	316.6	22.8	*	60.8	323.9	32.1	*											120			
180	160	130	45.1	301.1	14.7	*	49.7	308.8	19.6	*	56.6	317.8	29.3	*											130			
180	160	137													60.0	318.9	24.8	*							137			
180	160	140	39.8	290.2	12.5	*	44.8	299.6	16.7	*	52.2	310.7	26.3	*	58.8	317.2	24.1	*							140			
180	160	150	33.8	276.8	10.6	*	39.5	288.5	14.2	*	47.5	302.2	22.6	*	54.5	310.6	21.9	*							150			
180	160	160	26.7	263.7	9.1	*	33.4	275.0	12.0	*	42.5	292.2	19.3	*	50.0	302.9	20.0	*							160			
180	160	164																							164			
180	160	170	17.1	234.8	7.8	*	26.2	257.5	10.1	*	36.8	280.2	16.1	*	45.2	293.7	18.3	*	55.0	306.1	16.9	*	55.0	306.1	16.9	*	170	
180	160	177	0.0	187.8	7.5	*																			177			
180	160	180					16.3	231.8	8.5	*	30.4	265.1	13.2	*	39.9	282.8	16.8	*	47.5	293.1	14.3	*			180			
180	160	186					0.0	186.9	7.8	*															186			
180	160	189																							189			
180	160	190									22.3	244.9	10.9	*	33.9	269.5	14.1	*	42.5	283.1	12.9	*	50.0	291.1	10.5	*	190	
180	160	200									9.0	209.2	8.6	*	26.8	252.4	11.3	*	36.9	271.0	11.7	*	49.6	290.3	10.4	*	200	
180	160	202									0.0	184.2	7.3	*											202			
180	160	210													17.2	227.6	9.0	*	30.4	256.0	10.7	*	39.3	270.0	8.3	*	210	
180	160	217													0.0	180.4	6.3	*							217			
180	160	220																							220			
180	160	230																							230			
180	160	232																							232			
180	160	240																							240			
180	160	246																							246			
180	180	70	73.0	359.9	27.9	*																			70			
180	180	80	69.5	356.4	25.3	*																			80			
180	180	88					70.0	356.0	28.8	*															88			
180	180	90	66.1	352.3	22.6	*	69.3	355.2	28.3	*															90			
180	180	100	62.6	347.5	19.9	*	65.9	351.1	25.6	*															100			
180	180	110	58.9	341.9	17.3	*	62.3	346.3	22.9	*															110			
180	180	118									65.0	347.4	27.0	*											118			
180	180	120	55.1	335.4	15.0	*	58.7	340.6	20.1	*	64.3	346.4	26.5	*											120			
180	180	130	51.1	327.9	12.8	*	54.9	334.1	17.5	*	60.7	341.2	24.1	*											130			
180	180	140	46.9	319.2	10.9	*	50.9	326.5	15.1	*	57.0	335.2	21.8	*											140			

298HSL 360 Degree Capacities - Luffing Jib																					
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight																					
Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
180	180	147																		147	
180	180	150	42.4	309.1	9.2*	46.7	317.7	12.8*	53.1	328.2	19.6*	59.0	334.5	21.2						150	
180	180	160	37.4	297.2	7.7*	42.1	307.5	10.9*	49.0	320.1	17.5*	55.2	328.0	19.3						160	
180	180	170	31.8	282.7	6.4*	37.1	295.4	9.1*	44.7	310.7	15.5*	51.2	320.5	17.6						170	
180	180	175																		175	
180	180	180	25.2	264.3	5.4*	31.5	280.8	7.6*	39.9	299.7	12.7*	47.0	311.9	16.1	55.0	322.5	14.0*			180	
180	180	190	16.1	237.7	4.6*	24.7	262.0	6.3*	34.7	286.6	10.3*	42.4	301.8	14.4*	49.0	311.0	11.9*			190	
180	180	197	0.0	187.8	4.5*															197	
180	180	200				15.4	234.6	5.2*	28.6	270.4	8.4*	37.5	289.8	11.4*	44.7	301.6	10.7*			200	
180	180	202																		202	
180	180	206				0.0	186.9	4.8*							50.0	306.4	8.1*			206	
180	180	210							21.0	248.7	6.9*	31.9	275.4	9.0*	39.9	290.6	9.6*	46.6	299.3	7.3*	210
180	180	220							8.4	210.7	5.3*	25.2	257.0	7.1*	34.7	277.5	8.7*	42.0	289.0	6.4*	220
180	180	222							0.0	184.2	4.4*										222
180	180	230										16.2	230.6	5.6*	28.6	261.2	7.7*	37.0	276.9	5.7*	230
180	180	237										0.0	180.3	3.6*							237
180	180	240													21.0	239.6	5.8*	31.3	262.2	5.0*	240
180	180	250													8.5	201.6	4.0*	24.5	243.3	4.3*	250
180	180	252													0.0	175.1	3.0*				252
180	180	260																15.2	215.6	3.7*	260
180	180	266																0.0	168.5	2.4*	266
180	200	76	73.0	379.0	21.3*																76
180	200	80	71.7	377.6	20.4*																80
180	200	90	68.6	374.0	18.4*																90
180	200	95				70.0	374.8	22.2*													95
180	200	100	65.5	369.7	16.4*	68.4	372.8	21.2*													100
180	200	110	62.3	364.8	14.4*	65.3	368.5	19.1*													110
180	200	120	59.0	359.2	12.5*	62.1	363.6	17.1*													120
180	200	126							65.0	365.5	20.1*										126
180	200	130	55.6	352.8	10.7*	58.8	357.9	15.0*	63.9	363.8	19.3*										130
180	200	140	52.1	345.5	9.0*	55.4	351.5	13.0*	60.6	358.6	17.3*										140
180	200	150	48.3	337.2	7.5*	51.9	344.1	11.1*	57.3	352.5	15.3*										150
180	200	157																			157
180	200	160	44.4	327.6	6.2*	48.1	335.7	9.4*	53.8	345.7	13.5*	60.0	353.5	16.8*							160
180	200	170	40.1	316.6	5.1*	44.1	326.1	7.9*	50.2	337.9	11.8*	55.7	345.4	14.4*							170
180	200	180	35.4	303.7	4.1*	39.9	315.0	6.5*	46.4	329.0	10.1*	52.1	338.1	12.7*							180
180	200	187													55.0	338.9	11.3*				187
180	200	190	30.2	288.2	3.2*	35.1	302.0	5.3*	42.2	318.7	8.6*	48.4	329.8	11.1*	53.8	336.5	10.9*				190
180	200	200	23.8	268.6	2.5*	29.8	286.2	4.2*	37.8	306.8	7.2*	44.4	320.3	9.5*	50.2	328.7	9.7*				200
180	200	210				23.4	266.3	3.3*	32.8	292.7	5.9*	40.2	309.3	8.1*	46.4	319.8	8.6*				210
180	200	215																50.0	321.7	5.8*	215
180	200	220				14.6	237.2	2.6*	27.1	275.3	4.6*	35.5	296.4	6.7*	42.3	309.5	7.7*	48.0	317.2	5.4*	220
180	200	230							19.9	252.3	3.5*	30.2	280.9	5.2*	37.8	297.6	6.8*	44.1	307.6	4.6*	230
180	200	240							8.0	212.1	2.3*	23.9	261.4	3.9*	32.8	283.5	6.0*	39.8	296.5	3.9*	240
180	200	250										15.4	233.4	2.8*	27.1	266.2	4.3*	35.1	283.4	3.3*	250
180	200	260													19.9	243.2	3.0*	29.7	267.6	2.7*	260
180	200	270																23.3	247.5	2.2*	270

298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																			
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			Load Radius (ft)	
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)		
190	90	44	73.0	283.8	70.6*																44	
190	90	50	68.8	281.6	65.2*																50	
190	90	58				70.0	281.4	66.3*													58	
190	90	60	61.8	277.0	57.9*	68.7	280.7	64.8*													60	
190	90	70	54.3	270.8	49.9*	61.7	276.0	57.6*													70	
190	90	80	45.9	262.4	42.5*	54.2	269.8	51.9*													80	
190	90	82							65.0	275.7	55.6										82	
190	90	90	36.3	251.0	35.9*	45.9	261.4	45.5*	59.0	271.3	49.3										90	
190	90	100	23.4	233.5	30.5*	36.2	249.9	38.1*	51.3	264.3	43.8										100	
190	90	105										60.0	267.9	37.7							105	
190	90	110	0.0	197.7	28.0*																110	
190	90	110				23.3	232.4	31.9*	42.5	254.9	38.9	56.1	264.6	35.5							110	
190	90	117				0.0	196.8	28.2*													117	
190	90	120							32.0	241.8	34.8	48.0	256.8	31.8							120	
190	90	127													55.0	258.2	26.7				127	
190	90	130							16.5	219.6	31.4	38.7	246.2	28.7	52.6	256.0	25.9				130	
190	90	134							0.0	194.1	25.5*										134	
190	90	140										26.9	230.7	26.1	44.1	247.1	23.6				140	
190	90	148																50.0	246.5	19.3*	148	
190	90	150										0.0	190.0	22.2*	34.0	234.8	21.5	48.6	245.1	19.0*	150	
190	90	160													19.9	215.1	19.7	39.4	234.8	17.2*	160	
190	90	165													0.0	184.5	18.7				165	
190	90	170																27.9	219.8	15.6*	170	
190	90	180																6.0	187.0	14.1*	180	
190	100	47	73.0	293.4	65.1*																47	
190	100	50	71.0	292.3	62.5*																50	
190	100	60	64.8	288.2	55.5*																60	
190	100	62				70.0	290.8	61.1*													62	
190	100	70	58.3	282.8	47.7*	64.7	287.2	55.4*													70	
190	100	80	51.3	275.7	40.9*	58.2	281.8	49.7*													80	
190	100	86							65.0	284.7	51.8										86	
190	100	90	43.5	266.5	34.6*	51.2	274.7	44.3*	62.4	282.7	48.9										90	
190	100	100	34.3	254.1	29.4*	43.4	265.5	37.3*	55.7	276.7	43.4										100	
190	100	110	22.2	235.5	25.2*	34.2	253.1	31.4*	48.5	268.9	38.5	60.0	276.6	35.2							110	
190	100	117	0.0	197.7	23.1*																117	
190	100	120				22.1	234.4	26.4*	40.3	258.7	34.5	53.0	269.8	31.4							120	
190	100	127				0.0	196.8	23.4*													127	
190	100	130							30.3	244.6	31.2	45.4	261.1	28.4							130	
190	100	133													55.0	266.4	24.8				133	
190	100	140							15.6	221.0	26.7*	36.6	249.6	25.8	49.8	260.8	23.2				140	
190	100	144							0.0	194.1	21.5*										144	
190	100	150										25.5	233.0	23.5	41.8	251.0	21.1				150	
190	100	155																50.0	254.2	17.6*	155	
190	100	160										0.0	190.0	18.7*	32.2	237.8	19.4	46.0	249.5	16.7*	160	
190	100	170													18.9	216.8	17.8	37.3	238.2	15.1*	170	
190	100	175													0.0	184.5	16.4*				175	
190	100	180																26.5	222.2	13.7*	180	
190	100	190																5.7	187.6	12.4*	190	
190	120	52	73.0	312.5	53.7*																52	
190	120	60	69.2	309.9	49.0*																60	
190	120	68				70.0	309.6	51.8*													68	
190	120	70	64.0	305.6	43.0*	69.2	309.0	50.9*													70	
190	120	80	58.6	300.1	37.2*	64.0	304.6	45.0*													80	
190	120	90	52.8	293.3	31.9*	58.5	299.1	40.8*													90	
190	120	94							65.0	302.8	45.8										94	
190	120	100	46.5	284.8	27.2*	52.7	292.3	35.1*	62.0	300.1	42.7										100	
190	120	110	39.5	274.1	23.2*	46.5	283.8	29.9*	56.5	294.1	37.8										110	
190	120	120	31.3	260.0	19.8*	39.4	273.0	25.3*	50.5	286.7	33.9	60.0	293.9	30.7							120	
190	120	130	20.3	239.3	17.1*	31.2	258.9	21.4*	44.0	277.5	30.6	54.2	287.2	27.6							130	
190	120	137	0.0	197.7	15.9*																137	
190	120	140				20.1	238.1	18.1*	36.6	265.7	27.5*	48.0	279.2	25.0							140	
190	120	144													55.0	282.7	21.5				144	
190	120	147				0.0	196.8	16.2*													147	
190	120	150							27.6	249.7	22.8*	41.2	269.0	22.8	51.6	278.4	20.4				150	
190	120	160							14.2	223.6	18.7*	33.3	255.9	20.9	45.2	269.5	18.6				160	
190	120	164							0.0	194.1	15.2*										164	
190	120	168																50.0	269.5	14.3*	168	
190	120	170										23.3	237.3	19.2	38.0	258.3	17.0*	48.5	267.5	14.0*	170	
190	120	180										0.0	190.0	13.2*	29.3	243.2	15.4*	41.8	257.5	12.6*	180	
190	120	190													17.2	220.0	14.1*	34.0	244.7	11.5*	190	
190	120	195													0.0	184.5	11.5*				195	

298HSL 360 Degree Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																					Load Radius (ft)	
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees							
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)					
190	120	200																				24.1	226.7	10.4 *	200
190	120	210																				5.2	188.5	9.4 *	210
190	140	58	73.0	331.6	42.7 *																				58
190	140	60	72.3	331.1	42.0 *																				60
190	140	70	67.9	327.5	37.5 *																				70
190	140	75				70.0	328.4	43.2 *																	75
190	140	80	63.4	323.0	32.9 *	67.9	326.5	41.3 *																	80
190	140	90	58.8	317.5	28.6 *	63.4	322.0	36.7 *																	90
190	140	100	53.9	310.8	24.7 *	58.7	316.5	32.1 *																	100
190	140	103							65.0	321.0	39.4 *														103
190	140	110	48.6	302.8	21.2 *	53.8	309.8	27.7 *	61.7	317.4	37.0 *														110
190	140	120	42.9	293.0	18.1 *	48.6	301.7	23.8 *	57.0	311.5	33.2 *														120
190	140	130	36.5	281.0	15.5 *	42.8	292.0	20.2 *	51.9	304.3	29.9 *	60.0	311.2	26.9 *											130
190	140	140	28.9	265.4	13.2 *	36.4	279.9	17.2 *	46.5	295.7	26.9 *	55.0	304.7	24.3 *											140
190	140	150	18.7	242.7	11.5 *	28.8	264.3	14.6 *	40.6	285.2	22.8 *	49.9	297.0	22.1 *											150
190	140	156													55.0	299.1	18.4 *								156
190	140	157	0.0	197.7	10.7 *																				157
190	140	160				18.6	241.5	12.3 *	33.8	272.0	19.1 *	44.3	287.7	20.2 *	52.8	296.0	17.6 *								160
190	140	167				0.0	196.8	11.1 *																	167
190	140	170							25.5	254.5	15.9 *	38.0	276.2	18.6 *	47.5	287.6	15.9 *								170
190	140	180							13.2	226.0	13.0 *	30.8	261.7	17.1 *	41.7	277.5	14.4 *	50.0	284.8	11.5 *					180
190	140	184							0.0	194.1	10.5 *														184
190	140	190										21.5	241.3	13.7 *	35.1	264.9	13.1 *	44.7	276.1	10.4 *					190
190	140	200										0.0	190.0	9.0 *	27.1	248.3	11.9 *	38.5	264.8	9.3 *					200
190	140	210													16.0	222.9	10.8 *	31.4	250.5	8.4 *					210
190	140	215													0.0	184.5	7.7 *								215
190	140	220																22.3	230.8	7.6 *					220
190	140	230																4.8	189.4	6.8 *					230
190	160	64	73.0	350.7	33.7 *																				64
190	160	70	70.8	348.8	31.7 *																				70
190	160	80	67.0	345.0	28.4 *																				80
190	160	82				70.0	347.1	34.5 *																	82
190	160	90	63.0	340.3	25.0 *	66.9	344.0	31.8 *																	90
190	160	100	58.9	334.8	21.8 *	63.0	339.3	28.4 *																	100
190	160	110	54.6	328.2	18.8 *	58.9	333.8	24.9 *																	110
190	160	111							65.0	339.1	33.4 *														111
190	160	120	50.1	320.5	16.1 *	54.6	327.2	21.6 *	61.5	334.7	31.0 *														120
190	160	130	45.3	311.4	13.8 *	50.1	319.5	18.6 *	57.4	328.8	28.5 *														130
190	160	140	40.0	300.6	11.7 *	45.2	310.4	15.9 *	53.0	321.9	25.3 *	60.0	328.5	23.6 *											140
190	160	150	34.0	287.3	9.9 *	39.9	299.5	13.5 *	48.4	313.7	21.8 *	55.7	322.1	21.4 *											150
190	160	160	27.0	270.3	8.5 *	34.0	286.2	11.4 *	43.4	304.0	18.6 *	51.2	314.7	19.5 *											160
190	160	167													55.0	315.5	15.3 *								167
190	160	170	17.5	245.9	7.3 *	26.9	269.2	9.6 *	37.9	292.3	15.7 *	46.4	305.9	17.9 *	53.8	313.5	14.8 *								170
190	160	177	0.0	197.8	6.9 *																				177
190	160	180				17.4	244.7	8.1 *	31.6	277.9	13.1 *	41.3	295.5	16.4 *	49.2	305.5	13.3 *								180
190	160	187				0.0	196.8	7.2 *																	187
190	160	190							23.9	258.8	10.8 *	35.5	282.9	14.3 *	44.3	296.1	12.0 *								190
190	160	193																50.0	300.2	8.9 *					193
190	160	200							12.3	228.2	8.8 *	28.8	267.0	11.4 *	38.9	284.8	10.9 *	46.8	294.3	8.3 *					200
190	160	204							0.0	194.1	6.9 *														204
190	160	210										20.1	245.0	9.0 *	32.7	270.9	9.8 *	41.7	284.0	7.3 *					210
190	160	220										0.0	190.0	5.8 *	25.3	252.9	8.9 *	36.0	271.6	6.5 *					220
190	160	230													14.9	225.6	7.1 *	29.3	255.9	5.8 *					230
190	160	235													0.0	184.5	4.8 *								235
190	160	240																20.9	234.6	5.1 *					240
190	160	250																4.5	190.2	4.5 *					250

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
110	90	41	73.0	203.8	98.0 *															41	
110	90	50	66.9	200.5	80.3 *															50	
110	90	51				70.0	201.7	89.3 *												51	
110	90	60	59.7	195.5	65.5 *	63.9	197.9	78.4 *												60	
110	90	68							65.0	196.9	81.0 *									68	
110	90	70	52.0	188.7	55.6 *	56.5	192.2	63.9 *	63.5	195.8	78.7 *									70	
110	90	80	43.4	179.6	48.6 *	48.5	184.5	54.2 *	56.1	190.0	69.7 *									80	
110	90	84							60.0	190.6	64.0 *									84	
110	90	90	33.1	167.0	43.8 *	39.3	174.1	47.5 *	48.0	182.2	57.6 *	55.5	186.9	58.8 *						90	
110	90	100	18.5	146.3	40.6 *	27.8	159.0	43.0 *	38.7	171.6	48.7 *	47.4	178.9	51.5 *	55.0	183.0	49.1 *			100	
110	90	105	0.0	117.8	32.3 *															105	
110	90	110				5.1	125.1	36.9 *	27.0	156.1	41.6 *	38.0	168.1	47.2 *	46.5	174.5	46.4 *			110	
110	90	114																50.0	174.0	41.6 *	114
110	90	120							0.0	115.3	33.5 *	25.9	152.0	40.0 *	36.9	163.3	41.3 *	45.3	169.1	39.1 *	120
110	90	129										0.0	112.7	33.0 *							129
110	90	130													24.4	146.4	37.2 *	35.5	157.3	35.1 *	130
110	90	138													0.0	109.3	32.7 *				138
110	90	140																22.2	139.1	31.7 *	140
110	90	147																0.0	105.1	29.8 *	147
110	100	44	73.0	213.4	88.0 *																44
110	100	50	69.3	211.3	79.2 *																50
110	100	55				70.0	211.1	82.2 *													55
110	100	60	63.0	206.9	63.6 *	66.6	208.9	76.3 *													60
110	100	70	56.4	201.1	53.3 *	60.2	203.9	62.4 *													70
110	100	72							65.0	205.9	74.2 *										72
110	100	80	49.2	193.5	44.7 *	53.4	197.4	52.2 *	59.9	201.8	67.4 *										80
110	100	89										60.0	199.3	59.1 *							89
110	100	90	41.1	183.5	39.9 *	45.9	188.9	43.8 *	53.0	195.1	56.7 *	59.4	198.7	58.3 *							90
110	100	100	31.4	169.9	36.9 *	37.2	177.6	39.1 *	45.4	186.5	46.1 *	52.4	192.0	51.0 *							100
110	100	105													55.0	191.2	47.1 *				105
110	100	110	17.5	147.9	33.8 *	26.3	161.4	36.0 *	36.7	175.0	39.7 *	44.8	183.2	47.1 *	51.7	187.8	45.9 *				110
110	100	115	0.0	117.8	28.7 *																115
110	100	120				4.8	125.5	31.1 *	25.6	158.5	34.5 *	36.0	171.4	39.6 *	44.0	178.7	40.8 *				120
110	100	121																50.0	181.7	38.2 *	121
110	100	130							0.0	115.3	28.4 *	24.6	154.2	33.2 *	34.9	166.6	36.7 *	42.9	173.1	34.6 *	130
110	100	139										0.0	112.7	28.0 *							139
110	100	140													23.1	148.5	32.0 *	33.6	160.4	31.3 *	140
110	100	148													0.0	109.3	27.6 *				148
110	100	150																21.1	141.0	28.4 *	150
110	100	157																0.0	105.1	26.0 *	157
110	120	50	73.0	232.5	74.9 *																50
110	120	60	67.8	228.9	61.5 *																60
110	120	61				70.0	229.9	69.6 *													61
110	120	70	62.5	224.2	50.0 *	65.6	226.3	61.3 *													70
110	120	80	57.0	218.4	41.0 *	60.2	221.2	49.7 *	65.0	224.1	62.4 *										80
110	120	90	51.1	211.2	35.6 *	54.5	214.8	40.7 *	59.9	219.1	56.2 *										90
110	120	99										60.0	216.6	50.6 *							99
110	120	100	44.6	202.1	31.4 *	48.4	206.9	35.1 *	54.2	212.6	44.6 *	59.5	216.1	50.0 *							100
110	120	110	37.4	190.6	28.3 *	41.7	196.9	30.9 *	48.1	204.6	37.5 *	53.8	209.5	47.1 *							110
110	120	117													55.0	207.6	41.3 *				117
110	120	120	28.6	175.2	26.3 *	33.9	184.0	27.7 *	41.3	194.4	32.0 *	47.6	201.3	40.1 *	53.2	205.3	39.8 *				120
110	120	130	16.0	150.8	24.0 *	24.0	165.9	25.5 *	33.4	181.3	27.5 *	40.7	191.0	32.7 *	46.9	196.9	35.7 *				130
110	120	134																50.0	197.0	32.3 *	134
110	120	135	0.0	117.8	20.9 *																135
110	120	140				4.4	126.3	22.2 *	23.3	162.8	24.1 *	32.7	177.6	27.2 *	40.0	186.4	32.2 *	46.0	191.5	30.3 *	140
110	120	150							0.0	115.3	20.5 *	22.4	158.4	23.2 *	31.8	172.5	27.2 *	39.0	180.5	27.4 *	150
110	120	159										0.0	112.7	20.2 *							159

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
120	140	160				7.6	145.6	16.2*	23.4	180.8	17.4*	32.3	197.1	20.1*	39.2	207.1	24.7*	44.9	213.1	22.9*	160
120	140	161				0.0	127.1	14.5*													161
120	140	170							8.5	145.8	15.7*	23.5	178.2	17.0*	32.1	193.1	20.5*	38.8	201.9	20.9*	170
120	140	172							0.0	125.2	14.1*										172
120	140	180										8.8	143.7	14.7*	23.3	174.1	16.8*	31.7	187.8	19.1*	180
120	140	182										0.0	122.4	13.8*							182
120	140	190													8.3	138.8	13.9*	22.8	168.3	16.8*	190
120	140	192													0.0	118.7	13.5*				192
120	140	200																6.6	130.1	13.2*	200
120	140	201																0.0	114.2	12.7*	201
120	160	62	73.0	280.8	49.6*																62
120	160	70	69.9	278.0	44.2*																70
120	160	76				70.0	277.4	44.2*													76
120	160	80	66.0	274.0	38.2*	68.4	275.9	42.6*													80
120	160	90	62.0	269.1	31.8*	64.5	271.5	38.8*													90
120	160	99							65.0	270.2	39.1*										99
120	160	100	57.9	263.3	27.0*	60.5	266.3	32.8*	64.7	269.8	38.8*										100
120	160	110	53.6	256.5	23.2*	56.3	260.2	27.7*	60.6	264.6	35.3*										110
120	160	120	49.0	248.5	20.1*	51.9	252.9	23.7*	56.4	258.5	32.2*										120
120	160	122										60.0	260.9	34.7*							122
120	160	130	44.0	239.0	17.7*	47.2	244.4	20.4*	52.0	251.3	26.8*	56.5	255.7	32.2*							130
120	160	140	38.6	227.6	15.8*	42.1	234.3	17.8*	47.3	242.8	22.4*	52.1	248.5	29.3*							140
120	160	143													55.0	249.7	28.1*				143
120	160	150	32.4	213.6	14.3*	36.4	222.0	15.6*	42.2	232.7	18.8*	47.4	240.1	24.6*	52.0	244.7	26.2*				150
120	160	160	25.0	195.4	13.3*	29.9	206.7	13.9*	36.6	220.5	15.9*	42.3	230.0	20.0*	47.3	236.2	23.8*				160
120	160	164																50.0	236.7	21.1*	164
120	160	170	14.3	167.4	11.6*	21.6	185.9	12.5*	30.1	205.3	13.7*	36.7	217.9	16.5*	42.2	226.1	21.6*	47.0	231.2	19.9*	170
120	160	175	0.0	127.8	10.3*																175
120	160	180				7.1	146.8	11.4*	21.9	184.8	12.0*	30.1	202.7	13.8*	36.5	213.9	17.4*	41.9	221.0	18.1*	180
120	160	181				0.0	127.1	10.2*													181
120	160	190							7.9	147.3	10.9*	22.0	182.2	11.7*	30.0	198.7	14.1*	36.2	208.7	16.5*	190
120	160	192							0.0	125.2	9.9*										192
120	160	200										8.2	145.2	10.2*	21.8	178.1	11.6*	29.6	193.2	14.7*	200
120	160	202										0.0	122.4	9.7*							202
120	160	210													7.7	140.2	9.6*	21.3	172.2	11.7*	210
120	160	212													0.0	118.7	9.4*				212
120	160	220																6.1	131.2	9.2*	220
120	160	221																0.0	114.2	8.8*	221
120	180	68	73.0	299.9	37.9*																68
120	180	70	72.2	299.2	37.0*																70
120	180	80	68.8	295.6	33.6*																80
120	180	83				70.0	296.2	34.6*													83
120	180	90	65.4	291.4	30.1*	67.5	293.4	32.3*													90
120	180	100	61.8	286.4	25.0*	64.0	288.9	29.2*													100
120	180	108							65.0	288.3	29.9*										108
120	180	110	58.1	280.7	21.2*	60.5	283.6	26.2*	64.2	287.1	29.1*										110
120	180	120	54.3	274.0	18.0*	56.7	277.5	22.0*	60.6	281.9	26.3*										120
120	180	130	50.3	266.2	15.5*	52.8	270.5	18.7*	56.8	275.8	23.8*										130
120	180	132										60.0	278.2	25.8*							132
120	180	140	46.0	257.3	13.5*	48.7	262.3	15.9*	52.9	268.8	21.3*	56.9	273.1	23.7*							140
120	180	150	41.4	246.8	11.8*	44.3	252.8	13.7*	48.8	260.7	17.9*	53.0	266.1	21.4*							150
120	180	155																			155
120	180	160	36.3	234.4	10.5*	39.6	241.7	11.9*	44.5	251.2	14.8*	48.9	258.0	19.2*	55.0	266.1	22.4*				160
120	180	170	30.5	219.3	9.5*	34.3	228.4	10.4*	39.7	240.2	12.4*	44.5	248.5	16.3*	48.8	254.1	19.1*				170
120	180	177																			177
120	180	180	23.5	199.7	8.8*	28.1	211.9	9.2*	34.4	226.9	10.5*	39.8	237.5	13.3*	44.4	244.7	17.1*	50.0	252.0	17.7*	180
120	180	190	13.5	169.8	8.0*	20.3	189.6	8.3*	28.3	210.5	9.0*	34.5	224.3	11.0*	39.7	233.6	14.5*	44.2	239.6	15.6*	190

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
130	160	70	70.0	288.1	43.7															70	
130	160	77				70.0	287.4	43.6													77
130	160	80	66.2	284.1	39.6	68.8	286.2	42.3													80
130	160	90	62.2	279.3	32.9	64.9	281.9	38.6													90
130	160	100	58.0	273.5	27.9	60.9	276.8	34.4													100
130	160	101							65.0	280.0	38.5										101
130	160	110	53.7	266.8	23.9	56.7	270.7	28.9	61.3	275.4	35.4										110
130	160	120	49.1	258.8	20.7	52.3	263.6	24.6	57.2	269.5	32.3										120
130	160	124										60.0	270.6	34.3							124
130	160	130	44.2	249.3	18.1	47.6	255.2	21.2	52.8	262.4	28.5	57.6	267.1	32.5							130
130	160	140	38.8	238.1	16.1	42.5	245.2	18.4	48.2	254.2	23.7	53.2	260.2	29.7							140
130	160	147													55.0	259.1	26.1				147
130	160	150	32.7	224.2	14.5	36.9	233.2	16.1	43.2	244.4	19.8	48.6	252.0	26.8	53.5	256.7	25.2				150
130	160	160	25.3	206.1	12.5	30.5	218.2	14.2	37.6	232.7	16.6	43.6	242.4	21.5	48.9	248.7	22.8				160
130	160	168														50.0	245.8	19.2			168
130	160	170	14.8	178.7	10.9	22.4	198.1	12.7	31.3	218.1	14.1	38.2	230.9	17.5	44.0	239.2	20.7	49.1	244.1	18.8	170
130	160	175	0.0	137.8	10.1																175
130	160	180				9.3	162.9	11.0	23.5	198.8	12.2	31.9	216.6	14.5	38.6	227.8	18.9	44.1	234.6	17.1	180
130	160	182				0.0	137.1	9.9													182
130	160	190							11.6	167.2	10.8	24.3	198.0	12.1	32.4	213.7	15.2	38.7	223.3	15.6	190
130	160	193							0.0	135.1	9.4										193
130	160	200										13.2	168.5	10.3	24.9	195.4	12.3	32.6	209.3	14.2	200
130	160	204							0.0	132.1	9.1										204
130	160	210													14.2	167.3	10.0	25.1	191.2	12.7	210
130	160	215													0.0	128.1	8.8				215
130	160	220																14.6	163.4	9.9	220
130	160	225																0.0	123.2	8.4	225
130	180	68	73.0	309.9	36.7																68
130	180	70	72.3	309.3	36.1																70
130	180	80	68.9	305.7	33.1																80
130	180	84				70.0	306.2	34.1													84
130	180	90	65.5	301.5	29.8	67.8	303.7	32.1													90
130	180	100	61.9	296.6	25.9	64.4	299.3	29.0													100
130	180	109							65.0	298.1	29.5										109
130	180	110	58.3	290.9	21.9	60.8	294.1	26.2	64.8	297.8	29.3										110
130	180	120	54.4	284.2	18.6	57.1	288.1	23.0	61.2	292.7	26.5										120
130	180	130	50.4	276.5	16.0	53.2	281.1	19.5	57.5	286.8	23.9										130
130	180	134										60.0	287.9	25.5							134
130	180	140	46.2	267.6	13.8	49.1	273.0	16.6	53.6	279.9	21.5	57.9	284.4	24.0							140
130	180	150	41.6	257.2	12.1	44.7	263.7	14.2	49.6	272.0	19.0	54.0	277.6	21.7							150
130	180	158													55.0	275.5	22.2				158
130	180	160	36.5	244.9	10.7	40.0	252.7	12.3	45.2	262.8	15.7	50.0	269.8	19.5	54.3	274.2	21.7				160
130	180	170	30.8	229.8	9.7	34.7	239.6	10.7	40.6	252.1	13.1	45.7	260.8	17.4	50.2	266.4	19.6				170
130	180	180	23.8	210.5	8.4	28.7	223.4	9.3	35.4	239.3	11.0	41.0	250.2	14.2	46.0	257.5	17.6				180
130	180	181																50.0	261.1	16.0	181
130	180	190	14.0	181.2	7.3	21.1	201.9	8.3	29.5	223.5	9.3	35.9	237.6	11.6	41.3	247.0	15.7	46.1	252.9	14.6	190
130	180	195	0.0	137.8	6.7																195
130	180	200				8.8	164.4	7.6	22.1	202.8	8.0	30.1	222.2	9.6	36.3	234.5	12.6	41.5	242.4	13.2	200
130	180	202				0.0	137.1	6.5													202
130	180	210							10.9	169.2	7.1	22.9	202.1	8.0	30.5	219.4	10.1	36.4	230.1	12.0	210
130	180	213							0.0	135.0	6.2										213
130	180	220										12.4	170.8	6.7	23.5	199.7	8.1	30.6	215.0	10.9	220
130	180	224							0.0	132.0	6.0										224
130	180	230													13.4	169.7	6.6	23.7	195.5	8.5	230
130	180	235													0.0	128.1	5.8				235
130	180	240																13.7	165.9	6.5	240
130	180	245																0.0	123.2	5.5	245

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
140	120	90	51.7	242.0	38.7*	56.0	246.5	46.0*	62.7	251.5	57.0*									90	
140	120	100	45.4	233.1	33.9*	50.1	239.0	39.4*	57.2	245.7	49.9*									100	
140	120	107										60.0	245.6	45.8*						107	
140	120	110	38.2	221.9	29.3*	43.5	229.6	34.2*	51.3	238.5	44.9*	58.2	243.7	44.0*						110	
140	120	120	29.6	207.1	24.8*	36.0	217.6	30.2*	44.9	229.6	37.6*	52.4	236.8	39.0*						120	
140	120	127													55.0	235.8	33.2*			127	
140	120	130	17.7	184.2	21.2*	26.9	201.3	25.4*	37.7	218.2	31.6*	46.1	228.1	34.9*	53.3	233.7	32.1*			130	
140	120	136	0.0	147.8	19.8*															136	
140	120	140				12.8	173.5	21.2*	29.0	203.0	26.5*	39.1	217.3	31.5*	47.1	225.3	28.9*			140	
140	120	143				0.0	147.0	19.5*												143	
140	120	146																		146	
140	120	150							16.6	179.1	22.6*	30.7	202.9	26.7*	40.2	214.9	26.2*	50.0	224.2	24.7*	
140	120	155							0.0	144.9	18.4*							47.8	221.1	23.9*	
140	120	160										19.4	181.5	22.0*	32.1	201.1	23.8*	41.0	210.9	21.7*	
140	120	167							0.0	141.7	17.4*									167	
140	120	170													21.4	181.3	21.8*	33.0	197.6	19.7*	
140	120	178													0.0	137.5	16.6*			178	
140	120	180																22.8	178.8	18.1*	
140	120	189																0.0	132.3	15.9*	
140	140	57	73.0	281.6	58.4*															57	
140	140	60	71.5	280.6	56.5*															60	
140	140	70	67.2	276.8	50.0*															70	
140	140	71				70.0	278.5	55.3*												71	
140	140	80	62.6	272.1	42.4*	66.0	274.8	50.6*												80	
140	140	90	57.9	266.4	36.0*	61.4	269.9	44.3*												90	
140	140	94							65.0	271.7	50.2*									94	
140	140	100	53.0	259.5	30.9*	56.6	263.9	37.2*	62.3	268.8	45.9*									100	
140	140	110	47.6	251.2	26.9*	51.6	256.6	31.8*	57.6	263.1	41.9*									110	
140	140	117										60.0	262.9	39.5*						117	
140	140	120	41.8	241.1	23.5*	46.1	247.9	27.4*	52.6	256.1	36.9*	58.5	261.0	38.0*						120	
140	140	130	35.3	228.6	20.0*	40.1	237.2	24.0*	47.3	247.7	30.8*	53.5	254.3	33.9*						130	
140	140	139													55.0	252.1	28.3*			139	
140	140	140	27.4	212.1	17.1*	33.3	223.8	21.0*	41.4	237.5	25.7*	48.3	246.1	30.5*	54.3	251.1	27.9*			140	
140	140	150	16.4	187.2	14.8*	24.9	205.8	17.8*	34.8	224.7	21.5*	42.5	236.3	27.6*	49.1	243.2	25.2*			150	
140	140	156	0.0	147.8	14.0*															156	
140	140	159																		159	
140	140	160				11.8	175.7	15.0*	26.8	207.9	18.3*	36.1	224.1	22.4*	43.4	233.7	22.8*	50.0	239.5	20.8*	
140	140	163				0.0	147.0	13.8*										49.7	239.0	20.6*	
140	140	170							15.4	182.0	15.8*	28.4	208.2	18.4*	37.1	221.9	20.8*	44.0	229.6	18.7*	
140	140	175							0.0	144.9	13.1*									175	
140	140	180										17.9	184.8	15.4*	29.6	206.7	19.0*	37.8	218.1	17.1*	
140	140	187										0.0	141.7	12.3*						187	
140	140	190													19.8	184.9	15.3*	30.5	203.3	15.6*	
140	140	198													0.0	137.5	11.8*			198	
140	140	200																21.1	182.6	14.3*	
140	140	209																0.0	132.3	11.3*	
140	160	62	73.0	300.8	45.4*															62	
140	160	70	70.2	298.3	42.2*															70	
140	160	78				70.0	297.3	42.9*												78	
140	160	80	66.3	294.3	37.8*	69.1	296.5	42.0*												80	
140	160	90	62.3	289.5	33.4*	65.2	292.3	38.3*												90	
140	160	100	58.2	283.7	28.6*	61.2	287.2	34.9*												100	
140	160	103							65.0	289.9	37.9*									103	
140	160	110	53.9	277.0	24.5*	57.0	281.2	30.0*	62.0	286.2	35.5*									110	
140	160	120	49.3	269.1	21.2*	52.7	274.2	25.5*	57.9	280.4	32.4*									120	
140	160	127										60.0	280.2	33.8*						127	
140	160	130	44.4	259.7	18.5*	48.0	265.9	21.9*	53.6	273.6	29.4*	58.7	278.3	32.8*						130	

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
140	160	140	39.0	248.5	15.9*	43.0	256.1	18.9*	49.0	265.6	25.1*	54.4	271.7	29.5*						140	
140	160	150	32.9	234.7	13.6*	37.4	244.3	16.5*	44.1	256.1	20.8*	49.8	263.9	26.6*	55.0	268.5	24.1*			150	
140	160	160	25.6	216.8	11.7*	31.1	229.6	14.5*	38.6	244.7	17.3*	45.0	254.7	23.0*	50.5	261.0	21.8*			160	
140	160	170	15.3	190.0	10.2*	23.2	210.1	12.3*	32.5	230.7	14.6*	39.7	243.8	18.5*	45.7	252.0	19.8*			170	
140	160	172																50.0	254.8	17.3*	172
140	160	176	0.0	147.8	9.8*																176
140	160	180				11.1	177.7	10.5*	25.0	212.5	12.5*	33.7	230.3	15.2*	40.5	241.3	18.0*	46.3	247.9	16.1*	180
140	160	183				0.0	147.0	9.5*													183
140	160	190							14.4	184.6	10.8*	26.5	213.1	12.6*	34.6	228.3	16.2*	41.1	237.4	14.6*	190
140	160	195							0.0	144.9	9.0*										195
140	160	200										16.8	187.9	10.5*	27.7	211.8	13.0*	35.3	224.7	13.3*	200
140	160	207										0.0	141.7	8.5*							207
140	160	210													18.5	188.3	10.5*	28.5	208.6	12.1*	210
140	160	218													0.0	137.5	8.1*				218
140	160	220																19.7	186.2	10.7*	220
140	160	229																0.0	132.3	7.8*	229
140	180	68	73.0	319.9	35.1*																68
140	180	70	72.4	319.4	34.6*																70
140	180	80	69.1	315.9	31.5*																80
140	180	84				70.0	316.1	33.6*													84
140	180	90	65.6	311.7	28.4*	68.1	314.0	31.9*													90
140	180	100	62.1	306.8	25.2*	64.7	309.7	28.9*													100
140	180	110	58.4	301.1	22.2*	61.1	304.5	26.1*													110
140	180	111							65.0	308.0	29.0*										111
140	180	120	54.6	294.4	19.1*	57.4	298.6	23.5*	61.8	303.5	26.6*										120
140	180	130	50.6	286.8	16.4*	53.5	291.7	20.2*	58.1	297.7	24.0*										130
140	180	137										60.0	297.5	25.2*							137
140	180	140	46.3	277.9	14.1*	49.4	283.7	17.2*	54.3	291.1	21.6*	58.8	295.7	24.4*							140
140	180	150	41.7	267.6	12.3*	45.1	274.5	14.7*	50.3	283.3	19.3*	55.0	289.1	22.0*							150
140	180	160	36.7	255.3	10.5*	40.4	263.7	12.6*	46.0	274.4	16.5*	51.0	281.6	19.8*							160
140	180	162													55.0	284.9	20.5*				162
140	180	170	31.0	240.4	9.0*	35.2	250.8	10.9*	41.4	263.9	13.6*	46.8	272.9	17.7*	51.6	278.6	18.8*				170
140	180	180	24.1	221.2	7.7*	29.3	235.0	9.4*	36.3	251.5	11.3*	42.3	262.7	15.1*	47.5	270.1	17.0*				180
140	180	185																50.0	270.2	14.3*	185
140	180	190	14.4	192.6	6.7*	21.9	214.1	8.3*	30.6	236.4	9.5*	37.3	250.7	12.2*	43.0	260.2	15.5*	47.9	265.9	13.6*	190
140	180	196	0.0	147.8	6.5*																196
140	180	200				10.4	179.6	7.1*	23.6	216.8	8.1*	31.7	236.2	10.0*	38.1	248.5	13.6*	43.5	256.1	12.3*	200
140	180	203				0.0	147.0	6.2*													203
140	180	210							13.5	187.0	7.1*	25.0	217.6	8.2*	32.6	234.3	10.8*	38.6	244.6	11.1*	210
140	180	215							0.0	144.9	5.8*										215
140	180	220										15.8	190.7	6.8*	26.1	216.5	8.6*	33.2	230.8	10.1*	220
140	180	227										0.0	141.7	5.5*							227
140	180	230													17.5	191.5	6.8*	26.8	213.5	9.2*	230
140	180	238													0.0	137.5	5.2*				238
140	180	240																18.6	189.6	7.0*	240
140	180	249																0.0	132.3	5.1*	249
140	200	74	73.0	339.0	26.8*																74
140	200	80	71.2	337.1	25.6*																80
140	200	90	68.2	333.4	23.3*																90
140	200	91				70.0	334.9	25.8*													91
140	200	100	65.1	329.1	21.0*	67.3	331.6	23.5*													100
140	200	110	61.9	324.1	18.7*	64.2	327.1	21.0*													110
140	200	120	58.6	318.4	16.5*	61.0	321.9	18.7*				65.0	326.1	21.5*							120
140	200	130	55.1	311.9	14.4*	57.6	315.9	16.5*	61.6	320.8	19.1*										130
140	200	140	51.6	304.4	12.2*	54.2	309.2	14.5*	58.3	315.1	17.0*										140
140	200	147										60.0	314.9	17.9*							147
140	200	150	47.8	295.9	10.4*	50.6	301.5	12.6*	54.9	308.5	15.0*	58.9	313.0	17.3*							150

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
150	120	150							19.3	194.4	22.9 *	33.0	216.7	27.7 *	42.6	228.1	25.1 *				150
150	120	151																50.0	233.3	22.5 *	151
150	120	157							0.0	154.7	17.8 *										157
150	120	160										22.8	197.9	22.7 *	35.0	215.7	22.8 *	43.9	224.6	20.5 *	160
150	120	169										0.0	151.3	16.6 *							169
150	120	170													25.5	198.6	20.8 *	36.5	212.8	18.6 *	170
150	120	180													9.7	167.1	18.1 *	27.5	196.8	17.0 *	180
150	120	182													0.0	146.9	15.5 *				182
150	120	190																14.1	170.5	15.6 *	190
150	120	194																0.0	141.4	14.7 *	194
150	140	57	73.0	291.6	55.4 *																57
150	140	60	71.7	290.7	53.5 *																60
150	140	70	67.3	286.9	47.3 *																70
150	140	72				70.0	288.5	53.5 *													72
150	140	80	62.8	282.3	41.5 *	66.4	285.2	49.1 *													80
150	140	90	58.1	276.6	35.9 *	61.8	280.3	43.8 *													90
150	140	96							65.0	281.6	48.4 *										96
150	140	100	53.1	269.8	30.8 *	57.0	274.4	38.4 *	63.1	279.6	45.6 *										100
150	140	110	47.8	261.5	26.2 *	52.0	267.3	32.7 *	58.4	274.0	41.7 *										110
150	140	119										60.0	272.6	37.2 *							119
150	140	120	42.0	251.5	22.4 *	46.6	258.7	28.2 *	53.5	267.2	38.2 *	59.7	272.2	36.9 *							120
150	140	130	35.5	239.1	19.1 *	40.7	248.2	24.0 *	48.2	259.1	32.3 *	54.9	265.8	32.9 *							130
150	140	140	27.7	222.8	16.3 *	33.9	235.1	20.3 *	42.5	249.2	26.8 *	49.7	258.1	29.6 *							140
150	140	142													55.0	261.5	26.2 *				142
150	140	150	16.9	198.4	14.1 *	25.7	217.6	17.1 *	36.0	237.0	22.2 *	44.1	248.7	26.7 *	50.9	255.5	24.1 *				150
150	140	156	0.0	157.8	13.3 *																156
150	140	160				13.5	189.5	14.4 *	28.3	221.1	18.7 *	37.8	237.2	23.5 *	45.4	246.6	21.8 *				160
150	140	164				0.0	157.0	13.5 *										50.0	248.6	18.8 *	164
150	140	170							17.9	197.6	15.9 *	30.5	222.4	19.1 *	39.3	235.6	19.8 *	46.5	242.9	17.6 *	170
150	140	177							0.0	154.7	12.6 *										177
150	140	180										21.1	201.8	15.7 *	32.3	221.7	18.1 *	40.5	232.3	16.0 *	180
150	140	189										0.0	151.3	11.7 *							189
150	140	190													23.6	202.9	16.0 *	33.7	219.1	14.6 *	190
150	140	200													9.0	168.7	12.6 *	25.5	201.5	13.3 *	200
150	140	202													0.0	146.9	10.9 *				202
150	140	210																13.0	172.9	12.2 *	210
150	140	214																0.0	141.4	10.4 *	214
150	160	63	73.0	310.8	43.0 *																63
150	160	70	70.3	308.4	40.1 *																70
150	160	79				70.0	307.3	42.1 *													79
150	160	80	66.4	304.4	35.9 *	69.5	306.8	41.5 *													80
150	160	90	62.5	299.6	31.7 *	65.6	302.6	37.9 *													90
150	160	100	58.3	293.9	27.6 *	61.6	297.7	34.6 *													100
150	160	104							65.0	299.7	37.3 *										104
150	160	110	54.0	287.3	23.9 *	57.4	291.8	30.4 *	62.8	296.9	35.5 *										110
150	160	120	49.5	279.4	20.5 *	53.1	284.8	26.3 *	58.6	291.3	32.4 *										120
150	160	129										60.0	289.9	32.2 *							129
150	160	130	44.6	270.0	17.6 *	48.4	276.7	22.5 *	54.3	284.7	29.5 *	59.8	289.5	31.9 *							130
150	160	140	39.2	258.9	15.0 *	43.4	267.0	19.3 *	49.8	276.9	26.3 *	55.5	283.2	28.6 *							140
150	160	150	33.1	245.2	12.9 *	38.0	255.4	16.4 *	44.9	267.7	21.7 *	51.0	275.7	25.7 *							150
150	160	154													55.0	277.9	22.2 *				154
150	160	160	25.9	227.6	11.0 *	31.7	241.0	13.9 *	39.6	256.7	17.9 *	46.3	266.9	23.3 *	52.1	273.1	20.8 *				160
150	160	170	15.8	201.2	9.6 *	24.0	222.0	11.8 *	33.6	243.3	15.0 *	41.1	256.5	19.5 *	47.4	264.6	18.8 *				170
150	160	176	0.0	157.8	9.2 *																176
150	160	180				12.6	191.8	10.0 *	26.4	226.0	12.7 *	35.3	243.8	15.8 *	42.3	254.6	17.1 *	50.0	263.9	15.5 *	180
150	160	184				0.0	157.0	9.3 *										48.3	260.8	15.0 *	184
150	160	190							16.7	200.7	10.9 *	28.5	227.7	13.0 *	36.7	242.5	15.6 *	43.3	251.1	13.6 *	190

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
150	160	197							0.0	154.7	8.6 *									197	
150	160	200										19.7	205.4	10.7 *	30.2	227.3	13.7 *	37.8	239.4	12.3 *	200
150	160	209										0.0	151.3	7.9 *							209
150	160	210													22.1	207.0	10.9 *	31.5	225.0	11.2 *	210
150	160	220													8.4	170.2	8.6 *	23.8	205.9	10.2 *	220
150	160	222													0.0	146.9	7.4 *				222
150	160	230																12.2	175.1	8.6 *	230
150	160	234																0.0	141.4	7.0 *	234
150	180	69	73.0	329.9	33.3 *																69
150	180	70	72.6	329.5	32.9 *																70
150	180	80	69.2	326.0	30.0 *																80
150	180	85				70.0	326.1	33.0 *													85
150	180	90	65.7	321.9	26.9 *	68.4	324.3	31.6 *													90
150	180	100	62.2	317.0	23.9 *	65.0	320.0	28.6 *													100
150	180	110	58.5	311.3	20.9 *	61.4	315.0	25.9 *													110
150	180	113							65.0	317.8	28.6 *										113
150	180	120	54.7	304.7	18.2 *	57.7	309.1	23.3 *	62.4	314.3	26.6 *										120
150	180	130	50.7	297.1	15.7 *	53.9	302.3	20.5 *	58.8	308.7	24.1 *										130
150	180	139										60.0	307.2	24.8 *							139
150	180	140	46.5	288.3	13.5 *	49.8	294.5	17.7 *	55.0	302.1	21.7 *	59.8	306.9	24.6 *							140
150	180	150	41.9	278.0	11.5 *	45.5	285.3	15.1 *	51.0	294.6	19.4 *	56.0	300.6	22.3 *							150
150	180	160	36.9	265.8	9.8 *	40.8	274.7	12.9 *	46.8	285.9	17.3 *	52.1	293.3	20.1 *							160
150	180	165																			165
150	180	170	31.2	251.0	8.3 *	35.7	262.0	11.0 *	42.2	275.7	14.2 *	47.9	284.9	18.0 *	55.0	294.3	18.8 *				170
150	180	180	24.4	232.0	7.1 *	29.8	246.5	9.2 *	37.3	263.7	11.7 *	43.5	275.2	16.0 *	48.9	282.5	16.1 *				180
150	180	189																50.0	279.2	12.7 *	189
150	180	190	14.9	203.9	6.2 *	22.6	226.2	7.8 *	31.6	249.1	9.8 *	38.6	263.7	12.8 *	44.5	273.1	14.6 *	49.7	278.6	12.6 *	190
150	180	196	0.0	157.8	6.0 *																196
150	180	200				11.9	193.9	6.6 *	24.9	230.5	8.2 *	33.2	249.9	10.4 *	39.8	262.1	13.3 *	45.4	269.5	11.3 *	200
150	180	204				0.0	157.0	6.0 *													204
150	180	210							15.7	203.5	7.0 *	26.8	232.6	8.4 *	34.5	248.9	11.4 *	40.7	258.8	10.2 *	210
150	180	217							0.0	154.7	5.5 *										217
150	180	220										18.6	208.7	6.9 *	28.4	232.6	9.0 *	35.6	246.1	9.2 *	220
150	180	229										0.0	151.3	5.0 *							229
150	180	230													20.8	210.7	7.1 *	29.7	230.4	8.3 *	230
150	180	240													7.9	171.6	5.5 *	22.4	210.0	7.5 *	240
150	180	242													0.0	146.9	4.7 *				242
150	180	250																11.5	177.1	5.5 *	250
150	180	254																0.0	141.4	4.4 *	254
150	200	74	73.0	349.0	25.5 *																74
150	200	80	71.3	347.2	24.3 *																80
150	200	90	68.3	343.6	22.1 *																90
150	200	92				70.0	344.9	25.4 *													92
150	200	100	65.2	339.3	19.9 *	67.6	341.9	23.4 *													100
150	200	110	62.0	334.3	17.7 *	64.5	337.4	20.9 *													110
150	200	120	58.7	328.6	15.5 *	61.3	332.3	18.6 *													120
150	200	121							65.0	336.0	21.2 *										121
150	200	130	55.3	322.1	13.5 *	57.9	326.4	16.5 *	62.2	331.6	19.2 *										130
150	200	140	51.7	314.7	11.6 *	54.5	319.8	14.5 *	58.9	326.0	17.1 *										140
150	200	149										60.0	324.5	17.7 *							149
150	200	150	47.9	306.3	9.9 *	50.9	312.1	12.6 *	55.5	319.5	15.1 *	59.8	324.2	17.6 *							150
150	200	160	44.0	296.6	8.4 *	47.1	303.4	10.8 *	52.0	312.2	13.2 *	56.4	318.0	15.6 *							160
150	200	170	39.7	285.4	7.0 *	43.0	293.5	9.2 *	48.2	303.8	11.5 *	52.9	310.9	13.7 *							170
150	200	176																55.0	310.7	14.7 *	176
150	200	180	34.9	272.3	5.9 *	38.7	281.9	7.7 *	44.3	294.3	9.8 *	49.2	302.8	12.0 *	53.7	308.1	14.1 *				180
150	200	190	29.6	256.4	4.9 *	33.8	268.3	6.3 *	40.0	283.2	8.3 *	45.3	293.6	10.4 *	50.1	300.3	12.4 *				190
150	200	200	23.1	236.2	3.9 *	28.3	251.6	5.0 *	35.3	270.2	6.9 *	41.1	282.9	8.8 *	46.3	291.3	10.8 *				200

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)		
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees					
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
150	200	202																		50.0	294.5	10.1 *	202
150	200	210	14.1	206.5	2.7 *	21.4	230.1	3.7 *	30.0	254.6	5.5 *	36.6	270.5	7.4 *	42.1	281.1	9.3 *	47.0	287.6	9.2 *	210		
150	200	220				11.2	196.0	2.5 *	23.6	234.8	4.3 *	31.5	255.7	6.0 *	37.7	269.1	7.8 *	42.9	277.6	8.2 *	220		
150	200	230							14.9	206.2	3.1 *	25.4	237.2	4.8 *	32.7	254.9	6.5 *	38.6	266.0	7.3 *	230		
150	200	237							0.0	154.7	2.1 *											237	
150	200	240										17.6	211.9	3.6 *	26.9	237.5	5.2 *	33.7	252.3	6.5 *	240		
150	200	249										0.0	151.3	2.3 *								249	
150	200	250													19.7	214.3	4.0 *	28.1	235.6	5.6 *	250		
150	200	260													7.5	173.0	2.8 *	21.2	213.8	4.4 *	260		
150	200	262													0.0	146.9	2.4 *					262	
150	200	270																10.9	179.1	3.0 *	270		
150	200	274																0.0	141.4	2.3 *	274		
160	100	46	73.0	263.4	76.0 *																	46	
160	100	50	70.4	261.9	71.8 *																	50	
160	100	59				70.0	260.9	71.3 *														59	
160	100	60	64.1	257.7	63.4 *	69.3	260.5	70.3 *														60	
160	100	70	57.6	252.2	56.8 *	63.1	256.1	62.3 *														70	
160	100	80	50.5	244.9	47.4 *	56.4	250.2	55.9 *														80	
160	100	81							65.0	255.2	64.5 *											81	
160	100	90	42.6	235.4	39.9 *	49.2	242.7	50.2 *	59.0	250.2	56.1 *											90	
160	100	100	33.3	222.6	33.5 *	41.2	232.7	41.9 *	52.0	243.4	49.1 *											100	
160	100	102										60.0	247.6	47.0 *								102	
160	100	110	20.6	202.9	28.3 *	31.5	219.1	34.7 *	44.3	234.4	46.8 *	54.5	242.4	42.7 *								110	
160	100	116	0.0	167.8	26.1 *																	116	
160	100	120				17.7	197.3	28.8 *	35.4	222.5	41.7 *	47.1	234.3	37.9 *								120	
160	100	122													55.0	238.2	33.4 *					122	
160	100	125				0.0	166.9	26.2 *														125	
160	100	130							23.8	204.8	33.7 *	38.7	223.5	34.0 *	49.6	232.4	30.7 *					130	
160	100	138							0.0	164.6	24.1 *											138	
160	100	140										28.3	208.5	30.7 *	41.5	222.6	27.7 *					140	
160	100	142																50.0	227.0	24.3 *		142	
160	100	150										11.4	180.8	26.8 *	31.9	209.1	25.1 *	43.8	219.6	22.4 *		150	
160	100	152										0.0	161.0	22.1 *								152	
160	100	160													18.4	187.9	22.8 *	34.7	207.4	20.3 *		160	
160	100	165													0.0	156.3	20.3 *					165	
160	100	170																22.8	189.2	18.5 *		170	
160	100	178																0.0	150.4	17.2 *		178	
160	120	52	73.0	282.5	64.5 *																	52	
160	120	60	68.7	279.5	58.4 *																	60	
160	120	66				70.0	279.7	60.4 *														66	
160	120	70	63.5	275.1	51.3 *	67.8	278.0	57.6 *														70	
160	120	80	58.0	269.5	44.0 *	62.6	273.4	51.6 *														80	
160	120	89							65.0	273.3	54.8 *											89	
160	120	90	52.2	262.5	37.4 *	57.0	267.6	45.8 *	64.6	272.9	54.4 *											90	
160	120	100	45.8	253.8	31.6 *	51.1	260.4	40.2 *	59.2	267.6	48.0 *											100	
160	120	110	38.7	242.8	26.8 *	44.7	251.3	33.8 *	53.4	260.9	43.7 *											110	
160	120	112										60.0	264.9	40.6 *								112	
160	120	120	30.3	228.3	22.7 *	37.4	239.9	28.4 *	47.2	252.6	40.2 *	55.5	259.8	36.9 *								120	
160	120	130	18.8	206.3	19.5 *	28.7	224.5	23.8 *	40.3	242.2	34.2 *	49.5	252.2	33.0 *								130	
160	120	134													55.0	254.6	28.4 *					134	
160	120	136	0.0	167.8	18.2 *																	136	
160	120	140				16.1	200.2	20.0 *	32.2	228.5	28.0 *	42.8	242.6	29.7 *	51.4	250.0	26.6 *					140	
160	120	145				0.0	166.9	18.4 *															145
160	120	150							21.7	208.9	23.2 *	35.2	230.2	26.9 *	45.0	241.1	24.0 *					150	
160	120	155																50.0	242.3	20.3 *		155	
160	120	158							0.0	164.6	17.1 *											158	
160	120	160										25.8	213.3	23.4 *	37.8	229.7	21.8 *	46.8	237.8	19.3 *		160	

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)		
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees					
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
160	120	170											10.4	182.7	18.8 *	29.1	214.6	19.9 *	39.8	227.2	17.5 *	170	
160	120	172											0.0	161.0	15.7 *								172
160	120	180														16.8	191.0	18.2 *	31.6	213.3	16.0 *	180	
160	120	185														0.0	156.3	14.5 *				185	
160	120	190																	20.8	193.0	14.6 *	190	
160	120	198																	0.0	150.4	13.5 *	198	
160	140	57	73.0	301.6	52.1 *																	57	
160	140	60	71.8	300.8	50.5 *																	60	
160	140	70	67.5	297.1	45.0 *																	70	
160	140	73				70.0	298.5	51.1 *														73	
160	140	80	63.0	292.5	39.4 *	66.7	295.5	47.3 *														80	
160	140	90	58.3	286.8	34.0 *	62.2	290.8	42.2 *														90	
160	140	98							65.0	291.4	45.4 *											98	
160	140	100	53.3	280.0	29.2 *	57.5	284.9	37.2 *	63.9	290.3	44.4 *											100	
160	140	110	48.0	271.8	24.9 *	52.5	277.9	31.9 *	59.3	284.9	40.6 *											110	
160	140	120	42.3	261.9	21.2 *	47.1	269.5	27.2 *	54.4	278.4	37.2 *											120	
160	140	122										60.0	282.2	35.0 *								122	
160	140	130	35.7	249.5	18.1 *	41.2	259.2	23.0 *	49.2	270.5	33.8 *											130	
160	140	140	28.0	233.5	15.5 *	34.6	246.3	19.5 *	43.5	260.9	28.0 *	51.0	269.9	28.7 *								140	
160	140	145													55.0	270.9	24.1 *					145	
160	140	150	17.4	209.5	13.4 *	26.5	229.4	16.5 *	37.2	249.2	23.0 *	45.6	260.9	25.9 *	52.7	267.6	23.0 *					150	
160	140	156	0.0	167.8	12.6 *																	156	
160	140	160				14.9	202.9	13.9 *	29.8	234.1	19.1 *	39.5	250.0	23.5 *	47.3	259.2	20.8 *					160	
160	140	165				0.0	166.9	12.9 *														165	
160	140	168																	50.0	257.6	16.9 *	168	
160	140	170							20.0	212.5	16.1 *	32.5	236.3	19.8 *	41.5	249.0	18.9 *	48.8	255.8	16.5 *	170		
160	140	178							0.0	164.6	12.0 *											178	
160	140	180										23.9	217.7	16.1 *	34.9	236.3	17.2 *	43.1	246.1	14.9 *	180		
160	140	190										9.7	184.5	13.1 *	26.9	219.6	15.7 *	36.7	234.2	13.6 *	190		
160	140	192										0.0	161.0	11.0 *								192	
160	140	200													15.6	193.8	13.2 *	29.2	218.8	12.4 *	200		
160	140	205													0.0	156.3	10.1 *				205		
160	140	210																19.2	196.5	11.3 *	210		
160	140	218																0.0	150.4	9.4 *	218		
160	160	63	73.0	320.8	40.7 *																	63	
160	160	70	70.4	318.5	38.0 *																	70	
160	160	79				70.0	317.3	41.1 *														79	
160	160	80	66.6	314.6	34.0 *	69.8	317.1	40.9 *														80	
160	160	90	62.6	309.8	30.0 *	65.9	313.0	37.3 *														90	
160	160	100	58.5	304.2	26.1 *	61.9	308.1	33.1 *														100	
160	160	106							65.0	309.5	36.7 *											106	
160	160	110	54.2	297.5	22.6 *	57.8	302.3	29.0 *	63.4	307.7	35.4 *											110	
160	160	120	49.6	289.7	19.4 *	53.4	295.4	25.1 *	59.4	302.2	32.3 *											120	
160	160	130	44.8	280.4	16.6 *	48.8	287.4	21.6 *	55.1	295.8	29.5 *											130	
160	160	132										60.0	299.5	30.2 *								132	
160	160	140	39.4	269.3	14.2 *	43.9	277.9	18.4 *	50.6	288.2	26.8 *	56.6	294.6	27.6 *								140	
160	160	150	33.4	255.8	12.1 *	38.5	266.4	15.6 *	45.8	279.3	22.7 *	52.2	287.4	24.9 *								150	
160	160	157													55.0	287.3	20.4 *					157	
160	160	160	26.1	238.3	10.4 *	32.3	252.3	13.2 *	40.6	268.6	18.6 *	47.5	279.0	22.5 *	53.6	285.1	19.8 *				160		
160	160	170	16.2	212.5	9.0 *	24.8	233.9	11.2 *	34.7	255.7	15.4 *	42.5	269.0	20.4 *	49.0	277.1	17.9 *				170		
160	160	176	0.0	167.8	8.6 *																	176	
160	160	180				13.9	205.5	9.5 *	27.8	239.2	12.9 *	36.9	257.0	16.5 *	44.1	267.6	16.2 *					180	
160	160	181																50.0	273.0	13.8 *		181	
160	160	185				0.0	167.0	8.8 *														185	
160	160	190							18.7	215.9	10.9 *	30.4	241.9	13.4 *	38.7	256.3	14.7 *	45.5	264.5	12.5 *	190		
160	160	198							0.0	164.6	8.2 *											198	
160	160	200										22.3	221.7	10.9 *	32.6	242.3	13.4 *	40.2	253.7	11.4 *	200		

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees			
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	
190	100	86																			86
190	100	90																			90
190	100	100	43.5	266.5	34.6 *	51.2	274.7	44.3 *	62.4	282.7	53.0 *										100
190	100	110	34.3	254.1	29.4 *	43.4	265.5	37.3 *	55.7	276.7	46.2 *										110
190	100	117	22.2	235.5	25.2 *	34.2	253.1	31.4 *	48.5	268.9	43.2 *	60.0	276.6	39.1 *							117
190	100	120	0.0	197.7	23.1 *																120
190	100	127				22.1	234.4	26.4 *	40.3	258.7	39.3 *	53.0	269.8	34.6 *							127
190	100	130				0.0	196.8	23.4 *													130
190	100	133							30.3	244.6	32.8 *	45.4	261.1	30.9 *							133
190	100	140							15.6	221.0	26.7 *	36.6	249.6	27.9 *	55.0	266.4	26.0 *				140
190	100	144							0.0	194.1	21.5 *				49.8	260.8	24.1 *				144
190	100	150										25.5	233.0	25.2 *	41.8	251.0	21.8 *				150
190	100	155																50.0	254.2	17.6 *	155
190	100	160										0.0	190.0	18.7 *	32.2	237.8	19.7 *	46.0	249.5	16.7 *	160
190	100	170													18.9	216.8	18.0 *	37.3	238.2	15.1 *	170
190	100	175													0.0	184.5	16.4 *				175
190	100	180																26.5	222.2	13.7 *	180
190	100	190																5.7	187.6	12.4 *	190
190	120	52	73.0	312.5	53.7 *																52
190	120	60	69.2	309.9	49.0 *																60
190	120	68				70.0	309.6	51.8 *													68
190	120	70	64.0	305.6	43.0 *	69.2	309.0	50.9 *													70
190	120	80	58.6	300.1	37.2 *	64.0	304.6	45.0 *													80
190	120	90	52.8	293.3	31.9 *	58.5	299.1	40.8 *													90
190	120	94							65.0	302.8	47.3 *										94
190	120	100	46.5	284.8	27.2 *	52.7	292.3	35.1 *	62.0	300.1	43.9 *										100
190	120	110	39.5	274.1	23.2 *	46.5	283.8	29.9 *	56.5	294.1	40.0 *										110
190	120	120	31.3	260.0	19.8 *	39.4	273.0	25.3 *	50.5	286.7	36.7 *	60.0	293.9	33.6 *							120
190	120	130	20.3	239.3	17.1 *	31.2	258.9	21.4 *	44.0	277.5	32.8 *	54.2	287.2	29.9 *							130
190	120	137	0.0	197.7	15.9 *																137
190	120	140				20.1	238.1	18.1 *	36.6	265.7	27.5 *	48.0	279.2	26.8 *							140
190	120	144													55.0	282.7	22.0 *				144
190	120	147				0.0	196.8	16.2 *													147
190	120	150							27.6	249.7	22.8 *	41.2	269.0	24.2 *	51.6	278.4	20.7 *				150
190	120	160							14.2	223.6	18.7 *	33.3	255.9	22.0 *	45.2	269.5	18.7 *				160
190	120	164							0.0	194.1	15.2 *										164
190	120	168																50.0	269.5	14.3 *	168
190	120	170										23.3	237.3	20.0 *	38.0	258.3	17.0 *	48.5	267.5	14.0 *	170
190	120	180										0.0	190.0	13.2 *	29.3	243.2	15.4 *	41.8	257.5	12.6 *	180
190	120	190													17.2	220.0	14.1 *	34.0	244.7	11.5 *	190
190	120	195													0.0	184.5	11.5 *				195
190	120	200																24.1	226.7	10.4 *	200
190	120	210																5.2	188.5	9.4 *	210
190	140	58	73.0	331.6	42.7 *																58
190	140	60	72.3	331.1	42.0 *																60
190	140	70	67.9	327.5	37.5 *																70
190	140	75				70.0	328.4	43.2 *													75
190	140	80	63.4	323.0	32.9 *	67.9	326.5	41.3 *													80
190	140	90	58.8	317.5	28.6 *	63.4	322.0	36.7 *													90
190	140	100	53.9	310.8	24.7 *	58.7	316.5	32.1 *													100
190	140	103							65.0	321.0	39.4 *										103
190	140	110	48.6	302.8	21.2 *	53.8	309.8	27.7 *	61.7	317.4	37.0 *										110
190	140	120	42.9	293.0	18.1 *	48.6	301.7	23.8 *	57.0	311.5	33.8 *										120
190	140	130	36.5	281.0	15.5 *	42.8	292.0	20.2 *	51.9	304.3	31.1 *	60.0	311.2	28.9 *							130
190	140	140	28.9	265.4	13.2 *	36.4	279.9	17.2 *	46.5	295.7	26.9 *	55.0	304.7	25.8 *							140
190	140	150	18.7	242.7	11.5 *	28.8	264.3	14.6 *	40.6	285.2	22.8 *	49.9	297.0	23.2 *							150
190	140	156													55.0	299.1	18.4 *				156

298HSL Over End Blocked Capacities - Luffing Jib
68" x 80" Luffing Boom, 50" x 60" Luffing Jib, ABCDE + A Counterweight

Luffing Boom Length (ft)	Luffing Jib Length (ft)	Load Radius (ft)	Luffing Boom Angle																		Load Radius (ft)		
			88 Degrees			85 Degrees			80 Degrees			75 Degrees			70 Degrees			65 Degrees					
			Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)	Jib Angle (deg)	Tip Height (ft)	Capacity (kips)			
190	140	157	0.0	197.7	10.7 *																		157
190	140	160				18.6	241.5	12.3 *	33.8	272.0	19.1 *	44.3	287.7	21.0 *	52.8	296.0	17.6 *						160
190	140	167				0.0	196.8	11.1 *															167
190	140	170							25.5	254.5	15.9 *	38.0	276.2	19.1 *	47.5	287.6	15.9 *						170
190	140	180							13.2	226.0	13.0 *	30.8	261.7	17.2 *	41.7	277.5	14.4 *	50.0	284.8	11.5 *			180
190	140	184							0.0	194.1	10.5 *												184
190	140	190										21.5	241.3	13.7 *	35.1	264.9	13.1 *	44.7	276.1	10.4 *			190
190	140	200										0.0	190.0	9.0 *	27.1	248.3	11.9 *	38.5	264.8	9.3 *			200
190	140	210													16.0	222.9	10.8 *	31.4	250.5	8.4 *			210
190	140	215													0.0	184.5	7.7 *						215
190	140	220																22.3	230.8	7.6 *			220
190	140	230																4.8	189.4	6.8 *			230
190	160	64	73.0	350.7	33.7 *																		64
190	160	70	70.8	348.8	31.7 *																		70
190	160	80	67.0	345.0	28.4 *																		80
190	160	82				70.0	347.1	34.5 *															82
190	160	90	63.0	340.3	25.0 *	66.9	344.0	31.8 *															90
190	160	100	58.9	334.8	21.8 *	63.0	339.3	28.4 *															100
190	160	110	54.6	328.2	18.8 *	58.9	333.8	24.9 *															110
190	160	111							65.0	339.1	33.4 *												111
190	160	120	50.1	320.5	16.1 *	54.6	327.2	21.6 *	61.5	334.7	31.0 *												120
190	160	130	45.3	311.4	13.8 *	50.1	319.5	18.6 *	57.4	328.8	28.5 *												130
190	160	140	40.0	300.6	11.7 *	45.2	310.4	15.9 *	53.0	321.9	25.3 *	60.0	328.5	24.8 *									140
190	160	150	34.0	287.3	9.9 *	39.9	299.5	13.5 *	48.4	313.7	21.8 *	55.7	322.1	22.1 *									150
190	160	160	27.0	270.3	8.5 *	34.0	286.2	11.4 *	43.4	304.0	18.6 *	51.2	314.7	19.9 *									160
190	160	167													55.0	315.5	15.3 *						167
190	160	170	17.5	245.9	7.3 *	26.9	269.2	9.6 *	37.9	292.3	15.7 *	46.4	305.9	18.0 *	53.8	313.5	14.8 *						170
190	160	177	0.0	197.8	6.9 *																		177
190	160	180				17.4	244.7	8.1 *	31.6	277.9	13.1 *	41.3	295.5	16.4 *	49.2	305.5	13.3 *						180
190	160	187				0.0	196.8	7.2 *															187
190	160	190							23.9	258.8	10.8 *	35.5	282.9	14.3 *	44.3	296.1	12.0 *						190
190	160	193													50.0	300.2	8.9 *						193
190	160	200							12.3	228.2	8.8 *	28.8	267.0	11.4 *	38.9	284.8	10.9 *	46.8	294.3	8.3 *			200
190	160	204							0.0	194.1	6.9 *												204
190	160	210										20.1	245.0	9.0 *	32.7	270.9	9.8 *	41.7	284.0	7.3 *			210
190	160	220										0.0	190.0	5.8 *	25.3	252.9	8.9 *	36.0	271.6	6.5 *			220
190	160	230													14.9	225.6	7.1 *	29.3	255.9	5.8 *			230
190	160	235													0.0	184.5	4.8 *						235
190	160	240																20.9	234.6	5.1 *			240
190	160	250																4.5	190.2	4.5 *			250

Link-Belt Construction Equipment Company Lexington, Kentucky www.linkbelt.com

®Link-Belt is a registered trademark. Copyright 2008. We are constantly improving our products and therefore reserve the right to change designs and specifications.