
Electrosurgery



NON-STICK red

The new bipolar forceps from KLS Martin – with NON-STICK effect and a revolutionary ergonomic design

revolutionary ergonomic design

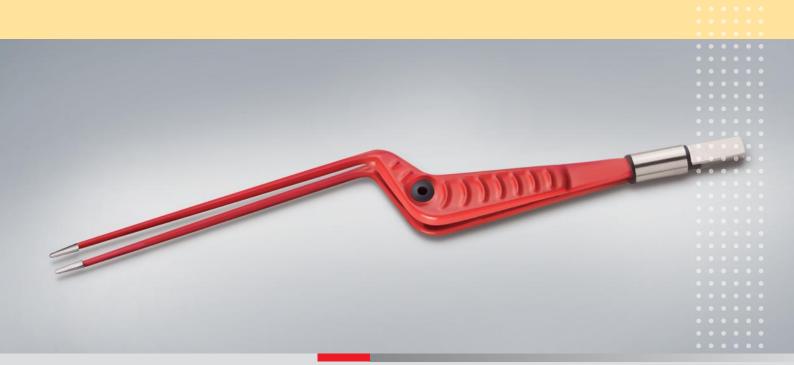



The new bipolar forceps

from KLS Martin – with NON-STICK effect and a revolutionary ergonomic design



"With the new KLS Martin bipolar NON-STICK **red** forceps, tissue sticking to the tips of the instrument is definitely a problem of the past.

Especially for operations involving extremely fine dissection (such as parotid and thyroid interventions or microvascular tissue transfer), the use of this new generation of bipolar forceps provides significant advantages due to their exceptional haptic quality: minimized risk of procedures, gentler operating technique and shorter operating times. The tips of the instrument need to be cleaned considerably less often during interventions and the cleaning process itself is much faster as well.

We simply wouldn't like to do without these forceps."

Dr. Paul-Stefan Mauz (M.D.) Senior Consultant Tübingen University Hospital Department of Otorhinolaryngology

> **r**evolutionary ergonomic design

The new generation of bipolar forceps with NON-STICK effect and a revolutionary ergonomic design


The new generation of bipolar forceps

Who hasn't encountered this everyday operating situation when working with conventional bipolar forceps? The tissue tends to stick to the tips of the instrument during coagulation and when withdrawing the instrument, the coagulated tissue is torn open again.


The result is renewed bleeding. Now, this unwelcome effect can be prevented by using KLS Martin NON-STICK **red**, the new and innovative generation of bipolar forceps – the coagulated tissue is no longer disrupted when opening the instrument.

What's more, the cumbersome and time-consuming process of cleaning the tips of the forceps during operations is largely eliminated at the same time. This means fewer interruptions of the surgical procedure and corresponding time savings.





Coagulating produces so-called "hot spots".



This prevents the tissue from sticking to the tips of the forceps.







Standard forceps

Coagulating produces so-called "hot spots".

As the heat cannot be discharged, overheating is the inevitable result.

Tissue tends to stick to the tips of the forceps. When opening the instrument, charred tissue is torn off in the process.




Improved heat conductivity

A special feature does the trick – polished noble-metal tips offering excellent heat conductivity. Thanks to this property, the tissue cannot adhere to the tips of the forceps.

The heat is discharged from the tips quickly and effectively. And what's more, the NON-STICK effect will last because the tips are not merely coated, but made of solid noble metal.

Variety of models

The new bipolar NON-STICK **red** forceps from KLS Martin are available in all usual sizes for the most diverse fields of use.

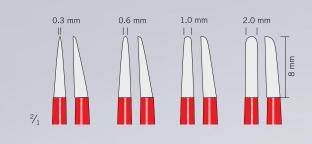

The tips of the forceps

The tips are precision-made and available in different sizes for extremely accurate surgical use. By adjusting the pressure applied, the user can coagulate merely with the tips or by using the full surfaces.

The polished noble-metal tips are excellent heat conductors preventing tissue adhesion.





marSIGHT

The special geometry of the forceps tips gives the surgeon an unobstructed view of the surgical site and the tissue to be coagulated. Moreover, the tips enable you to grasp tissue with utmost precision. Don't miss out on the experience!

The models featuring tips with marSIGHT geometry are clearly marked in this brochure.



Guiding mechanism


The guiding mechanism ensures the accurate, highly parallel closure of the pre-tensioned forceps and prevents "tip spread" as well. This, in turn, prevents fatigue in the user's hand and facilitates the dissecting process.

Connection

The bipolar NON-STICK **red** forceps can be used with any commonly available HF generator. Special connecting cables are available for this purpose.

marGRiP

The ergonomic handle surface provides for secure handling and prevents fatigue in the user's hand.



Shank geometry

Thanks to the view-optimized geometry of the shanks of the forceps, the surgeon's hand and the cable connector are kept out of the surgical field. This is particularly advantageous when working under the operating microscope.



Bipolar forceps, KLS Martin NON-STICK **r** e d, straight

| | | Tip width | Length | Item No. |
|--|--------|-----------|--|--------------|
| | | | | |
| marSIGHT tip | 0.3 mm | pointed | | |
| \square | | 0.3 mm | 12 cm/4 ¾" | 80-982-12-04 |
| /// | | 0.3 mm | 17 cm/6 ¼" | 80-982-17-04 |
| / // \ | | 0.3 mm | 20 cm/8" | 80-982-20-04 |
| / / \ \ | | 0.3 mm | 23 cm/9" | 80-982-23-04 |
| 2/1 | | | | |
| marSIGHT tip | 0.6 mm | blunt | | |
| \square | | 0.6 mm | 12 cm/4 ¾" | 80-984-12-04 |
| | | 0.6 mm | 17 cm/6 ¼" | 80-984-17-04 |
| / // \ | | 0.6 mm | 20 cm/8" | 80-984-20-04 |
| 2/1 Standard tip | 1.0 mm | blunt | | |
| Stanuaru tip | 1.0 mm | 1.0 mm | 12 cm/4 ¾ | 80-986-12-04 |
| \square | ΛŊΤ | 1.0 mm | $12 \text{ cm}/4 /_4$ $17 \text{ cm}/6 \frac{1}{4}$ " | 80-986-17-04 |
| / / \ | | 1.0 mm | 20 cm/8" | 80-986-20-04 |
| | | 1.0 mm | 20 cm/8 23 cm/9" | 80-986-23-04 |
| | | 1.0 11111 | 23 CHI/ 9 | 80-980-23-04 |
| ² ∕ ₁ I ■ | 2.0 mm | blunt | | |
| | | 2.0 mm | 17 cm/6 ¼" | 80-988-17-04 |
| () | | 2.0 mm | 20 cm/8" | 80-988-20-04 |
| | E E | 2.0 mm | 23 cm/9" | 80-988-23-04 |
| 2/1 | | | | |

 $1/_{1}$

80-982-12-04 12 cm/4 ¾" pointed, 0.3 mm

Example illustration



Bipolar forceps, KLS Martin NON-STICK **r** e d, angled

| Standard tip 3 mm 3 | | Tip width | Length | Item No. |
|--|-----------------------|-----------|---------------------------------------|--------------|
| 0.3 mm 12 cm/4 ¼* 80-983-12-04 0.3 mm 17 cm/6 ¼* 80-983-17-04 0.3 mm 17 cm/6 ¼* 80-983-17-04 0.3 mm 17 cm/6 ¼* 80-983-17-04 0.6 mm 0.6 mm 12 cm/4 ¾* 80-985-12-04 0.6 mm 0.6 mm 12 cm/4 ¾* 80-985-12-04 0.6 mm 12 cm/4 ¾* 80-985-12-04 0.6 mm 0.6 mm 10 cm/8* 80-985-20-04 0.6 mm 1.0 mm 10 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 10 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 12 cm/4 ¾* 80-987-20-04 1.0 mm 1.0 mm 20 cm/8* 80-987-23-04 1.0 mm 2.0 mm 2.0 mm 17 cm/6 ¼* 80-989-17-04 2.0 mm 2.0 cm/8* 80-989-20-04 2.0 mm 2.0 cm/8* 80-989-23-04 2.0 mm 2.0 cm/8* 80-989-23-04 | | | | |
| 0.3 mm 17 cm/6 ¼* 80-983-17-04 0.6 mm 0.6 mm 0.6 mm 0.6 mm 12 cm/4 ¾* 80-985-12-04 0.6 mm 17 cm/6 ¼* 80-985-12-04 0.6 mm 17 cm/6 ¼* 80-985-12-04 0.6 mm 10 cm 10 mm 1.0 mm 2.0 | Standard tip | pointed | | |
| Standard tip 0.6 mm blunt 0.6 mm 0.6 mm 12 cm/4 ¼* 80-985-12-04 0.6 mm 0.6 mm 17 cm/6 ¼* 80-985-17-04 0.6 mm 17 cm/6 ¼* 80-985-17-04 0.6 mm 20 cm/8* 80-985-20-04 Standard tip 1.0 mm 20 cm/8* 80-987-12-04 1.0 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 1.0 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 1.0 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 1.0 mm 1.0 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 1.0 mm 20 cm/8* 80-987-12-04 1.0 mm 12 cm/4 ¾* 80-987-20-04 1.0 mm 20 cm/8* 80-987-20-04 1.0 mm 20 cm/8* 80-987-23-04 1.0 mm 23 cm/9* 80-989-17-04 2.0 mm 2.0 mm 21 cm/9* 80-989-17-04 2.0 mm 20 cm/8* 80-989-20-04 2.0 mm 20 cm/8* 80-989-23-04 2.0 mm 20 cm/9* 80-989-23-04 2.0 mm 22 cm/9* 80-989- | 0.3 mm 2 8 | 0.3 mm | 12 cm/4 ¾" | 80-983-12-04 |
| Standard tip 0.6 mm blunt 0.6 mm 0.6 mm 12 cm/4 ¼* 80-985-12-04 0.6 mm 0.6 mm 17 cm/6 ¼* 80-985-17-04 0.6 mm 17 cm/6 ¼* 80-985-17-04 0.6 mm 20 cm/8* 80-985-20-04 Standard tip 1.0 mm 20 cm/8* 80-987-12-04 1.0 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 1.0 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 1.0 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 1.0 mm 1.0 mm 12 cm/4 ¾* 80-987-12-04 1.0 mm 1.0 mm 20 cm/8* 80-987-12-04 1.0 mm 12 cm/4 ¾* 80-987-20-04 1.0 mm 20 cm/8* 80-987-20-04 1.0 mm 20 cm/8* 80-987-23-04 1.0 mm 23 cm/9* 80-989-17-04 2.0 mm 2.0 mm 21 cm/9* 80-989-17-04 2.0 mm 20 cm/8* 80-989-20-04 2.0 mm 20 cm/8* 80-989-23-04 2.0 mm 20 cm/9* 80-989-23-04 2.0 mm 22 cm/9* 80-989- | 1/ 133 | 0.3 mm | 17 cm/6 ¼" | 80-983-17-04 |
| 0.6 mm 0.6 mm 0.6 mm 12 cm/4 ³ /4" 80-985-12-04 0.6 mm 17 cm/6 ¹ /4" 80-985-17-04 0.6 mm 20 cm/8" 80-985-20-04 1.0 mm 1.0 mm 1.0 mm 1.0 mm 1.0 mm 1.0 mm 2.0 m | | | | |
| 0.6 mm 20 cm/8" 80-985-20-04 2/1 blunt 1.0 mm 1.0 mm 12 cm/4 ¾" 80-987-12-04 1.0 mm 1.0 mm 17 cm/6 ¼" 80-987-12-04 1.0 mm 1.0 mm 17 cm/6 ¼" 80-987-12-04 1.0 mm 10 mm 17 cm/6 ¼" 80-987-12-04 1.0 mm 20 cm/8" 80-987-12-04 1.0 mm 10 mm 12 cm/4 ¾" 80-987-12-04 1.0 mm 20 cm/8" 80-987-12-04 1.0 mm 20 cm/8" 80-987-12-04 1.0 mm 20 cm/8" 80-987-20-04 1.0 mm 20 cm/8" 80-987-20-04 1.0 mm 23 cm/9" 80-989-17-04 2.0 mm 2.0 mm 17 cm/6 ¼" 80-989-20-04 2.0 mm 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 2.0 mm 23 cm/9" 80-989-25-04 2.0 mm 2.0 mm 28 cm/11" 80-989-28-04 | Standard tip | blunt | | |
| 0.6 mm 20 cm/8" 80-985-20-04 2/1 blunt 1.0 mm 1.0 mm 12 cm/4 ¾" 80-987-12-04 1.0 mm 1.0 mm 17 cm/6 ¼" 80-987-12-04 1.0 mm 1.0 mm 17 cm/6 ¼" 80-987-12-04 1.0 mm 10 mm 17 cm/6 ¼" 80-987-12-04 1.0 mm 20 cm/8" 80-987-12-04 1.0 mm 10 mm 12 cm/4 ¾" 80-987-12-04 1.0 mm 20 cm/8" 80-987-12-04 1.0 mm 20 cm/8" 80-987-12-04 1.0 mm 20 cm/8" 80-987-20-04 1.0 mm 20 cm/8" 80-987-20-04 1.0 mm 23 cm/9" 80-989-17-04 2.0 mm 2.0 mm 17 cm/6 ¼" 80-989-20-04 2.0 mm 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 2.0 mm 23 cm/9" 80-989-25-04 2.0 mm 2.0 mm 28 cm/11" 80-989-28-04 | 0.6 mm | 0.6 mm | 12 cm/4 ³ / ₄ " | 80-985-12-04 |
| 2/1 blunt 1.0 mm 1.0 mm 1.0 mm 1.0 mm 2/1 1.0 mm 1.0 mm 12 cm/4 ¾" 80-987-12-04 1.0 mm 17 cm/6 ¼" 80-987-20-04 1.0 mm 20 cm/8" 2/1 80-987-23-04 1.0 mm 23 cm/9" 80-987-23-04 1.0 mm 23 cm/9" 80-989-17-04 2.0 mm 17 cm/6 ¼" 2.0 mm 17 cm/6 ¼" 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 2.0 mm 23 cm/9" 80-989-25-04 2.0 mm 2.0 mm 28 cm/11" | 1/ 1/33 | 0.6 mm | 17 cm/6 ¼" | 80-985-17-04 |
| Standard tip blunt 1.0 mm 12 cm/4 ¾" 80-987-12-04 1.0 mm 17 cm/6 ¼" 80-987-17-04 1.0 mm 20 cm/8" 80-987-20-04 1.0 mm 20 cm/8" 80-987-23-04 1.0 mm 23 cm/9" 80-987-23-04 Standard tip 2.0 mm 2.0 mm 17 cm/6 ¼" 80-989-17-04 2.0 mm 2.0 cm/8" 80-989-20-04 2.0 mm 2.0 cm/8" 80-989-20-04 2.0 mm 20 cm/8" 80-989-23-04 2.0 mm 2.0 cm/9" 80-989-23-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 2.0 cm/9 ¾" 80-989-23-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 23 cm/9" 80-989-23-04 | | 0.6 mm | 20 cm/8" | 80-985-20-04 |
| 1.0 mm 12 cm/4 ¾" 80-987-12-04 1.0 mm 17 cm/6 ¼" 80-987-17-04 1.0 mm 17 cm/6 ¼" 80-987-20-04 1.0 mm 20 cm/8" 80-987-23-04 1.0 mm 23 cm/9" 80-987-23-04 1.0 mm 23 cm/9" 80-987-23-04 2.0 mm 2.0 mm 17 cm/6 ¼" 80-989-17-04 2.0 mm 2.0 mm 17 cm/6 ¼" 80-989-20-04 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 25 cm/9 ¾" 80-989-25-04 2.0 mm 28 cm/11" 80-989-28-04 | | | | |
| 1.0 mm 17 cm/6 ¼" 80-987-17-04 1.0 mm 20 cm/8" 80-987-20-04 1.0 mm 20 cm/8" 80-987-23-04 1.0 mm 23 cm/9" 80-987-23-04 1.0 mm 23 cm/9" 80-987-23-04 2.0 mm 2.0 mm 17 cm/6 ¼" 80-989-23-04 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 2.0 mm 25 cm/9 ¾" 80-989-25-04 2.0 mm 28 cm/11" 80-989-28-04 | • / | | | |
| 1.0 mm 20 cm/8" 80-987-20-04 1.0 mm 23 cm/9" 80-987-23-04 1.0 mm 23 cm/9" 80-987-23-04 2/1 blunt 20 cm/8" 80-989-17-04 2.0 mm 2.0 mm 17 cm/6 ¼" 80-989-20-04 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 25 cm/9 ¾" 80-989-25-04 2.0 mm 28 cm/11" 80-989-28-04 | 1.0 mm | | | |
| 1.0 mm 23 cm/9" 80-987-23-04 2/1 1.0 mm 23 cm/9" 80-987-23-04 Standard tip 10 mm 10 mm 10 mm 2.0 mm 10 mm 10 mm 10 mm 2.0 mm 10 mm 10 mm 10 mm 2.0 mm 10 cm/6 ¼° 80-989-17-04 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 23 cm/9" 80-989-25-04 2.0 mm 25 cm/9 ¾° 80-989-25-04 2.0 mm 28 cm/11" 80-989-28-04 | 1 (1/3 ³) | | | |
| 2.0 mm 2.0 mm | | | | |
| Standard tip blunt 2.0 mm 2.0 mm 17 cm/6 ¼" 80-989-17-04 2.0 mm 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 20 cm/9" 80-989-23-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 25 cm/9 ¾" 80-989-25-04 2.0 mm 28 cm/11" 80-989-28-04 | | 1.0 mm | 23 cm/9" | 80-987-23-04 |
| 2.0 mm 2.0 mm | 2/1 | | | |
| 2.0 mm 20 cm/8" 80-989-20-04 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 25 cm/9 ¾" 80-989-25-04 2.0 mm 28 cm/11" 80-989-28-04 | Standard tip | blunt | | |
| 2.0 mm 23 cm/9" 80-989-23-04 2.0 mm 25 cm/9 ¾" 80-989-25-04 2.0 mm 28 cm/11" 80-989-28-04 | 2.0 mm | 2.0 mm | 17 cm/6 ¼" | 80-989-17-04 |
| 2.0 mm 25 cm/9 ¾" 80-989-25-04 2.0 mm 28 cm/11" 80-989-28-04 | 1 1 33 | 2.0 mm | 20 cm/8" | 80-989-20-04 |
| 2.0 mm 28 cm/11" 80-989-28-04 | | 2.0 mm | | 80-989-23-04 |
| | | 2.0 mm | 25 cm/9 ¾" | 80-989-25-04 |
| 2/1 | | 2.0 mm | 28 cm/11" | 80-989-28-04 |
| | 2/1 | | | |



 $1/_{1}$

Example illustration




Bipolar forceps, KLS Martin NON-STICK **r e d**, bayonet-shaped

| | | Tip width | Length | Item No. |
|--------------|--------|-----------|------------|--------------|
| | | | | |
| marSIGHT tip | 0.3 mm | pointed | | |
| Л | | 0.3 mm | 17 cm/6 ¼" | 80-990-17-04 |
| /// | | 0.3 mm | 20 cm/8" | 80-990-20-04 |
| / // \ | | 0.3 mm | 23 cm/9" | 80-990-23-04 |
| / / \ \ | | 0.3 mm | 25 cm/9 ¾" | 80-990-25-04 |
| 2/1 | | | | |
| marSIGHT tip | 0.6 mm | blunt | | |
| \square | | 0.6 mm | 17 cm/6 ¼" | 80-991-17-04 |
| //\\ | | 0.6 mm | 20 cm/8" | 80-991-20-04 |
| / \ | | 0.6 mm | 23 cm/9" | 80-991-23-04 |
| / // \ | | 0.6 mm | 25 cm/9 ¾" | 80-991-25-04 |
| 2/1 | | | | |
| Standard tip | 1.0 mm | blunt | | |
| \square | | 1.0 mm | 17 cm/6 ¼" | 80-992-17-04 |
| | | 1.0 mm | 20 cm/8" | 80-992-20-04 |
| / \ | | 1.0 mm | 23 cm/9" | 80-992-23-04 |
| | | 1.0 mm | 25 cm/9 ¾" | 80-992-25-04 |
| 2/1 | | | | |
| Standard tip | 2.0 mm | blunt | | |
| | | 2.0 mm | 17 cm/6 ¼" | 80-993-17-04 |
| | | 2.0 mm | 20 cm/8" | 80-993-20-04 |
| | | 2.0 mm | 23 cm/9" | 80-993-23-04 |
| | | 2.0 mm | 25 cm/9 ¾" | 80-993-25-04 |
| 2/1 | | | | |

Example illustration





Bipolar forceps, KLS Martin NON-STICK **r e d**, bayonet-shaped, angled

| Standard tip 0.6 mm 23 cm/9* 80-997-23-04 0.6 mm 25 cm/9 ¾* 80-997-25-04 0.6 mm 25 cm/9 ¾* 80-997-25-04 Standard tip 0.6 mm 25 cm/9 ¾* 0.6 mm 23 cm/9* 80-997-25-04 Standard tip 0.6 mm 23 cm/9* 0.6 mm 23 cm/9* 80-996-23-04 0.6 mm 23 cm/9* 80-996-23-04 0.6 mm 25 cm/9 ¾* 80-996-23-04 0.6 mm 25 cm/9 ¾* 80-996-25-04 Standard tip blunt 5 cm/9 ¾* Standard tip blunt 5 cm/9 ¾* | Item No. |
|--|---------------------|
| 0.6 mm 0.6 mm 23 cm/9* 80-997-23-04 0.6 mm 25 cm/9* 80-997-25-04 2/1 0.6 mm 25 cm/9* 80-997-25-04 Standard tip blunt 0.6 mm 23 cm/9* 80-997-25-04 0.6 mm 0.6 mm 23 cm/9* 80-997-25-04 0.6 mm 0.6 mm 23 cm/9* 80-996-23-04 0.6 mm 23 cm/9* 80-996-23-04 0.6 mm 25 cm/9 ¾* 80-996-25-04 5tandard tip blunt 5 cm/9 ¾* 80-996-25-04 | |
| 0.6 mm 25 cm/9 ¾* 80-997-25-04 2/1 Standard tip 0.6 mm 25 cm/9 ¾* 80-997-25-04 blunt 0.6 mm 23 cm/9* 80-996-23-04 0.6 mm 25 cm/9 ¾* 80-996-25-04 blunt bl | |
| Standard tip blunt 0.6 mm 23 cm/9" 80-996-23-04 0.6 mm 25 cm/9 ¾" 80-996-25-04 Virtual 0.6 mm 25 cm/9 ¾" Standard tip blunt blunt | |
| Standard tip blunt 0.6 mm 23 cm/9" 80-996-23-04 0.6 mm 25 cm/9 ¾" 80-996-25-04 y y 80-996-25-04 Standard tip blunt blunt | 3 ¾" 80-997-25-04 |
| 0.6 mm 23 cm/9" 80-996-23-04 0.6 mm 25 cm/9 ³ /4" 80-996-25-04 0.6 mm 25 cm/9 ³ /4" 80-996-25-04 Standard tip blunt | |
| Order Order <th< th=""><th></th></th<> | |
| Y1 Standard tip | 80-996-23-04 |
| Y1 Standard tip | 9 3/4" 80-996-25-04 |
| | |
| | |
| 1.0 mm 20 cm/8" 80-994-20-04 | |
| 1.0 mm 23 cm/9" 80-994-23-04 1.0 mm 23 cm/9" 80-994-23-04 | |
| 1.0 mm 25 cm/9 ¾* 80-994-25-04 | } %" 80-994-25-04 |
| Standard tip blunt | |
| 1.0 mm 1.0 mm 20 cm/8" 80-995-20-04 | 3" 80-995-20-04 |
| 1.0 mm 1.0 mm 20 cm/8* 80-995-20-04 % ^{ft} 1.0 mm 23 cm/9* 80-995-23-04 | 9" 80-995-23-04 |
| 1.0 mm 25 cm/9 ¾" 80-995-25-04 | 34" 80-995-25-04 |
| 2/1 | |

Example illustration



Connecting cables for bipolar forceps with angled plugs



80-291-40-04 4 m/13 ft. Connecting cable for bipolar instruments for KLS Martin and Berchtold HF units



80-286-40-04 4 m/13 ft. Connecting cable for bipolar instruments for maxium® "e"-version / Erbe HF units ICC and ACC/VIO



80-293-40-04 4 m/13 ft. Connecting cable for bipolar instruments for maxium® "i"-version, ME MB2 "i"-version / Valleylab HF units





The respectful treatment of people, society and the environment has always been a matter of course to us. By design, most of our products can be recycled and used over many years, thus saving resources and reducing waste. Environment-friendly and recyclable materials are used also for our production processes, and energy and water consumption monitoring is a top priority as well. A case in point: our largest manufacturing site includes a heat recovery plant for efficient energy utilization. These and many other measures are clear evidence of our environmental commitment.

For further information, please refer to separate GoGreen brochure.

Should you have any questions... ...we'll be glad to answer them!

You can reach us in person either by e-mail or phone: E-mail: info@klsmartin.com Hotline: ++49 7461 706-0



For an overview of the whole range of KLS Martin HF products, please refer to our Catalog "Accessories for electrosurgery".

Printed version (90-302-48-07)

KLS Martin Group

Karl Leibinger GmbH & Co. KG 78570 Mühlheim · Germany Tel. +49 7463 838-0 info@klsmartin.com

KLS Martin GmbH + Co. KG 79224 Umkirch · Germany Tel. +49 7665 98 02-0 info@klsmartin.com

Stuckenbrock Medizintechnik GmbH 78532 Tuttlingen · Germany Tel. +49 7461 165880 verwaltung@stuckenbrock.de

Rudolf Buck GmbH 78570 Mühlheim · Germany Tel. +49 74 63 99 516-30 info@klsmartin.com KLS Martin France SARL 68000 Colmar · France Tel. +33 3 89 21 66 01 france@klsmartin.com

Martin Italia S.r.I. 20871 Vimercate (MB) · Italy Tel. +39 039 605 6731 italia@klsmartin.com

Martin Nederland/Marned B.V. 1270 AG Huizen · The Netherlands Tel. +31 35 523 45 38 nederland@klsmartin.com

KLS Martin UK Ltd. Reading RG1 3EU · United Kingdom Tel. +44 1189 000 570 uk@klsmartin.com Nippon Martin K.K. Osaka 541-0046 · Japan Tel. +81 6 62 28 9075 nippon@klsmartin.com

KLS Martin L.P. Jacksonville, FI 32246 · USA Tel. +1 904 641 77 46 usa@klsmartin.com

Gebrüder Martin GmbH & Co. KG Representative Office 121471 Moscow · Russia Tel. +7 499 792-76-19 russia@klsmartin.com

Gebrüder Martin GmbH & Co. KG Representative Office 201203 Shanghai · China Tel. +86 21 2898 6611 china@klsmartin.com Gebrüder Martin GmbH & Co. KG Representative Office Dubai · United Arab Emirates Tel. +971 4 454 16 55 middleeast@klsmartin.com

Gebrüder Martin GmbH & Co. KG A company of the KLS Martin Group Ludwigstaler Str. 132 · 78532 Tuttlingen · Germany Postfach 60 · 78501 Tuttlingen · Germany Tel. +49 7461 706-0 · Fax +49 7461 706-193 info@klsmartin.com · www.klsmartin.com