



Loeffler Shoes

959 Payne Avenue
St Paul MN 55130

(651) 771-3833

info@loefflershoes.com

LoefflerShoes.com


*"The original
and still
the best!"*



Safety & Occupational Footwear Catalog

Loeffler Shoes
959 Payne Avenue
St Paul MN 55130

(651) 771-3833 Office
(651) 771-6409 Fax
info@loefflershoes.com
www.LoefflerShoes.com

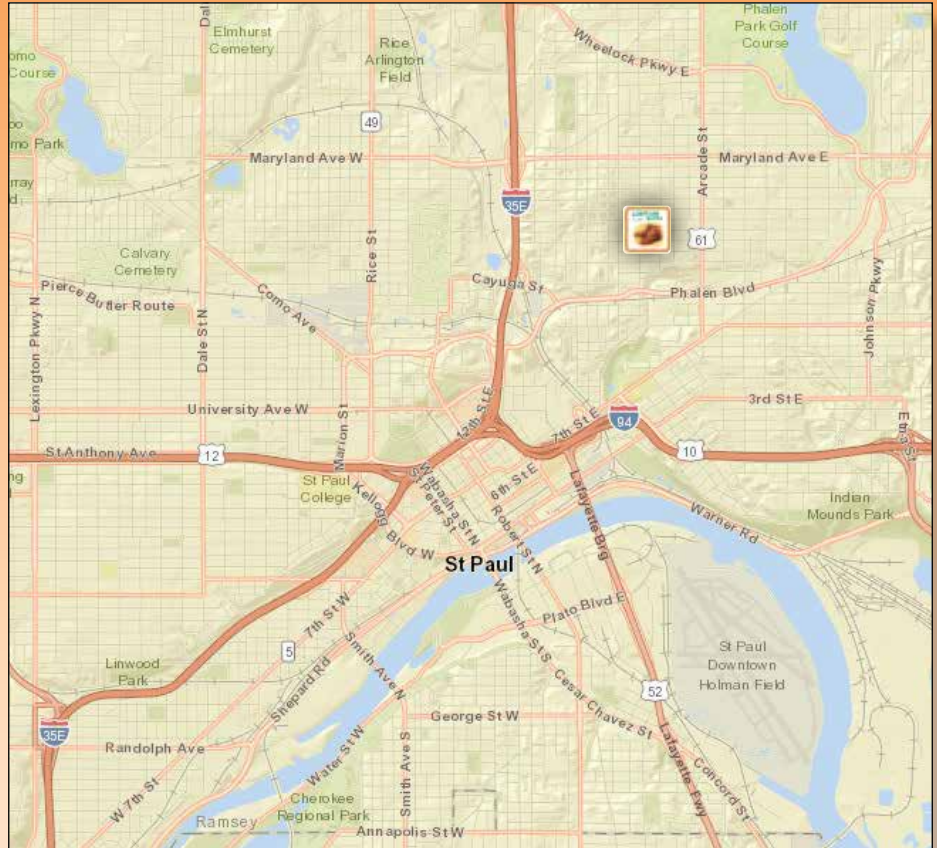

We look forward to serving your employee's footwear needs!

Our **Shoe Store on Wheels** brings footwear right to your door and our **Main Store** is conveniently located to take care of all your off-site purchases at 959 Payne Ave, St Paul, MN 55130.

Hours: Weekdays 9am - 5pm (*Same location for over 40 years!*)

We realize you can buy shoes from others. Our commitment is to help you in every way to get the right shoe and correct fit to make your shoe program a **complete success!**

We are *"The original and still the best!"*

Reebok



SIZES

M 7 - 12, 13, 14, 15, 16
W 7 - 12, 13, 14, 15

4037 Sublight Mesh Slip-On

- EH Alloy Safety Toe
- Athletic Slip-On
- Metal-Free Microfiber
- Slip Resistant Outsole

Special Features: ASTM F2413. Electrical Hazard Protection. MemoryTech Massage Footbed. Sublite EVA Cushion Midsole with Rubber Heel and Forefoot Pads. Extra Wide Toe. No Exposed Metal on Upper. Extremely Lightweight and Flexible.

SIZES

M 7 - 12, 13, 14, 15, 16
W 7 - 12, 13, 14, 15
4E 7 - 12, 13, 14



4041 EH Black | 4040 SD Blue (inset)

- Alloy Safety Toe
- No Exposed Metal
- Lightweight & Flexible
- Athletic Oxford

Special Features: ASTM F2413 Safety Standards. Moisture Wicking Nylon Mesh Lining. MemoryTech Massage Removable Cushion Footbed. Sublite EVA Cushion Midsole. **4041**- Electrical Hazard Protection. **4040**- Static Dissipating Dual Resistors



Reebok



SIZES

M 7 - 12, 13, 14, 15, 16
W 7 - 12, 13, 14, 15

4053 Speed TR | 4021 Sublight Legend (inset)

- Composite Safety Toe
- 100% Non-Metallic
- Mesh Upper
- Static Dissipative

Special Features: ASTM F2413. XTR® Brand Composite Cap. Slip Resistant. Static Dissipative (SD 10) with Dual Resistor. Metal Free. Extra Wide Toe. MemoryTech Memory Foam Removable Cushion Footbed.

SIZES

M 7 - 12, 13, 14, 15, 16
W 7 - 12, 13, 14, 15



3016 Zig Pulse | 4314 Flexweave (inset)

- Composite Safety Toe
- 100% Non-Metallic
- Slip Resistant Outsole
- Mesh Upper

Special Features: ASTM F2413. Composite Toe. XTR® Brand Composite Cap. **3016**- ESD Static Dissipative Dual Resistor (SD10). Zigtech Energy Dispersion. TPU Stabilizer. **4314**- Electrical Hazard Protection. Ultraknit & Flexweave Upper.



Reebok



SIZES

M 7 - 12, 13, 14, 15
W 7 - 12, 13, 14

4141 Mesh Mid Cut | 4047 Leather (inset)

- Alloy Safety Toe
- Slip Resistant
- Lightweight & Flexible
- Memory Tech Footbed

Special Features: Meets ASTM F2413 Standards. Extra Wide Toe. MemoryTech Massage Removable Cushion Footbed. Sublite EVA Cushion Midsole. No Exposed Metal on Upper. **4141**- ESD Static Dissipative Dual Resistor (SD10) **4047**- Electrical Hazard Protection.

SIZES

M 7 - 12, 13, 14, 15
W 7 - 12, 13, 14



4144 Waterproof Mid | 4058 Microfiber (inset)

- Composite Toe
- Slip Resistant
- Lightweight & Flexible
- Memory Tech Footbed

Special Features: ASTM F2413. XTR® Brand Composite Toe Cap. Slip Resistant Outsole. **4144**- Waterproof Leather. Electrical Hazard Protection. **4050**- Water Resistant Microfiber. ESD Static Dissipative Dual Resistor (SD10). 100% Non-Metallic.



77068 Ekron | 20065 Indurite (inset)

- Alloy Safety Toe
- Memory Foam Insole
- Electrical Hazard
- Slip Resistant

Special Features: Aluminum Alloy Safety Toe ASTM F2412/2413 I/75 C/75. Electrical Hazard (EH) ASTM F2412/2413. Slip Resistant Traction Outsole with Oil Resistance. **77068-** Trubuck Leather and Synthetic Upper. **20065-** Breathable Mesh and Synthetic Upper.

SIZES
W 7 - 12, 13, 14

20127 Malad II | 77013 Grinnel (inset)

- Composite Safety Toe
- Memory Foam Insole
- Electrical Hazard
- Slip Resistant

Special Features: Composite Safety Toe ASTM 2413 Standards. Electrical Hazard (EH) ASTM-F2413. Memory Foam topped cushioned removable comfort insole. **20127-** Mesh and Synthetic Upper. **77013-** Suede Synthetic and Mesh Upper.

SIZES
M 7 - 12, 13, 14, 15, 16
W 7 - 12, 13, 14



77066 Hartan Steel Toe

- Steel Toe Slip-on
- Leather Upper
- Electrical Hazard
- Slip Resistant

Special Features: Steel Safety Toe ASTM F2412/2413-2011 I/75 C/75. Electrical Hazard (EH) ASTM F2412-2011. Nitrile Rubber Lugged Traction Outsole is Oil, Chemical, and Slip Resistant. Gel Infused Memory Foam Cushioned Comfort Insole. Abrasion Resistant Toe.

SIZES
W 7 - 12, 13, 14

77051 Black WP | 77177 Tan WP (inset)

- Waterproof Design
- Action Leather Upper
- Electrical Hazard
- Memory Foam Insole

Special Features: Steel Safety Toe ASTM F2412/2413-2011 I/75 C/75. Electrical Hazard (EH) ASTM F2412/2413-2011. Waterproof Seam-Sealed Breathable Design. Memory Foam Removable Cushioned Comfort Insole. Rubber Slip-Resistant Traction Outsole.

SIZES
M 7 - 12, 13, 14



A300 Blade High-Top | A320 Low-Top (inset)

- Lightweight Aluminum Safety Toe Cap
- Breathable Premium Canvas Upper
- High Performance Mesh Lining
- Advanced EVA Midsole and Rubber Outsole Mark II
- Durable and Flexible Lightweight Cement Construction
- Meets or Exceeds ASTM 2413 Impact/Compression and Electrical Hazard Ratings

SIZES
M 7 - 12, 13, 14
W 7 - 12, 13, 14

Reebok



SIZES
M 7 - 12, 13, 14, 15
W 7 - 12, 13, 14

4132 High Top Composite Sneaker

- Composite Toe
- 100% Non-Metallic
- Electrical Hazard
- Slip Resistant

Special Features: ASTM F2413. XTR® Brand Composite Toe Electrical Hazard Protection. Slip Resistant Rubber Outsole. Metal Free. Moisture Wicking Nylon Mesh Lining. MemoryTech Memory Foam Removable Cushion Footbed.



SIZES
M/W 7 - 14 whole
 (if ordering ½ size go up
 to next whole size)

3875 Rush | 4545 Charge (inset)

- ASTM F2413 - 11 I/75 C/75 **Static Dissipative (SD)**
- 100% Non-Metallic with **Fiberglass Toe Cap**
- Durable Textile (**3875**) or Safety Knit (**3845**) Upper
- 572°F Heat Resistant with TPU Strengthening Upper
- Rubber Sole MOTION Impulse Stability and Comfort
- Slip-Resistant Outsole with IMPULSE.FOAM® Midsole in Two Different Densities for Maximum Cushioning



SIZES
M/W 7 - 14 whole
 (if ordering ½ size go up
 to next whole size)



0655 Conquest Brown | 0735 Black (inset)

- **Fiberglass Toe Cap** & Soft Oiled Tumbled Leather
- Breathable Lining with **Water Resistant** Membrane
- Oil- and Slip-Resistant Rubber Outsole
- TPU Heel Support and Kick-Off in the Heel Area
- Lateral YKK Zipper with Closed Dust Tongue
- Meets or Exceeds ASTM 2413-11 Impact/Compression and **Electrical Hazard Footwear Ratings**



SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

26488 Independence 8" | 26487 6" (inset)

- **KEEN.Dry® Waterproof Breathable Membrane**
- Carbon Fiber Safety Toe - Left and Right Asymmetrical
- Full-Grain Waterproof Leather Upper
- Oil- and Slip-Resistant Outsole
- KEEN Luftcell: Air-Infused, PU Midsole for Comfort
- ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 M I/75 C/75 **EH standards**



SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

25694 Cincinnati 8" Waterproof

- **KEEN.Dry® Waterproof Breathable Membrane**
- Carbon Fiber Safety Toe - Left and Right Asymmetrical
- Full-Grain Waterproof Leather Upper
- Oil- and Slip-Resistant Non-Marking Outsole
- ASTM F1677-96 MARK II Non-Slip Testing Standards
- ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 M I/75 C/75 **EH standards**



SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

17828 Logandale | 23236 Flint II (inset)

- **KEEN.Dry® Waterproof Breathable Membrane**
- Steel Safety Toe - Left and Right Asymmetrical
- Oil and Slip Resistant Non-Marking Rubber Outsole
- **17828-** Synthetic Upper **23236-** Leather/Mesh Upper
- ASTM F1677-96 MARK II Non-Slip Testing Standards
- ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH Standards**



SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

23387 Portland | 16962 Davenport (inset)

- **KEEN.Dry® Waterproof Breathable Membrane**
- Composite Safety Toe - Left and Right Asymmetrical
- Oil- and slip-resistant non-marking rubber outsole
- Meets ASTM F1677-96 MARK II Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH Standards**
- **23387-** Dual purpose metal lace hooks
- **16962-** 100% Non-Metallic Construction





SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

09173 Milwaukee | 26892 Pittsburgh *(inset)*

18079 Lansing WP | 20086 Detroit WP *(inset)*

- **KEEN.Dry® Waterproof Breathable Membrane**
- Steel Safety Toe - Left and Right Asymmetrical
- Waterproof Full-Grain Leather Upper
- Oil and Slip Resistant Non-Marking Rubber Outsole
- ASTM F1677-96 MARK II Non-Slip Testing Standards
- ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH Standards**

- **KEEN.Dry® Waterproof Breathable Membrane**
- Steel Safety Toe - Left and Right Asymmetrical
- Waterproof Leather Upper
- Oil and Slip Resistant Non-Marking Rubber Outsole
- Meets ASTM F2913-17 SATRA Non-Slip Standards
- Meets ASTM F1677-96 MARK II Non-Slip Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH Standards**



SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

20055 San Jose

26364 Roswell | 24576 Red Hook *(inset)*

- Aluminum Safety Toe - Left and Right Asymmetrical
- Water-Resistant Leather Upper
- Oil and Slip Resistant Non-Marking Rubber Outsole
- ASTM D471-06 903# Oil & Isooctane Chemical Resistance
- ASTM F1677-96 MARK II Non-Slip Testing Standards
- ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH Standards**

- **26364-** Breathable Canvas Upper
- **24576-** Waterproof Leather and Textile Upper *(inset)*
- Carbon-Fiber Safety Toe - Left and Right Asymmetrical
- Oil and Slip-Resistant Non-Marking Rubber Outsole
- Removable Metatomical PU footbed
- ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH Standards**



SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

24584 Vista Energy | 24588 VE Mid *(inset)*

23216 Atlanta EH | 23217 Atlanta SD *(inset)*

- Carbon-Fiber Safety Toe - Left and Right Asymmetrical
- 100% Non Metallic Construction
- Breathable Mesh and Synthetic Upper
- Oil and Slip-Resistant Non-Marking Rubber Outsole
- ASTM F1677-96 MARK II Non-Slip Testing Standards
- ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH Standards**

- Steel Safety Toe - Left and Right Asymmetrical
- Breathable Leather and Mesh Upper
- Oil- and Slip-Resistant Non-Marking Rubber Outsole
- ASTM F1677-96 MARK II Non-Slip Testing Standards
- ASTM F2913-19 SATRA Non-Slip Testing Standards
- **Electrical Hazard (23216)** or **Static Dissipative (23217)** ASTM F2412-18 and F2413-18 I/75 C/75 Standards



SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

25637 Sparta 2

- Aluminum Safety Toe - Left and Right Asymmetrical
- Mesh/Synthetic Upper Reduces Marking or Scratching
- Oil- and Slip-resistant Non-marking Rubber Outsole
- ASTM F1677-96 MARK II Non-Slip Testing Standards
- ASTM F2913-17 SATRA Non-Slip Testing Standards
- **Electro Static Dissipative (ESD)**
- ASTM F2412-18 and F2413-18 M I/75 C/75 SD 35 Standards

FLORSHEIM WORK



SIZES
D 7 - 12, 13, 14
EEE 7 - 12, 13

F2623 Cognac Wingtip Oxford

- Steel Safety Toe - Flair Wingtip Oxford
- Cognac Pigskin Leather Upper
- Removable Comfortech Footbed with High Rebound Foam
- Durable and Cushioned EVA Outsole
- Rubber Traction Pads on Heel
- Toe Slip Resistant Rubber Outsole
- ASTM F2413. **Steel Toe.**



FLORSHEIM WORK

SIZES
D 7 - 12, 13, 14
EEE 7 - 12, 13

F2000 Oxford Black | F2001 Brown (inset)

- Coronis Dress Lace Oxford Safety Toe
- Full Leather Upper
- Micro Fiber Suede Lining
- Removable EVA Cushion Insert with Comfort Heel Gel
- Dual Density, Rubber SR Outsole with EVA Cushion Midsole
- No Exposed Metal On Upper
- ASTM F2413. ESD. Slip Resistant. **ESD. Steel Toe.**



SIZES
D 7 - 12, 13, 14
EEE 7 - 12, 13

F2473 Knit Safety | F2005 Black Slip-On (inset)

- **F2473**- Mushroom Knit Lace-up with Comfortech Rebound Foam Footbed and Moisture Wicking Nylon Mesh Lining
- **F2005**- Black Dress Slip-on (inset) with Removable EVA Cushion Insert, Comfort Heel Gel, Micro Fiber Suede Lining
- No Exposed Metal on Upper
- Slip Resistant Rubber Outsole
- ASTM F2413. **Static Dissipative (SD 35). Steel Toe.**



ROCKPORT WORKS

SIZES
M 7 - 12, 13, 14
W 7 - 12, 13

2150 Casual | 6736 Boat Shoe (inset)

- Meets or Exceeds ASTM Class 75 Impact & Compression
- ASTM Class 75 and **Electrical Hazard Standards**
- Slip Resistant Rubber Outsole

2150: Composite Toe, Casual Slip-On, Charcoal Textile
6736: Steel Toe, 3 Eye Tie Boat Shoe, Brown Leather (inset)
Insole: Removable EVA Cushion
Lining: Moisture Wicking Brushed Microfiber



SIZES
M 7 - 12, 13, 14, 15
W 7 - 12, 13, 14, 15
EW 8 - 12, 13

6762 Brown Moc | 6761 Black Moc (inset)

- I/C75 Moc Toe Oxford — **Steel Toe**
- ASTM F2413-11 **Static Dissipative (SD) Standards**
- Slip Resistant and Oil Resistant

Type: "World Tour" 5 Eye Tie Casual Moc Toe Oxford
Lining: Moisture Wicking Nylon Mesh
Outsole: Rubber Outsole with EVA Cushion Midsole
Features: No Metal on Upper. Dual Resistor. CSA Approved.



SIZES
M 7 - 12, 13, 14
W 7 -12, 13, 14

7408 Black Boot

- Composite Safety Toe Cap
- Durable Leather Upper
- Removable Dual Density Insole
- EVA Midsole for Maximum Comfort
- Rubber Slip and Oil Resistant Outsole
- Meets or Exceeds ASTM 2413 -18 Impact/Compression and **Electrical Hazard Ratings (EH)**



SIZES
D 7 - 12, 13, 14
EE 7 - 12, 13, 14

4968 XT Carbon Waterproof

- 11" Workhog
- Square Safety Toe
- Electrical Hazard
- Slip- & Oil- Resisting

Features: Premium Leather Upper. Shock-Absorbing EVA Midsole. Goodyear® Welt. Mesh Lining. Oil- and Slip-Resisting Duratread™ Outsole. ATS™ MAX Stability System. ASTM F2413-11 M/1/75 C/75 EH. **Carbon Safety Toe & Waterproof**



SIZES
M 7 - 12, 13, 14, 15
W 7 -12, 13, 14, 15

1630 Black | 1620 Brown (inset)

- Full-Grain, Water Resistant Leather Upper
- Ergonomically Designed "Wide Area" Steel Toe Cap
- Highly Durable, Slip and Oil Resistant Stabilizer Outsole
- No Exposed Metal for Scratch Resistant Workplaces
- Mark II Slip Resistant with EVA Midsole
- Meets or Exceeds ASTM 2413-11 Impact/Compression and **SD Footwear Ratings**



SIZES
M 7 - 12, 13, 14
W 7 -12, 13, 14



7000 Brown Slip-On

- Aluminum Safety Toe Cap
- Durable Leather Upper
- Removable Dual Density Insole
- EVA Midsole for Maximum Comfort
- Rubber Slip and Oil Resistant Outsole
- Meets or Exceeds ASTM 2413 -18 Impact/Compression and **SD Footwear Ratings**



SIZES
M 7 - 12, 13, 14, 15
W 7 -12, 13, 14, 15

1900 Stratus EH | 1911 Stratus SD (inset)

- Composite (**1900**) or Aluminum (**1911**) Safety Toe Cap
- Slip-Resistant Rubber Outsole with a Mark II Slip Rating
- Durable Textile Upper and Lightweight Construction
- Advanced EVA midsole
- Removable Dual Density Insole
- Meets or Exceeds ASTM 2413 -18 Impact/Compression and EH (**1900**) or SD (**1911**) Ratings

SIZES
M 7 - 12, 13, 14, 15
W 7 -12, 13, 14, 15



1611 Breeze Charcoal Alloy Toe

- Alloy Toe Cap Meets or Exceeds ASTM F2413-18 I/75 C/75
- Slip-Resistant Rubber Outsole with .43 Mark II Slip-Rating
- No Exposed Metal for Scratch Resistant Workplaces
- EVA Midsole with Rubber Heel & Forefoot Pads
- Removable Dual Density Insole
- Electrical Hazard Protection with Durable Textile Upper



SIZES
M 8 - 12, 13, 14
W 8 - 12, 13, 14

SIZES
M 8 - 12, 13, 14
W 8 - 12, 13, 14

3239 Waterproof Comp Wellington

- Waterproof
- Composite Toe
- Class I/75 Footwear
- Electrical Hazard

Special Features: ASTM F2413-11 M I/75/C/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electrical Shock Resistance Standard. Leather Upper. V-Series Chevron Outsole. Goodyear Storm Welt.

3237 WP Comp 8" | 3236 WP Comp 6" (inset)

- Waterproof
- Composite Toe
- Class I/75 Footwear
- Electrical Hazard

Special Features: ASTM F2413-11 M I/75/C/75 Composite Safety Toe. EH Rated. Tested For and Meets CAN/CSA-Z195 18,000 Volts Electrical Shock Resistance Standard. Leather Upper. V-Series Chevron Outsole. Goodyear Storm Welt.



SIZES
M 8 - 12, 13, 14, 15
W 8 - 12, 13

9858 12" Brown Western Boot

- Steel Toe
- Crazy Horse Leather
- Oil Resistant Lug Sole
- Double Row Welt Stitching



SIZES
M 6 - 12, 13, 14
W 6.5 - 12, 13, 14

1428 9" Black Logger Boot

- Steel Toe
- Full-Grain Oil Leather
- Oil Resistant Lug Sole
- Goodyear Welt Construction



SIZES
M 7 - 12, 13
W 7 - 12, 13

1018 Oiled Brown Steel Toe

- 6" Brown Crazy Horse Leather Oiled Workboot
- Goodyear Welt Construction
- Acid, Slip, Oil Resistant Outsole
- Removable Orthotic
- Polyurethane Insole
- Heel & Toe Guard



SIZES
M 7 - 12, 13, 14
W 7 - 12, 13, 14

1980 Black Hiker | 1982 Tan Workboot (inset)

- Steel Toe
- Oil-Resistant Outsole
- Cushion Insole
- **1980-** Heavy Duty Full-Grain Oil Leather
- **1982-** Tan Nubuck Leather





SIZES

M 7 - 12, 13, 14, 15
W 7 - 12, 13, 14, 15

4440 Comp Toe Side-Zip Wellington

- Composite Toe
- Class I/75 Footwear
- Electrical Hazard
- Slip Resisting

Special Features: ASTM F2413-11 M I/75/C/75 Composite Toe. EH Rated. Goodyear Storm Welt. Composite Shank. GEN-flex2® Outsole. PU Footbed.



SIZES

D 8 - 12, 13, 14
EE 8 - 12, 13, 14

4210 Composite Toe 8" Wedge WP

- Made in U.S.A.
- Class I/75 Footwear
- X-Stream Waterproof
- Electrical Hazard

Special Features: ASTM F2413-11 M I/75/C/75 Composite Toe. EH Rated. Waterproof Membrane. Fiberglass Shank. Goodyear Welt. Poron® Cushion Insole.



SIZES

D 7 - 12, 13, 14
EE 8 - 12, 13, 14

4208 Steel Toe 8" MAXWear Wedge

- Union Made in U.S.A.
- Class I/75 Footwear
- Electrical Hazard
- Slip Resisting

Special Features: ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Poron® Cushion Insole. Goodyear Welt. Fiberglass Shank. MAXWear Slip-Resistant Outsole.



SIZES

D 7 - 12, 13, 14
EE 8 - 12, 13, 14

4205 Steel Toe Pull-On Wellington

- Made in U.S.A.
- Class I/75 Footwear
- Electrical Hazard
- Slip Resisting

Special Features: ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Removable Compression Foam Footbed on Poron® Insole. Goodyear Welt. Fiberglass Shank.



SIZES

D 7 - 12, 13, 14
EE 7 - 12, 13, 14

6201 Black Wedge

- Union Made in U.S.A.
- Class I/75 Footwear
- Electrical Hazard
- Slip Resisting

Special Features: ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Poron® Cushion Insole. Goodyear Welt. Fiberglass Shank. MAXWear Slip-Resistant Outsole.



SIZES

D 7 - 12, 13, 14
EE 7 - 12, 13, 14

4200 Brown Wedge

- Union Made in U.S.A.
- Class I/75 Footwear
- Electrical Hazard
- Slip Resisting

Special Features: ASTM F2413-11 M I/75/C/75 Steel Toe. EH Rated. Poron® Cushion Insole. Goodyear Welt. Fiberglass Shank. MAXWear Slip-Resistant Outsole.



7580 | 7400 (inset) Carbon WP PR

- Lightweight Carbon Composite Safety Toe Cap
- **Waterproof Membrane** Construction
- **Puncture Resistant** Insole Plate
- Security Friendly Non-Metallic Construction
- Slip- and Oil-Resistant Mark II Rubber Outsole
- Meets or Exceeds ASTM 2413 I I Impact/Compression and **EH Rating**

SIZES

M 7 - 12, 13, 14, 15
W 7 -12, 13, 14, 15

SIZES

M 7 - 12, 13, 14
W 7 -12, 13, 14

7119 Waterproof Comp Oxford

- Lightweight Carbon Composite Safety Toe Cap
- **Waterproof Membrane** Construction
- Dual Density PU Slip- and Oil-Resistant Outsole
- No Exposed Metal for Scratch Resistant Workplaces
- 100% Metal Free
- Meets or Exceeds ASTM 2413 -18 Impact/Compression and **EH Rating**



Reebok



6191 Comp Toe VWP Tactical Side-Zip

- Composite Toe
- Class I/75 Footwear
- X-Stream Waterproof
- Electrical Hazard

SIZES

M 7 - 12, 13, 14
W 7 - 12, 13, 14

SIZES

M 6 - 12, 13, 14, 15
W 6 - 12, 13, 14, 15

8850 Rapid Response Composite Toe

- 100% Non-Metallic
- Stealth 8" Side Zipper
- Electrical Hazard
- Extra Wide Toe

Special Features: ASTM F1671/I1671M-13.ASTM F2413-11.ASTM F1677-05.ASTM 2913-11. Composite Toe & Shank.. EH Rated.Waterproof Membrane. Z-Trac Outsole.

Special Features: ASTM F2413, XTR® Brand Extra Wide Composite Toe Cap.YKK Side Zipper. 100% Non-Metallic Security Friendly.Removable F2A Polyurethane Cushion Insert with Shock Eliminator Heel Cushion and EVA Cushion Midsole.Airport Friendly.



**Soft Toe
Kitchen &
Service
Duty**



06981 Dress Oxford | 06983 Slip-On (inset)

- **06999** - Women's Sizing of Dress Oxford
- TPU Stability Shank
- Water-Resistant Leather
- Memory-Foam Footbed
- Meets or Exceeds ASTM F1677-96 Mark II Non-Slip Testing Standards - **Soft Toe**

SIZES

Men's 7 - 12, 13, 14, 15
Women's 5 - 10, 11

Insulated



SIZES

D 7 - 12, 13, 14
EE 7 - 12, 13, 14

17804 Davenport IN/WP | 24222 Dover (inset)

- **KEEN.Dry® Waterproof Breathable Membrane**
- **400g KEEN.Warm® Insulation**
- Safety Toe Composite (**17804**) or Carbon-Fiber (**24222**)
- TPU Shank for Midfoot Support
- ASTM F1677-96 MARK II Oil- and Slip-Resistant
- ASTM F2412-11 and F2413-11 I/75 C/75 **EH standards**
- **17804 only**- 100% Non-Metallic Construction



Metatarsal Guards & Insulated



SIZES
M 8 - 12, 13, 14
W 8 - 12, 13, 14

3238 Comp Toe Insulated Waterproof

- Composite Toe
- Waterproof Membrane
- Class I/75 Footwear
- 400g Thinsulate Insulation

Special Features: ASTM F2413-11 M I/75/C/75 Composite Toe and Shank. EH Rated. Crazyhorse Leather. Goodyear Welt. V-Series Rubber Outsole. PU Footbed.



SIZES
M 7 - 12, 13, 14, 15, 16, 17
W 7 - 12, 13, 14, 15, 16, 17



7573 600g | 7577 1000g Insulated WP PR

- 600 Grams (**7573**) or 1000G (**7577**) Thinsulate™ Insulation
- Super Lightweight Carbon Nanofiber **Composite Toe**
- **Waterproof** Membrane Construction
- Lenzi® **Puncture Resistant** Plate
- 8" Full-Grain Crazy Horse Leather Upper
- Oil- and Slip-Resistant Nitrile Rubber Outsole
- ASTM F2413-11 I/C Puncture Resistant and **EH Ratings**



SIZES
D 7 - 12, 13, 14, 15
EE 7 - 12, 13, 14, 15

16166 Met Guard | 07969 Internal Met (inset)

- External (**16166**) or Internal (**07969**) Metatarsal
- ASTM F1677-96 Mark II Non-Slip Testing Standards
- ASTM F2412-11 and F2413-11 I/75 C/75 **EH** and **MT75**
- Left and Right Asymmetrical Steel Toe
- TPU Stability Shank
- **16166**- Kevlar Thread Protection to Abrasion/Sparks/Heat
- **07969**- KEEN.Dry Waterproof Breathable Membrane



SIZES
M 6 - 12, 13, 14
W 6 - 12, 13



5016 Black Met Guard | 5017 Brown Met (inset)

- Steel Toe
- Electric Hazard
- Kevlar Stitching
- Slip Resistant

Special Features: ASTM F2413 Steel Toe. Electrical Hazard. Metatarsal Guard. Black Full Grain Leather. Goodyear Welt Construction. Kevlar Stitching. Removable EVA Cushion Insert with Sponge Rubber Heel Wedge. Oil, Slip and Chemical Resisting Solid Rubber Bottom.



SIZES
D 5 - 12, 13, 14, 15
EEE 5 - 12, 13, 14

F0690 6" Quick Release Metatarsal

- Flexible Flex-Met™ **Internal Metatarsal Guard**
- Black Full Grain Leather
- No Exposed Metal on Upper
- Removable F2A Athletic Insert Dual Density Cushion Insert
- Direct Attach, Shock Absorbing PU Midsole and Long Wearing Rubber Bottom
- ASTM F2413-11 M/I/75/C/75/Mt/75 **EH Steel Toe.**



SIZES
D 7 - 12, 13, 14
EE 7 - 12, 13, 14



6755 Trainex Internal Met Guard

- ASTM F2413 Flex-Met® Internal Met Guard
- Composite Safety Toe, 100% Non-Metallic
- Electrical Hazard Protection
- Kevlar® Stitching, Abrasion Resistant Heel and Toe Guards
- Leather Upper with Moisture Wicking Nylon Mesh Lining
- EVA Cushion Removable Footbed with Sponge Rubber Heel
- PU Cushion Midsole and Aircom™ Air Comfort Technology



SIZES
M 5 - 10
W 5 - 10

3945 Define | 2925 Celerity (inset)

- Composite (3945) or Steel (2925) Toe Cap Safety Protection
- Woven SAFETY KNIT™ Textile Upper
- TPU Protection in the Toe and Heel Area
- Slip- and Oil- Resistant 572°F Heat Resistant Rubber Sole
- **Electro Static Dissipative (ESD)**
- ASTM F2413-11, F I/75 & C/75 SD
- **3945 only-** 100% Metal Free Construction



SIZES
Also in Black **M** 6 - 10, 11
W 6 - 10, 11

7127 WP Hiker | 7130 Insulated (inset)

- **7127 black available in brown - 7123**
- Lightweight Carbon Nanofiber **Composite Toe**
- Waterproof Membrane Construction
- Full-Grain Crazy Horse Leather Upper
- **Lenzi® Puncture Resistant Plate (7127 & 7123)**
- **400 Grams Thinsulate™ Insulation (7130 only)**
- ASTM F2413-11 I/75 C/75 EH Ratings. Mark II Slip Resistant



Reebok



SIZES
M 6 - 12
W 6 - 12

0470 EH Alloy Toe | 0360 ESD Comp (inset)

- Alloy Safety Toe
- Composite Toe
- Electrical Hazard
- Static Dissipative

Special Features: ASTM F2413-11. Slip Resistant Outsole. MemoryTech Massage Footbed. Cushion Midsole. Leather Upper.
0470- Electrical Hazard Protection & Lightweight. **0360-** ESD Static Dissipative Dual Resistor (SD10) & Metal Free Construction.

SIZES
M 4 - 12
W 4 - 12



0450 Turquoise | 0410 Black (inset)

- Lightweight Alloy Toe
- MemoryTech Footbed
- Flexible Microfiber
- WP Leather Upper

Special Features: ASTM F2413. Slip Resistant Outsole. MemoryTech Massage Footbed. Sublite EVA Cushion Midsole.
0450- ESD Static Dissipative Dual Resistor (SD10). **0410-** Electrical Hazard Protection.



Reebok

SIZES
M 6 - 12
W 6 - 12

0321 Zig Pulse | 0256 Ever Road (inset)

- Composite Safety Toe
- 100% Non-Metallic
- Slip Resistant Outsole
- Extra Wide Toe

Special Features: ASTM F2413. XTR® Brand Composite Toe. EVA Midsole with SR Rubber Sole Moisture Wicking Nylon Mesh Lining. MemoryTech Massage 2.0 Footbed. Electrical Hazard Protection.

ROCKPORT WORKS



SIZES
M 5 - 12
W 5 - 12

0644/0643 G/B Slip-On | 0777 WP Boot (inset)

- Composite Safety Toe
- Meets or Exceeds ASTM Class 75 Impact & Compression
- ASTM F2413 Electrical Hazard Standards
- Slip Resistant Rubber Outsole
- **0644-** Gold Leather or **0643-** Black Leather
- **0777-** Gray Nubuck Leather. **Waterproof Lining.**



SIZES
M 5 - 10, 11
W 5 - 10, 11

25241 Vista Energy | 25638 Sparta (inset)

- Carbon Fiber (**25241**) or Aluminum (**25638**) Safety Toe
- **25241 only**- 100% Non-Metallic Construction
- Oil-Slip Resistant (Mark II) Non-Marking Rubber Outsole
- Meets ASTM F1677-96 MARK II Non-Slip Testing Standards
- Meets ASTM F2913-19 SATRA Non-Slip Testing Standards
- Meets ASTM F2412-18 and F2413-18 F I/75 C/75 SD 35 standards. Electro static dissipative (**ESD**) footwear.



SIZES
M 5 - 10, 11
W 5 - 10, 11

23224 Cincinnati

- **KEEN.Dry® Waterproof Breathable Membrane**
- Waterproof Leather Upper
- Carbon-Fiber Safety Toe - Left and Right Asymmetrical
- Oil-Slip Resistant (Mark II) Non-Marking Rubber Outsole
- Removable Metatomical PU Footbed
- Meets ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH standards**



SIZES
M 5 - 10, 11
W 5 - 10, 11

23220 Atlanta | 23233 Flint II (inset)

- Steel Safety Toe - Left and Right Asymmetrical
- **ESD (23220)** or **EH (23233)** protection
- Oil- and Slip- Resistant Non-Marking Rubber Outsole
- Leather and Mesh Upper w/ Reflective Webbing
- Meets ASTM F1677-96 MARK II Non-Slip Testing Standards
- Meets ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 F I/75 C/75 standards



SIZES
M 5 - 10, 11
W 5 - 10, 11

25698 Lansing

- **KEEN.Dry® Waterproof Breathable Membrane**
- Waterproof Leather Upper
- Steel Safety Toe - Left and Right Asymmetrical
- Oil-Slip Resistant (Mark II) Non-Marking Rubber Outsole
- Removable Metatomical PU Footbed
- Meets ASTM F2913-19 SATRA Non-Slip Testing Standards
- ASTM F2412-18 and F2413-18 I/75 C/75 **EH standards**



SIZES
M 5 - 10, 11, 12
W 5 - 10, 11, 12

163| Black | 162| Brown (inset)

- Full-Grain, Water Resistant Leather Upper
- Ergonomically Designed "Wide Area" Steel Toe Cap
- Removable Anti-Fatigue Polyurethane Insole
- Highly Durable, Slip and Oil Resistant Stabilizer Outsole
- No Exposed Metal to Sheet Scratch Resistant Workplaces
- Meets or Exceeds ASTM 2413-11 Impact/Compression and **SD Footwear Ratings**



0670 Sailing Steel

SIZES **M** 6 - 11
W 6 - 11

0314 Fusion Comp

SIZES **M** 6 - 12
W 6 - 12

- Steel Toe (**0670**) or Composite Toe (**0314**) Protection
- Electro Static Dissipative (**ESD**) Reduces Static Electricity
- Slip- Resistant Rubber Outsole
- EVA Cushion Removable Footbed
- ANSI/ASTM I75 & C75 Approved



SIZES
M 5 - 9, 10, 11
W 5 - 9, 10, 11

SIZES
M 5 - 9, 10, 11

76553 Synergy | 8073 Kaiget (inset)

- Lightweight Design
- Memory Foam Insole
- Electrical Hazard
- Slip Resistant

Special Features: ASTM F2412/2413-2011 I/75 C/75. Electrical Hazard (EH) ASTM F2413-05. Slip Resistant ASTM F1677-96 Mark II. Memory Foam Cushioned Removable Comfort Insole.

76553- Aluminum Alloy Safety Toe. **8073-** Soft Toe.

8033 Bulkin Comp | 8043 Rotund ST (inset)

- Composite Safety Toe
- Mesh/Synthetic Upper
- Steel Safety Toe
- Canvas Fabric Upper

Special Features: Safety Toe Rated ASTM 2412-2011 I/75 C/75. Electrical Hazard (EH) Rated. Removable Memory Foam Cushioned Comfort Insole. Slip-Resistant Rubber Traction Outsole.



SIZES
M 6 - 11
W 6 - 11

A350 Blade High-Top | A360 Low-Top (inset)

- Lightweight Aluminum Safety Toe Cap
- Breathable Premium Canvas Upper
- High Performance Mesh Lining
- Advanced EVA Midsole and Rubber Outsole Mark II
- Durable and Flexible Lightweight Cement Construction
- Meets or Exceeds ASTM 2413 Impact/Compression and Electrical Hazard Ratings



SIZES
M 6 - 11
W 6 - 11

1355 Zephyr | 2050 Spark (inset)

- Lightweight Aluminum Alloy Safety Toe Cap
- Premium Microfiber and Textile upper
- High Performance Mesh Lining
- Advanced EVA Midsole and Rubber Outsole Mark II
- Durable and Flexible Lightweight Cement Construction
- Meets or Exceeds ASTM 2413 Impact/Compression and Static Dissipative (SD10) Ratings



USA: Ultimate Shock Absorption Insole

- Made In USA
- Dual Density Footbed
- Poron 4000 Comfort Cushioning
- **Sizes: S, M, L, XL**



Contour Pro Insole

- High Rebounding Moldable Polyurethane (PU) Base
- EZ Form Foam to Mold Shape
- Microcell® Top Cover
- Ensures Total Contact Insert, Reducing Sheer Motion & Friction Inside the Shoe
- A5512 Coded, Medicare Approved
- **Sizes: XS, S, M, L, XL, XXL**



Walking Pro Insole

- HTC Polyester Liner
- Memory Foam Top Layer to Mold Perfect Fit
- Ultron 168 Polyester PU Bottom Layer
- D-15 PU Gel Heel Pad
- Semi-Rigid Orthotic Between Layers Reduce Arch Strain
- Exceptional Shock Absorption and Superior Compression
- **Sizes: S, M, L, XL**



KNEED2Move Insole

- High Arch Support to Alleviate Pressure from the Heel to the Ball of the Foot
- Spacious Heel Cradle to Accommodate a Wider Fit
- Thick Quality Cushioning
- Heat and Wear Moldable Base Keeps its Support While Adapting to Your Foot
- **Sizes: 4 - 14**

REFUNDS AND EXCHANGES

Please try your shoes on carpet before wearing them on the job to ensure proper fit. If you are not satisfied with the shoes you purchased, please return them to us within 30 days. We simply ask that you return the shoes in the same new condition that you received them.

OUR WARRANTY

90/180 Product Warranty

90 Day Warranty—

If a manufacturer defect or material failure occurs within 90 days of purchase, Loeffler Shoes will replace the shoes free of charge.

180 Day Warranty—

If a manufacturer defect or material failure occurs within 180 days thereafter, Loeffler Shoes will repair the shoes or a prorated credit will be issued based on the extent of wear and general condition of the shoes.



Loeffler Shoes
959 Payne Avenue
St Paul MN 55130



To Place Your Order or Schedule a Truck



Phone
(651) 771-3833



Fax
(651) 771-6409



Email
info@loefflershoes.com



Online
www.loefflershoes.com

Look For Us

Follow Us!



Our Truck is Coming to You