



## Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

TWO-STAGE  
INDOOR AND OUTDOOR SPLIT EARTHPURE® SYSTEMS  
SIZES 026 - 064 [7.0 - 19.3 kW]

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Table of Contents

What's New with ClimateMaster's Tranquility® Digital Split Systems?.....	3	Part Load Correction Factors.....	19
iGate® Communicating Controls.....	4	Performance Data Selection Notes – vFlow.....	20
vFlow® Internal Variable Water Flow Control.....	5	Performance Data.....	22
How to Use This Catalog.....	6	Physical Data .....	30
Tranquility® TES/TEP Design Features .....	8	Electrical Data.....	31
Tranquility® TAC Design Features .....	11	Dimensional Data.....	33
Tranquility® TAH Design Features.....	12	Electrical Wiring Diagrams .....	37
Unit Model Key.....	14	Submittal Data.....	40
Model Key, Reference Calculations & Legend.....	15	Accessories & Options.....	41
About AHRI/ISO/ASHRAE 13256-1.....	16	Warranty Information.....	41
AHRI/ISO/ASHRAE/ANSI 13256-1 Performance.....	17	Revision History.....	44
Full Load Correction Factors.....	18		

# ClimateMaster Geothermal Heat Pump Systems

## What's New with ClimateMaster's Tranquility® Digital Split Systems?

**ClimateMaster has invested years of experience, research and development into new technologies that set the Tranquility® Digital Split systems apart from the rest by delivering higher cost savings, more reliability and unparalleled comfort.**

Building on the new Digital packaged line of products with iGate® and vFlow® technology, the Tranquility® Digital split system uses the same components in a more flexible configuration. The Tranquility Digital split system compressor section can be coupled with Tranquility Digital Air Handlers (TAH) and Tranquility (TAC) furnace coils to achieve ultra-high efficiencies, while still providing the flexibility of an all-electric or dual fuel system and a remote compressor section location. Split systems are often used in areas where it would be difficult to install a packaged unit, such as in an attic, crawl space or even outdoors.

### High Efficiency = Low Operating Cost

Tranquility Digital split systems break new ground in efficiency by approaching 25.6 EER part load cooling and 4.3 COP part load heating for ground loop applications. Leveraging the next generation Copeland scroll compressor; variable speed ECM motor; low pressure- drop water-to-refrigerant heat exchanger and variable-speed internal pump / modulating valve, the Tranquility Digital split systems have been optimized for maximum operating efficiency and lowest operating cost. The Hot-Water Generator further increases operating cost savings by pre-heating hot water for domestic use. Tranquility Digital Split systems are one of the highest efficiency split heating and cooling systems you can buy.

### iGate® - Digitally Monitor, Control and Diagnose the System



With ground-breaking iGate

-information gateway- as a standard feature on every unit, Tranquility Digital Split systems represent a significant breakthrough in monitoring, controlling and diagnosing systems, leveraging the power of 2-way communication with four-wire connections.

The new DXM2 control - the brain of the system - takes input from sensors and smart components to "calculate and communicate to" the system how to operate. Since it is exchanging information instead of just signals, it displays information in plain English on a thermostat/service tool. Compared to old systems with antiquated settings / monitoring using switches/ LEDs, iGate represents a quantum leap in access to information and control of the system.

The iGate system uses a four-wire connection to connect the compressor section to the communicating thermostat AND Tranquility Air Handler's AXM controls. This allows airflow configuration through the communicating thermostat and the ability to diagnose the system through the DXM2 or AXM controls.

In service mode, the system communicates not only the fault and possible causes, it also displays the operating conditions of the unit at the time of the fault, to aid in diagnosis.

### vFlow® Variable Water Flow

Built-in vFlow is enabled by iGate, which facilitates intelligent communication between the thermostat, DXM2 control, sensors and internal water pump/valve to make true variable water flow a reality for the first time in geothermal units. Built-in water flow components means quicker, simpler, single and multi-unit installations.

In closed loop applications, vFlow with variable speed pump saves 70-80% watts in part load compared to single speed water circulators. In open loop applications, vFlow with motorized modulating valve also saves watts off the well pump by limiting the flow to the required amount.



System reliability is significantly improved by varying the Waterflow to optimize extraction / absorption of heat and thus better maintaining refrigerant pressures.

### ENERGY STAR® Most Efficient – Communicating AND Efficient (Application Pending)

Tranquility Digital Split systems (TEP/TEP) have been recognized as ENERGY STAR Most Efficient 2018 for exceeding stringent efficiency requirements AND for meeting smart communication requirements. With these systems the customer is getting an EFFICIENT system and an INTELLIGENT system – buying a system can't get SMARTER than that!

### Easy to Install, Easy to Service – A Technician's Dream Machine

Installations are easier and quicker with Tranquility Digital Split systems with (1) vFlow built-in water flow vs. bulky external flow controllers / water flow components (2) iGate 4-wire connection between the compressor section, air handler and thermostat ; Also, system configuration (airflow, water ΔT, accessories) on the thermostat and (3) iGate Manual Operation from thermostat at start up to verify proper operation.



Service is even easier with (1) iGate Service Warning on the thermostat for homeowners to call the dealer with fault information (2) iGate Service Mode for dealers to see conditions (temperature, flow, input/output, configuration) at the time of fault, for better, quicker diagnosis (3) Easy Access to components with swing-out control board, easy-access panels, refrigerant/ water pressure Schrader ports at the front of the unit.

ClimateMaster has designed and built the EASIEST geothermal unit to install and service, period.

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## iGate® Communicating Controls

### **iGate® Information gateway to monitor, control and diagnose your system**

The Tranquility® Digital Split Units are equipped with industry-first, iGate® – Information Gateway – a 2-way communicating system that allows users to interact with their geothermal system in plain English AND delivers improved reliability and efficiency by precisely controlling smart variable speed components. iGate™ makes the Tranquility Digital series the easiest geothermal products to install and service.

**Monitor/Configure** – Installers can configure Tranquility Digital Split Units from the thermostat, including: Air flow, loop  $\Delta T$ , water-flow option configuration, unit configuration, accessory configuration, and demand reduction (optional, to limit unit operation during peak times). Users can look up the current system status: temperature sensor readings and operational status of the blower and pump.


**Precise Control** - The new DXM2 board enables intelligent, 2-way communication between the DXM2 board and smart components like the communicating thermostat, fan motor, and water pump. The DXM2 control can also directly control the modulating valve and accepts various feedback/input. The Intelligent DXM2 board uses information received from the smart components and sensors to precisely control operation of the variable-speed fan and variable-speed water pump (or modulating valve) to deliver higher efficiency, reliability and increased comfort.

**Diagnostics** – iGate takes diagnosing geothermal units to the next level of simplicity, by providing a dashboard of system and fault information, in plain English, on the iGate thermostat/ service tool.

iGate Service Warning warns the homeowner of a fault and displays dealer information (if programmed), fault descriptions, possible causes and current system status (temperature readings, fan RPM and water flow status) to provide to a dealer on the phone.

In iGate Service Mode, the service personnel can access fault descriptions, possible causes and most importantly, the conditions (temp, flow, i/o conditions, configuration) at the time of the fault and at the time of the call. Manual Operation mode allows the service personnel to manually command operation for any of the thermostat outputs, blower speed, as well as pump speed or valve position from the thermostat, to help troubleshoot specific components.

With the iGate communicating system, consumers and contractors have a gateway to system information never before available.

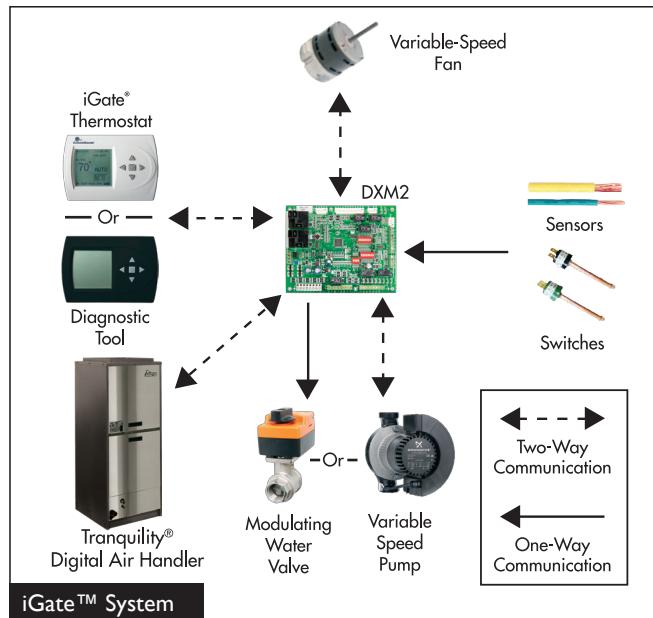

AIRFLOW SELECTION	
HEAT STAGE 1	CFM 600
HEAT STAGE 2	750
AUXILIARY HEAT	850
EMERGENCY HEAT	850
COOL STAGE 1	525
COOL STAGE 2	700
COOL DEHUMID 1	425
COOL DEHUMID 2	550
CONTINUOUS FAN	350
HEAT OFF DELAY	60
COOL OFF DELAY	30

◀ PREVIOUS

NEXT ▶

POSSIBLE FAULT CAUSES	
LOW WATER COIL TEMP	
LOW WATER TEMP - HTG	
LOW WATER FLOW - HTG	
LOW REFRIG CHARGE - HTG	
INCORRECT LT1 SETTING	
BAD LT1 THERMISTOR	

◀ PREVIOUS

FAULT TEMPERATURE CONDITIONS	
LT1	LOW WATER TEMP
HEAT	1 11:11 AM 11/14
LT1	TEMP 28.1
LT2	TEMP 97.3
HOT WATER EWT	121.5
COMP DISCHARGE	157.7
LEAVING AIR	92.7
LEAVING WATER	34.9
ENTERING WATER	42.1
CONTROL VOLTAGE	26.4

◀ PREVIOUS

# ClimateMaster Geothermal Heat Pump Systems

## vFlow® Internal Variable Water Flow Control

### vFlow® Internal Variable Water Flow

Industry-first, built-in vFlow® replaces a traditionally inefficient, external component of the geothermal system (water circulation) with an ultra-high-efficient, variable speed, internal water flow system. This saves homeowners 70-80% on operating water circulator vs traditional single speed pump systems. It saves installers time and labor by avoiding installing bulky external flow centers or flow regulators. Multi-unit installations are also much simpler with vFlow systems, as the units automatically adjust water flow across the system.

vFlow is enabled by iGate®, which facilitates intelligent communication between the thermostat, DXM2 control, sensors and internal water pump/valve to make true variable water flow a reality.



### vFlow® is available for three applications:

- 1) Closed loop – individual unit pumping: vFlow Internal Flow Controller model ("2" in Position 11 of the unit model number) would be used. This includes variable speed pump, flushing ports, 3 way flushing valves and expansion tank. Copper water coil is standard with this option.
- 2) Closed loop – multi unit / central pumping: vFlow Internal Low Pressure Drop (high Cv) Motorized Modulating Valve ("5" in Position 11 of the unit model number) would be used. Copper water coil is standard with this option. Not available in Outdoor Digital Split (TEP).
- 3) Open loop: vFlow Internal Motorized Modulating Valve ("6" in Position 11 of the unit model number) would be used. Cupro-Nickel water coil is standard with this option. Valves in open loop models have higher pressure drop than the valves in the closed loop (modulating valve) models for better flow control when used in systems with higher pressure water supply pumps, and are not recommended for closed loop applications. Not available in Outdoor Digital Split (TEP).



Variable speed pump or motorized modulating valve delivers variable water-flow, controlled by DXM2 control, based on loop water ΔT.

### vFlow® delivers three main benefits:

- 1) Easier and quicker unit installation as the flow control is built in to the unit.
- 2) Superior reliability by varying the water flow to deliver more stable operation.
- 3) Higher cost savings by varying the flow (and pump watt consumption) to match the unit's mode of operation.

### Internal components

Tranquility® Digital Split Units can be installed more easily and compactly than their predecessors because water-flow components are internal to the unit. It also saves installing contractors labor and time by eliminating the need for an external flow regulator or a bulky external pumping module.

### Variable flow


vFlow technology enables variable water flow through the unit, with the DXM2 control adjusting the pump speed to maintain an installer-set loop ΔT. By controlling the water flow, the system is able to operate at its optimal capacity and efficiency. vFlow provides a lower flow rate for part load where units typically operate 80% of the time and a higher, more normal flow rate for full load operation.

### Energy Savings with water circulation control

Units with vFlow deliver higher operating cost savings by varying the water flow to match the unit's operation (ex: lower water flow when unit is in part load operation). Lowering the flow results in lower energy consumption by the water pump (=higher cost savings) in vFlow units (whether internal or external pump).

In closed loop applications, using vFlow with an internal variable-speed (ECM) flow controller, the ECM pump uses fewer watts than a fixed speed (PSC) pump, even at full load (see chart). The ECM pump excels in energy savings in part load, saving 70-80% watts compared to fixed speed pumps (see chart). The ECM pump can operate with independent flow rates for heating and cooling, further saving even more energy.

In open loop applications, when the motorized modulating valve slows down the water flow during part load operation, the external pump consumes fewer watts, thus saving more energy.

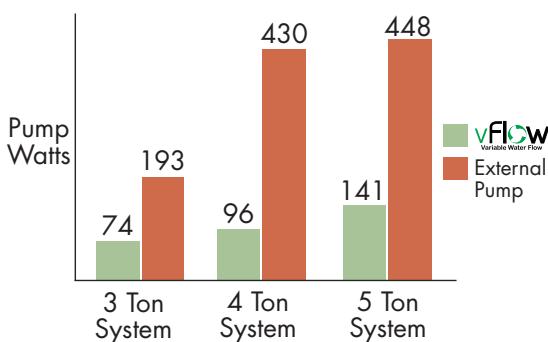

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## How to Use this Catalog

As with any unit selection the first step is to perform a proper load calculation. Once the design cooling and heating loads are known the predominant load can be used to select the appropriate unit. In northern climates the heating load may be used to select the unit, whereas in southern climates the cooling load may be used. Likewise, the anticipated maximum EWT should be used for the cooling mode and the minimum anticipated EWT should be used when selecting for the heating mode. These EWTs may be the same temperature in the case of a ground water application.

Use the Full Load performance pages to select the unit size. Once the unit size is determined read the associated flow rate (gpm) for the needed capacity. Typically this is 1.5 – 2 gpm/nominal ton for ground water applications and 2.25 – 3 gpm/ton for ground loop applications.

### For Closed Loop Applications

For closed loop systems where an internal circulating pump is desired, Tranquility® Digital Split Units can be ordered with an internal, variable speed loop circulator. This would typically be for a ground loop or secondary pumping application. The internal loop circulator is available in a high head version for all unit sizes and in a standard head version for unit sizes 026 and 038. Units with the standard head pump should not be combined with units with high head pumps on the same loop. Standard head pumps are best suited for small applications with a single unit. The maximum possible pump curve is shown in the tables below. The pumps can also operate at any point below the curve as a "partial load" pumping condition. The designer/installer should use the information presented in this catalog to determine the available pump head for any external piping/accessories and ground loop (if applicable). This can be done in the following manner:

1. Determine the desired flow rate through Tranquility Digital Split Units from the performance pages (as described above). Read the associated pressure drop in feet of head for the worst case condition (lowest anticipated entering water temperature) at the required flow rate.
2. Determine the maximum pump head from the pump curve associated with the required flow rate from step 1.
3. Subtract the unit pressure drop (from step 1) from the maximum available pump head (from step 2).
4. The remainder is the available pump head to overcome any external piping/accessories and the ground loop.


If the available pump head is equal to or greater than the calculated external piping and loop pressure drop, no other steps are required. If the available pump head is less than the calculated pressure drop of all external piping and the loop, then changes to the loop design should be considered.

Typically residential loops consist of  $\frac{3}{4}$ " circuit piping and  $1\frac{1}{4}$ " supply and return piping. If the available pump head is less than the calculated pressure drop of all external piping and the loop, it is recommended that larger pipe sizes be investigated such as 1" circuit piping and/or  $1\frac{1}{2}$ " or 2" supply and return piping. This will significantly reduce system pressure drop with little change in Reynolds number. If this causes the Reynolds number to fall to an unacceptable level, try reducing the overall number of circuits. This will increase the flow rate through each circuit, increasing the Reynolds number.


Another solution might be to allow the system flow rate to be reduced. Typical geothermal flow rates are between 2.25 and 3 gpm/ton. As long as the system flow rate using the internal variable speed circulator is at or above 2.25 gpm/ton it is safe to operate the system. A quick review of the unit performance tables will show that this causes very little change in unit performance.

ClimateMaster's Pressure Drop Software can be used in conjunction with the pump performance information presented here to determine actual flow rate when the internal circulator is not able to provide the desired design flow rate.

### Standard Head Variable Pump

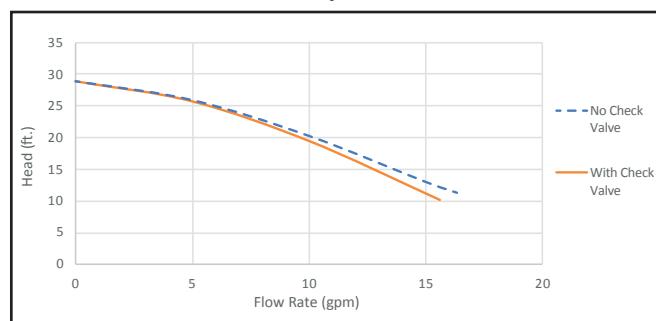

### High Head Variable Pump

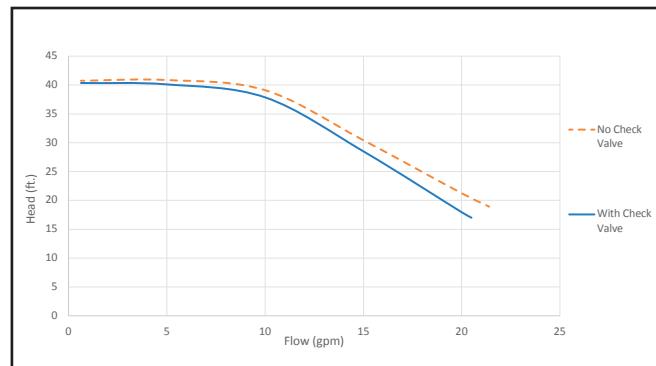

# ClimateMaster Geothermal Heat Pump Systems

## How to Use this Catalog

For secondary pumping applications follow the above steps except do not consider the pressure drop of the loop. The internal circulator will only need to overcome the pressure drop of the unit and any piping connecting the unit to the primary loop.

Tranquility Digital Split Units can also be ordered with an internal modulating water control valve for closed loop systems with multiple units and a central pump. In this case the modulating water valve will stop water flow through the unit when the unit is not operating and control the flow rate through the unit during operation, saving pumping energy in both cases.

When using an internal modulating water valve the central pump must be able to overcome the pressure drop of the valve in addition to the pressure drop of the unit. Because of this, internal modulating valves for closed loop systems are designed with a low pressure drop in mind. The minimum pressure drop for the internal closed loop valve is shown in the 'Modulating Valves for Closed Loop Applications' table below. This pressure drop should be added to the unit pressure drop when determining system pressure drop for central pump selection.

### Modulating Valves for Closed Loop Applications

TES/P026		
Valve Cv = 4.7		
60°F Water		
GPM	Valve ΔP @ GPM (psi)	Valve ΔP @ GPM (ft hd)
2.0	0.181	0.4
3.0	0.407	0.9
4.0	0.724	1.7
5.0	1.132	2.6
6.0	1.630	3.8

TES/P038		
Valve Cv = 7.4		
60°F Water		
GPM	Valve ΔP @ GPM (psi)	Valve ΔP @ GPM (ft hd)
3.0	0.2	0.4
4.0	0.3	0.7
5.0	0.5	1.1
6.0	0.7	1.5
7.0	0.9	2.1
8.0	1.2	2.7
9.0	1.5	3.4

TES/P049		
Valve Cv = 10		
60°F Water		
GPM	Valve ΔP @ GPM (psi)	Valve ΔP @ GPM (ft hd)
4.0	0.2	0.4
5.0	0.3	0.6
6.0	0.4	0.8
7.0	0.5	1.1
8.0	0.6	1.5
9.0	0.8	1.9
10.0	1.0	2.3
11.0	1.2	2.8
12.0	1.4	3.3

TES/P064		
Valve Cv = 19		
60°F Water		
GPM	Valve ΔP @ GPM (psi)	Valve ΔP @ GPM (ft hd)
6.0	0.1	0.2
7.0	0.1	0.3
8.0	0.2	0.4
9.0	0.2	0.5
10.0	0.3	0.6
11.0	0.3	0.8
12.0	0.4	0.9
13.0	0.5	1.1
14.0	0.5	1.3
15.0	0.6	1.4
16.0	0.7	1.6
17.0	0.8	1.8

### Modulating Valves for Open Loop Applications

TES/P026, 038 & 049		
Valve Cv = 4.7		
60°F Water		
GPM	Valve ΔP @ GPM (psi)	Valve ΔP @ GPM (ft hd)
2.0	0.2	0.4
3.0	0.4	0.9
4.0	0.7	1.7
5.0	1.1	2.6
6.0	1.6	3.8
7.0	2.2	5.1
8.0	2.9	6.7
9.0	3.7	8.5
10.0	4.5	10.5
11.0	5.5	12.7
12.0	6.5	15.1

TES/P064		
Valve Cv = 7.4		
60°F Water		
GPM	Valve ΔP @ GPM (psi)	Valve ΔP @ GPM (ft hd)
6.0	0.7	1.5
7.0	0.9	2.1
8.0	1.2	2.7
9.0	1.5	3.4
10.0	1.8	4.2
11.0	2.2	5.1
12.0	2.6	6.1
13.0	3.1	7.1
14.0	3.6	8.3
15.0	4.1	9.5
16.0	4.7	10.8
17.0	5.3	12.2

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Tranquility® Digital Split (TES/TEP) Design Features

The Tranquility® Digital Series Split system compressor sections (indoor / outdoor) have abundant features and ultra high efficiency.

### Application Flexibility

- Four Capacities 026, 038, 049, and 064.
- Ideal for remote applications like 2nd floor or crawl space areas. Indoor and outdoor models available.
- Can be used as a total electric heat pump or add on heat pump with fossil fuel backup.
- Ideal for unit replacement market, designed for quiet outdoor installations with weather tight cabinet (outdoor model).
- Ground breaking iGate® communicating controls – Configure, monitor, control and Diagnose from the thermostat
- 4-wire connection between Tranquility Air Handler, Tranquility Digital Split and communicating (ATC32U) thermostat
- Built-in industry first vFlow® Variable Waterflow for 60-80% savings in pumping watts (VS pump models)
- Internal Flow Controls-Closed loop models include VS pump, flushing valves, expansion tank and copper water coil
- Motorized Modulating valve-Closed loop models include Motorized Modulating valve, Copper water coil
- Motorized Modulating valve-Open loop models include Motorized Modulating valve, Cupro-Nickel water coil (indoor split only)
- Extended range operation (20-120°F EWT) and flow rates directly controlled by DXM2 control based on  $\Delta T$
- Circuit breaker protected loop and hot water generator pumps (indoor model).
- Field selectable low-temperature protection setting for GWHP or GLHP (indoor model).
- Open service-friendly cabinet (i.e., all components in compressor section can be serviced from the front).
- Pre-charged compressor section with back-seating refrigerant service valves for quick installation.
- AHRI matched and rated with Tranquility Cased coil and Air Handler products.
- Exceeds ASHRAE 90.1 and Energy Star 3.0 efficiencies.\*
- Thru-the-Bottom loop access (outdoor model).

\* When installed with a ClimateMaster TAC or TAH product.

### Operating Efficiencies

- Exceeds ASHRAE 90.1 and Energy Star Tier 3 efficiency levels
- Energy Star® Most Efficient
- EarthPure® HFC-410A zero ozone depletion refrigerant.
- Among the highest efficiencies in AHR/ISO/ASHRAE/ANSI 13256-1 ratings for heating COPs, cooling EERs with low water flow rates.
- 25.6 EER/4.3 COP.
- Rugged and highly efficient next generation Copeland UltraTech scroll compressors provide Two-stage operation for ultra-high efficiencies and unsurpassed comfort with reduced cycling losses.
- Optional hot water generator generates hot water at considerable savings.
- Oversized coaxial tube water-to-refrigerant heat exchangers operate at low liquid pressure drop.

### Service & Installation Advantages

- ClimateMaster's Tranquility Digital Split series incorporates features that are industry firsts, which make it extremely easy to install:
  - 1) vFlow - with the industry exclusive features, these units are ready to install out of the box with no requirement for external pumps, expansion tanks, or valves for the ground loop removing a lot of the complexity of installation.
  - 2) Full digital iGate controls that communicate with the thermostat and Communicating Tranquility Air Handler over 4 wires, allowing all unit configuration from the thermostat... the easiest installation setup for any level of installer. Far simpler than the use of dip-switches on the unit control board.
- Tranquility Digital Split Units only requires 4 wires between the communicating air handler (TAH), communicating thermostat (ATC32) and the unit. Others require up to 9 or 14 wires for full functionality. This is achieved by leveraging the full power of the microprocessor on the control.
- Internal variable speed circulator includes an internal check valve for multiple unit/ shared loop installations.
- Standard corner-post shreader ports provide access to source pressure drop across unit coaxial heat exchanger.
- The communicating iGate DXM2 control board diagnostic and communicating thermostat features allow the home owner to tell the service technician what is wrong with the unit before the technician leaves the shop.
- The two-section swing-out and removable control box design provides wide-open service access to the compressor section.
- Multiple unit access panels allow technicians to access any side of the cabinet.
- Service friendly highly accessible high/low refrigerant pressure ports are located on a service bracket at the front of the unit. No other product / manufacturer in the geothermal segment offer this convenience.
- An innovative two-section electrical control box design that tucks the stationary line voltage components safely behind a swing-out low voltage control panel to provide clear service access through the front of the unit. The low voltage panel can even be quickly pulled off the hinges and removed. Harness connections make controller replacement a snap.
- MPT condensate connection directly from condensate drain pan eliminates internal plastic drain tubing that is subject to clogging and avoids the need for a fitting that reduces the drain opening size.
- Diagnostic display of system inputs, outputs, and configuration settings at thermostat or Configuration/Diagnostic tool.
- Diagnostic display of system temperatures at thermostat (ATC32U\*\*):
  - Geo source in and out
  - Compressor discharge line
  - LT1 and LT2 Refrigerant Line Temperature Sensors
  - Leaving air
  - Entering potable hot water to HWG
- Immediate manual control of all DXM2 outputs is available at the thermostat (ATC32U\*\*) or Configuration/Diagnostic tool (ACDU\*\*) for rapid troubleshooting.

## Tranquility® Digital Split (TES/TEP) Design Features

- Expansion tank eliminates "flat loop callbacks" by working to maintain steady loop pressure.
- Brass swivel geo and hot water connections for quick connection and elimination of wrenches or sealants during installation.
- Intelligent fault retry with history retention.
- Two configurable auxiliary relays for low voltage control of accessories.
- UPS (Unit Performance Sentinel) provides early warning of inefficient operation.

### Factory Quality & Industry Certifications

All units are built and factory run tested on our Integrated Process Control Assembly System (IPCS). The IPCS is a unique state of the art manufacturing system that is designed to assure quality of the highest standards of any manufacturer in the water-source industry. Our IPCS system:

- Verifies that the correct components are being assembled.
- Automatically performs special leak tests on all joints
- Conducts pressure tests
- Performs detailed run test
- Automatically disables packaging for a "failed" unit
- Creates computer database for future service analysis and diagnostics from run test results
- All refrigerant brazing is done in a nitrogen atmosphere
- All units are deep evacuated to less than 100 microns prior to refrigerant charging
- All joints are both helium and halogen leak tested to insure annual leak rate of less than  $\frac{1}{4}$  ounce
- AHRI/ASHRAE/ANSI/ISO 13256-1 certified.
- ETL listed.
- US EPA "Energy Star" Tier 3 certified

### Advanced Controls

iGate communicating control provides advanced unit functionality and comprehensive configuration, monitoring and diagnostic capabilities through digital communication links with the variable-speed fan motor (on TAH), variable-speed source pump (or modulating valve) and communicating thermostat or Configuration/Diagnostic tool.

- 7 temperature sensor inputs for system protection and control
- Anti-short cycle and over/under voltage protection
- High pressure, loss of charge, and condensate overflow protection
- LED fault and status indication at controller
- Service tool port for optional setup and diagnostics at unit

### Factory Options & Accessories

- Hot water generator with internally mounted pump and advanced logic control

### Field Installed Accessories

- iGate Communicating, Programmable Thermostat (ATC32U\*\*)
- Auxiliary Electric Heater
- EarthPure Polarized Media Electric Air Cleaner
- Communicating Configuration / Diagnostic Tool (ACDU\*\*)
- Outdoor/Remote Temperature Sensor (AST008)
- Anti Scald Valve (AVAS4)

- Secure Start Compressor Soft Start Kit (13B0045N01)
- Unit Vibration Isolation Pad
- Unit Stand


### Warranty

- ClimateMaster residential class heat pumps are backed by a ten-year limited warranty on all unit parts, including the following accessories when installed with ClimateMaster units: Flow Controllers, Thermostats & Electric Heaters.
- ClimateMaster goes even further to back up its commitment to quality by including a service labor allowance for the first five years on unit parts and thermostats, auxiliary electric heaters and geothermal pumping modules.
- The Optional Extended Factory Service Labor Allowance Warranty offers additional length of term protection to the consumer by offsetting service labor costs for 10 years.


# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Tranquility® Digital Indoor (TES) and Outdoor (TEP) Split Design Features

- 1** vFlow® Internal Variable Water Flow System with Internal Flow Center or Internal Motorized Modulating Valve for optimized efficiency and reliability
- 2** Next generation Copeland™ Ultra-Tech™ Two-Stage Scroll Compressor with dual-level isolation for ultra-quiet and high-efficiency operation
- 3** Two-Section Swing-out Control Box design provides wide-open service access
- 4** Water Schrader Ports located on corner post to easily read pressure drop across water heat exchanger for easy troubleshooting
- 5** Heavy Gauge Galvanized Steel Cabinet is epoxy powder-coated in a durable and attractive black matte finish with stainless steel front access panels



- 1** Exclusive iGate® Two-Way Communicating Control to configure, monitor and diagnose AT THERMOSTAT
- 2** vFlow Internal Variable Water Flow System with Internal Flow Center or Internal Motorized Modulating Valve for optimized efficiency and reliability
- 3** Next generation Copeland™ Ultra-Tech™ Two-Stage Scroll Compressor with dual-level isolation for ultra-quiet and high-efficiency operation
- 4** Fully Insulated Water and Refrigerant Lines
- 5** Large Easily Accessible Control Box
- 6** Backseating Brass Service Valves with Service Port
- 7** Stainless Steel Braided Hoses for Easy Connection to Loop Piping

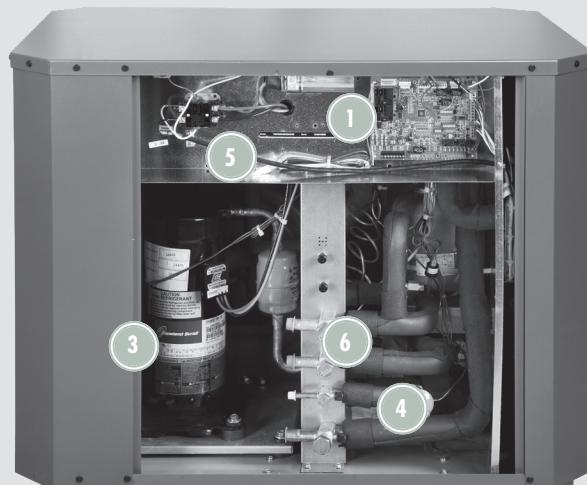

# ClimateMaster Geothermal Heat Pump Systems

## Tranquility® Cased Coil (TAC) Design Features

The Tranquility® Cased Coil (TAC) Series has abundant features and industry leading efficiency.

### Application Flexibility

- Four Capacities 026, 038, 049, & 064.
- Fully convertible vertical upflow or downflow, and horizontal left or horizontal right airflow.
- Thermoset plastic drain pan.
- AHRI matched and rated with TEP and TES products.
- Easily connects to a new or existing fossil fuel furnaces.
- Large removable access panel provide an open service-friendly cabinet.
- Heavy gauge galvanized steel construction with attractive grey powder coat finish.

### Operating Efficiencies

- EarthPure® HFC-410A zero ozone depletion refrigerant.
- Highest efficiencies in AHRI/ISO/ASHRAE/ANSI 13256-1 ratings for heating COP's, cooling EER's with low water flow rates when matched with TEP/TES models.
- Exceeds ASHRAE 90.1 and Energy Star 3.0 efficiencies.\*

\*When matched with a ClimateMaster Tranquility split compressor sections.

### Service & Installation Advantages

- Large removable access panels.
- Bi-directional thermal expansion valve (TXV).
- Fully convertible.

### Factory Quality & Industry Certifications

- All units are built on our Integrated Process Control Assembly System (IPCS). The IPCS is a unique state of the art manufacturing system that is designed to assure quality of the highest standards of any manufacturer in the water-source industry. Our IPCS system:
  - Verifies that the correct components are being assembled.
  - Automatically performs special leak tests on all joints.
  - Conducts pressure tests.
- All refrigerant brazing is done in a nitrogen atmosphere.
- All joints are both helium and halogen leak tested to insure annual leak rate of less than 1/4 ounce.
- Refrigerant suction lines are fully insulated to eliminate condensation problems in low temperature applications.
- Standard 10-year limited warranty on all parts with 5-year labor allowance; Optional additional extended 5-year limited labor allowance available.
- AHRI/ASHRAE/ANSI/ISO 13256-1 certified.
- NRTL & ETL listed.
- US EPA "Energy Star" certified

### Features

- Fully convertible vertical upflow or downflow, and horizontal left or horizontal right airflow.

- 1 Fully convertible vertical upflow or downflow, and horizontal left or horizontal right airflow
- 2 Thermoset plastic drain pan
- 3 Large easily removable access panel provide an open service-friendly cabinet
- 4 Heavy gauge galvanized steel construction with attractive grey powder coat finish



# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Tranquility® Digital Air Handler (TAH) Design Features

The Tranquility® Digital Air Handler (TAH) Series has abundant features and industry leading efficiency.

### Application Flexibility

- Four Capacities 026, 038, 049, & 064.
- State-of-the-Art Variable Speed Blower Motor.
- Variable speed ECM fan motor adapts to various duct systems.
- Condensate over-flow protection.
- 230v and 115v field convertible
- Fully field convertible for vertical upflow, downflow, horizontal left and horizontal right airflow.
- Foil faced insulation.
- Less than 2% air leakage.
- AHRI matched and rated with TEP and TES products.
- Three cabinet foot prints: 026 - 18" wide, 026-049 - 22.5" wide, & 038-064 - 25.5" wide.
- Ideal for remote applications like a 2nd floor, crawl spaces, and attics.
- Dehumidification mode for high latent cooling (when matched with ATP32U04 Thermostat)
- 1 or 2" compatible filterbase.

### Operating Efficiencies

- EarthPure® HFC-410A zero ozone depletion refrigerant.
- Large low RPM blowers with variable speed fan motors provide quiet, efficient air movement with high static capability.
- Exceeds ASHRAE 90.1 and Energy Star 3.0 efficiencies.\*
- Highest efficiencies in AHRI/ISO/ASHRAE/ANSI 13256-1 ratings for heating COP's, cooling EER's with low water flow rates when matched with TEP/TES models.

\*When matched with a ClimateMaster Tranquility® split compressor sections.

### TAH Service & Installation Advantages

- Low profile control box grants easy access to all internal components.
- Bi-directional thermal expansion valve (TXV).
- Circuit breaker protected 75VA control transformer.
- Fan motors have quick attach wiring harness for fast removal.
- Internal dropout blower for easy servicing.
- Accurate refrigerant sensing low-temperature protection.
- Intelligent fault retry -condensate overflow protection.
- Air coil low temperature cut-out using high accuracy thermistor.
- 24vac accessory relays.
- The communicating DXM2 control board diagnostic and communicating thermostat features allow the home owner to tell the service technician what is wrong with the unit before the technician leaves the shop.
- Large removable access panel provides an open service-friendly cabinet.

### Factory Quality & Industry Certifications


- All units are built on our Integrated Process Control Assembly System (IPCS). The IPCS is a unique state of the art manufacturing system that is designed to assure quality of the highest standards of any manufacturer in the water-source industry. Our IPCS system:
  - Verifies that the correct components are being assembled.
  - Automatically performs special leak tests on all joints.
  - Conducts pressure tests.
  - Performs highly detailed acceptance test unparalleled in the HVAC industry.
  - Automatically disables packaging for a "failed" unit.
  - Creates computer database for future service analysis and diagnostics from run test results.
- Heavy gauge galvanized steel cabinets are epoxy powder coated for durable and long-lasting finish.
- All refrigerant brazing is done in a nitrogen atmosphere.
- All joints are both helium and halogen leak tested to insure annual leak rate of less than 1/4 ounce.
- ClimateMaster residential class heat pumps are backed by a ten-year limited warranty on all unit parts, including the following accessories when installed with ClimateMaster units: Flow Controllers, Thermostats & Electric Heaters.
- ClimateMaster goes even further to back up its commitment to quality by including a service labor allowance for the first five years on unit parts and thermostats, auxiliary electric heaters and geothermal pumping modules.
- AHRI/ASHRAE/ANSI/ISO 13256-1 certified.
- ETL listed.
- US EPA "Energy Star" certified.

### Options & Accessories

- iGate® Communicating, Programmable Thermostat (ATC32U\*\*)
- Electronic communicating auto-changeover thermostat with 3-stage heat, 2-stage cool and indicator LED's.
- The Optional Extended Factory Service Labor Allowance Warranty offers additional length of term protection to the consumer by offsetting service labor costs for 10 years. • Internal Electric Heat for Easy Field Installation.
- Dehumidification mode for high latent cooling (when matched with ATP32U04/ATC32U03 thermostat).

# ClimateMaster Geothermal Heat Pump Systems




## Tranquility® Digital Air Handler (TAH) Design Features

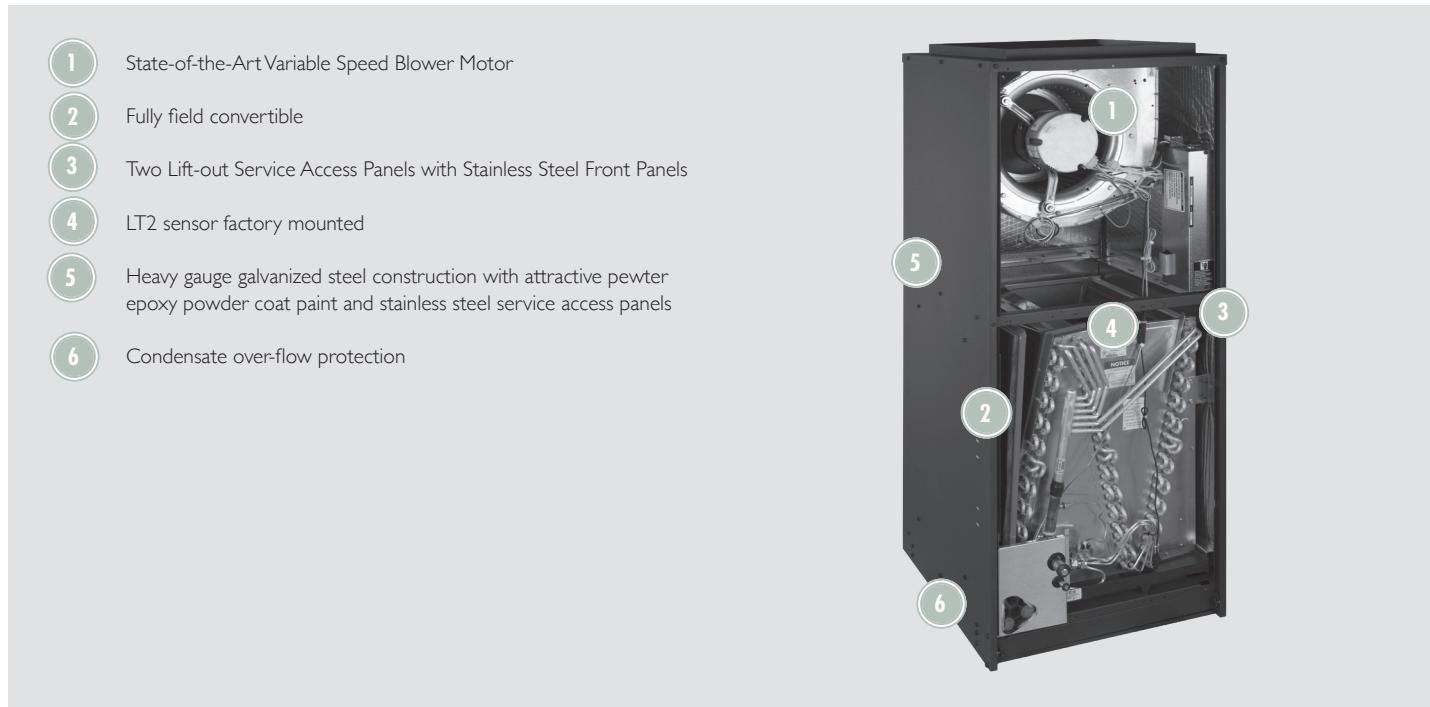

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Model Key

### Unit Model Key

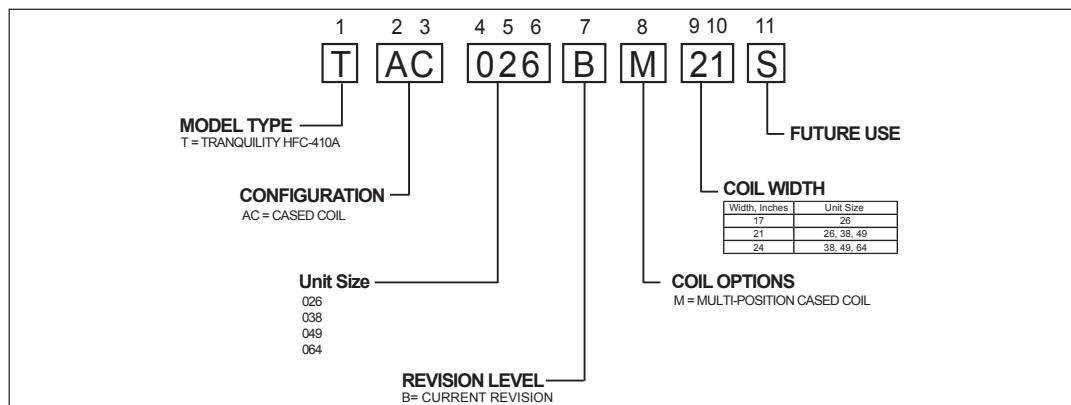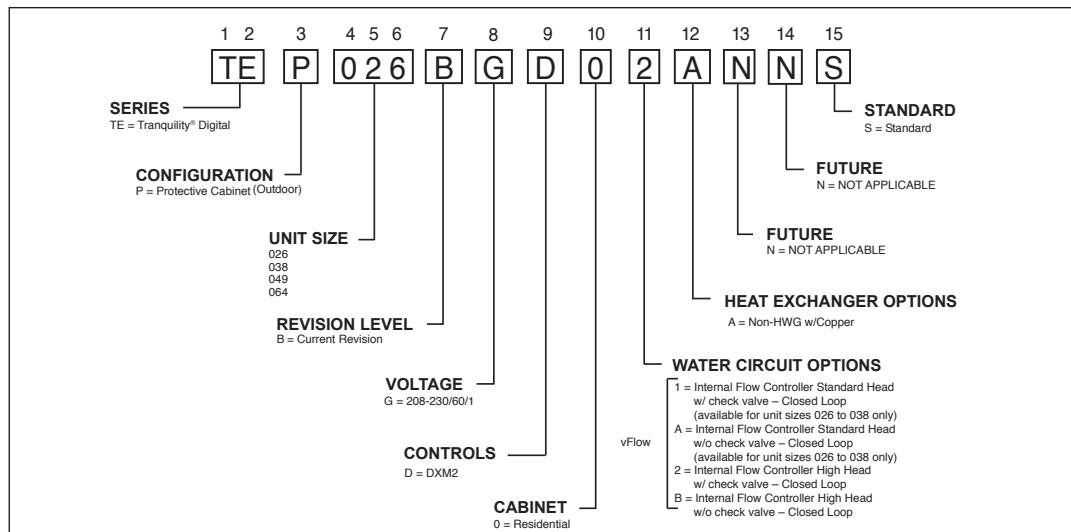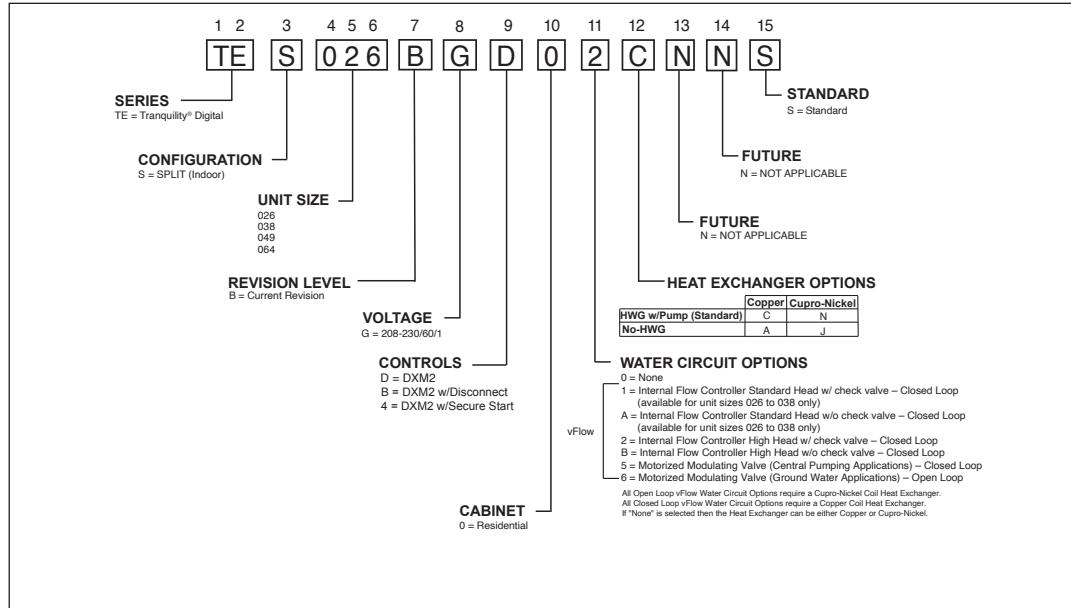


ClimateMaster: Declare your personal energy independence.

# ClimateMaster Geothermal Heat Pump Systems

## Model Key, Reference Calculations & Legend

### Unit Model Key

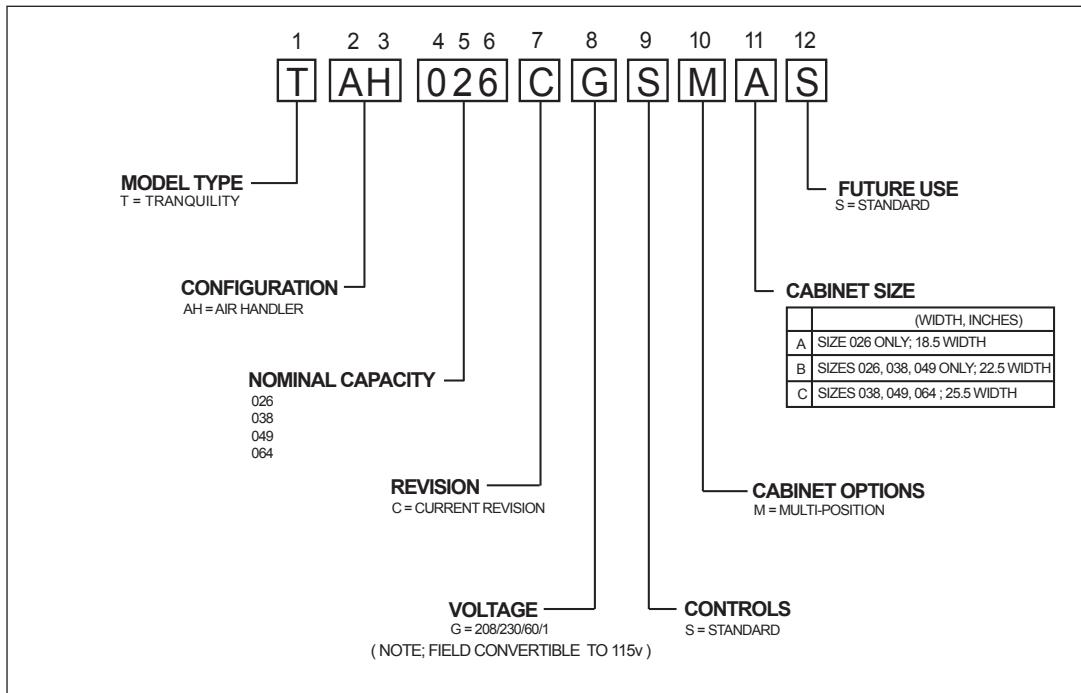

**Heating**

$$LWT = EWT - \frac{HE}{GPM \times 500}$$

$$LAT = EAT + \frac{HC}{CFM \times 1.08}$$

**Cooling**

$$LWT = EWT + \frac{HR}{GPM \times 500}$$

$$LAT (DB) = EAT (DB) - \frac{SC}{CFM \times 1.08}$$

$$S/T = \frac{SC}{TC}$$

Hot Water Generator capacities (HWC) are based on potable water flow rate of 0.4 gpm per nominal equipment ton and 90°F entering potable water temperature.

CFM	= airflow, cubic feet/minute
EWT	= entering water temperature, °F
GPM	= water flow in US gallons/minute
EAT	= entering air temperature, Fahrenheit (dry bulb/wet bulb)
HC	= air heating capacity, Mbtuh
TC	= total cooling capacity, Mbtuh
SC	= sensible cooling capacity, Mbtuh
KW	= total power unit input, KiloWatts
HR	= total heat of rejection, Mbtuh

HE	= total heat of extraction, Mbtuh
HWC	= Hot Water Generator (desuperheater) capacity, Mbtuh
WPD	= Water coil pressure drop (psi & ft hd)
EER	= Energy Efficiency Ratio = BTU output/Watt input
COP	= Coefficient of Performance = BTU output/BTU input
LWT	= leaving water temperature, °F
LAT	= leaving air temperature, °F
LC	= latent cooling capacity, Mbtuh
S/T	= sensible to total cooling ratio

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## About AHRI/ISO/ASHRAE 13256-1

### About AHRI/ISO/ASHRAE 13256-1

AHRI/ASHRAE/ISO 13256-1 (Air-Conditioning and Refrigeration Institute/American Society of Heating, Refrigerating and Air Conditioning Engineers/International Standards Organization) is a certification standard for water-source heat pumps used in the following applications:

- WLHP (Water Loop Heat Pump – Boiler/Tower)
- GWHP (Ground Water Heat Pump – Open Loop)
- GLHP (Ground Loop Heat Pump – Geothermal)

The directory at <http://www.ahrinet.org/> is constantly being updated and immediately available on the Internet. All ratings are submitted by the manufacturer for certification, and must be approved by AHRI. Therefore, there is a significant difference between AHRI "certified" and AHRI "rated." Thirty percent of a manufacturer's basic models must be tested each year. AHRI selects models at random from stock for testing on the basis of its evaluation of a participant's certification data.

Units that fail one or more certified test (90% of declared performance or lower) may be declared defective. If the initial failure is a performance test, the manufacturer must obsolete all units within the same basic model group or elect to have a second sample tested. If the second unit fails a performance test, it must be obsoleted, together with all units within the same basic model group. ClimateMaster takes certification seriously. We were recently awarded a certificate for consecutive years of no AHRI failures.

Temperatures used in AHRI certification standards are S.I. (Système International – metric) based. For example, typical catalog data for cooling is shown at 80°F DB/67°F WB [26.7°C DB/19.4°C] entering air temperature, but the AHRI standard for cooling is 80.6°F DB/66.2°F WB [27°C DB/19°C], since it is based upon whole numbers in degrees Celsius. Water and air temperatures for the standard are shown below.

### Test Condition Comparison Table

	WLHP	GWHP	GLHP
<b>Cooling</b> Entering Air Temperature - DB/WB °F [°C] Entering Water Temperature - °F [°C] Fluid Flow Rate	80.6/66.2 [27/19] 86 [30] *	80.6/66.2 [27/19] 59 [15] *	80.6/66.2 [27/19] 77 [25] *
<b>Heating</b> Entering Air Temperature - DB/WB °F [°C] Entering Water Temperature - °F [°C] Fluid Flow Rate	68 [20] 68 [20] *	68 [20] 50 [10] *	68 [20] 32 [0] *

\*Flow rate is specified by the manufacturer

Data certified by AHRI include heating/cooling capacities, EER (Energy Efficiency Ratio – Btuh per Watt) and COP (Btuh per Btuh) at the various conditions shown above. Pump power correction is calculated to adjust efficiencies for pumping Watts. Within each model, only one water flow rate is specified for all three groups, and pumping Watts are calculated using the formula below. This additional power is added onto the existing power consumption.

- Pump power correction =  $(\text{gpm} \times 0.0631) \times (\text{Press Drop} \times 2990)/300$

Fan power is corrected to zero external static pressure using the equation below. The nominal airflow is rated at a specific external static pressure. This effectively reduces the power consumption of the unit and increases cooling capacity but decreases heating capacity.

- Fan Power Correction =  $(\text{cfm} \times 0.472) \times (\text{esp} \times 249)/300$

Capacities and efficiencies are calculated using the following equations:

- ISO Cooling Capacity = Cooling Capacity (Btu/h) + [Fan Power Correction (Watts)  $\times 3.412$ ]
- ISO EER Efficiency (Btuh/W) =  $\text{ISO Cooling Capacity (Btu/h)} / [\text{Power Input (Watts)} - \text{Fan Power Correction (Watts)} + \text{Pump Power Correction (Watts)}]$
- ISO Heating Capacity = Heating Capacity (Btu/h) – [Fan Power Correction (Watts)  $\times 3.412$ ]
- ISO COP Efficiency (Btuh/Btu) =  $\text{ISO Heating Capacity (Btu/h)} \times 3.412 / [\text{Power Input (Watts)} - \text{Fan Power Correction (Watts)} + \text{Pump Power Correction (Watts)}]$

# ClimateMaster Geothermal Heat Pump Systems

## AHRI/ISO/ASHRAE/ANSI 13256-1 Performance

ASHRAE/AHRI/ISO 13256-1. TES/TEP with Tranquility® Air Handler

Model	Ground Water Heat Pump				Ground Loop Heat Pump			
	Cooling 59°F		Heating 50°F		Full Cool 77°F Part Cool 68°F		Full Heat 32°F Part Heat 41°F	
	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP
*TES/P026 Part	20,400	27.8	18,700	4.8	20,900	24.0	15,300	4.0
*TES/P026 Full	25,600	22.4	24,900	4.5	25,800	17.7	18,800	3.6
**TES/P026 Part	21,500	30.9	17,700	4.9	20,500	25.6	15,500	4.3
**TES/P026 Full	27,300	24.0	22,800	4.4	24,900	18.3	18,700	3.8
TES/P038 Part	28,800	29.7	23,700	4.8	28,200	24.7	21,000	4.3
TES/P038 Full	40,500	23.4	32,700	4.5	38,100	17.8	26,200	3.8
TES/P049 Part	40,700	29.4	34,300	4.6	39,500	23.8	29,600	4.0
TES/P049 Full	52,800	23.0	45,900	4.2	49,200	16.9	35,900	3.5
TES/P064 Part	48,100	26.0	41,700	4.3	46,000	21.7	35,900	3.8
TES/P064 Full	62,400	20.3	56,600	4.0	57,800	15.5	44,300	3.4

Cooling capacities based upon 80.6°F DB, 66.2°F WB entering air temperature

Heating capacities based upon 68°F DB, 59°F WB entering air temperature

Ground Loop Heat Pump ratings based on 15% methanol antifreeze solution

All ratings based upon operation at lower voltage of dual voltage rated models

\* w/17" wide coil

\*\* w/21" wide coil

ASHRAE/AHRI/ISO 13256-1. TES/TEP with Tranquility® Cased Coil

Model	Ground Water Heat Pump				Ground Loop Heat Pump			
	Cooling 59°F		Heating 50°F		Full Cool 77°F Part Cool 68°F		Full Heat 32°F Part Heat 41°F	
	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP
*TES/P026 Part	20,100	28.0	28.0	4.9	19,600	23.6	15,800	4.4
*TES/P026 Full	25,200	22.4	22.4	4.5	24,000	17.4	18,800	3.9
**TES/P026 Part	21,100	28.8	28.8	4.9	21,000	24.8	15,500	4.3
**TES/P026 Full	26,400	22.5	22.5	4.5	26,000	18.0	18,600	3.8
TES/P038 Part	29,300	28.2	28.2	4.6	28,500	23.5	21,400	4.1
TES/P038 Full	40,200	22.3	22.3	4.4	38,000	17.3	26,600	3.7
TES/P049 Part	41,300	27.9	27.9	4.5	38,400	22.2	30,000	4.0
TES/P049 Full	52,000	21.3	21.3	4.2	48,400	16.4	36,000	3.5
TES/P064 Part	45,000	23.7	23.7	4.1	44,200	20.5	36,400	3.8
TES/P064 Full	58,700	19.3	19.3	3.8	54,500	15.2	44,000	3.4

Cooling capacities based upon 80.6°F DB, 66.2°F WB entering air temperature

Heating capacities based upon 68°F DB, 59°F WB entering air temperature

Ground Loop Heat Pump ratings based on 15% methanol antifreeze solution

All ratings based upon operation at lower voltage of dual voltage rated models

\* w/17" wide coil

\*\* w/21" wide coil

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Full Load Correction Factors

### Air Flow Correction Table

Airflow % of Nominal	Heating				Cooling			
	Htg Cap	Power	Heat of Extraction	Total Cap	Sens Cap	S/T	Power	Heat of Rejection
60.00	0.946	1.153	0.896	0.925	0.788	0.852	0.913	0.922
68.75	0.959	1.107	0.924	0.946	0.829	0.876	0.926	0.942
75.00	0.969	1.078	0.942	0.960	0.861	0.897	0.937	0.955
81.25	0.977	1.053	0.959	0.972	0.895	0.921	0.950	0.968
87.50	0.985	1.032	0.974	0.983	0.930	0.946	0.965	0.979
93.75	0.993	1.014	0.988	0.992	0.965	0.973	0.982	0.990
100.00	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
106.25	1.006	0.989	1.011	1.007	1.033	1.027	1.020	1.009
112.50	1.012	0.982	1.019	1.012	1.064	1.052	1.042	1.018
118.75	1.018	0.979	1.027	1.016	1.092	1.075	1.066	1.025
125.00	1.022	0.977	1.033	1.018	1.116	1.096	1.091	1.032
130.00	1.026	0.975	1.038	1.019	1.132	1.110	1.112	1.037

### Entering Air Correction Table

Full Load Heating Corrections			
Entering Air DB°F	Heating Capacity	Power	Heat of Extraction
40	1.052	0.779	1.120
45	1.043	0.808	1.102
50	1.035	0.841	1.084
55	1.027	0.877	1.065
60	1.019	0.915	1.045
65	1.010	0.957	1.023
68	1.004	0.982	1.010
70	1.000	1.000	1.000
75	0.989	1.045	0.974
80	0.976	1.093	0.946

\* = Sensible capacity equals total capacity  
AHRI/ISO/ASHRAE 13256-1 uses entering air conditions of Cooling - 80.6°F DB/66.2°F WB, 1 and Heating - 68°F DB/59°F WB entering air temperature

Entering Air WB°F	Total Capacity	Sensible Cooling Capacity Multiplier - Entering DB °F										Power	Heat of Rejection
		60	65	70	75	80	80.6	85	90	95	100		
45	0.832	1.346	1.461	1.603	*	*	*	*	*	*	*	0.946	0.853
50	0.850	1.004	1.174	1.357	*	*	*	*	*	*	*	0.953	0.870
55	0.880	0.694	0.902	1.115	1.331	*	*	*	*	*	*	0.964	0.896
60	0.922	0.646	0.875	1.103	1.329	1.356	*	*	*	*	*	0.977	0.932
65	0.975		0.639	0.869	1.096	1.123	1.320	*	*	*	*	0.993	0.979
66.2	0.990		0.582	0.812	1.039	1.066	1.262	1.482	*	*	*	0.997	0.991
67	1.000		0.545	0.774	1.000	1.027	1.223	1.444	*	*	*	1.000	1.000
70	1.040		0.630	0.853	0.880	1.075	1.297	1.517	*	*	1.011	1.035	
75	1.117		0.601	0.627	0.821	1.046	1.275	1.510	1.033	1.101			

\* Sensible capacity equals total capacity.

# ClimateMaster Geothermal Heat Pump Systems

## Part Load Correction Factors

### Air Flow Correction Table

Airflow	Heating				Cooling			
	% of Nominal	Htg Cap	Power	Heat of Extraction	Total Cap	Sens Cap	S/T	Power
60.00	0.946	1.153	0.896	0.925	0.788	0.852	0.913	0.922
68.75	0.959	1.107	0.924	0.946	0.829	0.876	0.926	0.942
75.00	0.969	1.078	0.942	0.960	0.861	0.897	0.937	0.955
81.25	0.977	1.053	0.959	0.972	0.895	0.921	0.950	0.968
87.50	0.985	1.032	0.974	0.983	0.930	0.946	0.965	0.979
93.75	0.993	1.014	0.988	0.992	0.965	0.973	0.982	0.990
100.00	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
106.25	1.006	0.989	1.011	1.007	1.033	1.027	1.020	1.009
112.50	1.012	0.982	1.019	1.012	1.064	1.052	1.042	1.018
118.75	1.018	0.979	1.027	1.016	1.092	1.075	1.066	1.025
125.00	1.022	0.977	1.033	1.018	1.116	1.096	1.091	1.032
130.00	1.026	0.975	1.038	1.019	1.132	1.110	1.112	1.037

### Entering Air Correction Table

Full Load Heating Corrections			
Entering Air DB°F	Heating Capacity	Power	Heat of Extraction
40	1.084	0.732	1.161
45	1.073	0.764	1.140
50	1.060	0.802	1.117
55	1.046	0.846	1.090
60	1.031	0.893	1.061
65	1.016	0.945	1.031
68	1.006	0.978	1.013
70	1.000	1.000	1.000
75	0.984	1.058	0.968
80	0.968	1.117	0.936

\* = Sensible capacity equals total capacity  
AHR/ISO/ASHRAE 13256-1 uses entering air conditions of Cooling - 80.6°F DB/66.2°F WB, 1 and Heating - 68°F DB/59°F WB entering air temperature

Entering Air WB°F	Total Capacity	Sensible Cooling Capacity Multiplier - Entering DB °F										Power	Heat of Rejection
		60	65	70	75	80	80.6	85	90	95	100		
		*	*	*	*	*	*	*	*	*	*		
45	0.876	1.286	1.302	1.389	*	*	*	*	*	*	*	0.981	0.895
50	0.883	1.002	1.099	1.241	*	*	*	*	*	*	*	0.985	0.901
55	0.903	0.706	0.871	1.060	1.271	*	*	*	*	*	*	0.989	0.918
60	0.935		0.617	0.844	1.079	1.319	1.349	*	*	*	*	0.993	0.945
65	0.979			0.595	0.849	1.096	1.128	1.342	*	*	*	0.998	0.982
66.2	0.991			0.531	0.789	1.040	1.070	1.284	1.522	*	*	0.999	0.993
67	1.000			0.486	0.747	1.000	1.030	1.245	1.481	*	*	1.000	1.000
70	1.035				0.583	0.842	0.873	1.090	1.327	1.552	*	1.003	1.030
75	1.105					0.552	0.584	0.811	1.057	1.290	1.510	1.008	1.086

\* Sensible capacity equals total capacity.

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series


## Performance Data Selection Notes – vFlow Models

### Operation in Shaded Area: Closed Loop Application

For operation in the shaded area, appropriate levels of a proper antifreeze should be used in systems with leaving water temperatures of 40°F or below and the JW3 jumper should be clipped. This is due to the potential of the refrigerant temperature being as low as 32°F [0°C] with 40°F [4.4°C] LWT, which may lead to a nuisance cutout due to the activation of the Low Temperature Protection. JW3 should never be clipped for systems without antifreeze.

### Open Loop Application:

For operation in shaded area (below 40°F LWT) in open loop applications,  $\Delta T$  (on DXM2) should be set such that the LWT ( $=EWT - \Delta T$ ) doesn't drop below 40°F. JW3 should NEVER be clipped for systems without antifreeze.

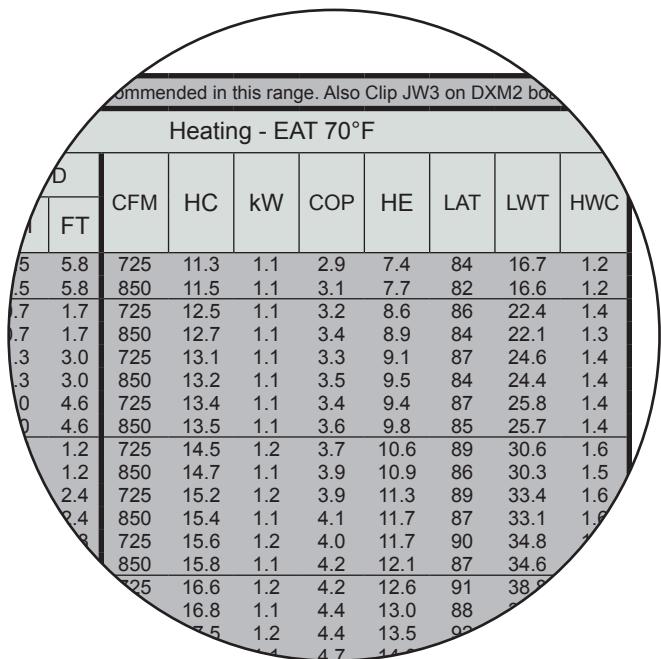

### Performance Data Selection Notes - Models without vFlow™

For operation in the shaded area when water is used in lieu of an antifreeze solution, the LWT (Leaving Water Temperature) must be calculated. Flow must be maintained to a level such that the LWT is maintained above 40°F [4.4°C] when the JW3 jumper is not clipped (see example below). Otherwise, appropriate levels of a proper antifreeze solution should be used in systems with leaving water temperatures of 40°F [4.4°C] or below and the JW3 jumper should be clipped. This is due to the potential of the refrigerant temperature being as low as 32°F [0°C] with 40°F [4.4°C] LWT, which may lead to a nuisance cutout due to the activation of the Low Temperature Protection. JW3 should never be clipped for standard range equipment or systems without antifreeze.

Example:

At 50°F EWT (Entering Water Temperature) and 1.5 gpm/ton, a 3 ton unit has a HE of 22,500 Btuh. To calculate LWT, rearrange the formula for HE as follows:

HE = TD x GPM x 500, where HE = Heat of Extraction (Btuh); TD = temperature difference (EWT - LWT) and GPM = U.S. Gallons per Minute.

$$TD = HE / (GPM \times 500)$$


$$TD = 22,500 / (4.5 \times 500)$$

$$TD = 10^{\circ}\text{F}$$

$$LWT = EWT - TD$$

$$LWT = 50 - 10 = 40^{\circ}\text{F}$$

In this example, as long as the EWT does not fall below 50°F, the system will operate as designed. For EWTs below 50°F, higher flow rates will be required (open loop systems, for example, require at least 2 gpm/ton when EWT is below 50°F).

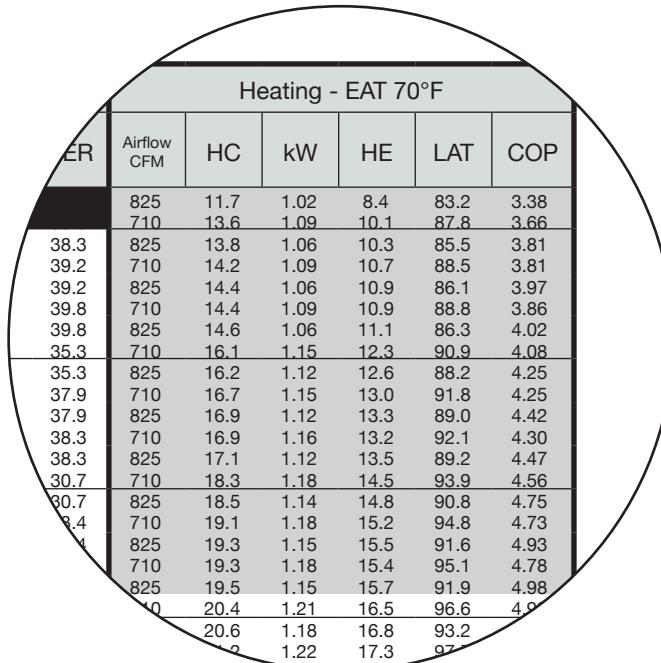

# ClimateMaster Geothermal Heat Pump Systems

## Performance Data Selection Notes – vFlow Models

**Antifreeze Correction Table**

Antifreeze Type	Antifreeze %	Cooling		Heating		WPD Corr. Fct. EWT 30°F	
		EWT 90°F		EWT 30°F			
		Total Cap	Sens Cap	Power	Htg Cap	Power	
Water	0	1.000	1.000	1.000	1.000	1.000	1.000
Propylene Glycol	5	0.995	0.995	1.003	0.989	0.997	1.070
	15	0.986	0.986	1.009	0.968	0.990	1.210
	25	0.978	0.978	1.014	0.947	0.983	1.360
Methanol	5	0.997	0.997	1.002	0.989	0.997	1.070
	15	0.990	0.990	1.007	0.968	0.990	1.160
	25	0.982	0.982	1.012	0.949	0.984	1.220
Ethanol	5	0.998	0.998	1.002	0.981	0.994	1.140
	15	0.994	0.994	1.005	0.944	0.983	1.300
	25	0.986	0.986	1.009	0.917	0.974	1.360
Ethylene Glycol	5	0.998	0.998	1.002	0.993	0.998	1.040
	15	0.994	0.994	1.004	0.980	0.994	1.120
	25	0.988	0.988	1.008	0.966	0.990	1.200

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Performance Data — TES/TEP026 Part Load With vFlow

950 CFM Nominal Airflow Heating, 850 CFM Nominal Airflow Cooling

Performance capacities shown in thousands of Btu/h

EWT °F	Cooling - EAT 80/67°F										Heating - EAT 70°F													
	GPM	WPD		CFM	TC	SC	kW	HR	EER	LWT	TTS HWC	TTP HWC	GPM	WPD		CFM	HC	kW	HE	COP	LAT	LWT	TTS HWC	TTP HWC
		PSI	FT											PSI	FT									
20	1.0	0.4	1.0	590	22.5	14.7	0.77	25.1	29.2	70.0	0.9	0.8	4.5	2.5	5.8	670	11.4	1.21	7.3	2.8	85.8	16.8	1.1	1.1
	1.0	0.4	1.0	725	23.1	16.4	0.81	25.9	28.5	70.0	0.9	0.9	4.5	2.5	5.8	825	11.7	1.15	7.7	3.0	83.1	16.6	1.2	1.1
30	1.3	0.3	0.7	590	22.5	14.7	0.77	25.1	29.2	70.0	0.9	0.8	2.3	0.7	1.7	670	13.0	1.20	8.9	3.2	87.9	22.3	1.3	1.2
	1.3	0.3	0.7	725	23.1	16.4	0.81	25.9	28.5	70.0	0.9	0.9	2.3	0.7	1.7	825	13.3	1.14	9.4	3.4	84.9	21.8	1.3	1.2
	1.3	0.3	0.7	590	22.5	14.7	0.77	25.1	29.2	70.0	0.9	0.8	3.4	1.3	3.0	670	13.6	1.20	9.5	3.3	88.9	24.4	1.3	1.3
	1.3	0.3	0.7	590	22.5	14.7	0.77	25.1	29.2	70.0	0.9	0.9	3.4	1.3	3.0	825	14.0	1.14	10.1	3.6	85.7	24.1	1.4	1.3
	1.3	0.3	0.7	725	23.1	16.4	0.81	25.9	28.5	70.0	0.9	0.9	4.5	2.0	4.6	670	14.0	1.20	9.9	3.4	89.4	25.6	1.3	1.3
40	1.7	0.3	0.8	590	22.5	14.7	0.77	25.1	29.2	70.0	0.9	0.8	2.3	0.5	1.2	670	15.3	1.20	11.2	3.7	91.2	30.2	1.5	1.4
	1.7	0.3	0.8	725	23.1	16.4	0.81	25.9	28.5	70.0	0.9	0.9	2.3	0.5	1.2	825	15.7	1.14	11.8	4.0	87.6	29.7	1.5	1.4
	1.7	0.3	0.8	590	22.5	14.7	0.77	25.1	29.2	70.0	0.9	0.8	3.4	1.0	2.4	670	16.2	1.21	12.1	3.9	92.4	32.9	1.5	1.4
	1.7	0.3	0.8	725	23.1	16.4	0.81	25.9	28.5	70.0	0.9	0.9	3.4	1.0	2.4	825	16.6	1.15	12.6	4.2	88.6	32.6	1.6	1.5
	1.7	0.3	0.8	590	22.5	14.7	0.77	25.1	29.2	70.0	0.9	0.8	4.5	1.6	3.8	670	16.7	1.21	12.5	4.0	93.0	34.4	1.6	1.5
50	2.3	0.5	1.0	590	22.3	14.7	0.79	25.0	28.2	71.7	1.1	1.0	2.3	0.4	1.0	670	17.7	1.21	13.6	4.3	94.5	38.2	1.6	1.5
	2.3	0.5	1.0	725	22.9	16.4	0.83	25.7	27.6	72.4	1.1	1.0	2.3	0.4	1.0	825	18.1	1.15	14.2	4.6	90.3	37.6	1.7	1.6
	2.6	0.6	1.3	590	22.5	14.7	0.77	25.1	29.2	70.0	0.9	0.8	3.4	0.9	2.0	670	18.7	1.21	14.6	4.5	95.9	41.4	1.7	1.6
	2.6	0.6	1.3	725	23.1	16.4	0.81	25.9	28.5	70.0	0.9	0.9	3.4	0.9	2.0	825	19.1	1.15	15.2	4.9	91.5	41.0	1.8	1.7
	2.6	0.6	1.3	725	23.1	16.4	0.81	25.9	28.5	70.0	0.9	0.9	4.5	1.4	3.2	825	19.7	1.15	15.8	5.0	92.1	43.0	1.8	1.7
60	2.3	0.4	1.0	590	21.4	14.4	0.90	24.4	23.7	81.3	1.5	1.4	2.3	0.4	1.0	670	20.0	1.22	15.8	4.8	97.7	46.2	1.8	1.7
	2.3	0.4	1.0	725	22.0	16.0	0.95	25.2	23.1	81.9	1.5	1.4	2.3	0.4	1.0	825	20.5	1.16	16.5	5.2	93.0	45.6	1.9	1.8
	3.4	0.8	1.8	590	22.0	14.6	0.82	24.8	27.0	74.6	1.2	1.1	3.4	0.8	1.8	670	21.1	1.22	17.0	5.1	99.2	50.0	1.9	1.8
	3.4	0.8	1.8	725	22.7	16.3	0.86	25.6	26.4	75.1	1.2	1.1	3.4	0.8	1.8	825	21.6	1.16	17.7	5.5	94.3	49.6	1.9	1.8
	4.5	1.3	2.9	590	22.3	14.7	0.78	25.0	28.7	71.1	1.0	0.9	4.5	1.3	2.9	670	21.7	1.23	17.5	5.2	100.0	52.2	1.9	1.8
70	2.3	0.5	1.1	590	20.3	13.9	1.04	23.8	19.6	90.7	1.9	1.8	2.3	0.4	1.0	670	22.2	1.23	18.0	5.3	100.7	54.3	2.0	1.9
	2.3	0.5	1.1	725	20.9	15.6	1.09	24.6	19.2	91.4	2.0	1.9	2.3	0.4	1.0	825	22.7	1.17	18.7	5.7	95.5	53.7	2.0	1.9
	3.4	0.8	1.8	590	21.1	14.2	0.94	24.3	22.4	84.3	1.5	1.5	3.4	0.8	1.8	670	23.4	1.23	19.2	5.6	102.3	58.7	2.0	1.9
	3.4	0.8	1.8	725	21.7	15.9	0.99	25.0	21.9	84.7	1.6	1.5	3.4	0.8	1.8	825	23.9	1.17	19.9	6.0	96.8	58.3	2.1	2.0
	4.5	1.2	2.7	590	21.4	14.4	0.89	24.5	24.0	80.9	1.4	1.3	4.5	1.2	2.7	670	24.0	1.24	19.7	5.7	103.1	61.2	2.1	2.0
80	2.3	0.5	1.2	590	19.1	13.5	1.19	23.2	16.1	100.2	2.6	2.5	2.3	0.5	1.1	670	24.2	1.24	20.0	5.7	103.5	62.6	2.1	2.0
	2.3	0.5	1.2	725	19.7	15.1	1.25	24.0	15.8	100.8	2.7	2.6	2.3	0.5	1.1	825	24.8	1.18	20.8	6.2	97.8	61.9	2.2	2.1
	3.4	0.8	1.8	590	19.9	13.8	1.08	23.6	18.4	93.9	2.1	2.0	2.9	0.6	1.5	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
	3.4	0.8	1.8	725	20.5	15.4	1.14	24.4	18.0	94.4	2.2	2.1	2.9	0.6	1.5	825	25.5	1.19	21.4	6.3	98.6	65.0	2.2	2.1
	4.5	1.2	2.7	590	20.3	14.0	1.04	23.9	19.6	90.6	1.9	1.8	2.9	0.6	1.5	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
90	2.3	0.5	1.2	725	20.9	15.6	1.09	24.7	19.2	91.0	2.0	1.9	2.9	0.6	1.5	825	25.5	1.19	21.4	6.3	98.6	65.0	2.2	2.1
	2.3	0.5	1.2	590	18.0	13.0	1.36	22.6	13.2	109.7	3.4	3.2	1.7	0.4	1.0	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
	2.3	0.5	1.2	725	19.3	14.9	1.31	23.8	14.7	110.3	2.9	2.8	1.7	0.4	1.0	825	25.5	1.19	21.4	6.3	98.6	65.0	2.2	2.1
	3.4	0.8	1.9	590	18.8	13.3	1.24	23.0	15.1	103.5	2.8	2.7	1.7	0.4	1.0	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
	3.4	0.8	1.9	725	19.3	14.9	1.31	23.8	14.7	104.0	2.9	2.8	1.7	0.4	1.0	825	25.5	1.19	21.4	6.3	98.6	65.0	2.2	2.1
100	4.5	1.2	2.7	590	19.2	13.5	1.19	23.2	16.1	100.3	2.6	2.5	1.7	0.4	1.0	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
	4.5	1.2	2.7	725	19.7	15.1	1.25	24.0	15.8	100.7	2.7	2.6	1.7	0.4	1.0	825	25.5	1.19	21.4	6.3	98.6	65.0	2.2	2.1
	3.4	0.8	1.9	590	17.6	12.9	1.43	22.5	12.3	113.2	3.7	3.5	1.2	0.4	0.9	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
	3.4	0.8	1.9	725	18.1	14.4	1.50	23.2	12.1	113.7	3.8	3.6	1.2	0.4	0.9	825	25.5	1.19	21.4	6.3	98.6	65.0	2.2	2.1
	4.5	1.2	2.7	590	18.0	13.0	1.37	22.6	13.1	110.1	3.4	3.2	1.2	0.4	0.9	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
110	2.3	0.5	1.1	590	16.0	12.4	1.77	22.0	9.0	129.1	5.3	5.1	1.0	0.3	0.7	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
	2.3	0.5	1.1	725	16.5	13.9	1.86	22.8	8.8	129.8	5.5	5.2	1.0	0.3	0.7	825	25.5	1.19	21.4	6.3	98.6	65.0	2.2	2.1
	3.4	0.8	1.8	590	16.6	12.6	1.62	22.1	10.2	123.0	4.6	4.4	1.0	0.3	0.7	670	24.9	1.25	20.6	5.8	104.4	65.0	2.2	2.1
	3.4	0.8	1.8																					

# ClimateMaster Geothermal Heat Pump Systems

## Performance Data — TES/TEP026 Full Load With vFlow

950 CFM Nominal (Rated) Airflow Heating, 850 CFM Nominal (Rated) Airflow Cooling

Performance capacities shown in thousands of Btu/h

EWT °F	Cooling - EAT 80/67°F												Heating - EAT 70°F												
	GPM	WPD		CFM	TC	SC	kW	HR	EER	LWT	TTS HWC	TTP HWC	GPM	WPD		CFM	HC	kW	HE	COP	LAT	LWT	TTS HWC	TTP HWC	
		PSI	FT											PSI	FT										
20	1.4	0.6	1.4	690	28.9	17.9	1.16	32.9	25.0	70.0	1.4	1.3	6.0	3.7	8.6	770	15.8	1.54	10.5	3.0	89.0	16.5	1.5	1.5	
	1.4	0.6	1.4	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		6.0	3.7	8.6	950	16.1	1.46	11.2	3.2	85.7	16.3	1.6	1.5
30	1.7	0.5	1.1	690	28.9	17.9	1.16	32.9	25.0	70.0	1.3	1.3	3.0	1.1	2.5	770	18.0	1.58	12.6	3.3	91.6	21.6	1.6	1.6	
	1.7	0.5	1.2	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		3.0	1.1	2.5	950	18.4	1.50	13.3	3.6	88.0	21.1	1.7	1.6
	1.7	0.5	1.2	690	28.9	17.9	1.16	32.9	25.0	70.0	1.3	1.3		4.5	2.0	4.6	770	19.1	1.59	13.6	3.5	92.9	23.9	1.8	1.7
	1.7	0.5	1.2	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		4.5	2.0	4.6	950	19.5	1.51	14.4	3.8	89.0	23.6	1.9	1.8
	1.7	0.5	1.2	690	28.9	17.9	1.16	32.9	25.0	70.0	1.3	1.3		6.0	3.1	7.1	770	19.6	1.60	14.2	3.6	93.6	25.3	1.8	1.7
	1.7	0.5	1.2	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		6.0	3.1	7.1	950	20.1	1.52	14.9	3.9	89.6	25.0	1.9	1.8
40	2.3	0.5	1.2	690	28.9	17.9	1.16	32.9	25.0	70.0	1.3	1.2	3.0	0.9	2.0	770	21.2	1.62	15.7	3.8	95.5	29.6	2.0	1.9	
	2.3	0.5	1.2	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		3.0	0.9	2.0	950	21.7	1.54	16.4	4.1	91.1	29.0	2.1	2.0
	2.3	0.5	1.2	690	28.9	17.9	1.16	32.9	25.0	70.0	1.3	1.2		4.5	1.6	3.8	770	22.3	1.64	16.7	4.0	96.9	32.6	2.1	2.0
	2.3	0.5	1.2	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		4.5	1.6	3.8	950	22.9	1.56	17.5	4.3	92.3	32.2	2.1	2.1
	2.3	0.5	1.2	690	28.9	17.9	1.16	32.9	25.0	70.0	1.3	1.2		6.0	2.6	6.0	770	22.9	1.65	17.3	4.1	97.6	34.2	2.2	2.1
	2.3	0.5	1.2	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		6.0	2.6	6.0	950	23.5	1.57	18.1	4.4	92.9	34.0	2.3	2.2
50	3.0	0.7	1.6	690	28.7	17.8	1.20	32.8	24.0	71.8	1.5	1.4	3.0	0.7	1.6	770	24.0	1.67	18.3	4.2	98.9	37.8	2.4	2.3	
	3.0	0.7	1.6	850	29.5	19.9	1.26	33.8	23.4	72.5	1.5	1.4		3.0	0.7	1.6	950	24.6	1.59	19.1	4.5	93.9	37.2	2.5	2.4
	3.4	0.8	1.8	690	28.9	17.9	1.16	32.9	25.0	70.0	1.3	1.3		4.5	1.4	3.2	770	25.1	1.70	19.3	4.3	100.2	41.4	2.5	2.4
	3.4	0.8	1.8	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		4.5	1.4	3.2	950	25.7	1.61	20.2	4.7	95.1	41.0	2.6	2.5
	3.4	0.8	1.8	690	28.9	17.9	1.16	32.9	25.0	70.0	1.3	1.3		6.0	2.3	5.2	770	24.4	1.68	18.6	4.2	99.3	43.8	2.6	2.5
	3.4	0.8	1.8	850	29.8	20.0	1.22	33.9	24.4	70.0	1.4	1.3		6.0	2.3	5.2	950	25.0	1.60	19.5	4.6	94.3	38.5	2.7	2.6
60	3.0	0.7	1.6	690	27.6	17.4	1.32	32.1	20.9	81.4	1.8	1.7	3.0	0.7	1.5	770	26.4	1.73	20.5	4.5	101.8	46.3	2.7	2.6	
	3.0	0.7	1.6	850	28.4	19.5	1.39	33.1	20.4	82.1	1.9	1.8		3.0	0.7	1.5	950	27.1	1.64	21.5	4.8	96.4	45.7	2.8	2.7
	4.5	1.3	3.0	690	28.4	17.7	1.23	32.6	23.2	74.5	1.5	1.5		4.5	1.3	2.9	770	27.5	1.75	21.6	4.6	103.1	50.4	2.9	2.8
	4.5	1.3	3.0	850	29.3	19.8	1.29	33.7	22.7	75.0	1.6	1.5		4.5	1.3	2.9	950	28.2	1.66	22.5	5.0	97.5	50.0	3.0	2.9
	6.0	2.0	4.6	690	28.8	17.8	1.18	32.8	24.5	70.9	1.4	1.3		6.0	2.0	4.7	770	28.1	1.76	22.1	4.7	103.8	52.6	3.0	2.9
	6.0	2.0	4.6	850	29.6	19.9	1.24	33.9	23.9	71.3	1.4	1.3		6.0	2.0	4.7	950	28.8	1.67	23.1	5.1	98.0	52.3	3.1	2.9
70	3.0	0.6	1.4	690	26.3	17.0	1.47	31.3	17.9	90.9	2.3	2.2	3.0	0.6	1.5	770	28.6	1.77	22.6	4.7	104.4	55.0	3.1	2.9	
	3.0	0.6	1.4	850	27.1	19.0	1.55	32.4	17.5	91.6	2.4	2.3		3.0	0.6	1.5	950	29.3	1.68	23.5	5.1	98.5	54.3	3.2	3.0
	4.5	1.2	2.8	690	27.3	17.3	1.36	31.9	20.1	84.2	1.9	1.8		4.5	1.2	2.7	770	29.7	1.80	23.5	4.8	105.7	59.5	3.3	3.1
	4.5	1.2	2.8	850	28.1	19.3	1.43	32.9	19.6	84.6	2.0	1.9		4.5	1.2	2.7	950	30.4	1.71	24.5	5.2	99.6	59.1	3.4	3.2
	6.0	1.9	4.4	690	27.7	17.5	1.31	32.2	21.1	80.7	1.8	1.7		6.0	1.9	4.4	770	30.2	1.81	24.1	4.9	106.4	62.0	3.4	3.2
	6.0	1.9	4.4	850	28.5	19.5	1.38	33.2	20.7	81.1	1.9	1.8		6.0	1.9	4.4	950	30.9	1.72	25.1	5.3	100.2	61.6	3.5	3.3
80	3.0	0.7	1.6	690	25.0	16.5	1.64	30.6	15.2	100.4	3.0	2.9	3.0	0.7	1.5	770	30.5	1.82	24.3	4.9	106.7	63.8	3.4	3.2	
	3.0	0.7	1.6	850	25.7	18.4	1.73	31.6	14.8	101.0	3.1	2.9		3.0	0.7	1.5	950	31.3	1.73	25.4	5.3	100.5	63.1	3.5	3.3
	4.5	1.2	2.8	690	25.9	16.8	1.52	31.1	17.1	93.8	2.5	2.4		3.4	0.8	1.8	770	31.0	1.83	24.7	5.0	107.2	65.0	3.5	3.3
	4.5	1.2	2.8	850	26.7	18.8	1.60	32.1	16.7	94.3	2.6	2.5		3.4	0.8	1.8	950	31.7	1.74	25.8	5.3	100.9	65.0	3.6	3.4
	6.0	1.8	4.2	690	26.4	17.0	1.45	31.4	18.2	90.5	2.3	2.2		3.4	0.8	1.8	770	31.0	1.83	24.7	5.0	107.2	65.0	3.5	3.3
	6.0	1.8	4.2	850	27.2	19.0	1.53	32.4	17.8	90.8	2.4	2.3		3.4	0.8	1.8	950	31.7	1.74	25.8	5.3	100.9	65.0	3.6	3.4
90	3.0	0.7	1.6	690	23.6	15.9	1.84	29.9	12.8	110.0	3.7	3.5	2.1	0.5	1.2	770	31.0	1.83	24.7	5.0	107.2	65.0	3.5	3.3	
	3.0	0.7	1.6	850	25.3	18.2	1.79	31.4	14.1	110.6	3.3	3.1		2.1	0.5	1.2	950	31.7	1.74	25.8	5.3	100.9	65.0	3.6	3.4
	4.5	1.2	2.8	690	24.5	16.3	1.70	30.3	14.4	103.5	3.2	3.0		2.1	0.5	1.2	770	31.0	1.83	24.7	5.0	107.2	65.0	3.5	3.3
	4.5	1.2	2.8	850	25.3	18.2	1.79	31.4	14.1	103.9	3.3	3.1		2.1	0.5	1.2	950	31.7	1.74	25.8	5.3	100.9	65.0	3.6	3.4
	6.0	1.8	4.2	690	25.0	16.5	1.63	30.6	15.3	100.2	2.9	2.8		2.1	0.5	1.2	770	31.0	1.83	24.7	5.0	107.2	65.0	3.5	3.3
	6.0	1.8	4.2	850	25.7	18.4	1.72	31.																	

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Performance Data — TES/TEP038 Part Load With vFlow

1000 CFM Nominal Airflow Heating, 1000 CFM Nominal Airflow Cooling

Performance capacities shown in thousands of Btu/h

EWT °F	Cooling - EAT 80/67°F											Heating - EAT 70°F												
	GPM	WPD		CFM	TC	SC	kW	HR	EER	LWT	TTS HWC	TTP HWC	GPM	WPD		CFM	HC	kW	HE	COP	LAT	LWT	TTS HWC	TTP HWC
		PSI	FT											PSI	FT									
20	1.4	1.0	2.3	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	6.0	4.9	11.2	810	15.9	1.56	10.6	3.0	88.2	16.5	1.6	1.6
	1.4	1.0	2.3	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	6.0	4.9	11.2	1000	16.3	1.48	11.2	3.2	85.1	16.3	1.7	1.6
30	1.7	0.7	1.6	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	3.0	1.5	3.4	810	17.7	1.57	12.4	3.3	90.2	21.8	1.7	1.7
	1.7	0.7	1.6	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	3.0	1.5	3.4	1000	18.1	1.49	13.0	3.6	86.8	21.3	1.8	1.7
	1.7	0.7	1.6	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	4.5	2.6	6.0	810	18.6	1.57	13.2	3.5	91.2	24.1	1.8	1.7
	1.7	0.7	1.6	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	4.5	2.6	6.0	1000	19.0	1.49	13.9	3.7	87.6	23.8	1.9	1.8
	1.7	0.7	1.6	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	6.0	3.8	8.9	810	19.1	1.58	13.7	3.5	91.8	25.4	1.9	1.8
	1.7	0.7	1.6	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	6.0	3.8	8.9	1000	19.5	1.50	14.4	3.8	88.1	25.2	2.0	1.9
40	2.3	0.7	1.6	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	3.0	1.1	2.5	810	20.5	1.59	15.1	3.8	93.4	30.0	2.0	1.9
	2.3	0.7	1.6	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	3.0	1.1	2.5	1000	21.0	1.51	15.8	4.1	89.4	29.4	2.1	2.0
	2.3	0.7	1.6	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	4.5	2.0	4.7	810	21.5	1.59	16.1	4.0	94.6	32.9	2.1	2.0
	2.3	0.7	1.6	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	4.5	2.0	4.7	1000	22.0	1.51	16.9	4.3	90.4	32.5	2.2	2.1
	2.3	0.7	1.6	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	6.0	3.1	7.2	810	22.1	1.59	16.6	4.1	95.2	34.5	2.2	2.1
	2.3	0.7	1.6	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	6.0	3.1	7.2	1000	22.6	1.51	17.4	4.4	90.9	34.2	2.3	2.2
50	3.0	0.9	2.0	810	29.7	18.6	1.00	33.1	29.8	72.1	1.3	1.2	3.0	0.9	2.0	810	23.2	1.60	17.7	4.2	96.5	38.2	2.3	2.2
	3.0	0.9	2.0	1000	30.6	20.8	1.05	34.1	29.1	72.8	1.3	1.2	3.0	0.9	2.0	1000	23.7	1.52	18.5	4.6	92.0	37.7	2.4	2.3
	3.4	1.1	2.4	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	4.5	1.7	3.9	810	24.3	1.61	18.8	4.4	97.8	41.6	2.4	2.3
	3.4	1.1	2.4	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	4.5	1.7	3.9	1000	24.9	1.53	19.7	4.8	93.0	41.3	2.5	2.4
	3.4	1.1	2.4	810	29.9	18.6	0.96	33.2	31.2	70.0	1.2	1.1	6.0	2.7	6.2	810	24.9	1.61	19.4	4.5	98.5	43.5	2.5	2.4
	3.4	1.1	2.4	1000	30.8	20.8	1.01	34.2	30.5	70.0	1.2	1.1	6.0	2.7	6.2	1000	25.5	1.53	20.3	4.9	93.6	43.2	2.6	2.5
60	3.0	0.8	1.8	810	28.7	18.4	1.16	32.7	24.8	81.8	1.8	1.7	3.0	0.8	1.8	810	25.8	1.62	20.2	4.7	99.4	46.5	2.6	2.5
	3.0	0.8	1.8	1000	29.6	20.5	1.22	33.7	24.2	82.5	1.9	1.8	3.0	0.8	1.8	1000	26.4	1.54	21.1	5.0	94.4	45.9	2.7	2.6
	4.5	1.5	3.5	810	29.5	18.5	1.04	33.0	28.5	74.7	1.4	1.3	4.5	1.5	3.5	810	27.0	1.62	21.5	4.9	100.9	50.4	2.7	2.6
	4.5	1.5	3.5	1000	30.3	20.7	1.09	34.1	27.8	75.1	1.4	1.3	4.5	1.5	3.5	1000	27.7	1.54	22.4	5.3	95.6	50.0	2.8	2.7
	6.0	2.4	5.5	810	29.8	18.6	0.98	33.1	30.5	71.0	1.3	1.2	6.0	2.4	5.6	810	27.7	1.63	22.1	5.0	101.7	52.6	2.8	2.7
	6.0	2.4	5.5	1000	30.7	20.8	1.03	34.2	29.8	71.4	1.3	1.2	6.0	2.4	5.6	1000	28.4	1.55	23.1	5.4	96.3	52.3	2.9	2.8
70	3.0	0.8	1.9	810	27.5	18.0	1.35	32.1	20.4	91.4	2.6	2.5	3.0	0.8	1.9	810	28.3	1.63	22.7	5.1	102.4	54.8	2.8	2.7
	3.0	0.8	1.9	1000	28.3	20.1	1.42	33.2	19.9	92.1	2.7	2.6	3.0	0.8	1.9	1000	29.0	1.55	23.7	5.5	96.8	54.2	2.9	2.8
	4.5	1.5	3.4	810	28.4	18.3	1.21	32.6	23.6	84.5	2.0	1.9	4.5	1.5	3.4	810	29.7	1.64	24.1	5.3	104.0	59.3	2.9	2.8
	4.5	1.5	3.4	1000	29.3	20.4	1.27	33.6	23.0	84.9	2.1	2.0	4.5	1.5	3.4	1000	30.4	1.56	25.1	5.7	98.2	58.8	3.0	2.9
	6.0	2.3	5.2	810	28.9	18.4	1.14	32.8	25.3	80.9	1.7	1.7	6.0	2.3	5.3	810	30.5	1.64	24.9	5.4	104.9	61.7	3.0	2.9
	6.0	2.3	5.2	1000	29.7	20.6	1.20	33.8	24.7	81.3	1.8	1.7	6.0	2.3	5.3	1000	31.2	1.56	25.9	5.9	98.9	61.4	3.1	2.9
80	3.0	0.9	2.0	810	26.2	17.4	1.56	31.5	16.8	101.0	3.6	3.4	3.0	0.9	2.0	810	30.9	1.65	25.2	5.5	105.3	63.2	3.0	2.9
	3.0	0.9	2.0	1000	26.9	19.5	1.64	32.5	16.4	101.7	3.7	3.5	3.0	0.9	2.0	1000	31.6	1.57	26.2	5.9	99.2	62.5	3.1	2.9
	4.5	1.5	3.4	810	27.2	17.8	1.41	32.0	19.3	94.2	2.8	2.7	3.6	1.1	2.5	810	31.6	1.65	26.0	5.6	106.1	65.0	3.1	2.9
	4.5	1.5	3.4	1000	28.0	19.9	1.48	33.0	18.9	94.7	2.9	2.8	3.6	1.1	2.5	1000	32.4	1.57	27.0	6.0	100.0	65.0	3.2	3.0
	6.0	2.2	5.2	810	27.7	18.0	1.33	32.2	20.8	90.7	2.5	2.4	3.6	1.1	2.5	810	31.6	1.65	26.0	5.6	106.1	65.0	3.1	2.9
	6.0	2.2	5.2	1000	28.5	20.1	1.40	33.2	20.3	91.1	2.6	2.5	3.6	1.1	2.5	1000	32.4	1.57	27.0	6.0	100.0	65.0	3.2	3.0
90	3.0	0.9	2.1	810	24.6	16.8	1.80	30.7	13.7	110.5	4.7	4.5	2.2	0.7	1.6	810	31.6	1.65	26.0	5.6	106.1	65.0	3.1	2.9
	3.0	0.9	2.1	1000	26.5	19.3	1.71	32.3	15.5	111.2	4.0	3.8	2.2	0.7	1.6	1000	32.4	1.57	27.0	6.0	100.0	65.0	3.2	3.0
	4.5	1.5	3.5	810	25.7	17.3	1.62	31.3	15.8	103.9	3.9	3.7	2.2	0.7	1.6	810	31.6	1.65	26.0	5.6	106.1	65.0	3.1	2.9
	4.5	1.5	3.5	1000	26.5	19.3	1.71	32.3	15.5	104.4	4.0	3.8	2.2	0.7	1.6	1000	32.4	1.57	27.0	6.0	100.0	65.0	3.2	3.0
	6.0	2.2	5.2	810	26.3	17.5	1.54	31.5	17.1	100.5	3.5	3.3	2.2	0.7	1.6	810	31.6	1.65	26.0	5.6	106.1	65.0	3.1	2.9
	6.0	2.2	5.2	1000	27.0	19.5	1.62	32.6	16.7	100.9	3.6	3.4	2.2	0.7	1.6	1000	32.4	1.57	27.0	6.0	100.0	65.0	3.2	3.0
100	3.0	0.9	2.1	810	23.0	16.1	2.05	30.0	11.2	120.0	6.1	5.8	1.5	0.5	1.1	810	31.6	1.65	26.0	5.6	1			

# ClimateMaster Geothermal Heat Pump Systems

## Performance Data — TES/TEP038 Full Load With vFlow

1000 CFM Nominal Airflow Heating, 1000 CFM Nominal Airflow Cooling

Performance capacities shown in thousands of Btu/h

EWT °F	Cooling - EAT 80/67°F											Heating - EAT 70°F												
	GPM	WPD		CFM	TC	SC	kW	HR	EER	LWT	TTS HWC	TTP HWC	GPM	WPD		CFM	HC	kW	HE	COP	LAT	LWT	TTS HWC	TTP HWC
		PSI	FT											PSI	FT									
20	2.0	1.4	3.3	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	9.0	8.3	19.2	1010	23.9	2.12	16.7	3.3	91.9	16.3	2.0	1.9
	2.0	1.4	3.3	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	9.0	8.3	19.2	1250	24.5	2.01	17.6	3.6	88.1	16.1	2.1	2.0
30	2.5	1.2	2.7	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	4.5	2.6	6.0	1010	26.0	2.15	18.7	3.6	93.9	21.7	2.3	2.2
	2.5	1.2	2.7	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	4.5	2.6	6.0	1250	26.6	2.04	19.7	3.8	89.7	21.3	2.4	2.3
	2.5	1.2	2.7	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	6.8	4.6	10.6	1010	27.1	2.17	19.7	3.7	94.9	24.2	2.5	2.4
	2.5	1.2	2.7	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	6.8	4.6	10.6	1250	27.7	2.06	20.7	3.9	90.6	23.9	2.6	2.5
	2.5	1.2	2.7	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	9.0	6.9	16.0	1010	27.7	2.18	20.2	3.7	95.4	25.5	2.5	2.4
	2.5	1.2	2.7	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	9.0	6.9	16.0	1250	28.3	2.07	21.3	4.0	91.0	25.3	2.6	2.5
40	3.3	1.3	2.9	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	4.5	2.0	4.7	1010	29.5	2.21	21.9	3.9	97.0	30.2	2.8	2.7
	3.3	1.3	2.9	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	4.5	2.0	4.7	1250	30.2	2.10	23.0	4.2	92.4	29.8	2.9	2.8
	3.3	1.3	2.9	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	6.8	3.8	8.8	1010	30.7	2.24	23.1	4.0	98.2	33.2	3.0	2.9
	3.3	1.3	2.9	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	6.8	3.8	8.8	1250	31.5	2.13	24.2	4.3	93.3	32.9	3.1	2.9
	3.3	1.3	2.9	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	9.0	5.9	13.6	1010	31.4	2.25	23.7	4.1	98.8	34.7	3.1	2.9
	3.3	1.3	2.9	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	9.0	5.9	13.6	1250	32.1	2.14	24.8	4.4	93.8	34.5	3.2	3.0
50	4.5	1.7	3.9	1010	41.7	25.7	1.70	47.5	24.5	71.1	1.8	1.7	4.5	1.7	3.9	1010	32.9	2.29	25.1	4.2	100.2	38.8	3.3	3.1
	4.5	1.7	3.9	1250	42.9	28.8	1.79	49.0	24.0	71.8	1.9	1.8	4.5	1.7	3.9	1250	33.7	2.17	26.3	4.6	95.0	38.3	3.4	3.2
	4.9	1.9	4.5	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	6.8	3.3	7.6	1010	34.3	2.32	26.4	4.3	101.5	42.2	3.5	3.3
	4.9	1.9	4.5	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	6.8	3.3	7.6	1250	35.1	2.20	27.6	4.7	96.0	41.9	3.6	3.4
	4.9	1.9	4.5	1010	41.9	25.8	1.68	47.6	24.9	70.0	1.8	1.7	9.0	5.2	11.9	1010	35.0	2.34	27.0	4.4	102.1	44.0	3.6	3.4
	4.9	1.9	4.5	1250	43.1	28.8	1.77	49.1	24.3	70.0	1.9	1.8	9.0	5.2	11.9	1250	35.8	2.22	28.3	4.7	96.6	43.7	3.7	3.5
60	4.5	1.5	3.5	1010	40.5	25.5	1.87	46.9	21.7	80.9	2.5	2.4	4.5	1.5	3.5	1010	36.2	2.36	28.2	4.5	103.2	47.5	3.8	3.6
	4.5	1.5	3.5	1250	41.7	28.5	1.97	48.4	21.2	81.5	2.6	2.5	4.5	1.5	3.5	1250	37.1	2.24	29.4	4.9	97.5	46.9	3.9	3.7
	6.8	2.9	6.8	1010	41.4	25.7	1.75	47.4	23.7	74.0	2.0	1.9	6.8	2.9	6.8	1010	37.7	2.40	29.5	4.6	104.6	51.2	4.0	3.8
	6.8	2.9	6.8	1250	42.6	28.7	1.84	48.9	23.2	74.5	2.1	2.0	6.8	2.9	6.8	1250	38.6	2.28	30.8	5.0	98.6	50.9	4.1	3.9
	9.0	4.7	10.8	1010	41.8	25.8	1.69	47.6	24.7	70.6	1.8	1.7	9.0	4.7	10.8	1010	38.5	2.41	30.2	4.7	105.3	53.3	4.1	3.9
	9.0	4.7	10.8	1250	43.0	28.8	1.78	49.1	24.2	70.9	1.9	1.8	9.0	4.7	10.8	1250	39.4	2.29	31.6	5.0	99.2	53.0	4.2	4.0
70	4.5	1.5	3.4	1010	39.1	25.1	2.07	46.2	18.9	90.5	3.3	3.1	4.5	1.5	3.4	1010	39.4	2.43	31.1	4.7	106.1	56.2	4.3	4.0
	4.5	1.5	3.4	1250	40.2	28.0	2.18	47.7	18.5	91.2	3.4	3.2	4.5	1.5	3.4	1250	40.3	2.31	32.4	5.1	99.9	55.6	4.4	4.2
	6.8	2.8	6.4	1010	40.2	25.4	1.93	46.7	20.8	83.8	2.7	2.6	6.8	2.8	6.4	1010	40.9	2.47	32.4	4.8	107.5	60.4	4.5	4.2
	6.8	2.8	6.4	1250	41.3	28.4	2.03	48.2	20.4	84.3	2.8	2.7	6.8	2.8	6.4	1250	41.9	2.35	33.8	5.2	101.0	60.0	4.6	4.4
	9.0	4.4	10.1	1010	40.7	25.5	1.86	47.0	21.8	80.4	2.4	2.3	9.0	4.4	10.1	1010	41.6	2.50	33.1	4.9	108.2	62.6	4.5	4.3
	9.0	4.4	10.1	1250	41.8	28.5	1.96	48.5	21.3	80.8	2.5	2.4	9.0	4.4	10.1	1250	42.6	2.37	34.5	5.3	101.6	62.3	4.7	4.5
80	4.5	1.5	3.4	1010	37.5	24.5	2.30	45.3	16.3	100.1	4.2	4.0	4.5	1.5	3.4	1010	42.3	2.51	33.7	4.9	108.8	65.0	4.6	4.4
	4.5	1.5	3.4	1250	38.6	27.4	2.42	46.8	15.9	100.8	4.3	4.1	4.5	1.5	3.4	1250	43.3	2.38	35.2	5.3	102.1	64.4	4.8	4.6
	6.8	2.7	6.2	1010	38.6	24.9	2.14	45.9	18.1	93.6	3.6	3.4	4.7	1.6	3.6	1010	42.5	2.52	33.9	4.9	108.9	65.0	4.7	4.5
	6.8	2.7	6.2	1250	39.8	27.8	2.25	47.4	17.7	94.1	3.7	3.5	4.7	1.6	3.6	1250	43.5	2.39	35.3	5.3	102.2	65.0	4.9	4.7
	9.0	4.2	9.7	1010	39.2	25.1	2.06	46.2	19.0	90.3	3.2	3.0	4.7	1.6	3.6	1010	42.5	2.52	33.9	4.9	108.9	65.0	4.7	4.5
	9.0	4.2	9.7	1250	40.3	28.0	2.17	47.7	18.6	90.6	3.3	3.1	4.7	1.6	3.6	1250	43.5	2.39	35.3	5.3	102.2	65.0	4.9	4.7
90	4.5	1.5	3.5	1010	35.7	23.9	2.57	44.5	13.9	109.8	5.2	5.0	2.8	0.9	2.0	1010	42.5	2.52	33.9	4.9	108.9	65.0	4.7	4.5
	4.5	1.5	3.5	1250	38.0	27.2	2.50	46.5	15.2	110.4	4.7	4.5	2.8	0.9	2.0	1250	43.5	2.39	35.3	5.3	102.2	65.0	4.9	4.7
	6.8	2.7	6.2	1010	36.9	24.3	2.38	45.0	15.6	103.3	4.5	4.3	2.8	0.9	2.0	1010	42.5	2.52	33.9	4.9	108.9	65.0	4.7	4.5
	6.8	2.7	6.2	1250	38.0	27.2	2.50	46.5	15.2	103.8	4.7	4.5	2.8	0.9	2.0	1250	43.5	2.39	35.3	5.3	102.2	65.0	4.9	4.7
	9.0	4.1	9.5	1010	37.5	24.6	2.29	45.4	16.4	100.1	4.2	4.0	2.8	0.9	2.0	1010	42.5	2.52	33.9	4.9	108.9	65.0	4.7	4.5
	9.0	4.1	9.5	1250	38.6	27.4	2.41	46.8	16.0	100.4	4.3	4.1	2.8	0.9	2.0	1250	43.5	2.39	35.3	5.3	102.2	65.0	4.9	4.7
100	4.5	1.5	3.4	1010	33.9	23.3	2.87	43.7	11.8	119.4	6.4	6.1	2.0	0.										

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Performance Data — TES/TEP049 Part Load With vFlow

1400 CFM Nominal (Rated) Airflow Heating, 1300 CFM Nominal (Rated) Airflow Cooling

Performance capacities shown in thousands of Btuh

EWT °F	Cooling - EAT 80/67°F											Heating - EAT 70°F												
	GPM	WPD		CFM	TC	SC	kW	HR	EER	LWT	TTS HWC	TTP HWC	GPM	WPD		CFM	HC	kW	HE	COP	LAT	LWT	TTS HWC	TTP HWC
		PSI	FT											PSI	FT									
20	1.9	0.1	0.2	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.4	1.3	9.0	3.2	7.4	1140	22.9	2.36	14.9	2.9	88.6	16.7	2.4	2.3
	1.9	0.1	0.2	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	9.0	3.2	7.4	1400	23.5	2.24	15.8	3.1	85.5	16.5	2.5	2.4
30	2.3	0.0	0.0	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.5	1.4	4.5	0.6	1.4	1140	25.0	2.36	17.0	3.1	90.3	22.5	2.5	2.4
	2.3	0.0	0.0	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	4.5	0.6	1.4	1400	25.6	2.24	18.0	3.3	86.9	22.0	2.6	2.5
	2.3	0.0	0.0	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.5	1.4	6.8	1.6	3.7	1140	26.0	2.35	18.0	3.2	91.1	24.7	2.5	2.4
	2.3	0.0	0.0	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	6.8	1.6	3.7	1400	26.6	2.23	19.0	3.5	87.6	24.4	2.6	2.5
	2.3	0.0	0.0	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.5	1.4	9.0	2.8	6.4	1140	26.5	2.35	18.5	3.3	91.6	25.9	2.5	2.4
	2.3	0.0	0.0	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	9.0	2.8	6.4	1400	27.2	2.23	19.6	3.6	88.0	25.7	2.6	2.5
40	3.1	0.1	0.2	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.5	1.4	4.5	0.5	1.1	1140	28.7	2.35	20.7	3.6	93.3	30.8	2.6	2.5
	3.1	0.1	0.2	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	4.5	0.5	1.1	1400	29.4	2.23	21.7	3.9	89.4	30.3	2.7	2.6
	3.1	0.1	0.2	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.5	1.4	6.8	1.3	3.1	1140	30.1	2.35	22.0	3.8	94.4	33.5	2.6	2.5
	3.1	0.1	0.2	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	6.8	1.3	3.1	1400	30.8	2.23	23.2	4.0	90.3	33.2	2.7	2.6
	3.1	0.1	0.2	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.5	1.4	9.0	2.4	5.6	1140	30.8	2.35	22.8	3.8	95.0	34.9	2.6	2.5
	3.1	0.1	0.2	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	9.0	2.4	5.6	1400	31.5	2.23	23.9	4.1	90.8	34.7	2.7	2.6
50	4.5	0.4	0.9	1300	40.1	24.3	1.50	45.2	26.7	70.1	1.5	1.4	4.5	0.4	0.9	1140	32.7	2.36	24.7	4.1	96.6	39.0	2.7	2.6
	4.5	0.4	0.9	1060	41.2	27.2	1.58	46.6	26.1	70.7	1.5	1.4	4.5	0.4	0.9	1400	33.5	2.24	25.8	4.4	92.1	38.5	2.8	2.7
	4.7	0.4	1.0	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.5	1.4	6.8	1.2	2.7	1140	34.4	2.36	26.4	4.3	98.0	42.2	2.8	2.7
	4.7	0.4	1.0	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	6.8	1.2	2.7	1400	35.2	2.24	27.6	4.6	93.3	41.9	2.9	2.8
	4.7	0.4	1.0	1300	40.1	24.3	1.49	45.2	26.9	70.0	1.5	1.4	9.0	2.2	5.1	1140	35.3	2.37	27.3	4.4	98.7	43.9	2.8	2.7
	4.7	0.4	1.0	1060	41.3	27.2	1.57	46.7	26.3	70.0	1.5	1.4	9.0	2.2	5.1	1400	36.2	2.25	28.5	4.7	93.9	43.7	2.9	2.8
60	4.5	0.4	0.8	1300	38.7	24.3	1.71	44.6	22.6	79.8	2.0	1.9	4.5	0.4	0.8	1140	36.9	2.37	28.8	4.6	99.9	47.2	2.8	2.7
	4.5	0.4	0.8	1060	39.8	27.1	1.80	46.0	22.1	80.4	2.1	2.0	4.5	0.4	0.8	1400	37.7	2.25	30.1	4.9	95.0	46.6	2.9	2.8
	6.8	1.1	2.5	1300	39.7	24.4	1.57	45.1	25.3	73.3	1.5	1.5	6.8	1.1	2.5	1140	38.8	2.38	30.7	4.8	101.5	51.0	2.9	2.8
	6.8	1.1	2.5	1060	40.9	27.2	1.65	46.5	24.8	73.7	1.6	1.5	6.8	1.1	2.5	1400	39.8	2.26	32.0	5.2	96.3	50.6	3.0	2.9
	9.0	2.0	4.7	1300	40.1	24.3	1.50	45.2	26.7	70.1	1.5	1.4	9.0	2.0	4.7	1140	39.9	2.38	31.7	4.9	102.4	52.9	3.0	2.9
	9.0	2.0	4.7	1060	41.3	27.2	1.58	46.7	26.1	70.4	1.5	1.4	9.0	2.0	4.7	1400	40.8	2.26	33.1	5.3	97.0	52.7	3.1	2.9
70	4.5	0.4	0.9	1300	36.8	23.8	1.95	43.5	18.9	89.3	2.7	2.6	4.5	0.4	0.9	1140	40.9	2.39	32.7	5.0	103.2	55.4	3.0	2.9
	4.5	0.4	0.9	1060	37.9	26.6	2.05	44.9	18.5	90.0	2.8	2.7	4.5	0.4	0.9	1400	41.9	2.27	34.1	5.4	97.7	54.8	3.1	2.9
	6.8	1.1	2.4	1300	38.2	24.2	1.79	44.3	21.4	83.0	2.2	2.1	6.8	1.1	2.4	1140	43.0	2.40	34.8	5.2	104.9	59.8	3.2	3.0
	6.8	1.1	2.4	1060	39.3	27.0	1.88	45.7	20.9	83.4	2.3	2.2	6.8	1.1	2.4	1400	44.0	2.28	36.2	5.7	99.1	59.4	3.3	3.1
	9.0	2.0	4.5	1300	38.8	24.3	1.71	44.6	22.7	79.9	1.9	1.8	9.0	2.0	4.5	1140	44.0	2.41	35.8	5.3	105.7	62.1	3.2	3.0
	9.0	2.0	4.5	1060	39.9	27.1	1.80	46.0	22.2	80.2	2.0	1.9	9.0	2.0	4.5	1400	45.0	2.29	37.2	5.8	99.8	61.7	3.3	3.1
80	4.5	0.4	0.9	1300	34.5	23.1	2.22	42.1	15.5	98.7	3.7	3.5	4.5	0.4	0.9	1140	44.6	2.39	32.7	5.0	106.2	63.8	3.3	3.1
	4.5	0.4	0.9	1060	35.5	25.8	2.34	43.5	15.2	99.3	3.8	3.6	4.5	0.4	0.9	1400	45.6	2.29	37.8	5.8	100.2	63.2	3.4	3.2
	6.8	1.1	2.4	1300	36.1	23.6	2.04	43.1	17.7	92.7	3.0	2.9	5.1	0.5	1.3	1140	45.3	2.41	37.1	5.5	106.8	65.0	3.4	3.2
	6.8	1.1	2.4	1060	37.2	26.4	2.15	44.5	17.3	93.1	3.1	2.9	5.1	0.5	1.3	1400	46.4	2.29	38.6	5.9	100.7	65.0	3.5	3.3
	9.0	1.9	4.4	1300	36.8	23.8	1.95	43.5	18.9	89.7	2.7	2.6	5.1	0.5	1.3	1140	45.3	2.41	37.1	5.5	106.8	65.0	3.4	3.2
	9.0	1.9	4.4	1060	37.9	26.6	2.05	44.9	18.5	90.0	2.8	2.7	5.1	0.5	1.3	1400	46.4	2.29	38.6	5.9	100.7	65.0	3.5	3.3
90	4.5	0.4	1.0	1300	32.0	22.0	2.54	40.6	12.6	108.1	4.7	4.5	3.1	0.2	0.5	1140	45.3	2.41	37.1	5.5	106.8	65.0	3.4	3.2
	4.5	0.4	1.0	1060	34.6	25.4	2.45	43.0	14.1	108.7	4.1	3.9	3.1	0.2	0.5	1400	46.4	2.29	38.6	5.9	100.7	65.0	3.5	3.3
	6.8	1.1	2.4	1300	33.7	22.7	2.33	41.6	14.5	102.2	4.0	3.8	3.1	0.2	0.5	1140	45.3	2.41	37.1	5.5	106.8	65.0	3.4	3.2
	6.8	1.1	2.4	1060	34.6	25.4	2.45	43.0	14.1	102.6	4.1	3.9	3.1	0.2	0.5	1400	46.4	2.29	38.6	5.9	100.7	65.0	3.5	3.3
	9.0	1.9	4.4	1300	34.5	23.0	2.23	42.1	15.4	99.3	3.7	3.5	3.1	0.2	0.5	1140	45.3	2.41	37.1	5.5	106.8	65.0	3.4	3.2
	9.0	1.9	4.4	1060	35.4	25.7	2.35	43.5	15.1	99.7	3.8	3.6	3.1	0.2	0.5	1400	46.4	2.29	38.6	5.9	100.7	65.0	3.5	3.3
100	4.5	0.4	0.9	1300	29.2	20.6	2.88	39.0	10.1	117.3	6.1	5.8	2.2	0.2	0.4									

# ClimateMaster Geothermal Heat Pump Systems

## Performance Data — TES/TEP049 Full Load With vFlow

1650 CFM Nominal (Rated) Airflow Heating, 1550 CFM Nominal (Rated) Airflow Cooling

Performance capacities shown in thousands of Btu/h

EWT °F	Cooling - EAT 80/67°F												Heating - EAT 70°F											
	GPM	WPD		CFM	TC	SC	kW	HR	EER	LWT	TTS HWC	TTP HWC	GPM	WPD		CFM	HC	kW	HE	COP	LAT	LWT	TTS HWC	TTP HWC
		PSI	FT											PSI	FT									
20	2.5	0.2	0.5	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	12.0	5.3	12.1	1340	33.0	3.15	22.2	3.1	92.8	16.3	3.2	3.0
	2.5	0.2	0.5	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	12.0	5.3	12.1	1650	33.7	2.99	23.5	3.3	88.9	16.1	3.3	3.1
30	3.1	0.2	0.5	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	6.0	1.2	2.8	1340	36.0	3.19	25.1	3.3	94.9	21.6	3.4	3.2
	3.1	0.2	0.4	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	6.0	1.2	2.8	1650	36.9	3.03	26.5	3.6	90.7	21.2	3.5	3.3
	3.1	0.2	0.4	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	9.0	2.8	6.4	1340	37.6	3.21	26.6	3.4	96.0	24.1	3.4	3.2
	3.1	0.2	0.4	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	9.0	2.8	6.4	1650	38.5	3.05	28.1	3.7	91.6	23.8	3.5	3.3
	3.1	0.2	0.4	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	12.0	4.7	10.8	1340	38.4	3.22	27.4	3.5	96.5	25.4	3.5	3.3
	3.1	0.2	0.4	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	12.0	4.7	10.8	1650	39.3	3.06	28.9	3.8	92.1	25.2	3.6	3.4
40	4.1	0.3	0.8	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	6.0	1.0	2.3	1340	40.9	3.25	29.8	3.7	98.3	30.1	3.6	3.4
	4.1	0.3	0.8	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	6.0	1.0	2.3	1650	41.9	3.09	31.4	4.0	93.5	29.5	3.7	3.5
	4.1	0.3	0.8	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	9.0	2.4	5.6	1340	42.7	3.29	31.5	3.8	99.5	33.0	3.7	3.5
	4.1	0.3	0.8	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	9.0	2.4	5.6	1650	43.7	3.12	33.1	4.1	94.5	32.7	3.8	3.6
	4.1	0.3	0.8	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	12.0	4.2	9.7	1340	43.6	3.30	32.4	3.9	100.2	34.6	3.8	3.6
	4.1	0.3	0.8	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	12.0	4.2	9.7	1650	44.7	3.13	34.0	4.2	95.1	34.3	3.9	3.7
50	6.0	0.9	2.0	1250	52.2	31.6	2.34	60.2	22.3	70.1	2.3	2.2	6.0	0.9	2.0	1340	45.6	3.33	34.3	4.0	101.5	38.6	3.9	3.7
	6.0	0.9	2.0	1550	53.7	35.3	2.46	62.1	21.8	70.7	2.4	2.3	6.0	0.9	2.0	1650	46.7	3.16	35.9	4.3	96.2	38.0	4.0	3.8
	6.2	0.9	2.2	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	9.0	2.2	5.1	1340	47.5	3.36	36.1	4.1	102.8	42.0	4.0	3.8
	6.2	0.9	2.2	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	9.0	2.2	5.1	1650	48.6	3.19	37.8	4.5	97.3	41.6	4.1	3.9
	6.2	0.9	2.2	1250	52.3	31.6	2.33	60.2	22.5	70.0	2.2	2.1	12.0	3.9	9.0	1340	48.5	3.38	37.0	4.2	103.5	43.8	4.1	3.9
	6.2	0.9	2.2	1550	53.8	35.3	2.45	62.1	22.0	70.0	2.3	2.2	12.0	3.9	9.0	1650	49.7	3.21	38.7	4.5	97.9	43.6	4.2	4.0
60	6.0	0.8	1.8	1250	51.0	31.2	2.56	59.7	20.0	79.9	2.8	2.7	6.0	0.8	1.9	1340	50.0	3.41	38.4	4.3	104.6	47.2	4.3	4.0
	6.0	0.8	1.8	1550	52.5	34.9	2.69	61.7	19.5	80.6	2.9	2.8	6.0	0.8	1.9	1650	51.2	3.24	40.1	4.6	98.7	46.6	4.4	4.2
	9.0	2.0	4.7	1250	51.9	31.5	2.40	60.1	21.6	73.4	2.4	2.3	9.0	2.0	4.7	1340	51.9	3.45	40.1	4.4	105.9	51.1	4.4	4.1
	9.0	2.0	4.7	1550	53.4	35.2	2.53	62.0	21.1	73.8	2.5	2.4	9.0	2.0	4.7	1650	53.2	3.28	42.0	4.7	99.8	50.7	4.5	4.3
	12.0	3.6	8.4	1250	52.3	31.6	2.34	60.2	22.4	70.0	2.2	2.1	12.0	3.6	8.4	1340	52.9	3.47	41.1	4.5	106.6	53.2	4.5	4.2
	12.0	3.6	8.4	1550	53.8	35.3	2.46	62.2	21.9	70.4	2.3	2.2	12.0	3.6	8.4	1650	54.2	3.30	42.9	4.8	100.4	52.8	4.6	4.4
70	6.0	0.8	1.8	1250	49.3	30.6	2.82	59.0	17.5	89.7	3.6	3.4	6.0	0.8	1.8	1340	54.0	3.50	42.1	4.5	107.3	56.0	4.6	4.4
	6.0	0.8	1.8	1550	50.7	34.2	2.97	60.9	17.1	90.3	3.7	3.5	6.0	0.8	1.8	1650	55.3	3.32	43.9	4.9	101.0	55.4	4.8	4.6
	9.0	2.0	4.5	1250	50.5	31.1	2.64	59.5	19.1	83.2	3.0	2.9	9.0	2.0	4.5	1340	55.8	3.54	43.7	4.6	108.6	60.3	4.8	4.6
	9.0	2.0	4.5	1550	52.0	34.7	2.78	61.5	18.7	83.7	3.1	2.9	9.0	2.0	4.5	1650	57.1	3.36	45.7	5.0	102.1	59.9	5.0	4.8
	12.0	3.5	8.1	1250	51.1	31.3	2.56	59.8	20.0	80.0	2.8	2.7	12.0	3.5	8.1	1340	56.7	3.56	44.6	4.7	109.2	62.6	4.9	4.7
	12.0	3.5	8.1	1550	52.5	34.9	2.69	61.7	19.5	80.3	2.9	2.8	12.0	3.5	8.1	1650	58.0	3.38	46.5	5.0	102.6	62.2	5.1	4.8
80	6.0	0.8	1.8	1250	47.2	29.7	3.13	57.9	15.1	99.3	4.4	4.1	6.0	0.8	1.8	1340	57.4	3.58	45.2	4.7	109.7	64.9	5.0	4.8
	6.0	0.8	1.8	1550	48.6	33.2	3.29	59.8	14.8	99.9	4.5	4.3	6.0	0.8	1.8	1650	58.8	3.40	47.2	5.1	103.0	64.3	5.2	4.9
	9.0	1.9	4.4	1250	48.7	30.3	2.92	58.6	16.7	93.0	3.8	3.6	6.3	0.9	2.1	1340	57.7	3.58	45.4	4.7	109.8	65.0	5.2	5.0
	9.0	1.9	4.4	1550	50.1	33.9	3.07	60.6	16.3	98.6	3.9	3.7	6.3	0.9	2.1	1650	59.0	3.40	47.4	5.1	103.1	65.0	5.4	5.1
	12.0	3.4	7.9	1250	49.4	30.6	2.81	58.9	17.6	89.8	3.5	3.3	6.3	0.9	2.1	1340	57.7	3.58	45.4	4.7	109.8	65.0	5.2	5.0
	12.0	3.4	7.9	1550	50.8	34.2	3.24	59.6	17.2	90.1	3.6	3.4	6.3	0.9	2.1	1650	59.0	3.40	47.4	5.1	103.1	65.0	5.4	5.1
90	6.0	0.8	1.9	1250	44.8	28.6	3.49	56.7	12.8	108.9	5.4	5.1	3.8	0.3	0.7	1340	57.7	3.58	45.4	4.7	109.8	65.0	5.2	5.0
	6.0	0.8	1.9	1550	47.8	32.8	3.41	59.4	14.0	109.5	4.9	4.7	3.8	0.3	0.7	1650	59.0	3.40	47.4	5.1	103.1	65.0	5.4	5.1
	9.0	1.9	4.4	1250	46.4	29.3	3.24	57.5	14.3	102.8	4.7	4.5	3.8	0.3	0.7	1340	57.7	3.58	45.4	4.7	109.8	65.0	5.2	5.0
	9.0	1.9	4.4	1550	47.8	32.8	3.41	59.4	14.0	103.2	4.9	4.7	3.8	0.3	0.7	1650	59.0	3.40	47.4	5.1	103.1	65.0	5.4	5.1
	12.0	3.3	7.7	1250	47.2	29.7	3.13	57.9	15.1	99.6	4.5	4.2	3.8	0.3	0.7	1340	57.7	3.58	45.4	4.7	109.8	65.0	5.2	5.0
	12.0	3.3	7.7	1550	48.6	33.2	3.29	59.8	14.8	100.0	4.6	4.4	3.8	0.3	0.7	1650	59.0	3.40	47.4	5.1	103.1	65.0	5.4	5.1
100	6.0	0.8	1.9	1250	42.1	27.4	3.90	55.4	10.8															

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Performance Data — TES/TEP064 Part Load With vFlow

1650 CFM Nominal (Rated) Airflow Heating, 1550 CFM Nominal (Rated) Airflow Cooling

Performance capacities shown in thousands of Btuh

EWT °F	Cooling - EAT 80/67°F												Heating - EAT 70°F											
	GPM	WPD		CFM	TC	SC	kW	HR	EER	LWT	TTS HWC	TTP HWC	GPM	WPD		CFM	HC	kW	HE	COP	LAT	LWT	TTS HWC	TTP HWC
		PSI	FT											PSI	FT									
20	2.2	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	12.0	5.2	11.9	1340	28.9	2.91	18.9	2.9	89.9	16.8	3.0	2.9
	2.2	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		12.0	5.2	11.9	1650	29.5	2.76	20.1	3.1	86.6	16.6	3.1
30	2.8	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	6.0	0.9	2.1	1340	31.8	2.94	21.7	3.2	92.0	22.8	3.1	2.9
	2.8	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		6.0	0.9	2.1	1650	32.5	2.79	23.0	3.4	88.3	22.3	3.2
	2.8	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	9.0	2.5	5.7	1340	33.0	2.95	22.9	3.3	92.8	24.9	3.1	2.9
	2.8	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		9.0	2.5	5.7	1650	33.8	2.80	24.2	3.5	88.9	24.6	3.2
	2.8	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	12.0	4.2	9.6	1340	33.7	2.96	23.6	3.3	93.3	26.1	3.1	2.9
	2.8	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		12.0	4.2	9.6	1650	34.4	2.81	24.9	3.6	89.3	25.9	3.2
40	3.7	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	6.0	0.5	1.1	1340	36.4	2.98	26.2	3.6	95.1	31.3	3.2	3.0
	3.7	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		6.0	0.5	1.1	1650	37.2	2.83	27.6	3.9	90.9	30.8	3.3
	3.7	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	9.0	1.9	4.4	1340	37.9	3.00	27.7	3.7	96.2	33.9	3.3	3.1
	3.7	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		9.0	1.9	4.4	1650	38.8	2.85	29.1	4.0	91.8	33.5	3.4
	3.7	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	12.0	3.4	7.9	1340	38.7	3.00	28.5	3.8	96.8	35.3	3.3	3.1
	3.7	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		12.0	3.4	7.9	1650	39.6	2.85	29.9	4.1	92.2	35.0	3.4
50	5.5	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	6.0	0.2	0.6	1340	41.1	3.02	30.8	4.0	98.4	39.7	3.4	3.2
	5.5	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		6.0	0.2	0.6	1650	42.1	2.87	32.3	4.3	93.6	39.2	3.5
	5.5	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	9.0	1.5	3.5	1340	42.9	3.04	32.6	4.1	99.7	42.8	3.5	3.3
	5.5	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		9.0	1.5	3.5	1650	44.0	2.89	34.1	4.5	94.7	42.4	3.6
	5.5	0.1	0.2	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.7	1.7	12.0	3.0	6.9	1340	43.9	3.05	33.5	4.2	100.4	44.4	3.5	3.3
	5.5	0.1	0.2	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.8	1.7		12.0	3.0	6.9	1650	45.0	2.90	35.1	4.5	95.2	44.2	3.6
60	6.0	0.2	0.4	1220	45.6	31.2	2.09	52.8	21.8	77.6	2.2	2.1	6.0	0.2	0.4	1340	45.9	3.06	35.5	4.4	101.7	48.2	3.6	3.4
	6.0	0.2	0.4	1500	46.9	34.8	2.20	54.4	21.3	78.1	2.3	2.2		6.0	0.2	0.4	1650	47.0	2.91	37.1	4.7	96.4	47.6	3.7
	9.0	1.4	3.1	1220	46.7	31.5	1.93	53.2	24.2	71.8	1.8	1.7	9.0	1.4	3.2	1340	48.0	3.09	37.5	4.6	103.2	51.7	3.7	3.5
	9.0	1.4	3.1	1500	48.0	35.2	2.03	54.9	23.6	72.2	1.9	1.8		9.0	1.4	3.2	1650	49.1	2.93	39.1	4.9	97.6	51.3	3.8
	11.1	2.3	5.3	1220	47.1	31.6	1.86	53.4	25.3	70.0	1.8	1.7	12.0	2.7	6.3	1340	49.1	3.10	38.5	4.6	103.9	53.6	3.8	3.6
	11.1	2.3	5.3	1500	48.4	35.3	1.96	55.1	24.7	70.0	1.9	1.8		12.0	2.7	6.3	1650	50.2	2.94	40.2	5.0	98.2	53.3	3.9
70	6.0	0.2	0.4	1220	44.0	30.4	2.38	52.1	18.5	87.4	3.1	2.9	6.0	0.2	0.4	1340	50.6	3.11	40.0	4.8	105.0	56.7	3.9	3.7
	6.0	0.2	0.4	1500	45.3	34.0	2.51	53.8	18.0	87.9	3.2	3.0		6.0	0.2	0.4	1650	51.8	2.95	41.8	5.1	99.1	56.1	4.0
	9.0	1.3	3.0	1220	45.0	30.9	2.20	52.5	20.4	81.7	2.6	2.5	9.0	1.3	3.0	1340	52.9	3.12	42.3	5.0	106.5	60.6	4.0	3.8
	9.0	1.3	3.0	1500	46.3	34.5	2.32	54.2	19.9	82.0	2.7	2.6		9.0	1.3	3.0	1650	54.1	2.96	44.0	5.4	100.4	60.2	4.1
	12.0	2.6	6.0	1220	45.5	31.1	2.12	52.7	21.5	78.8	2.3	2.2	12.0	2.6	6.0	1340	54.1	3.13	43.4	5.1	107.4	62.8	4.1	3.9
	12.0	2.6	6.0	1500	46.8	34.7	2.23	54.4	21.0	79.1	2.4	2.3		12.0	2.6	6.0	1650	55.4	2.97	45.2	5.5	101.1	62.5	4.2
80	6.0	0.3	0.6	1220	42.2	29.5	2.74	51.5	15.4	97.2	4.1	3.9	6.0	0.3	0.6	1340	55.2	3.14	44.5	5.2	108.1	65.2	4.2	4.0
	6.0	0.3	0.6	1500	43.4	33.0	2.88	53.2	15.1	97.7	4.2	4.0		6.0	0.3	0.6	1650	56.5	2.98	46.3	5.6	101.7	64.6	4.3
	9.0	1.3	3.1	1220	43.3	30.1	2.52	51.9	17.2	91.5	3.5	3.3	6.2	0.3	0.7	1340	55.4	3.14	44.7	5.2	108.3	65.0	4.4	4.1
	9.0	1.3	3.1	1500	44.6	33.6	2.65	53.6	16.8	91.9	3.6	3.4		6.2	0.3	0.7	1650	56.7	2.98	46.5	5.6	101.8	65.0	4.5
	12.0	2.6	5.9	1220	43.8	30.3	2.42	52.1	18.1	88.7	3.2	3.0	6.2	0.3	0.7	1340	55.4	3.14	44.7	5.2	108.3	65.0	4.5	4.2
	12.0	2.6	5.9	1500	45.1	33.9	2.55	53.8	17.7	89.0	3.3	3.1		6.2	0.3	0.7	1650	56.7	2.98	46.5	5.6	101.8	65.0	4.6
90	6.0	0.3	0.7	1220	39.9	28.4	3.13	50.6	12.8	106.9	5.2	5.0	3.7	0.1	0.2	1340	55.4	3.14	44.7	5.2	108.3	65.0	4.2	4.0
	6.0	0.3	0.7	1500	42.5	32.5	3.04	52.9	14.0	107.4	4.7	4.5		3.7	0.1	0.2	1650	56.7	2.98	46.5	5.6	101.8	65.0	4.3
	9.0	1.4	3.2	1220	41.3	29.1	2.89	51.2	14.3	101.4	4.5	4.3	3.7	0.1	0.2	1340	55.4	3.14	44.7	5.2	108.3	65.0	4.2	4.0
	9.0	1.4	3.2	1500	42.5	32.5	3.04	52.9	14.0	101.8	4.7	4.5		3.7	0.1	0.2	1650	56.7	2.98	46.5	5.6	101.8	65.0	4.3
	12.0	2.6	6.0	1220	42.0	29.4	2.77	51.4	15.1	98.6	4.3	4.0	3.7	0.1	0.2	1340								

# ClimateMaster Geothermal Heat Pump Systems

## Performance Data — TES/TEP064 Full Load With vFlow

2050 CFM Nominal (Rated) Airflow Heating, 1825 CFM Nominal (Rated) Airflow Cooling

Performance capacities shown in thousands of Btu/h

EWT °F	Cooling - EAT 80/67°F												Heating - EAT 70°F												
	GPM	WPD		CFM	TC	SC	kW	HR	EER	LWT	TTS HWC	TTP HWC	GPM	WPD		CFM	HC	kW	HE	COP	LAT	LWT	TTS HWC	TTP HWC	
		PSI	FT											PSI	FT										
20	3.0	0.1	0.2	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6	15.0	7.3	16.8	1660	41.0	3.92	27.6	3.1	92.9	16.3	3.7	3.5	
	3.0	0.1	0.2	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		15.0	7.3	16.8	2050	42.0	3.72	29.3	3.3	89.0	16.1	3.8	3.6
30	3.8	0.1	0.2	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6	7.5	1.7	3.9	1660	44.6	3.99	31.0	3.3	94.9	21.7	3.9	3.7	
	3.8	0.1	0.2	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		7.5	1.7	3.9	2050	45.7	3.79	32.7	3.5	90.6	21.3	4.0	3.8
	3.8	0.1	0.2	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6		11.3	3.7	8.6	1660	46.5	4.03	32.7	3.4	95.9	24.2	4.0	3.8
	3.8	0.1	0.2	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		11.3	3.7	8.6	2050	47.5	3.83	34.5	3.6	91.5	23.9	4.1	3.9
	3.8	0.1	0.2	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6		15.0	6.1	14.1	1660	47.4	4.06	33.6	3.4	96.5	25.5	4.0	3.8
	3.8	0.1	0.2	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		15.0	6.1	14.1	2050	48.6	3.86	35.4	3.7	91.9	25.3	4.1	3.9
40	5.0	0.1	0.2	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6	7.5	1.2	2.7	1660	50.6	4.14	36.5	3.6	98.2	30.3	4.2	4.0	
	5.0	0.1	0.2	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		7.5	1.2	2.7	2050	51.8	3.93	38.4	3.9	93.4	29.8	4.3	4.1
	5.0	0.1	0.2	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6		11.3	3.1	7.1	1660	52.7	4.19	38.4	3.7	99.4	33.2	4.3	4.0
	5.0	0.1	0.2	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		11.3	3.1	7.1	2050	54.0	3.98	40.4	4.0	94.4	32.8	4.4	4.2
	5.0	0.1	0.2	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6		15.0	5.3	12.2	1660	53.9	4.22	39.5	3.7	100.1	34.7	4.4	4.1
	5.0	0.1	0.2	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		15.0	5.3	12.2	2050	55.1	4.01	41.5	4.0	94.9	34.5	4.5	4.3
50	7.5	0.9	2.0	1480	63.3	39.5	2.93	73.3	21.6	69.5	2.7	2.6	7.5	0.9	2.0	1660	56.5	4.29	41.8	3.9	101.5	38.8	4.5	4.2	
	7.5	0.9	2.0	1825	65.1	44.1	3.08	75.7	21.2	70.2	2.8	2.7		7.5	0.9	2.0	2050	57.8	4.07	43.9	4.2	96.1	38.3	4.6	4.4
	7.6	0.9	2.1	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6		11.3	2.6	6.1	1660	58.8	4.35	44.0	4.0	102.8	42.2	4.6	4.4
	7.6	0.9	2.1	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		11.3	2.6	6.1	2050	60.2	4.13	46.1	4.3	97.2	41.8	4.8	4.6
	7.6	0.9	2.1	1480	63.4	39.5	2.92	73.3	21.7	70.0	2.7	2.6		15.0	4.7	10.8	1660	60.0	4.38	45.1	4.0	103.5	44.0	4.7	4.5
	7.6	0.9	2.1	1825	65.2	44.1	3.07	75.7	21.2	70.0	2.8	2.7		15.0	4.7	10.8	2050	61.4	4.16	47.2	4.3	97.7	43.7	4.9	4.7
60	7.5	0.8	1.7	1480	61.5	39.0	3.20	72.4	19.2	79.3	3.3	3.1	7.5	0.8	1.7	1660	62.0	4.43	46.9	4.1	104.6	47.5	4.9	4.7	
	7.5	0.8	1.7	1825	63.3	43.6	3.37	74.8	18.8	79.9	3.4	3.2		7.5	0.8	1.7	2050	63.5	4.21	49.1	4.4	98.7	46.9	5.1	4.8
	11.3	2.4	5.5	1480	62.7	39.4	3.01	73.0	20.8	72.9	2.8	2.7		11.3	2.4	5.5	1660	64.4	4.50	49.1	4.2	105.9	51.3	5.1	4.9
	11.3	2.4	5.5	1825	64.6	44.0	3.17	75.4	20.4	73.4	2.9	2.8		11.3	2.4	5.5	2050	65.9	4.27	51.4	4.5	99.8	50.9	5.3	5.0
	15.0	4.3	10.0	1480	63.3	39.5	2.92	73.3	21.7	69.8	2.6	2.5		15.0	4.3	10.0	1660	65.6	4.53	50.2	4.2	106.6	53.3	5.2	5.0
	15.0	4.3	10.0	1825	65.2	44.1	3.07	75.6	21.2	70.1	2.7	2.6		15.0	4.3	10.0	2050	67.2	4.30	52.5	4.6	100.3	53.0	5.4	5.1
70	7.5	0.7	1.7	1480	59.5	38.3	3.52	71.5	16.9	89.1	4.2	4.0	7.5	0.7	1.7	1660	67.1	4.57	51.5	4.3	107.4	56.3	5.3	5.1	
	7.5	0.7	1.7	1825	61.2	42.8	3.71	73.8	16.5	89.7	4.3	4.1		7.5	0.7	1.7	2050	68.6	4.34	53.8	4.6	101.0	55.6	5.5	5.2
	11.3	2.3	5.3	1480	60.9	38.8	3.31	72.1	18.4	82.8	3.6	3.4		11.3	2.3	5.3	1660	69.3	4.62	53.5	4.4	108.6	60.5	5.6	5.3
	11.3	2.3	5.3	1825	62.6	43.4	3.48	74.5	18.0	83.2	3.7	3.5		11.3	2.3	5.3	2050	70.9	4.39	55.9	4.7	102.0	60.1	5.8	5.5
	15.0	4.1	9.5	1480	61.5	39.0	3.20	72.4	19.2	79.7	3.3	3.1		15.0	4.1	9.6	1660	70.4	4.65	54.5	4.4	109.2	62.7	5.7	5.4
	15.0	4.1	9.5	1825	63.3	43.6	3.37	74.8	18.8	80.0	3.4	3.2		15.0	4.1	9.6	2050	72.0	4.42	56.9	4.8	102.5	62.4	5.9	5.6
80	7.5	0.8	1.8	1480	57.1	37.3	3.92	70.4	14.5	98.8	5.2	5.0	7.5	0.8	1.8	1660	71.3	4.68	55.3	4.5	109.8	65.2	5.9	5.6	
	7.5	0.8	1.8	1825	58.7	41.6	4.13	72.8	14.2	99.4	5.4	5.1		7.5	0.8	1.8	2050	73.0	4.44	57.8	4.8	103.0	64.6	6.1	5.8
	11.3	2.3	5.2	1480	58.7	37.9	3.66	71.2	16.0	92.6	4.5	4.3		7.7	0.9	2.0	1660	71.4	4.69	55.5	4.5	109.9	65.0	5.9	5.6
	11.3	2.3	5.2	1825	60.4	42.4	3.85	73.5	15.7	93.1	4.7	4.5		7.7	0.9	2.0	2050	73.1	4.45	57.9	4.8	103.0	65.0	6.1	5.8
	15.0	4.1	9.4	1480	59.4	38.3	3.53	71.5	16.8	89.5	4.2	4.0		7.7	0.9	2.0	1660	71.4	4.69	55.5	4.5	109.9	65.0	5.9	5.6
	15.0	4.1	9.4	1825	61.1	42.7	3.72	73.8	16.4	89.8	4.3	4.1		7.7	0.9	2.0	2050	73.1	4.45	57.9	4.8	103.0	65.0	6.1	5.8
90	7.5	0.8	1.9	1480	54.2	36.0	4.40	69.2	12.3	108.4	6.5	6.2	4.6	0.1	0.2	1660	71.4	4.69	55.5	4.5	109.9	65.0	5.9	5.6	
	7.5	0.8	1.9	1825	57.7	41.2	4.29	72.3	13.5	109.1	5.8	5.5		4.6	0.1	0.2	2050	73.1	4.45	57.9	4.8	103.0	65.0	6.1	5.8
	11.3	2.3	5.3	1480	56.1	36.8	4.08	70.0	13.8	102.4	5.6	5.3		4.6	0.1	0.2	1660	71.4	4.69	55.5	4.5	109.9	65.0	5.9	5.6
	11.3	2.3	5.3	1825	57.7	41.2	4.29	72.3	13.5	102.9	5.8	5.5		4.6	0.1	0.2	2050	73.1	4.45	57.9	4.8	103.0	65.0	6.1	5.8
	15.0	4.0	9.3	1480	57.0	37.2	3.93	70.4	14.5	99.4	5.2	5.0		4.6	0.1	0.2	1660	71.4							

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Physical Data

### Physical Data

Model	TES				TEP			
	026	038	049	064	026	038	049	064
Compressor [1 Each]	Copeland UltraTech Two-Stage Scroll				Copeland UltraTech Two-Stage Scroll			
Factory Charge HFC-410A (oz) [kg]	96 [2.72]	104 [2.95]	126 [3.57]	192 [5.44]	96 [2.72]	104 [2.95]	126 [3.57]	192 [5.44]
Water Connection Size								
(In)	1 (Swivel)				3/4 (Swivel)	1 (Swivel)		
HWG Connection Size								
(In)	1 (Swivel)				5/8 (I.D. Sweat)			
Line Set Connection Size								
Liquid Line Sweat Connection (in.)	3/8	3/8	3/8	1/2	3/8	3/8	3/8	1/2
Vapor Line Sweat Connection (in.)	3/4	7/8	7/8	7/8	3/4	7/8	7/8	7/8
Weight - Operating, (lbs) [kg]	233 [106]	251 [114]	280 [127]	295 [134]	245 [111]	263 [119]	309 [140]	337 [153]
Weight - Packaged, (lbs) [kg]	248 [112]	266 [121]	295 [134]	310 [141]	260 [118]	278 [126]	324 [147]	352 [160]

Units have grommet compressor mountings, TXV expansion devices, and 1/2" [12.2mm] & 3/4" [19.1mm] electrical knockouts.

Unit Maximum Working Water Pressure	
Options	Max Pressure PSIG (kPa)
Base Unit	500 (3,447)
Unit with Internal Flow Controller	145 (999)
Unit with Internal Modulating Water Valve	300 (2,068)

TAC							
Model	026BM17	026BM21	038BM21	038BM24	049BM21	049BM24	064BM24
Connections - Sweat							
Liquid I.D. - in	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Suction I.D. - in	3/4	3/4	7/8	7/8	7/8	7/8	7/8
Cased Coil Dimensions							
A - Width - in [cm]	17 1/2 [44.5]	21 [53.3]	21[53.3]	24 1/2 [62.2]	21 [53.3]	24 1/2 [62.2]	24 1/2 [62.2]
B - Coil Height - in [cm]	14 1/2 [36.8]	17 1/2 [44.5]	25 7/8 [65.7]	25 3/8 [64.5]	25 7/8 [65.7]	25 3/8 [64.5]	30 [76.2]
C- Height - in [cm]	20 [50.8]	20 [50.8]	28 [71.1]	32 [81.3]	28 [71.1]	32 [81.3]	32 [81.3]
Weight							
Coil Weight lbs. [kg]	43 [20]	49 [22]	71 [32]	83 [38]	71 [32]	83 [38]	100 [45]
Shipping Weight lbs. [kg]	48 [22]	54 [24]	78 [35]	93 [42]	78 [35]	93 [42]	110 [50]

TAH							
Model	026-A	026-B	038-B	038-C	049-B	049-C	064-C
Liquid I.D. in.	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Suction I.D. in.	3/4	3/4	7/8	7/8	7/8	7/8	7/8
Fan Motor Type/Speeds	ECM Variable						
Fan Motor (hp)	1/2				1		
Blower Wheel Size (Dia x W) in. [mm]	9 x 7 [229 x 178]		11 x 10 [279 x 254]				
Air Coil Dimensions (H x W) in. [mm]	14 x 17 [356 x 432]			24 x 17 [610 x 432]			24x17 [610 x 432]
Filter Standard - 1" [25mm] Thick Throwaway in. [mm]	16 x 20 [406 x 508]	20 x 20 [508 x 508]		20 x 24 [508 x 610]	20 x 20 [508 x 508]	20 x 24 [508 x 610]	
Weight - Operating lbs. [kg]	80 [36]	163 [74]	173 [78]	181 [82]	180 [82]	188 [85]	198 [90]
Weight - Packaged lbs. [kg]	96 [44]	179 [81]	198 [90]	206 [93]	218 [99]	226 [103]	236 [107]

# ClimateMaster Geothermal Heat Pump Systems

## Electrical Data

### Electrical Data (TES without Flow Controller)

Model	Compressor			HWG FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/ HACR
	RLA	LRA	Qty				
026	11.7	58.3	1	0.5	12.2	15.1	25
038	15.3	83.0	1	0.5	15.8	19.6	30
049	21.2	104.0	1	0.5	21.7	27.0	45
064	27.1	152.9	1	0.5	27.6	34.3	60

Rated Voltage of 208/230/60/1  
All fuses Class RK-5

Min/Max Voltage of 197/252

### Electrical Data (TES with High Head Flow Controller)

Model	Compressor			Loop Pump FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/ HACR
	RLA	LRA	Qty				
026	11.7	58.3	1	1.44	13.1	16.1	25
038	15.3	83.0	1	1.44	16.7	20.6	35
049	21.2	104.0	1	1.44	22.6	27.9	45
064	27.1	152.9	1	1.44	28.5	35.3	60

Rated Voltage of 208/230/60/1  
All fuses Class RK-5

Min/Max Voltage of 197/252

### Electrical Data (TES with Standard Head Flow Controller)

Model	Compressor			HWG Pump FLA	Loop Pump FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/ HACR
	RLA	LRA	Qty					
026	11.7	58.3	1	0.5	0.7	12.9	15.8	25
038	15.3	83.0	1	0.5	0.7	16.5	20.3	35

Rated Voltage of 208/230/60/1  
All fuses Class RK-5

Min/Max Voltage of 197/252

### Electrical Data (TEP with High Head Flow Controller)

Model	Compressor			Loop Pump FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/ HACR
	RLA	LRA	Qty				
026	11.7	58.3	1	1.44	13.1	16.1	25
038	15.3	83.0	1	1.44	16.7	20.6	35
049	21.2	104.0	1	1.44	22.6	27.9	45
064	27.1	152.9	1	1.44	28.5	35.3	60

Rated Voltage of 208/230/60/1  
All fuses Class RK-5

Min/Max Voltage of 197/252

### Electrical Data (TEP with Standard Head Flow Controller)

Model	Compressor			Loop Pump FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/ HACR
	RLA	LRA	Qty				
026	11.7	58.3	1	0.7	12.4	15.3	25
038	15.3	83.0	1	0.7	16.0	19.8	35

Rated Voltage of 208/230/60/1  
All fuses Class RK-5

Min/Max Voltage of 197/252

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Electrical Data

### Electrical Data (HWG)

HWG Module	Voltage	Pump FLA	Total FLA	Min Circuit Amps
AHWG1BASS	115/60/1	0.52	0.52	1.20
AHWG1BGSS	208/230/60/1	0.40	0.40	0.90

### Electrical Data (TAH)

Model	Fan Motor FLA	Fan Motor HP	Max Fan ESP	Min Circ Amp (120) 208/230	Total Unit FLA	Max Fuse/ HACR (120) 208/230
026	(7.7) 4.3	1/2	0.5	(7.8) 4.9	(7.7) 4.3	(15) 15
038	(7.7) 4.3	1/2	0.5	(7.8) 4.9	(7.7) 4.3	(15) 15
049	(12.8) 7	1	1	(14.4) 8.6	(12.8) 7	(25) 15
064	(12.8) 7	1	1	(14.4) 8.6	(12.8) 7	(25) 15

Dual Rated Volts: (115) 208/230


Min/Max Voltage: 115: 114/132

Min/Max Voltage: 208/230: 197/252

# ClimateMaster Geothermal Heat Pump Systems

## Tranquility® Digital Indoor (TES) Dimensional Data


Model	Overall Cabinet			Water Connections						Refrigerant Connection				Electrical Knockouts					
	A Width	B Height	C Depth	1 Water In/Out	2 HWG In/Out	D1 Water In	D2 Water In	E Water Out	F HWG In	G HWG Out	3 Suction	4 Liquid	H Suction	I Liquid	J	K	L	M	
				Swivel															
026	in	22.4	24.3	25.6	1"	1"	1.8	3.9	8.4	14.6	17.0	3/4"	3/8"	21.6	19.8	4.4	5.9	7.4	1.4
	cm	56.9	61.7	65.0			4.6	9.9	21.3	37.1	43.2			54.9	50.3	11.2	15.0	18.8	3.5
038	in	25.4	26.3	30.6	1"	1"	2.0	3.9	8.4	15.4	18.7	7/8"	3/8"	23.6	21.8	4.4	5.9	7.4	1.7
	cm	64.5	66.8	77.7			5.1	9.9	21.3	39.1	47.5			59.9	55.4	11.2	15.0	18.8	4.3
049	in	25.4	26.3	30.6	1"	1"	2.0	3.9	8.4	15.4	18.7	7/8"	3/8"	23.6	21.8	4.4	5.9	7.4	1.7
	cm	64.5	66.8	77.7			5.1	9.9	21.3	39.1	47.5			59.9	55.4	11.2	15.0	18.8	4.3
064	in	25.4	26.3	30.6	1"	1"	2.0	3.9	8.4	15.4	18.7	7/8"	1/2"	23.6	21.8	4.4	5.9	7.4	1.7
	cm	64.5	66.8	77.7			5.1	9.9	21.3	39.1	47.5			59.9	55.4	11.2	15.0	18.8	4.3

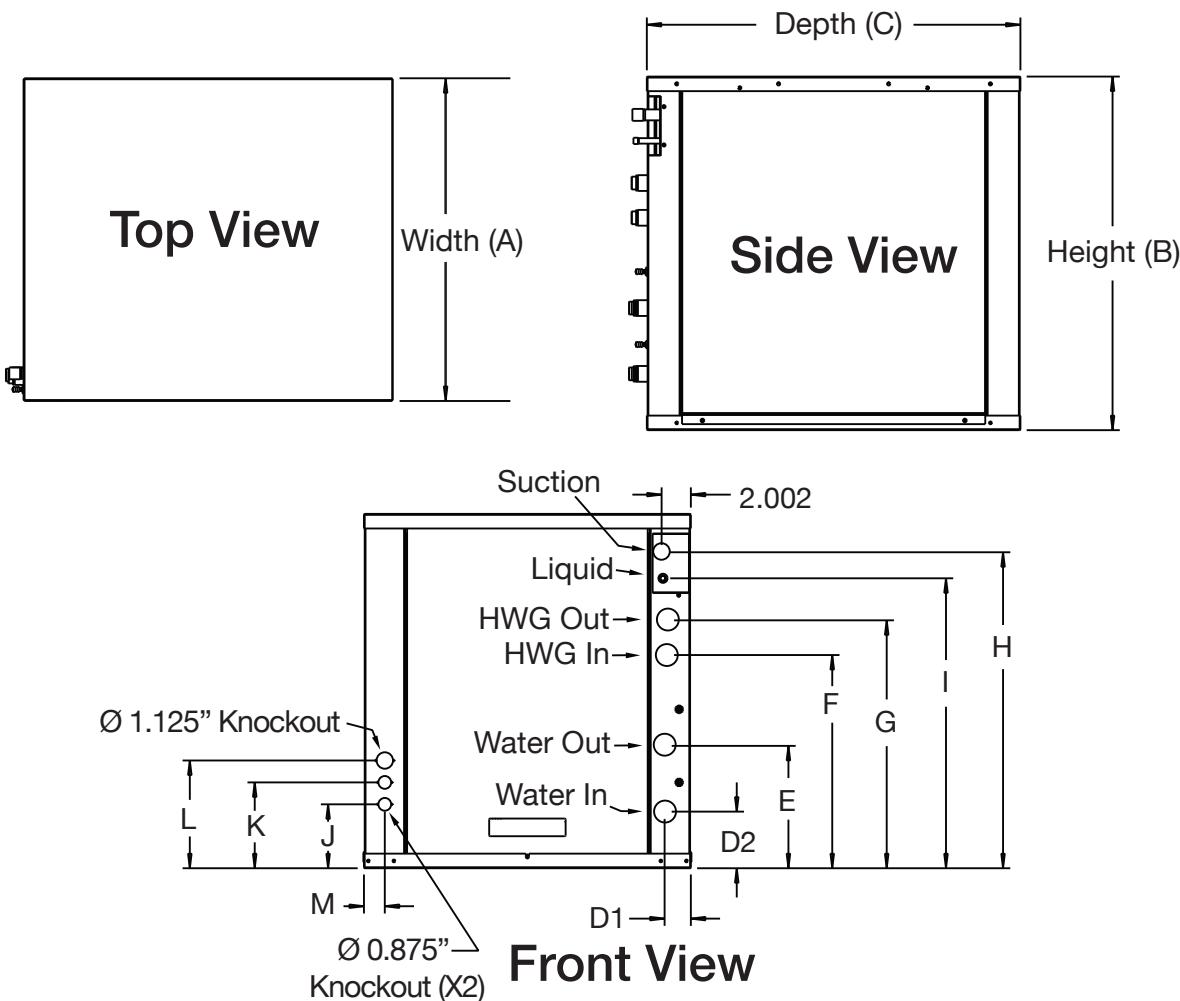


# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Tranquility® Digital Outdoor (TEP) Dimensional Data


Model		Overall Cabinet			Refrigerant Line Connections						Electrical Knockouts					
		A Width	B Height	C Depth	1 To HWG	2 From HWG	D	E	3 Liquid Line	4 Vapor Line	F	G	Line Voltage	Low Voltage	H	J
026	in [cm]	26.3 [66.8]	29.1 [73.9]	37.4 [95.0]	5/8"	5/8"	9.9 [25.1]	7.4 [18.8]	3/8"	3/4"	4.9 [12.4]	2.4 [6.1]	7/8"	7/8"	25.1 [63.8]	21.1 [53.6]
038	in [cm]	26.3 [66.8]	29.1 [73.9]	37.4 [95.0]	5/8"	5/8"	9.9 [25.1]	7.4 [18.8]	3/8"	7/8"	4.9 [12.4]	2.4 [6.1]	7/8"	7/8"	25.1 [63.8]	21.1 [53.6]
049	in [cm]	26.3 [66.8]	29.1 [73.9]	37.4 [95.0]	5/8"	5/8"	9.9 [25.1]	7.4 [18.8]	3/8"	7/8"	4.9 [12.4]	2.4 [6.1]	7/8"	7/8"	25.1 [63.8]	21.1 [53.6]
064	in [cm]	26.3 [66.8]	29.1 [73.9]	37.4 [95.0]	5/8"	5/8"	9.9 [25.1]	7.4 [18.8]	1/2"	7/8"	4.9 [12.4]	2.4 [6.1]	7/8"	7/8"	25.1 [63.8]	21.1 [53.6]

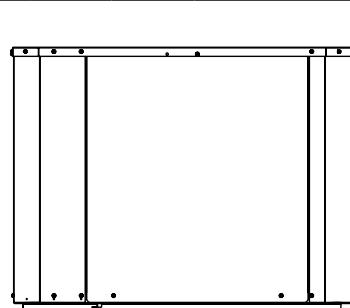


Side View

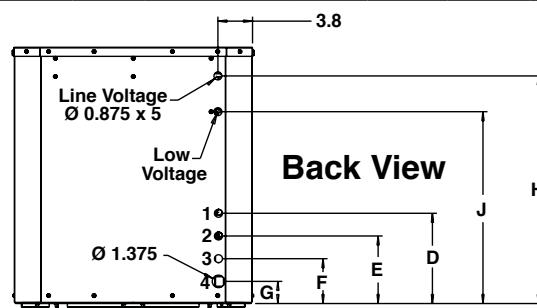


Back View

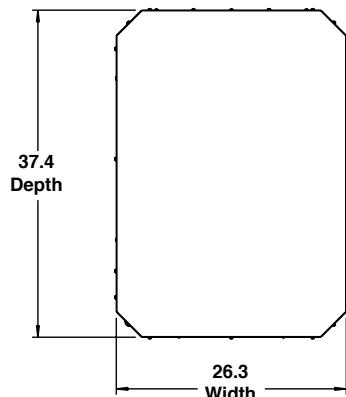


Top View

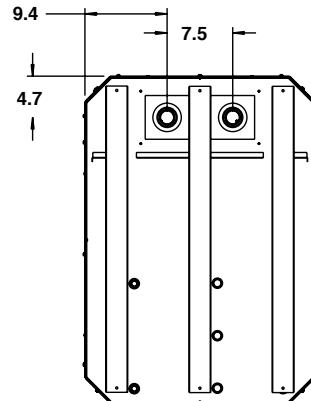

Bottom View

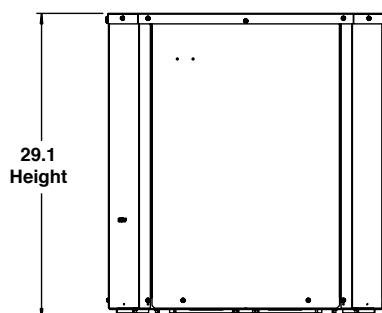

Front View

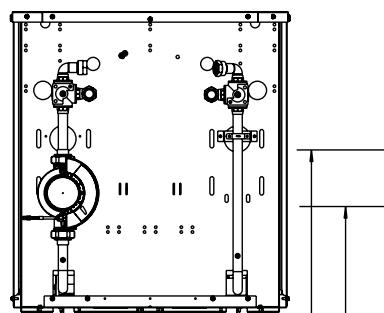


Front View  
Without Panel

9 Water Loop  
Connection  
Maximum Height  
  
4 Water Loop  
Connection  
Minimum Height

# ClimateMaster Geothermal Heat Pump Systems

## Tranquility® Cased Coil (TAC) Dimensional Data




Model	026BM17	026BM21	038BM21	038BM24	049BM21	049BM24	064BM24
<b>Connections - Sweat</b>							
Liquid I.D. - in	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Suction I.D. - in	3/4	3/4	7/8	7/8	7/8	7/8	7/8
<b>Cased Coil Dimensions</b>							
A - Width - in [cm]	17 1/2 [44.5]	21 [53.3]	21[53.3]	24 1/2 [62.2]	21 [53.3]	24 1/2 [62.2]	24 1/2 [62.2]
B - Coil Height - in [cm]	14 1/2 [36.8]	17 1/2 [44.5]	25 7/8 [65.7]	25 3/8 [64.5]	25 7/8 [65.7]	25 3/8 [64.5]	30 [76.2]
C- Height - in [cm]	20 [50.8]	20 [50.8]	28 [71.1]	32 [81.3]	28 [71.1]	32 [81.3]	32 [81.3]
<b>Weight</b>							
Coil Weight lbs. [kg]	43 [20]	49 [22]	71 [32]	83 [38]	71 [32]	83 [38]	100 [45]
Shipping Weight lbs. [kg]	48 [22]	54 [24]	78 [35]	93 [42]	78 [35]	93 [42]	110 [50]

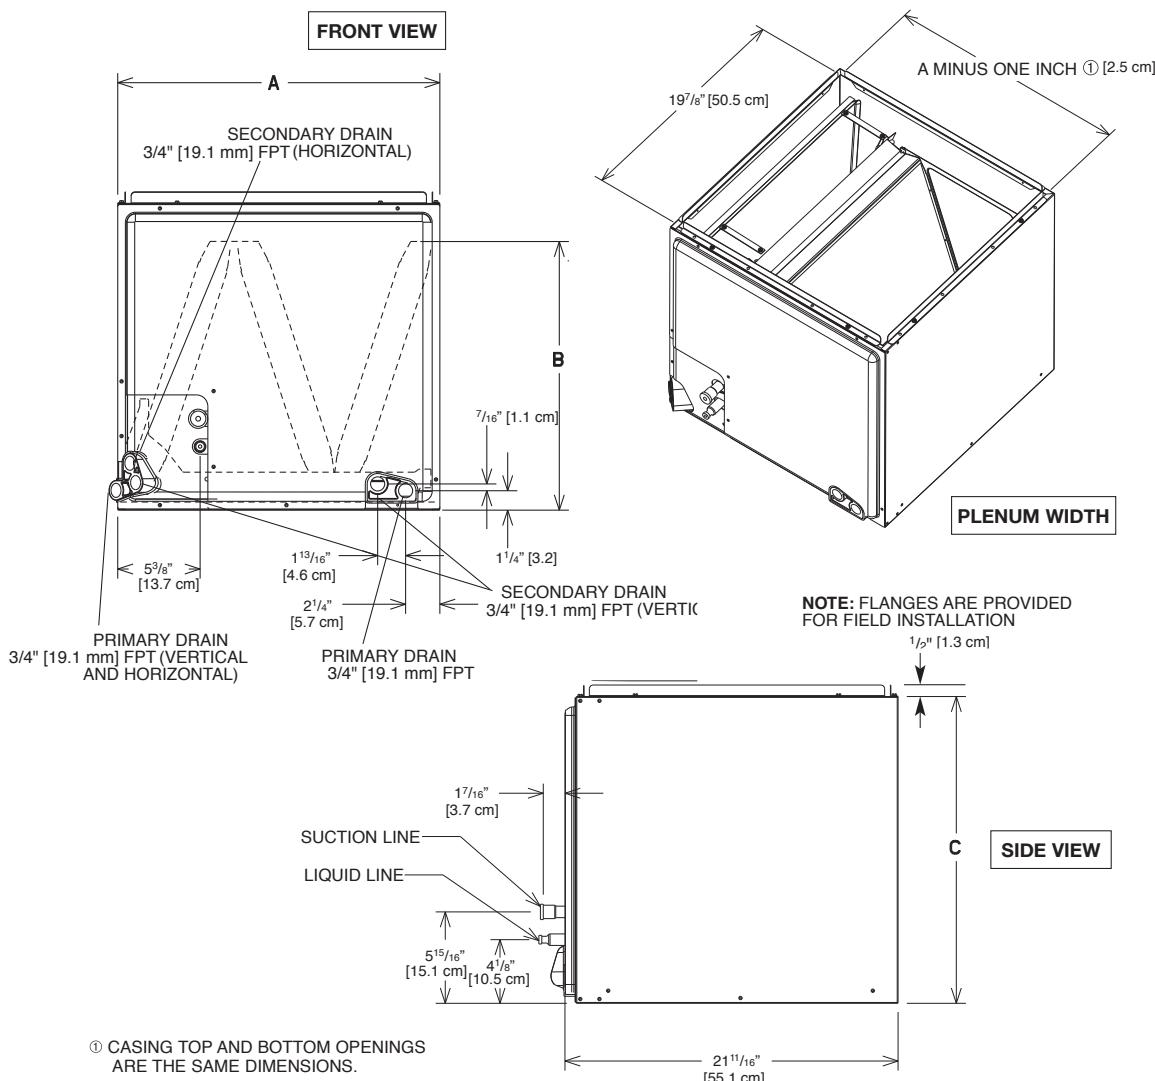

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Tranquility® Digital Air Handler (TAH) Dimensional Data


Cabinet Size		Overall Cabinet			Supply Air Opening		Return Air Opening		F	G	H	J
		A Width	B Height	C Depth	D Width	E Depth	DD Width	EE Depth				
A - Cabinet	in.	18.5	44.0	22.0	14.0	14.0	17.3	20.4	2.3	2.3	4.1	4.1
	cm.	47.0	111.8	55.9	35.6	35.5	43.9	51.8	5.8	5.8	10.3	10.3
B - Cabinet	in.	22.0	55.0	22.0	18.0	18.0	20.8	20.4	2.1	2.1	2.1	2.1
	cm.	55.9	139.7	55.9	45.7	45.7	52.8	51.8	5.2	5.2	5.2	5.2
C - Cabinet	in.	25.5	59.0	22.0	18.0	18.0	24.3	20.4	3.8	3.8	2.1	2.1
	cm.	64.8	149.9	55.9	45.7	45.7	61.7	51.8	9.9	9.9	5.2	5.2

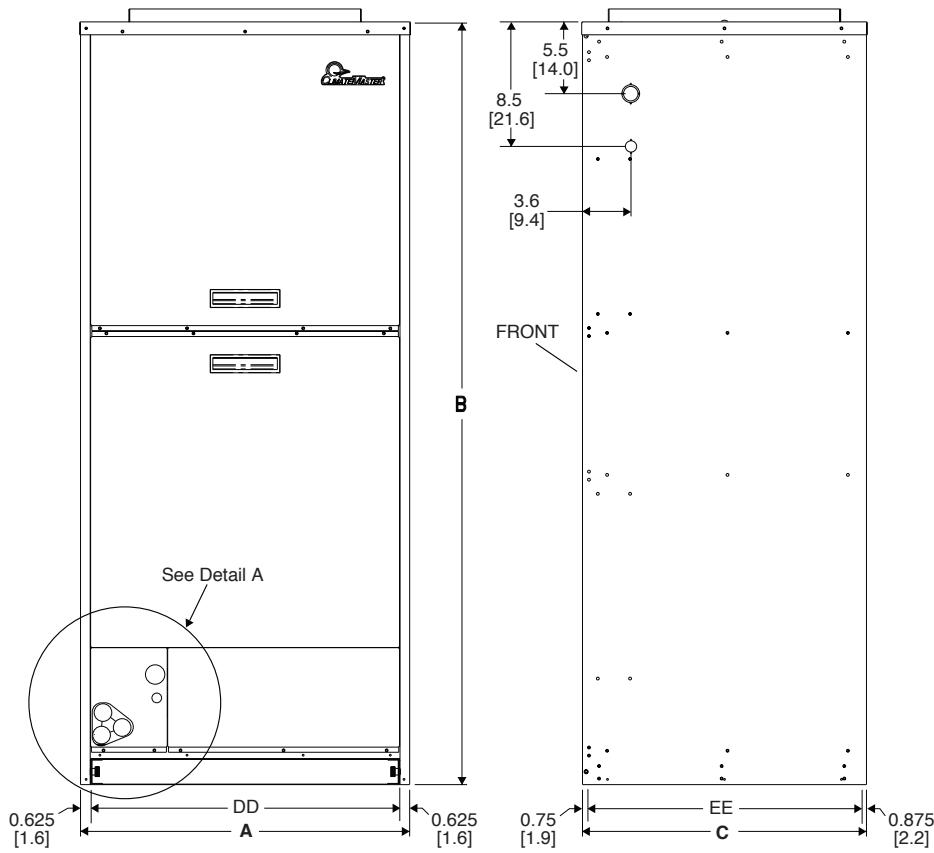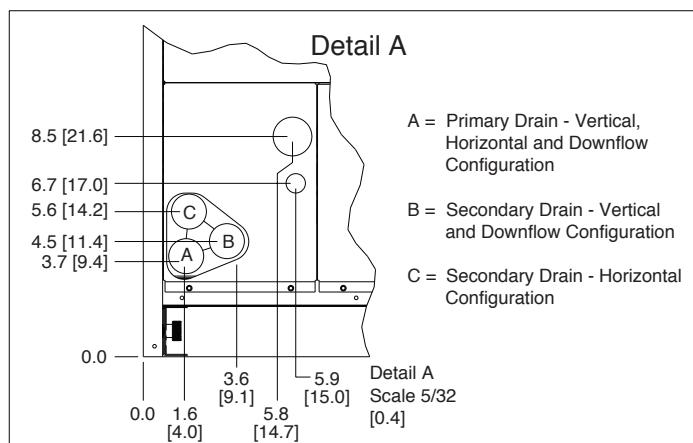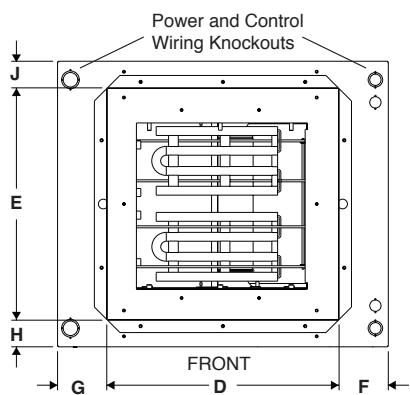

ClimateMaster: Declare your personal energy independence.


# ClimateMaster Geothermal Heat Pump Systems

## Tranquility® Digital Indoor Split (TES) Electrical Wiring Diagram - 96B0005N54

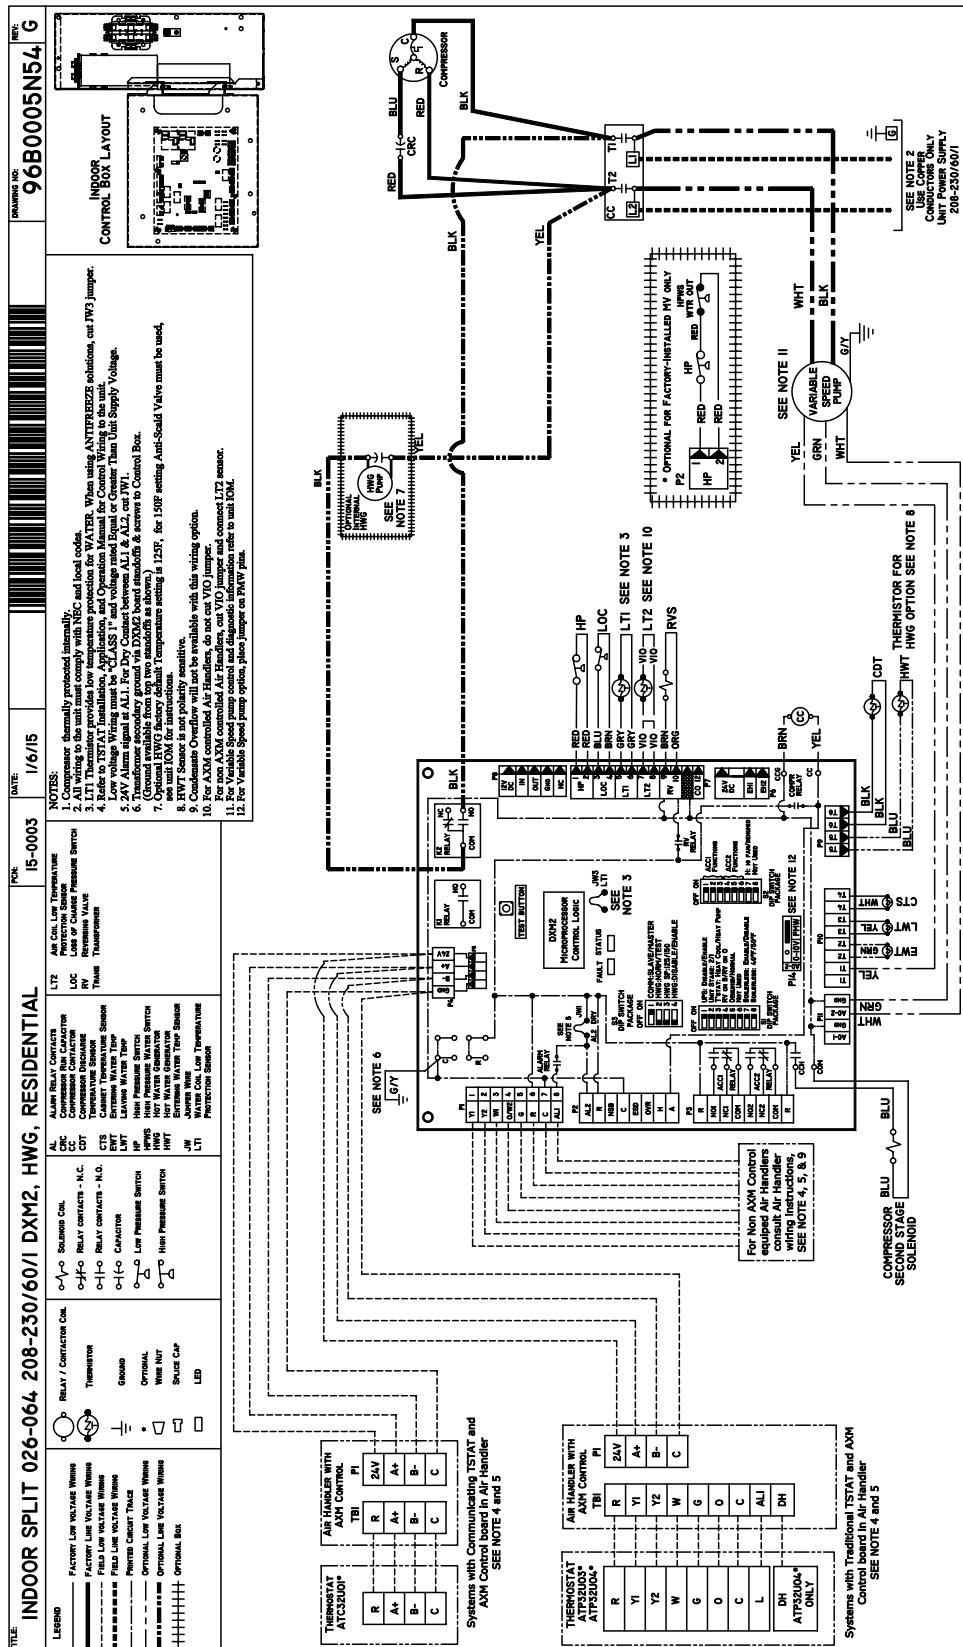


# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Tranquility® Digital Outdoor Split (TEP) DXM2 wiring diagram with Internal Flow Controller - 96B0005N65

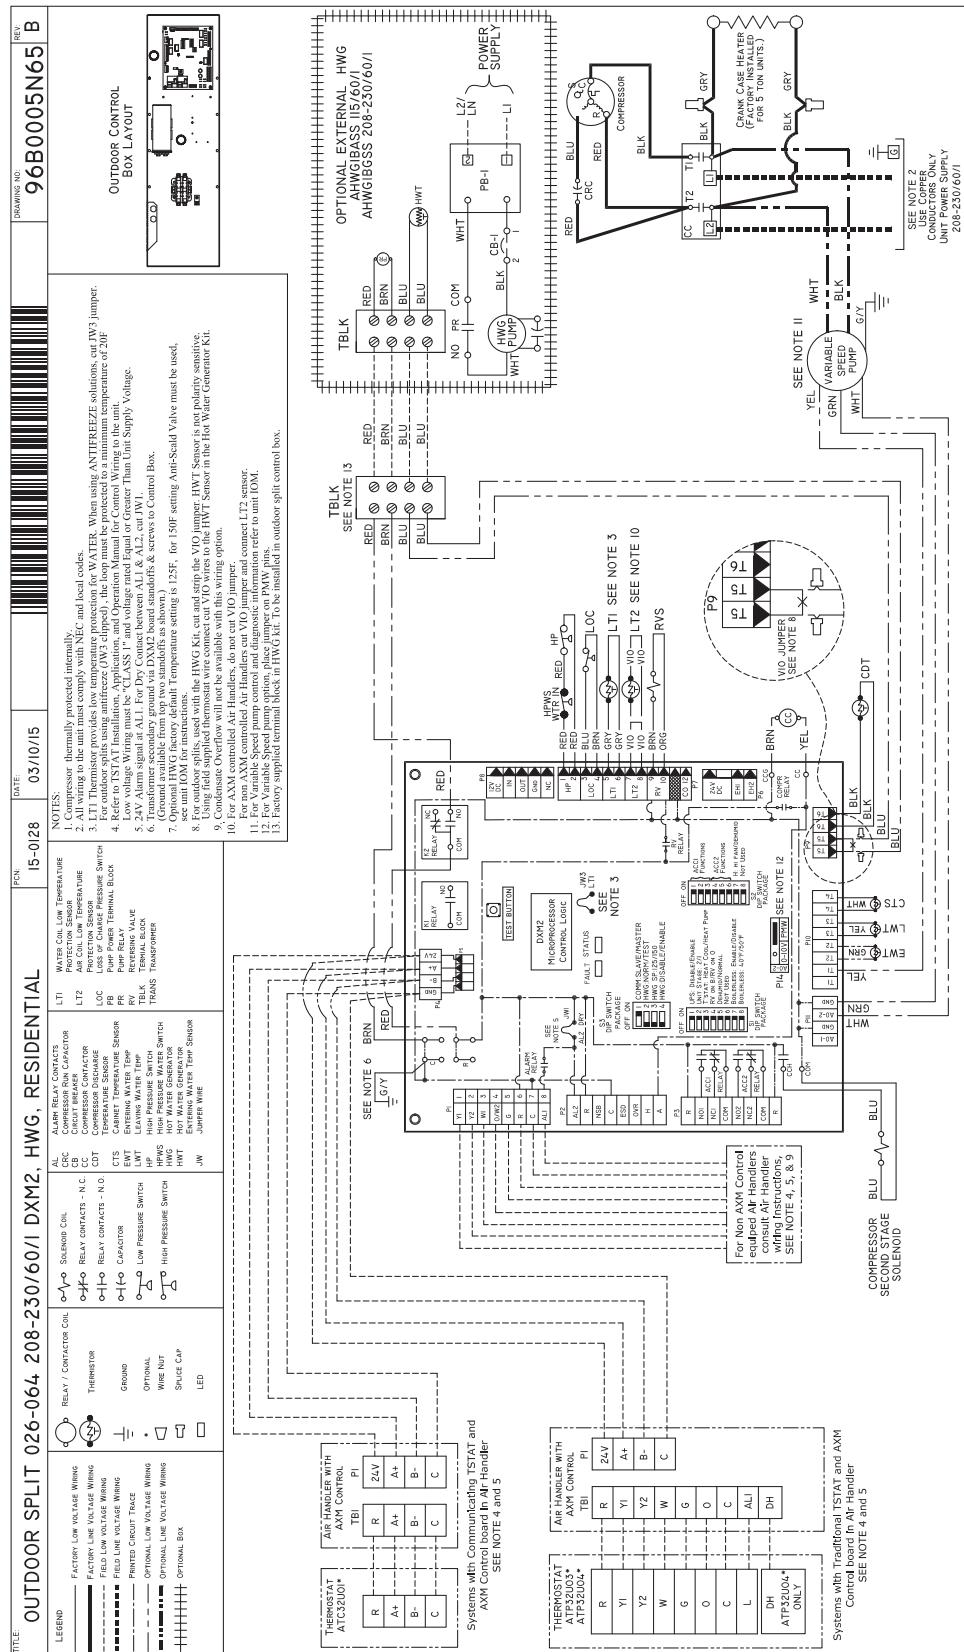

# ClimateMaster Geothermal Heat Pump Systems

Tranquility® Digital Air Handler (TAH) Electrical Wiring Diagram -  
96B0005N55

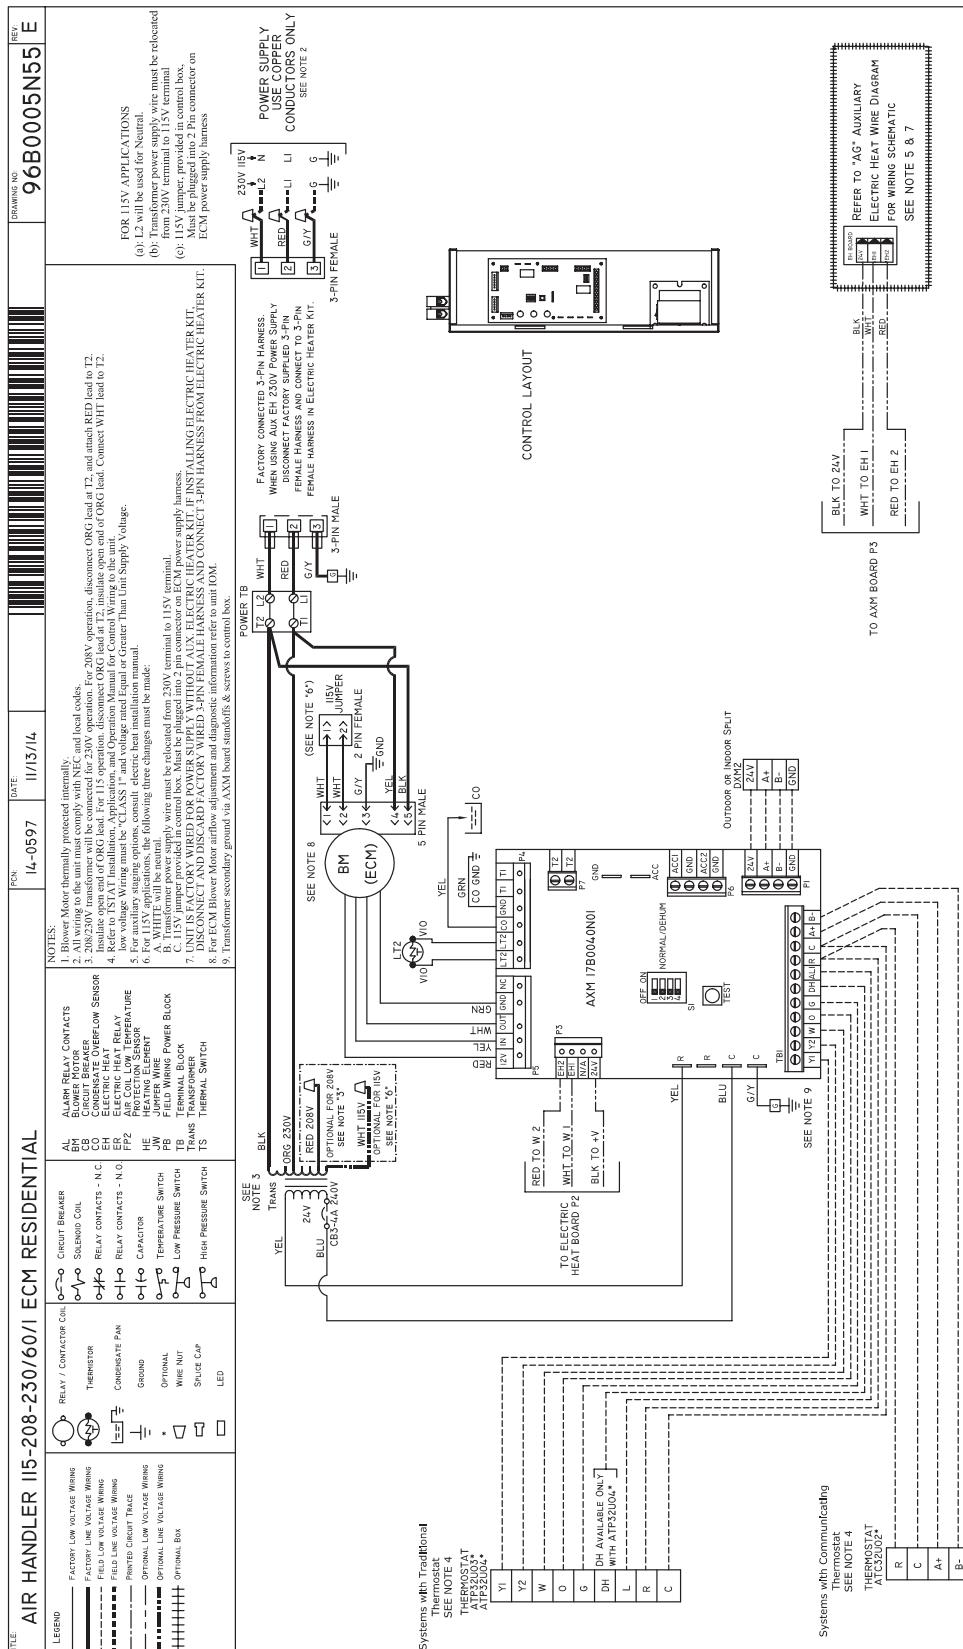

## Tranquility® Digital Split (TES/TEP/TAC/TAH) Series Submittal Data

Models 026 - 064  
60Hz - HFC-410A

Residential



### SUBMITTAL DATA - I-P UNITS

Unit Designation: \_\_\_\_\_

Job Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_

### PERFORMANCE DATA

Cooling Capacity: \_\_\_\_\_ Btu/h

EER: \_\_\_\_\_

Heating Capacity: \_\_\_\_\_ Btu/h

COP: \_\_\_\_\_

Ambient Air Temp: \_\_\_\_\_ °F

Entering Water Temp (Clg): \_\_\_\_\_ °F

Entering Air Temp (Clg): \_\_\_\_\_ °F

Entering Water Temp (Htg): \_\_\_\_\_ °F

Entering Air Temp (Htg): \_\_\_\_\_ °F

Airflow: \_\_\_\_\_ CFM

Fan Speed or Motor/RPM/Turns: \_\_\_\_\_

Operating Weight: \_\_\_\_\_ (lb)

### ELECTRICAL DATA

Power Supply: 208/230 Volts Single Phase 60 Hz

Minimum Circuit Ampacity: \_\_\_\_\_

Maximum Overcurrent Protection: \_\_\_\_\_

# ClimateMaster Geothermal Heat Pump Systems

## Accessories & Options

### vFlow® Internal Variable Speed Water-flow Control

ClimateMaster takes ease and speed of installation of geothermal heating and cooling systems to the next level with vFlow® variable water flow control. vFlow integrates water-flow control inside the unit AND matches the flow to the unit's operating requirements. Compared to conventional units that can just turn the water-flow on or off, Tranquility® Digital Split units vary the water-flow, which results in lower operating cost and longer system life. New 2-way communicating control (and communicating Pump / modulating valve) make vFlow a reality and are only available on ClimateMaster Tranquility Digital systems.

### Thermostat (field installed)

The ATC32U\*\* communicating thermostat is a programmable multi-stage auto-changeover electronic digital thermostat. The ATC offers up to 3 heating and 2 cooling stages with precise temperature control. The ATC is capable of controlling heating and cooling stages using a differential or proportional integral control algorithm. Multiple system temperatures and data can be displayed. The ATC is an integral component in system configuration and diagnostics.

### Hot Water Generator

#### (Indoor Compressor Section Only)

An optional heat reclaiming desuperheater coil of vented double-wall copper construction suitable for potable water shall be provided. The coil and hot water circulating pump shall be factory mounted inside the unit. A high limit and low compressor discharge line temperature switch shall be provided to disable the pump when these conditions occur.

### Hot Water Generator

#### (Outdoor Compressor Section Only)

An optional external heat reclaiming desuperheater module including a vented double-wall heat cupro-nickel exchanger suitable for potable water use shall be provided. The heat exchanger, hot water circulating pump, and a microprocessor control shall be factory installed in an external cabinet. A sensor shall be provided to monitor the entering potable water temperature. A second sensor shall be used to monitor the compressor discharge temperature. A microprocessor shall be provided to control the desuperheater based on the sensor inputs. The Hot Water Generator module shall be 115 vac and listed by a nationally recognized safety-testing laboratory or agency.

### Cupro-Nickel Heat Exchanger

An optional corrosion resistant Cupro-Nickel coaxial heat exchanger shall be factory installed in lieu of standard copper construction (indoor section only).

### Hose Kits (field installed)

A rubber hose kit shall provide connections between the unit and Flow Controller. Rubber 1" hose allows flexible connection and absorbs vibration transmission between unit and Flow Controller. Brass elbows with MPT fittings for unit connection, barbed fittings for hose connection and FPT fittings for Pressure/Temperature ports shall be included to allow service and troubleshooting of the unit.

Hose clamps shall be used to connect the hose to the brass elbows and Flow Controller.

## Warranty Information

ClimateMaster residential class heat pumps are backed by a ten-year limited warranty on all unit parts, including the following accessories when installed with ClimateMaster units: Flow Controllers, Thermostats & Electric Heaters.

ClimateMaster goes even further to back up its commitment to quality by including a service labor allowance for the first five years on unit parts and thermostats, auxiliary electric heaters and geothermal pumping modules.

See ClimateMaster's 2010 Limited Express Residential Warranty Certificate RP851 for specific coverage and limitation.

The Optional Extended Factory Service Labor Allowance Warranty offers additional length of term protection to the consumer by offsetting service labor costs for 10 years.

To order this warranty, contact your ClimateMaster distributor. This coverage must be purchased within 90 days of unit installation. See Limited Express Extended Labor Warranty Certificate RP852 for details.



# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Notes

# ClimateMaster Geothermal Heat Pump Systems

## Notes

# Tranquility® Digital Split (TES/TEP/TAH/TAC) Series

## Revision History

Date	Page #	Description
November 4, 2020	Various	General Materials Update
December 27, 2019	14	Removed table and added footnote to decoder
November 11, 2019	5	Removed no flow center graphic
October 29, 2019	6, 14	Decoder and pump curve updates
January 23, 2019	6,31	High Head Variable Pump update
April 1, 2016	9	Run test description
January 14, 2016	17	Update Table Data
November 23, 2015	Various	Updated Table Data
October 30, 2015	Various	Revision Updates on Data Tables and Images
October 13, 2015	All	Revision Updates
February 12, 2015	31	Update Electrical Data for External Pump
January 22, 2015	All	Added no vFlow and UPM-Geo Options
October 13, 2013	17	ISO Ratings Updated
June 7, 2013	30	Edits to 038-064 RLA, FLA and MCA
February 15, 2013	3-7	What's New, iGate™ Communicating Controls, vFlow™ Internal Variable Water Flow Control and How to Use pages added
November 9, 2012	All	First Published



RP1003



7300 S.W. 44th Street  
Oklahoma City, OK 73179

Phone: 405-745-6000  
Fax: 405-745-6058  
[climatemaster.com](http://climatemaster.com)

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time for order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products.

Engineered and assembled in the USA

© ClimateMaster, Inc. 2009

ClimateMaster: Declare your personal energy independence.