

Federal Aviation Administration

Instrument Rating – Airplane Airman Certification Standards

Date TBD


Flight Standards Service Washington, DC 20591

Acknowledgments

The U.S. Department of Transportation, Federal Aviation Administration (FAA), Airman Testing Standards Branch, AFS-630, and P.O. Box 25082, Oklahoma City, OK 73125 developed this Airman Certification Standards (ACS) document with the assistance of the aviation community. The FAA gratefully acknowledges the valuable support from the many individuals and organizations who contributed their time and expertise to assist in this endeavor.

Availability

This ACS is available for download from www.faa.gov. Please send comments regarding this document to AFS630comments@faa.gov.

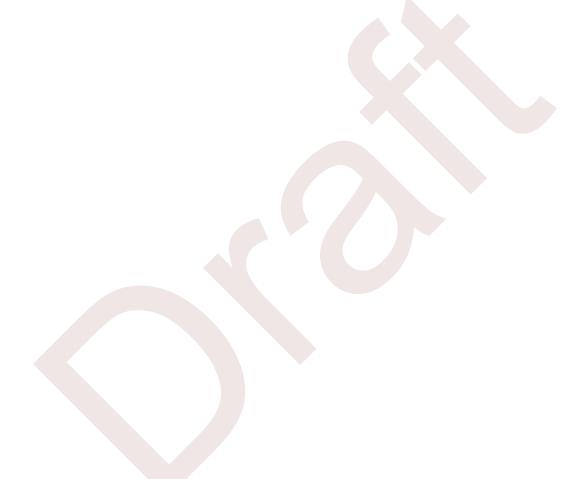

Foreword

The Federal Aviation Administration (FAA) has published the Instrument Rating Airplane Airman Certification Standards (ACS) document to communicate the aeronautical knowledge, flight proficiency, and risk management standards for the instrument rating (IR) in the airplane category, single-engine land and sea; and multiengine land and sea classes. This ACS incorporates and supersedes the previous Practical Test Standards (PTS).

The FAA views the ACS as the foundation of its transition to a more integrated and systematic approach to airman certification. The ACS is part of the safety management system (SMS) framework that the FAA uses to mitigate risks associated with airman certification training and testing. Specifically, the ACS, associated guidance, and test item bank question components of the airman certification system are constructed around the four functional components of an SMS:

- Safety Policy that defines and describes aeronautical knowledge, flight proficiency, and risk management
 as integrated components of the airman certification system;
- Safety Risk Management processes through which internal and external stakeholders identify and evaluate regulatory changes, safety recommendations, or other factors that require modification of airman testing and training materials;
- Safety Assurance processes to ensure the prompt and appropriate incorporation of changes arising from new regulations and safety recommendations; and
- Safety Promotion in the form of ongoing engagement with both external stakeholders (e.g., the aviation training industry) and FAA policy divisions.

In this connection, the FAA gratefully acknowledges and deeply appreciates the many hours that aviation training experts throughout the industry have contributed to the development of this ACS, along with the associated guidance and a more systematic approach to knowledge test question development. This kind of collaboration, a hallmark of a robust safety culture, strengthens and enhances aviation safety at every level of the airman certification system.

John S. Duncan Director, Flight Standards Service

Revision History

Rev. #	Description	Effective Date
VI	Original for ACS WG review	08/19/2015
VII	508 Compliance applied	10/22/2015



Table of Contents

Acknowledgments	ii
Availability	ii
Foreword	iii
Revision History	iv
Introduction	1
Airman Certification Standards Concept	1
Using the ACS	1
I. Preflight Preparation	3
A. Pilot Qualifications	3
B. Weather Information	4
C. Cross-Country Flight Planning	5
II. Preflight Procedures	6
A. Aircraft Systems Related to IFR Operations	6
B. Aircraft Flight Instruments and Navigation Equipment	7
C. Instrument and Equipment Cockpit Check	8
III. Air Traffic Control Clearances and Procedures	9
A. Compliance with Air Traffic Control Clearances	9
B. Holding Procedures	10
IV. Flight by Reference to Instruments	11
A. Instrument Flight	11
B. Recovery from Unusual Flight Attitudes	12
V. Navigation Systems	13
A. Intercepting and Tracking Navigational Systems	13
B. Departure, En route and Arrival Operations	14
VI. Instrument Approach Procedures	15
A. Nonprecision Approach	15
B. Precision Approach	16
C. Missed Approach	17
D. Circling Approach	18
E. Landing from an Instrument Approach	19
VII. Emergency Operations	20
A. Loss of Communications	20
B. One Engine Inoperative – Instrument Approach (Multiengine Airplane)	21
C. Approach with Loss of Primary Flight Instrument Indicators	22
VIII.Postflight Procedures	23
A. Checking Instruments and Equipment	23
Appendix Table of Contents	25



Introduction

Airman Certification Standards Concept

The goal of the airman certification process is to ensure the applicant possesses the knowledge and skill as well as the ability to manage the risks of flight in order to act as pilot in command consistent with the privileges of the certificate or rating being exercised. In fulfilling its responsibilities for the airman certification process, the Federal Aviation Administration (FAA) Flight Standards Service (AFS) plans, develops, and maintains materials related to airman certification training and testing.

Historically, these materials have included several components. The FAA knowledge test measures mastery of the aeronautical knowledge areas listed in Title 14 of the Code of Federal Regulations (14 CFR) part 61. The Practical Test Standards (PTS) defined the acceptable parameters of flight proficiency in the Areas of Operation listed in 14 CFR part 61. FAA handbooks (FAA H-8083-XX series), computer testing supplements (FAA-CT-8080-XX series), and other materials provide guidance to applicants, instructors, and evaluators on aeronautical knowledge, flight proficiency, and risk management.

The FAA recognizes that safe operations in today's complex National Airspace System (NAS) require a more systematic integration of aeronautical knowledge, flight proficiency standards, and risk management. The FAA further recognizes the need to more clearly calibrate knowledge, skills, and risk management according to the level of the certificate or rating. To that end, the FAA drew upon the expertise of organizations and individuals across the aviation and training community to develop the Airman Certification Standards (ACS). The ACS incorporates and supersedes the PTS.

Based on aeronautical knowledge and flight proficiency standards specified in 14 CFR part 61, the ACS integrates the knowledge, skills, and risk management abilities necessary for the safe conduct of each Task. In keeping with this integrated and systematic approach, the knowledge, skills, and risk management sections of each Task stipulate that the applicant must demonstrate understanding of each specific item. The applicant demonstrates this understanding by passing the knowledge exam and practical test.

Throughout this process, the FAA expects evaluators to assess the applicant's mastery of the topic in accordance with the level of learning (i.e., rote, understanding, application, or correlation) most appropriate for the specified Task. For some topics, the evaluator will ask the applicant to describe or explain. For other items, the evaluator will assess the applicant's understanding by providing a scenario that requires the applicant to appropriately apply and/or correlate knowledge, experience, and information to the circumstances of the given scenario. The flight portion of the practical test requires the applicant to demonstrate flight proficiency, operational skill, and risk management in accordance with the ACS.

Note: As used in this ACS, an evaluator is any person authorized to conduct airman testing (e.g., an FAA aviation safety inspector, designated pilot examiner, or other individual authorized to conduct a practical test).

Using the ACS

The ACS consists of *Areas of Operation*, arranged in a logical sequence, that begin with Preflight Preparation and end with Postflight Procedures. Each Area of Operation includes *Tasks* appropriate to that Area of Operation. Each Task begins with an *Objective* stating what the applicant should know and/or do. The ACS then lists the aeronautical knowledge, skills, and risk management elements relevant to the specific Task, along with the conditions and standards for acceptable performance. The ACS uses *Notes* to emphasize special considerations. The ACS uses the terms "will" and "must" to convey directive (mandatory) information. The terms "should" and "may" denote items that are recommended but not required.

The abbreviation(s) within parentheses immediately following a Task refer to the category and/or class aircraft appropriate to that Task. The meaning of each abbreviation is as follows.

ASEL: Airplane – Single-Engine Land ASES: Airplane – Single-Engine Sea AMEL: Airplane – Multiengine Land AMES: Airplane – Multiengine Sea **Note:** When administering a test based on this ACS, the Tasks appropriate to the class airplane (ASEL, ASES, AMEL, or AMES) used for the test must be included in the plan of action. The absence of a class indicates the Task is for all classes.

Each Task in the ACS is coded according to a scheme that includes four elements. For example:

IR.VIII.A.K1:

IR = Applicable ACS (Instrument Rating – Airplane)

VIII = Area of Operation (Postflight Procedures)

A = Task (Checking instruments and equipment)

K1 = Knowledge Task element 1 (the requirements for documenting equipment malfunctions)

Knowledge test questions are mapped to the ACS codes, which replace the previous system of "Learning Statement Codes." Because the airman knowledge test report will list an ACS code that correlates to a specific Task Element for a given Area of Operation and Task, remedial instruction and re-testing will be specific, targeted, and based on specified learning criteria. Similarly, a Notice of Disapproval for the practical test will use the ACS codes to identify the deficient Task element(s).

The applicant must pass the knowledge test before taking the practical test. The practical test is conducted in accordance with the ACS that is current as of the date of the test. Further, the applicant must pass the oral portion of the practical test before beginning the flight portion. The oral portion of the practical test allows the evaluator to determine whether the applicant is sufficiently prepared to advance to the flight portion of the practical test. The evaluator must assess the applicant on all Skill elements for each Task included in each Area of Operation of the ACS unless otherwise noted. The evaluator must also assess at least one Knowledge element and one Risk Management element in each Area of Operation, focusing on any task element(s) the applicant missed on the knowledge exam. The evaluator administering the practical test has the discretion to combine tasks/elements as appropriate to testing scenarios.

The FAA encourages applicants and instructors to use the ACS to measure progress during training, and as a reference to ensure the applicant is adequately prepared for the knowledge and practical tests. The FAA will revise the ACS as circumstances require.

I. Preflight Preparation

Task	A. Pilot Qualifications
References	14 CFR 61; FAA 8083-2, FAA 8083-15
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with the requirements to act as Pilot-in-Command (PIC) under Instrument Flight Rules (IFR).
Knowledge	The applicant demonstrates understanding of:
IR.I.A.K1	When an instrument rating is required.
IR.I.A.K2	Recent instrument flight experience requirements.
IR.I.A.K3	3. Meteorological requirements necessary to qualify for logging currency.
IR.I.A.K4	4. Requirements when recent instrument rating flight experience has not been met.
IR.I.A.K5	5. Pilot logbook/record-keeping.
IR.I.A.K6	6. Physiological factors that might affect the pilot's ability to fly under instrument conditions.
Skills	The applicant demonstrates the ability to:
IR.I.A.S1	1. Apply requirements to act as PIC under IFR in a scenario given by the evaluator.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.I.A.R1	Maintaining currency versus proficiency.
IR.I.A.R2	Setting personal minimums.
IR.I.A.R3	3. Flying with unfamiliar flight display systems.

I. Preflight Preparation

Task	B. Weather Information
References	14 CFR 61, 91; FAA 8083-2, FAA 8083-15; AC 00-6; AC 00-45, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with obtaining, understanding, and applying weather information for a flight under IFR.
Knowledge	The applicant demonstrates understanding of:
IR.I.B.K1	Current and forecast weather for departure, arrival and en route.
IR.I.B.K2	General elements of weather systems.
IR.I.B.K3	3. Types and hazards of icing.
IR.I.B.K4	4. Meteorology to include:
IR.I.B.K4a	a. Weather system formation, including air masses and fronts
IR.I.B.K4b	b. Cloud types and hazards
IR.I.B.K4c	c. Turbulence
IR.I.B.K4d	d. Thunderstorms and microbursts
IR.I.B.K4e	e. Wind shear
IR.I.B.K4f	f. Fog
IR.I.B.K4g	g. Frost/ice/atmosphere/temperature/moisture/precipitation
IR.I.B.K4h	h. Atmosphere
IR.I.B.K4i	i. Wind
IR.I.B.K4j	j. Temperature
IR.I.B.K4k	k. Moisture/precipitation
IR.I.B.K5	5. En route weather resources.
Skills	The applicant demonstrates the ability to:
IR.I.B.S1	1. Use available aviation weather resources to obtain an adequate weather briefing.
IR.I.B.S2	Correlate weather information to determine alternate requirements.
IR.I.B.S3	3. Correlate weather information to make a competent go/no-go decision.
IR.I.B.S4	Obtain weather during-flight.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.I.B.R1	Limitations of aviation weather reports and forecasts.
IR.I.B.R2	2. Limitations of inflight aviation weather resources.
IR.I.B.R3	Alternate airports along the intended route of flight.
IR.I.B.R4	Circumstances that would make diversion prudent.
IR.I.B.R5	5. Hazardous weather conditions that may affect the planned flight.
IR.I.B.R6	6. Known or forecast icing conditions.

I. Preflight Preparation

Task	C. Cross-Country Flight Planning
References	14 CFR 91; FAA 8083-2; FAA 8083-15; FAA 8083-16; FAA 8083-25, AFD, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with planning and filing an IFR cross-country flight.
Knowledge	The applicant demonstrates understanding of:
IR.I.C.K1	How to compute fuel reserves.
IR.I.C.K2	2. Definitions of minimum or emergency fuel.
IR.I.C.K3	3. Conditions conducive to icing, wind shear, microbursts, and turbulence.
IR.I.C.K4	4. Symbology found on IFR en route and approach charts and diagrams.
IR.I.C.K5	5. Where to locate and how to apply preferred IFR routing.
IR.I.C.K6	6. Elements and operational requirements of an IFR flight plan.
IR.I.C.K7	7. Procedures for activating and closing an IFR flight plan in controlled and non-controlled airspace.
IR.I.C.K8	8. Oxygen requirements.
IR.I.C.K9	Altitude and course requirements
IR.I.C.K10	10. Preflight requirements
IR.I.C.K11	11. Airspace, cloud clearance, and visibility requirements
IR.I.C.K12	12. Selection of an alternate airport.
Skills	The applicant demonstrates the ability to:
IR.I.C.S1	1. Recalculate fuel reserves based on a scenario provided by the evaluator.
IR.I.C.S2	2. Create and file an IFR flight plan for a route assigned by the evaluator.
IR.I.C.S3	3. Interpret departure, en route, arrival, and instrument approach procedures.
IR.I.C.S4	4. Divert to a suitable alternate.
IR.I.C.S5	5. Calculate time en route and fuel.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.I.C.R1	Appropriate IFR altitudes.
IR.I.C.R2	2. Dynamic weather.
IR.I.C.R3	3. Inadvertent icing encounters.
IR.I.C.R4	4. Limitations of ATC radar advisories.
IR.I.C.R5	5. Fuel reserves and situations that would merit increasing minimum fuel reserves.
IR.I.C.R6	6. Minimum or emergency fuel conditions.
IR.I.C.R7	 A route involving significant environmental influences, mountains, and large bodies of water.
IR.I.C.R8	8. Human factors that may impact making an initial no-go decision, and the decision, continuing the flight ongoing evaluation of the flight.
IR.I.C.R9	Areas unsuitable for landing or below personal weather minimums.

II. Preflight Procedures

Task	A. Aircraft Systems Related to IFR Operations	
References	14 CFR 61, 91, FAA 8083-2, FAA 8083-15; AFM; AC 61-84; AC 91-74	
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with anti-icing and de-icing systems.	
Knowledge	The applicant demonstrates understanding of:	
IR.II.A.K1	General operational characteristics and limitations of anti-icing and deicing equipment.	
Skills	The applicant demonstrates the ability to:	
IR.II.A.S1	Understand and operate anti-icing and deicing equipment, applicable to their aircraft, in icing conditions.	
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:	
IR.II.A.R1	1. Fuselage, wing, tail plane, propeller, carburetor and intake, and pitot icing.	
IR.II.A.R2	Anti- and deicing equipment aircraft limitations.	
IR.II.A.R3	Limitations of systems certified for flight into known icing.	

II. Preflight Procedures

Task	B. Aircraft Flight Instruments and Navigation Equipment
References	14 CFR 61, 91; AC 61-27; AC 61-84; AC 90-48
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with managing instruments appropriate for an IFR flight.
Knowledge	The applicant demonstrates understanding of:
IR.II.B.K1	General operation of flight instruments.
IR.II.B.K1a	a. Pitot-static instruments.
IR.II.B.K1b	b. Gyroscopic/electric instruments.
IR.II.B.K1c	c. Magnetic compass.
IR.II.B.K1d	d. Errors.
IR.II.B.K2	General characteristics of navigation instruments
IR.II.B.K2a	a. NAVAIDs.
IR.II.B.K2b	b. VOR.
IR.II.B.K2c	c. DME.
IR.II.B.K2d	d. RNAV.
IR.II.B.K2e	e. ILS.
IR.II.B.K2f	f. GPS.
IR.II.B.K3	3. General characteristics and common failure modes of autopilot systems.
IR.II.B.K4	Common failure modes of flight and navigation instruments.
IR.II.B.K5	5. Difference between approved and non-approved navigation devices.
IR.II.B.K6	6. Limitations of portable navigation devices for guidance or reference.
Skills	The applicant demonstrates the ability to:
IR.II.B.S1	Operate and manage installed instruments and navigation equipment.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.II.B.R1	1. Automation management.
IR.II.B.R2	Operation and interpretation of unfamiliar flight and navigation instruments.
IR.II.B.R3	Distractions created by programming advanced avionics.
IR.II.B.R4	4. Limitations of using an electronic flight bag.

II. Preflight Procedures

Task	C. Instrument and Equipment Cockpit Check
References	14 CFR 61,91; FAA 8083-15
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with preflighting the aircraft instruments necessary for an IFR flight.
Knowledge	The applicant demonstrates understanding of:
IR.II.C.K1	Purpose of performing an instrument cockpit check and requirements.
IR.II.C.K2	Procedures for flying with inoperative equipment.
IR.II.C.K3	Required documentation for flying with inoperative equipment.
IR.II.C.K4	4. Limitations of flying with inoperative equipment.
IR.II.C.K5	5. Requirement for having a current aviation database.
IR.II.C.K6	6. Required equipment for IFR flight.
Skills	The applicant demonstrates the ability to:
IR.II.C.S1	 Perform an adequate preflight inspection of installed flight instruments and navigation equipment.
IR.II.C.S2	2. Make a determination if the aircraft is legal and/or safe to fly with inoperative equipment.
IR.II.C.S3	Properly document inoperative equipment.
IR.II.C.S4	Determine if databases are current.
IR.II.C.S5	5. Use appropriate procedures to avoid runway incursions.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.II.C.R1	Inoperative equipment.
IR.II.C.R2	Appropriate time(s) to program avionics.
IR.II.C.R3	3. Hazards of outdated navigation publications or databases.

III. Air Traffic Control Clearances and Procedures

Task	A. Compliance with Air Traffic Control Clearances
References	14 CFR 61, 91; FAA 8083-15, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with understanding and complying with ATC clearances and procedures.
Knowledge	The applicant demonstrates understanding of:
IR.III.A.K1	Responsibilities associated with accepting a clearance.
IR.III.A.K2	Requirements to read back ATC clearances.
IR.III.A.K3	3. Pilot in Command (PIC) emergency authority associated while flying under IFR.
IR.III.A.K4	Methods to obtain ATC clearances.
IR.III.A.K5	5. Terrain clearance requirements associated with departure procedures.
IR.III.A.K6	6. Lost communication procedures.
IR.III.A.K7	7. Purpose of "expect" in a clearance.
IR.III.A.K8	8. Procedures involved for departure, en route, and arrival.
IR.III.A.K9	9. Position reporting.
Skills	The applicant demonstrates the ability to:
IR.III.A.S1	Use and understand standard phraseology.
IR.III.A.S2	2. Correctly copy, read back, interpret, and comply with ATC clearances.
IR.III.A.S3	3. Correctly set up communication frequencies, navigation systems and transponder codes in compliance with the ATC clearance.
IR.III.A.S4	4. Establish two-way communication with the proper controlling agency, in a timely manner, using standard phraseology.
IR.III.A.S5	 Maintain the applicable airspeed within ±10 knots; headings within ±10°; altitude within ±100 feet; and tracks a course, radial, or bearing within ¾- scale deflection of the CDI on a procedure.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.III.A.R1	Failure to fully understand an ATC clearance
IR.III.A.R2	2. Inappropriate, incomplete, or incorrect ATC clearances.
IR.III.A.R3	ATC clearances inconsistent with aircraft performance and /or navigation capability to comply
IR.III.A.R4	4. Short void times.
IR.III.A.R5	5. Airborne clearances.
IR.III.A.R6	6. Terrain avoidance on takeoff and managing risks in a non-radar environment.
IR.III.A.R7	7. Avoiding acceptance of another aircraft's clearance.
IR.III.A.R8	8. Use of outdated navigation publications and databases.
IR.III.A.R9	9. Collision avoidance.

III. Air Traffic Control Clearances and Procedures

Task	B. Holding Procedures
References	14 CFR 61, 91; FAA 8083-15, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with holding procedures.
Knowledge	The applicant demonstrates understanding of:
IR.III.B.K1	Purpose of holding.
IR.III.B.K2	Reporting criteria associated with holding patterns.
IR.III.B.K3	Recommended entry procedures.
IR.III.B.K4	Definitions of minimum and emergency fuel.
IR.III.B.K5	5. Wind corrections in holding.
IR.III.B.K6	6. Using the autopilot (if equipped) for holding.
Skills	The applicant demonstrates the ability to:
IR.III.B.S1	Update fuel reserve calculations based on EFC times.
IR.III.B.S2	2. Maintain the airspeed within ±10 knots; altitude within ±100 feet; headings within ±10°; and track a selected course, radial or bearing within ¾-scale deflection of the CDI.
IR.III.B.S3	3. Use appropriate navigation displays, as supplementary devices, to maintain prescribed ground track.
IR.III.B.S4	4. Use proper wind correction procedures to maintain the desired pattern and to arrive over the fix as close as possible to a specified time.
IR.III.B.S5	5. Comply with restrictions, if applicable, associated with the holding pattern.
IR.III.B.S6	6. Set appropriate power settings for fuel conservation.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.III.B.R1	1. Fuel reserves if assigned an unanticipated expect further clearance time.
IR.III.B.R2	Need to declare minimum or emergency fuel.
IR.III.B.R3	3. Scenarios that could lead to holding.
IR.III.B.R4	4. Possibility of deteriorating weather in holding and/or at the destination.

IV. Flight by Reference to Instruments

Task	A. Instrument Flight
References	14 CFR 61, 97, FAA 8083-15
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with performing basic instrument flight maneuvers.
Knowledge	The applicant demonstrates understanding of:
IR.IV.A.K1	Concepts of instrument flight references
IR.IV.A.K1a	a. Pitch instruments
IR.IV.A.K1b	b. Bank instruments.
IR.IV.A.K1c	c. Power instruments.
IR.IV.A.K2	Spatial disorientation and optical illusions.
IR.IV.A.K3	Normal and abnormal instrument indications.
IR.IV.A.K4	Normal and abnormal instrument operations.
Skills	The applicant demonstrates the ability to:
IR.IV.A.S1	 Maintain altitude within ±100 feet during level flight, headings within ±10°, airspeed within ±10 knots, and bank angles within ±5° during turns.
IR.IV.A.S2	Use proper instrument cross-check and interpretation, and apply the appropriate pitch, bank, power, and trim corrections when applicable.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.IV.A.R1	Situations that can degrade instrument cross-check.
IR.IV.A.R2	Distractions created by passengers.
IR.IV.A.R3	3. Physiological factors that can degrade instrument cross-check.

IV. Flight by Reference to Instruments

Task	B. Recovery from Unusual Flight Attitudes
References	14 CFR part 61, FAA 8083-15
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with performing unusual flight attitudes.
Knowledge	The applicant demonstrates understanding of:
IR.IV.B.K1	Physiological factors that can lead to, or hinder recovery from, unusual attitudes.
IR.IV.B.K2	Systems and equipment failures that could lead to unusual attitudes.
IR.IV.B.K3	Environmental factors that can lead to unusual attitudes.
IR.IV.B.K4	Recovery process to restore the aircraft to normal flight attitude.
Skills	The applicant demonstrates the ability to:
IR.IV.B.S1	 Recognize, confirm, and recover from unusual attitudes (nose-high and nose-low; low or high speed).
IR.IV.B.S2	 Apply proper instrument cross-check and interpretation, and apply the appropriate pitch, bank, and power corrections, in the correct sequence, to return the aircraft to a stabilized level flight attitude.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.IV.B.R1	Situations that could lead to loss of control.
IR.IV.B.R2	2. Unusual attitudes associated with stress, high workload, task saturation, and distractions.
IR.IV.B.R3	Startle response during unexpected events
IR.IV.B.R4	Aircraft attitude while making control inputs
IR.IV.B.R5	Proper recovery procedures.

V. Navigation Systems

Task	A. Intercepting and Tracking Navigational Systems
References	14 CFR parts 61, 91; FAA 8083-15; AFM, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with intercepting and tracking navigation aids.
	Note: The evaluator may disregard reference to specific navigational equipment if the aircraft is not equipped with those systems.
Knowledge	The applicant demonstrates understanding of:
IR.V.A.K1	Procedures for intercepting and tracking.
IR.V.A.K2	Course guidance indications to include VOR and HSI.
IR.V.A.K3	3. Indications of navigation systems failures.
Skills	The applicant demonstrates the ability to:
IR.V.A.S1	Tune and correctly identify the navigation facility.
IR.V.A.S2	Set and correctly orient to the course to be intercepted.
IR.V.A.S3	 Intercept the specified course at a predetermined angle, inbound to or outbound from a navigational facility.
IR.V.A.S4	 Maintain airspeed within ±10 knots, altitude within ±100 feet, and selected headings within ±5°.
IR.V.A.S5	5. Apply proper correction to maintain a course, allowing no more than ¾-scale deflection of the CDI or within ±10° in case of an RMI.
IR.V.A.S6	6. Determine the aircraft position relative to the navigational facility or waypoint.
IR.V.A.S7	7. Intercept an arc, if applicable for the procedure being flown, and maintain that arc within ±1 nautical mile.
IR.V.A.S8	8. Recognize navigational receiver or facility failure, and when required, report the failure to ATC.
IR.V.A.S9	9. Use MFD and other graphical navigation displays, if installed, to monitor position, track wind drift, and other parameters to intercept and maintain the desired flight path.
IR.V.A.S10	10. Properly program the autopilot, if installed, to intercept courses.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.V.A.R1	Correct course intercepts and tracking
IR.V.A.R2	2. Use of secondary display information to intercept and track courses.

V. Navigation Systems

Task	B. Departure, En route and Arrival Operations
References	14 CFR parts 61, 91, FAA 8083-15; AC 91-74, AFM, AIM, AIM Pilot/Controller Glossary
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with intercepting and tracking navigation aids.
	Note: The evaluator may disregard reference to specific navigational equipment if the aircraft is not equipped with those systems.
Knowledge	The applicant demonstrates understanding of:
IR.V.B.K1	Departure Procedures (DP)
IR.V.B.K2	Services available to pilots.
IR.V.B.K3	Pilot/Controller roles and responsibilities.
IR.V.B.K4	Instrument altitudes.
IR.V.B.K5	5. Airport lighting, signs, and markings.
IR.V.B.K6	6. STARS.
IR.V.B.K7	7. Communication during arrival.
IR.V.B.K8	Instrument approach terms and abbreviations.
IR.V.B.K9	Instrument approach procedures chart.
Skills	The applicant demonstrates the ability to:
IR.V.B.S1	Recognize guidance equipment sensitivity changes.
IR.V.B.S2	Monitor ATC and use proper response(s).
IR.V.B.S3	3. Recognize and comply with instrument approach procedures (IAP) chart notes.
IR.V.B.S4	4. Use of VFR-on-Top clearance.
IR.V.B.S5	5. Select an appropriate course of action.
IR.V.B.S6	6. Maintain an appropriate heading, climb and descent.
IR.V.B.S7	7. Use navigation systems/facilities for assistance, as appropriate for IFR flight.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.V.B.R1	1. Icing conditions.
IR.V.B.R1a	a. Tail plane.
IR.V.B.R1b	b. Avoidance.
IR.V.B.R1c	c. Exit strategy.
IR.V.B.R1d	d. Static system.
IR.V.B.R1e	e. Aerodynamics.
IR.V.B.R1f	f. Weight and balance.
IR.V.B.R2	Appropriate use of see and avoid techniques.
IR.V.B.R3	Traffic avoidance equipment uses and limitations.
IR.V.B.R4	4. Use of appropriate charts and database(s).
IR.V.B.R5	5. CFIT avoidance.

Task	A. Nonprecision Approach
References	14 CFR 61, 91; FAA 8083-15; FAA 8083-16; IAP, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with performing nonprecision approach procedures.
Knowledge	The applicant demonstrates understanding of:
IR.VI.A.K1	Procedures and limitations associated with nonprecision approach.
IR.VI.A.K2	Differences between Localizer Performance (LP) and Lateral Navigation (LNAV) approach guidance.
IR.VI.A.K3	3. Annunciations expected during a Global Positioning System (GPS) based approach.
Skills	The applicant demonstrates the ability to:
IR.VI.A.S1	1. Select and comply with the appropriate instrument approach procedure to be performed.
IR.VI.A.S2	Establish two-way communications with ATC, as appropriate, to the phase of flight or approach segment, and uses proper communication phraseology.
IR.VI.A.S3	 Select, tune, identify, and confirm the operational status of navigation equipment to be used for the approach procedure.
IR.VI.A.S4	4. Comply with all clearances issued by ATC or the evaluator.
IR.VI.A.S5	5. Recognize if any flight instrumentation is inaccurate or inoperative, and take appropriate action.
IR.VI.A.S6	6. Advise ATC or the evaluator anytime the aircraft is unable to comply with a clearance.
IR.VI.A.S7	 Establish the appropriate aircraft configuration and airspeed considering turbulence and wind shear, and complete the aircraft checklist items appropriate to the phase of the flight.
IR.VI.A.S8	8. Maintain, prior to beginning the final approach segment, altitude within ±100feet, heading within ±10° and allows less than ¾-scale deflection of the CDI or within ±10° in the case of an RMI, and maintain airspeed within ±10 knots.
IR.VI.A.S9	 Apply the necessary adjustments to the published MDA and visibility criteria for the aircraft approach category when required.
IR.VI.A.S10	10. Establish a stabilized approach profile with a rate of descent and track that will ensure arrival at the MDA prior to reaching the MAP.
IR.VI.A.S11	11. Maintain, while on the final approach segment, no more than a ¾-scale deflection of the CDI or within 10° in case of an RMI, and maintain airspeed within ±10 knots of desired value
IR.VI.A.S12	12. Maintain the MDA, when reached, within +100 feet, −0 feet to the MAP.
IR.VI.A.S13	13. Execute the missed approach procedure when the required visual references for the intended runway are not distinctly visible and identifiable at the MAP.
IR.VI.A.S14	14. Execute a normal landing from a straight-in or circling approach when instructed by the evaluator.
IR.VI.A.S15	15. Use MFD and other graphical navigation displays, if installed, to monitor position, track wind drift and other parameters to maintain desired flight path.
IR.VI.A.S16	16. Confirm appropriate annunciations during a GPS-based (non-precision) approach.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.VI.A.R1	Use of prescribed procedures.
IR.VI.A.R2	Avoidance of excessive descent rates.
IR.VI.A.R3	3. Worsening weather conditions on approach.
IR.VI.A.R4	Importance of flying a stabilized approach

Task	B. Precision Approach
References	14 CFR 61, 91; FAA 8083-15, FAA 8083-16, IAP, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with performing precision approach procedures. Note: See Appendix (3-2): A precision approach, utilizing aircraft NAVAID equipment for centerline and vertical guidance, must be accomplished in simulated or actual instrument conditions to decision altitude.
Knowledge	The applicant demonstrates understanding of:
IR.VI.B.K1	Procedures and limitations associated with precision approach.
IR.VI.B.K2	Proper Missed Approach Procedure (MAP) associated with an Flight Management System (FMS).
IR.VI.B.K3	Descent rates needed to follow the vertical guidance.
IR.VI.B.K4	4. Inoperative components on approach.
Skills	The applicant demonstrates the ability to:
IR.VI.B.S1	Establish two-way communications with ATC using the proper communications phraseology, as required for the phase of flight or approach segment.
IR.VI.B.S2	2. Comply, in a timely manner, with all clearances, instructions, and procedures.
IR.VI.B.S3	3. Advise ATC unable to comply with a clearance.
IR.VI.B.S4	 Establish the appropriate airplane configuration and airspeed/V-speed considering turbulence, wind shear, microburst conditions, or other meteorological and operating conditions.
IR.VI.B.S5	Complete the aircraft checklist items appropriate to the phase of flight or approach segment, including engine out approach and landing checklists, if appropriate.
IR.VI.B.S6	6. Prior to beginning the final approach segment, maintain the desired altitude±100 feet, the desired airspeed within ±10 knots, the desired heading within ±10°; and accurately tracks radials, courses, and bearings.
IR.VI.B.S7	7. Select tune, identify, and monitors the operational status of ground and airplane navigation equipment used for the approach.
IR.VI.B.S8	8. Apply the necessary adjustments to the published Decision Altitude (DA)/Decision Height (DH) and visibility criteria for the airplane approach category as required.
IR.VI.B.S9	9. Establish a predetermined rate of descent at the point where the electronic glideslope begins, which approximates that required for the aircraft to follow the glideslope.
IR.VI.B.S10	10. Maintain a stabilized final approach, from the Final Approach Fix (FAF) to Decision Altitude (DA)/Decision Height (DH) allowing no more than ¾- scale deflection of either the glideslope or localizer indications and maintain the desired airspeed within ±10 knots.
IR.VI.B.S11	11. Immediately initiate the missed approach procedures when at the DA/DH, and the required visual references for the runway are not unmistakably visible and identifiable.
IR.VI.B.S12	12. Transition to a normal landing approach only when the aircraft is in a position from which a descent to a landing on the runway can be made at a normal rate of descent using normal maneuvering.
IR.VI.B.S13	13. Maintain localizer and glideslope within ¾-scale deflection of the indicators during the visual descent from DA/DH to a point over the runway where glideslope must be abandoned to accomplish a normal landing.
IR.VI.B.S14	14. Use MFD and other graphical navigation displays, if installed, as appropriate to monitor position, track wind drift and other parameters to maintain desired flight path.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.VI.B.R1	Use of prescribed procedures
IR.VI.B.R2	Avoiding descent below DA/DH without proper visual references.
IR.VI.B.R3	3. Ensuring proper aircraft configuration during approach and missed approach.
IR.VI.B.R4	4. Human factors that might influence continuing an approach in worsening conditions.
IR.VI.B.R5	Importance of flying a stabilized approach.

Task	C. Missed Approach
References	14 CFR 61, 91; FAA 8083-15; IAP, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with performing missed approach procedures.
Knowledge	The applicant demonstrates understanding of:
IR.VI.C.K1	Procedures and limitations associated with missed approach.(MAP).
IR.VI.C.K2	Missed Approach Procedure (MAP) associated with a Flight Management System (FMS), if equipped.
IR.VI.C.K3	3. Proper autopilot management procedures associated with MAP.
Skills	The applicant demonstrates the ability to:
IR.VI.C.S1	1. Initiate the missed approach promptly by applying power, establishing a climb attitude, and reducing drag in accordance with the aircraft manufacturer's recommendations.
IR.VI.C.S2	2. Report to ATC beginning the missed approach procedure.
IR.VI.C.S3	 Uncouple and re-engage couples autopilot, if installed at appropriate times during the MAP.
IR.VI.C.S4	4. Comply with the published or alternate missed approach procedure.
IR.VI.C.S5	Advise ATC or evaluator anytime the aircraft is unable to comply with a clearance, restriction, or climb gradient.
IR.VI.C.S6	6. Follow the recommended checklist items appropriate to the go-around procedure.
IR.VI.C.S7	7. Request, if appropriate, ATC clearance to the alternate airport, clearance limit, or as directed by the evaluator.
IR.VI.C.S8	8. Maintain the recommended airspeed within ±10 knots; heading, course, or bearing within ±10°; and altitude(s) within ±100 feet during the missed approach procedure.
IR.VI.C.S9	9. Use MFD and other graphical navigation displays, if installed, to monitor position and track to help navigate the missed approach.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.VI.C.R1	Use of prescribed procedures.
IR.VI.C.R2	2. Options for holding, diverting, or electing to fly the approach again.
IR.VI.C.R3	3. A missed approach "plan" before reaching final approach fix.
IR.VI.C.R4	Factors that might lead to executing a missed approach procedure before the missed approach point.

Task	D. Circling Approach
References	14 CFR 61, 91; FAA 8083-15, IAP, AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with performing circling approach procedures.
Knowledge	The applicant demonstrates understanding of:
IR.VI.D.K1	Procedures and limitations associated with circling approach.
IR.VI.D.K2	Approach categories and relevant airspeed limitations.
Skills	The applicant demonstrates the ability to:
IR.VI.D.S1	Select and comply with the appropriate circling approach procedure considering turbulence and wind shear and considering the maneuvering capabilities of the aircraft.
IR.VI.D.S2	Confirm the direction of traffic and adheres to all restrictions and instructions issued by ATC and the evaluator.
IR.VI.D.S3	3. Maintain the appropriate circling altitude until in a position from which a descent to a normal landing can be made.
IR.VI.D.S4	4. Maneuver the aircraft, after reaching the authorized MDA and maintains that altitude within +100 feet, −0 feet and a flight path that permits a normal landing on a runway. The runway selected must be such that it requires at least a 90° change of direction, from the final approach course, to align the aircraft for landing.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.VI.D.R1	Use of prescribed circling approach procedures.
IR.VI.D.R2	2. Hazards of executing a circling approach at night.
IR.VI.D.R3	3. Hazards of losing sight of the runway during a circling approach.
IR.VI.D.R4	4. Hazards of accepting a circling approach in marginal visibility.

Task	E. Landing from an Instrument Approach
References	14 CFR 61, 91; FAA 8083-15; AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with performing the procedures for landing from an instrument approach.
Knowledge	The applicant demonstrates understanding of:
IR.VI.E.K1	Procedures and limitations associated with landing from an instrument approach.
IR.VI.E.K2	2. Purpose of a stabilized approach.
IR.VI.E.K3	Regulatory requirements for landing from an instrument approach.
IR.VI.E.K4	Approach lighting systems.
IR.VI.E.K5	5. Land and hold short operations (LAHSO) or option to refuse LAHSO restriction.
IR.VI.E.K6	6. Airport signs, markings and lighting.
IR.VI.E.K7	7. Approach and landing hazards.
Skills	The applicant demonstrates the ability to:
IR.VI.E.S1	1. Transition at the DA/DH, MDA, or VDP to a visual flight condition, allowing for safe visual maneuvering and a normal landing.
IR.VI.E.S2	2. Adhere to all ATC (or evaluator) advisories, such as NOTAMs, wind shear, wake turbulence, runway surface, braking conditions, and other operational considerations.
IR.VI.E.S3	3. Complete appropriate checklist items for the pre-landing and landing phase.
IR.VI.E.S4	4. Maintain positive aircraft control throughout the complete landing maneuver.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.VI.E.R1	Hazards of landing from an unstabilized instrument approach.
IR.VI.E.R2	Hazards of flying below glidepath.
IR.VI.E.R3	3. Hazards of runway incursion after landing from an approach.
IR.VI.E.R4	4. Transitioning to visual references for landing.

VII. Emergency Operations

Task	A. Loss of Communications
References	14 CFR 61, 91; AIM
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated performing the procedures associated with loss of communication.
Knowledge	The applicant demonstrates understanding of:
IR.VII.A.K1	Procedures for lost communication at various phases of flight.
IR.VII.A.K2	Criteria for beginning an approach procedure at the destination.
IR.VII.A.K3	3. When to deviate from an IFR clearance.
IR.VII.A.K4	Techniques for re-establishing communications.
Skills	The applicant demonstrates the ability to:
IR.VII.A.S1	Recognize loss of communication.
IR.VII.A.S2	Accomplish actions to re-establish communication.
IR.VII.A.S3	3. Continue to destination.
IR.VII.A.S4	Begin an approach at the appropriate time.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.VII.A.R1	1. Maintaining Visual Flight Rules (VFR)/Visual Meteorological Conditions (V _{mc}) in marginal weather.
IR.VII.A.R2	Possible loss of communication.

VII. Emergency Operations

Task	B. One Engine Inoperative – Instrument Approach (Multiengine Airplane)
References	14 CFR 61,91; FAA 8083-3, FAA 8083-15
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated the procedures for recovering the aircraft with an inoperative engine.
Knowledge	The applicant demonstrates understanding of:
IR.VII.B.K1	The procedures and/or differences used during an instrument approach in a multiengine aircraft with one engine inoperative versus all engines operating.
Skills	The applicant demonstrates the ability to:
IR.VII.B.S1	Recognize engine failures simulated by the evaluator.
IR.VII.B.S2	2. Set all engine controls, reduce drag, and identify and verify the inoperative engine.
IR.VII.B.S3	 Establish the best engine-inoperative airspeed, or airspeed appropriate for the phase of flight, and trim the aircraft.
IR.VII.B.S4	4. Attempt to determine the reason for the engine failure.
IR.VII.B.S5	Accomplish prescribed checklist procedures for restarting and/or securing the inoperative engine.
IR.VII.B.S6	Establish and maintain the recommended flight attitude and configuration for the best performance during the instrument approach procedures.
IR.VII.B.S7	7. Monitor all engine control functions and make necessary adjustments.
IR.VII.B.S8	Follow the actual or a simulated ATC clearance for a straight-in or circling instrument approach.
IR.VII.B.S9	 Establish a rate of descent that will ensure arrival at the MDA/DA prior to reaching the MAP with the aircraft continuously in a position from which descent to a landing on the intended runway can be made.
IR.VII.B.S10	10. Maintain, where applicable, the specified altitude within ±100 feet, the airspeed within ±10 knots if within the aircraft's capability, and the heading within ±10°.
IR.VII.B.S11	11. Set the navigation and communication equipment used during the approach and uses the proper communications technique.
IR.VII.B.S12	 Avoid loss of aircraft control, or attempted flight contrary to the engine- inoperative operating limitations of the aircraft.
IR.VII.B.S13	 Use MFD and other graphical navigation displays, if installed, to monitor position and enhance situational awareness.
IR.VII.B.S14	14. Comply with the published minima for the approach.
IR.VII.B.S15	15. During the final approach, allow no more than ¾-scale deflection (precision approach) or if either the localizer or glideslope or GPS indications, or within ±10° or ¾-scale deflection during a non-precision approach.
IR.VII.B.S16	16. Complete a safe landing.
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.VII.B.R1	Maintaining adequate airspeed.
IR.VII.B.R2	Managing startle response during unexpected events.
IR.VII.B.R3	Increased probability of loss of aircraft control.
IR.VII.B.R4	4. Hazards of executing a missed approach with an inoperative engine.
IR.VII.B.R5	5. Using vertical guidance, if available, during the approach

VII. Emergency Operations

Task	C. Approach with Loss of Primary Flight Instrument Indicators
References	14 CFR 61, 91; FAA 8083-15; IAP
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with performing an approach with the loss of primary flight control instruments.
	Note: This task should evaluate the most realistic failure mode(s) of the aircraft equipment used for the test.
Knowledge	The applicant demonstrates understanding of:
IR.VII.C.K1	Common failure modes of vacuum and electric attitude instruments.
IR.VII.C.K2	Recognizing and confirming likely malfunctions, and how to correct or minimize the effect of their loss.
Skills	The applicant demonstrates the ability to:
IR.VII.C.S1	Advise ATC or evaluator if unable to comply with a clearance.
IR.VII.C.S2	 Complete a nonprecision instrument approach without the use of the primary flight instruments using the objectives of the nonprecision approach task. (See <u>Area of Operation VI, Task A</u>)
Risk Management	The applicant demonstrates the ability to identify, assess and mitigate risks, encompassing:
IR.VII.C.R1	Use of secondary flight displays.
IR.VII.C.R2	Properly using moving map guidance to increase situational awareness.

VIII. Postflight Procedures

Task	A. Checking Instruments and Equipment
References	14 CFR 61, 91
Objective	To determine the applicant exhibits satisfactory knowledge, skills, and risk management associated with checking flight instruments after flight.
Knowledge	The applicant demonstrates understanding of:
IR.VIII.A.K1	The requirements for documenting equipment malfunctions.
IR.VIII.A.K2	Aircraft accident/incident reporting.
Skills	The applicant demonstrates the ability to:
IR.VIII.A.S1	Check all flight equipment for proper operation.
	1. Oneok all hight equipment for proper operation.
IR.VIII.A.S2	Note all equipment and/or aircraft malfunctions and makes appropriate documentation of improper operation or failure of such equipment.
IR.VIII.A.S2 Risk Management	2. Note all equipment and/or aircraft malfunctions and makes appropriate documentation of
Risk	 Note all equipment and/or aircraft malfunctions and makes appropriate documentation of improper operation or failure of such equipment. The applicant demonstrates the ability to identify, assess and mitigate risks,



Appendix Table of Contents

Appendix 1: The Knowledge Test Eligibility, Prerequisites and Testing Centers	A-1
Knowledge Test Description	A-1
English Language Proficiency	A-1
Knowledge Test Requirements	A-1
Knowledge Test Centers	A-2
Knowledge Test Registration	A-2
Appendix 2: Knowledge Test Procedures and Tips	A-3
Acceptable Materials	A-3
Test Tips	
Cheating or Other Unauthorized Conduct	A-4
Testing Procedures for Applicants Requesting Special Accommodations	A-4
Appendix 3: Airman Knowledge Test Report	A-5
FAA Knowledge Test Question Coding	A-5
Appendix 4: The Practical Test – Eligibility and Prerequisites	A-6
Appendix 5: Practical Test Roles, Responsibilities, and Outcomes	A-7
Applicant Responsibilities	A-7
Instructor Responsibilities	A-7
Evaluator Responsibilities	A-7
Possible Outcomes of the Test	A-8
Instrument Proficiency Check	A-11
Appendix 6: Safety of Flight	A-12
General	A-12
Stall and Spin Awareness	A-12
Use of Checklists	A-12
Use of Distractions	A-12
Positive Exchange of Flight Controls	A-12
Aeronautical Decision Making, Risk Management, CRM and SRM	A-13
Multiengine Considerations	A-13
Single-Engine Considerations	A-14
Appendix 7: Aircraft, Equipment, and Operational Requirements & Limitations	A-15
Aircraft Requirements & Limitations	A-15
Equipment Requirements & Limitations	A-15
Operational Requirements & Limitations	A-15
Appendix 8: Use of Flight Simulation Training Devices (FSTD) and Aviation Training Devices (ATD): Airplane Single-Engine, Multi Engine Land and Sea	A-16
Use of FSTDs	A-16
Use of ATDs	A-16
Credit for Time in an FSTD	A-17
Credit for Time in an ATD	A-17
Instrument Experience	A-18

Instrument Proficiency Check	A-18
Use of an FSTD on a Practical Test	A-18
Appendix 9: References	A-19
Appendix 10: Abbreviations and Acronyms	A-20



Appendix 1: The Knowledge Test Eligibility, Prerequisites and Testing Centers

Knowledge Test Description

The knowledge test is an important part of the airman certification process. Applicants must pass the knowledge test before taking the practical test.

The knowledge test consists of objective, multiple-choice questions. There is a single correct response for each test question. Each test question is independent of other questions. A correct response to one question does not depend upon, or influence, the correct response to another.

	Percentage of
IRA Topics	Test Questions
I. Aeronautical Decision Making	3 – 5%
II. AIM IFR Information	3 – 5%
III. Air Traffic Control Procedures	3 – 5%
IV. Critical Weather and Winds hear	3 – 5%
V. Flight Operations	3 – 5%
VI. IFR En Route and Approach Charts	3 – 5%
VII. IFR Flight Operations	5 – 10%
VIII. IFR Navigation and Approaches	5 – 10%
IX. Instrument Procedures	15 – 20%
X. Navigation	5 – 10%
XI. Publications	5 – 10%
XII. Regulations	5 – 10%
XIII. Safe IFR Operations	3 – 5%
XIV. Weather	10 – 15%
Total Number of Questions	60

English Language Proficiency

In accordance with the requirements of 14 CFR part 61, section 61.153(b) and the FAA Aviation English Language Proficiency standard, throughout the application and testing process the applicant must demonstrate the ability to read, write, speak, and understand the English language. English language proficiency is required to communicate effectively with ATC, to comply with ATC instructions, and to ensure clear and effective crew communication and coordination. Normal restatement of questions as would be done for a native English speaker is permitted, and does not constitute grounds for disqualification.

[back]

Knowledge Test Requirements

In order to take the Instrument Rating knowledge test, you must provide proper identification. To verify your eligibility to take the test, you must also provide one of the following in accordance with the requirements of 14 CFR, part 61:

Section 61.35 lists the prerequisites for taking the knowledge test, to include the minimum age an
applicant must be to sit for the test.

- Received an endorsement, if required by this part, from an authorized instructor certifying that the
 applicant accomplished the appropriate ground-training or a home-study course required by this
 part for the certificate or rating sought and is prepared for the knowledge test;
- Proper identification at the time of application that contains the applicant's—
 - (i) Photograph;
 - o (ii) Signature;
 - o (iii) Date of birth;
 - (iv) If the permanent mailing address is a post office box number, then the applicant must provide a current residential address
- Section 61.49 acceptable forms of retest authorization for all Instrument Rating tests:
 - An applicant retesting after failure is required to submit the applicable test report indicating failure, along with an endorsement from an authorized instructor who gave the applicant the required additional training. The endorsement must certify that the applicant is competent to pass the test. The test proctor must retain the original failed test report presented as authorization and attach it to the applicable sign-in/out log.

Note: If the applicant no longer possesses the original test report, he or she may request a duplicate replacement issued by AFS-760.

- Acceptable forms of authorization for ICP only:
 - Confirmation of Verification Letter issued by the Airmen Certification Branch (AFS-760).
 - Requires <u>no</u> instructor endorsement or other form of written authorization.

Knowledge Test Centers

The FAA authorizes hundreds of knowledge testing center locations that offer a full range of airman knowledge tests. For information on authorized testing centers and to register for the knowledge test, contact one of the providers listed at www.faa.gov.

Knowledge Test Registration

When you contact a knowledge testing center to register for a test, please be prepared to select a test date, choose a testing center, and make financial arrangements for test payment when you call. You may register for test(s) several weeks in advance, and you may cancel in accordance with the testing center's cancellation policy.

[back]

Appendix 2: Knowledge Test Procedures and Tips

Before starting the actual test, the testing center will provide an opportunity to practice navigating through the test. This practice or tutorial session may include sample questions to familiarize the applicant with the look and feel of the software. (e.g., selecting an answer, marking a question for later review, monitoring time remaining for the test, and other features of the testing software.)

Acceptable Materials

The applicant may use the following aids, reference materials, and test materials, as long as the material does not include actual test questions or answers:

Acceptable Materials	Unacceptable Materials	Notes
Supplement book provided by proctor	Written materials that are handwritten, printed, or electronic	Testing centers may provide calculators and/or deny the use of personal calculators.
All models of aviation-oriented calculators or small electronic calculators that perform only arithmetic functions	Electronic calculators incorporating permanent or continuous type memory circuits without erasure capability.	Unit Member (proctor) may prohibit the use of your calculator if he or she is unable to determine the calculator's erasure capability
Calculators with simple programmable memories, which allow addition to, subtraction from, or retrieval of one number from the memory; or simple functions, such as square root and percentages	Magnetic Cards, magnetic tapes, modules, computer chips, or any other device upon which prewritten programs or information related to the test can be stored and retrieved	Printouts of data must be surrendered at the completion of the test if the calculator incorporates this design feature.
Scales, straightedges, protractors, plotters, navigation computers, blank log sheets, holding pattern entry aids, and electronic or mechanical calculators that are directly related to the test	Dictionaries	Before, and upon completion of the test, while in the presence of the Unit Member, actuate the ON/OFF switch or RESET button, and perform any other function that ensures erasure of any data stored in memory circuits
Manufacturer's permanently inscribed instructions on the front and back of such aids, e.g., formulas, conversions, regulations, signals, weather data, holding pattern diagrams, frequencies, weight and balance formulas, and air traffic control procedures	Any booklet or manual containing instructions related to use of test aids	Unit Member makes the final determination regarding aids, reference materials, and test materials

[back]

Test Tips

When taking a knowledge test, please keep the following points in mind:

- Carefully read the instructions provided with the test.
- Answer each question in accordance with the latest regulations and guidance publications.
- Read each question carefully before looking at the answer options. You should clearly understand the problem before trying to solve it.

- After formulating a response, determine which answer option corresponds with your answer. The answer you choose should completely solve the problem.
- Remember that only one answer is complete and correct. The other possible answers are either incomplete or erroneous.
- If a certain question is difficult for you, mark it for review and return to it after you have answered the less difficult questions. This procedure will enable you to use the available time to maximum advantage.
- When solving a Calculation problem, be sure to read all the associated notes.
- For questions involving use of a graph, you may request a printed copy that you can mark in computing
 your answer. This copy and all other notes and paperwork must be given to the testing center upon
 completion of the test.

Cheating or Other Unauthorized Conduct

To avoid test compromise, computer testing centers must follow strict security procedures established by the FAA and described in FAA Order 8080.6 (as amended), Conduct of Airman Knowledge Tests. The FAA has directed testing centers to terminate a test at any time a test unit member suspects that a cheating incident has occurred.

The FAA will investigate and, if the agency determines that cheating or unauthorized conduct has occurred, any airman certificate or rating you hold may be revoked. You will also be prohibited from applying for or taking any test for a certificate or rating under 14 CFR part 61 for a period of one year.

Testing Procedures for Applicants Requesting Special Accommodations

An applicant with learning or reading disability may request approval from AFS-630 through the local Flight Standards District Office (FSDO) or International Field Office/International Field Unit (IFO/IFU) to take airman knowledge test using one of the three options listed below, in preferential order:

- **Option 1:** Use current testing facilities and procedures whenever possible.
- **Option 2:** Use a self-contained, electronic device which pronounces and displays typed-in words (e.g., the Franklin Speaking Wordmaster®) to facilitate the testing process.
 - **Note:** The device should consist of an electronic thesaurus that audibly pronounces typed-in words and presents them on a display screen. The device should also have a built-in headphone jack in order to avoid disturbing others during testing.
- Option 3: Request the proctor's assistance in reading specific words or terms from the test questions and/or supplement book. To prevent compromising the testing process, the proctor must be an individual with no aviation background or expertise. The proctor may provide reading assistance only (i.e., no explanation of words or terms). When an applicant requests this option, the FSDO or IFO/IFU inspector must contact the Airman Testing Standards Branch (AFS-630) for assistance in selecting the test site and assisting the proctor. Before approving any option, the FSDO or IFO/IFU inspector must advise the applicant of the regulatory certification requirement to be able to read, write, speak, and understand the English language.

[back]

Appendix 3: Airman Knowledge Test Report

Immediately upon completion of the knowledge test, the applicant receives a printed Airman Knowledge Test Report documenting the score with the testing center's raised, embossed seal. The applicant must retain the original Airman Knowledge Test Report. The instructor must provide instruction in each area of deficiency and provide a logbook endorsement certifying that the applicant has demonstrated satisfactory knowledge in each area. When taking the practical test, the applicant must present the original Airman Knowledge Test Report to the evaluator, who is required to assess the noted areas of deficiency during the oral portion of the practical test.

An Airman Knowledge Test Report expires on the 24-calendar months from the month the applicant completes the knowledge test. If the Airman Knowledge Test Report expires before completion of the practical test, the applicant must retake the knowledge test.

To obtain a duplicate Airman Knowledge Test Report due to loss or destruction of the original, the applicant can send a signed request accompanied by a check or money order for \$12.00, payable to the FAA to:

Federal Aviation Administration Airmen Certification Branch, AFS-760 P.O. Box 25082 Oklahoma City, OK 73125

To obtain a copy of the application form or a list of the information required, please see the AFS-760 web page.

FAA Knowledge Test Question Coding

Each task in the Airman Certification Standard includes an Airman Certification Standards (ACS) code. This ACS code is displayed on the airman test report to indicate what task element was proven deficient on the Knowledge Exam. Instructors can then provide remedial training in the deficient areas and evaluators can re-test this element during the practical exam.

The ACS coding consists of 4 elements. For example: this code is deciphered as follows:

IR.I.C.K1:

IR = Applicable ACS (Instrument Rating – Airplane)

Area of Operation (Preflight Preparation)

C = Task (Cross-Country Flight Planning)

K1 = Knowledge Task element 1 (How to compute fuel reserves.)

Every question is correlated to a specific ACS task/element. This coding methodology will be useful to all involved with airman certification—the applicant, the evaluator, and the flight instructor. It indicates what test subjects (tasks) were satisfactorily passed and what tasks need to be reviewed prior to the practical test.

Appendix 4: The Practical Test – Eligibility and Prerequisites

The prerequisite requirements and general eligibility for a practical test and the specific requirements for the original issuance of an instrument rating in the airplane can be found in sections 61.39 and 61.65, respectively.



Appendix 5: Practical Test Roles, Responsibilities, and Outcomes

Applicant Responsibilities

The applicant is responsible for mastering the established standards for knowledge, skill, and risk management elements in all Tasks appropriate to the certificate and rating sought. The applicant should use this ACS, its references, and the Applicant's Checklist in this Appendix in preparation to take the practical test.

Instructor Responsibilities

The instructor is responsible for training the applicant to meet the established standards for knowledge, skill, and risk management elements in all Tasks appropriate to the certificate and rating sought. The instructor should use this ACS and its references as part of preparing the applicant to take the practical test and, if necessary, in retraining the applicant to proficiency in all subject(s) missed on the knowledge test.

[back]

Evaluator Responsibilities

The evaluator who conducts the practical test is responsible for determining the applicant meets the acceptable standards of aeronautical knowledge, skills, and risk management for each Task in the appropriate ACS. This responsibility also includes verifying the experience requirements specified for a certificate or rating.

At the initial stage of the practical test, the evaluator must also determine that the applicant meets FAA Aviation English Language Proficiency (AELP) standards by verifying that he or she can understand ATC instructions and communicate in English at a level that is understandable to ATC and other pilots. The evaluator should use AC 60-28, English Language Skill Standards Required by 14 CFR parts 61, 63, and 65 (current version) when evaluating the applicant's ability to meet the standard. If, at any point during the practical test, the applicant does not meet the AELP standards, the evaluator must issue a Notice of Disapproval, FAA form 8060-5, with "NOT FAA AELP" in the comments. If there is any doubt, the evaluator should contact the local Flight Standards District Office (FSDO) for assistance.

The evaluator must develop a Plan of Action (POA), written in English, to conduct the practical test, and it must include all of the required Areas of Operation and Tasks. The POA must include a scenario that evaluates as many of the required Areas of Operation and Tasks as possible. As the scenario unfolds during the test, the evaluator will introduce problems and emergencies that the applicant must manage. The evaluator has the discretion to modify the POA in order to accommodate unexpected situations as they arise. For example, the evaluator may elect to suspend and later resume a scenario in order to assess certain tasks.

The Areas of Operation contain Tasks, which include "knowledge" elements, "skill" elements, and "risk management" elements. During the oral portion of the practical test, the evaluator must test at least one item in each of the Knowledge and Risk Management elements for every Task, emphasizing the topics (if any) the applicant missed on the knowledge test.

Unless otherwise noted in the Task, the evaluator must test each item in the skills section by asking the applicant to perform each one. As safety of flight conditions permit, the evaluator may use questions during flight to test knowledge and risk management elements not evident in the demonstrated skills. To the greatest extent practicable, evaluators shall test the applicant's ability to apply and correlate information, and use rote questions only when they are appropriate for the material being tested.

To test the applicant's knowledge in the Emergency Operations Area of Operations (IR.VIII.C), the evaluator will separately assess at least three systems and equipment malfunctions appropriate to the airplane provided for the practical test. To maximize safety and to more realistically reflect real world operations, the evaluator will not use multiple simultaneous failures to test this task.

If an evaluator other than an FAA Inspector is qualified and current in the specific make, model and, if appropriate, type aircraft and it is certified for two or more crewmembers, he or she may occupy a duty position. If the evaluator occupies a duty position on an aircraft that requires two or more crewmembers, the evaluator must fulfill the duties of that position, using crew resource management (CRM) and performing functions as briefed and requested by the applicant. During the performance of steep turns, approach to stalls, and unusual attitude

recovery, the applicant must demonstrate the ability to control the aircraft without the intervention from the non-flying pilot.

Possible Outcomes of the Test

There are three possible outcomes of the practical test: (1) satisfactory, (2) unsatisfactory, or (3) discontinuance.

The regulations governing the tolerances for operation under Instrument Flight Rules are established in 14 CFR part 91. As defined in the ACS, they represent the performance expected in normal flying conditions. They provide guidance for evaluators to use in judging the applicant's qualifications.

If the evaluator determines that a Task is incomplete, or the outcome is uncertain, the evaluator may require the applicant to repeat that Task, or portions of that Task. This provision does not mean that instruction, practice, or the repetition of an unsatisfactory Task is permitted during the practical test.

If an applicant refuses to demonstrate a requested maneuver, the evaluator may issue a Letter of Discontinuance to allow the evaluator and applicant to discuss the applicant's concern about the requested maneuver. If, however, the evaluator determines the applicant's skill and abilities to be in serious doubt, the appropriate outcome is unsatisfactory and the evaluator must issue a Notice of Disapproval.

Satisfactory

Satisfactory performance requires that the applicant:

- Perform the Tasks specified in the Areas of Operation for the certificate or rating sought within the established standards;
- Demonstrate mastery of the aircraft by performing each Task successfully;
- Demonstrate proficiency and competency in accordance with the approved standards;
- Demonstrate sound judgment and exercise aeronautical decision-making/risk management;
- Demonstrate competence in crew resource management in aircraft certificated for more than one required pilot crew member, or, single-pilot competence in an airplane that is certificated for singlepilot operations.

Satisfactory performance will result in the issuance of a temporary certificate.

[back]

Unsatisfactory

If, in the judgment of the evaluator, the applicant does not meet the standards for any Task, the applicant fails the Task and associated Area of Operation. The test is unsatisfactory, and the evaluator issues a Notice of Disapproval.

When the evaluator issues a Notice of Disapproval, he or she shall list the Area of Operation in which the applicant did not meet the standard. The Notice of Disapproval must also list the Area(s) of Operation not tested, and the number of practical test failures.

The evaluator or the applicant may end the test if the applicant fails a Task. The evaluator may continue the test only with the consent of the applicant, and the applicant is entitled to credit only those Areas of Operation and the associated Tasks satisfactorily performed. Though not required, the evaluator has discretion to reevaluate any Task, including those previously passed, during the retest.

Typical areas of unsatisfactory performance and grounds for disqualification include:

- Any action or lack of action by the applicant that requires corrective intervention by the evaluator to maintain safe flight.
- Failure to use proper and effective visual scanning techniques to clear the area before and while performing maneuvers.

- Consistently exceeding tolerances stated in the skill elements of the Task.
- Failure to take prompt corrective action when tolerances are exceeded.
- Failure to exercise risk management.

Discontinuance

When it is necessary to discontinue a practical test for reasons other than unsatisfactory performance (e.g., equipment failure, weather, illness), the evaluator must return all test paperwork to the applicant. The evaluator must prepare, sign, and issue a Letter of Discontinuance that lists those Areas of Operation the applicant successfully completed and the time period remaining to complete the test. The evaluator should advise the applicant to present the Letter of Discontinuance to the evaluator when the practical test resumes in order to receive credit for the items successfully completed. The Letter of Discontinuance becomes part of the applicant's certification file.



Practical Test Checklist (Applicant) Appointment with Evaluator

Evalua	ator's Name:
Locati	on:
Date/T	ime:
Ассер	table Aircraft
	Aircraft Documents:
	□ Airworthiness Certificate
	□ Registration Certificate
	□ Operating Limitations
	Aircraft Maintenance Records:
	□ Logbook Record of Airworthiness Inspections and AD Compliance
	Pilot's Operating Handbook, FAA-Approved Aircraft Flight Manual
Perso	nal Equipment
	View-Limiting Device
	Current Aeronautical Charts (Printed or Electronic)
	Computer and Plotter
	Flight Plan Form
	Flight Plan Form and Flight Logs (printed or electronic)
	Airport Facility Directory, Airport Diagrams and Appropriate Publications
	Current AIM
Perso	nal Records
	Identification—Photo/Signature ID
	Pilot Certificate
	Current Medical Certificate
	Completed FAA Form 8710-1, Airman Certificate and/or Rating Application with Instructor's Signature
	Original Knowledge Test Report
	Pilot Logbook with appropriate Instructor Endorsements
	FAA Form 8060-5, Notice of Disapproval (if applicable)
	Letter of Discontinuance (if applicable)
	Approved School Graduation Certificate (if applicable)
	Evaluator's Fee (if applicable)

Instrument Proficiency Check

14 CFR § 61.57(d) sets forth the requirements for an instrument proficiency check (IPC). Instructors and evaluators conducting an IPC must ensure the pilot meets the standards established in this ACS. A representative number of Tasks must be selected to assure the competence of the applicant to operate in the IFR environment. As a minimum, the applicant must demonstrate the ability to perform the Tasks listed in the table below. The person giving the check should develop a scenario that incorporates as many required tasks as practical to assess the pilot's ADM and risk management skills.

Guidance on how to conduct an IPC is found in Advisory Circular 61-98, *Currency Requirements and Guidance for the Flight Review and Instrument Proficiency Check.* You may obtain a copy at: http://www.faa.gov.

Area of Operation	Minimum Task(s) Required ¹
Air Traffic Control Clearances	Holding
Flight by Reference to Instruments	Recovery From Unusual Flight Attitudes
Navigation Systems	Intercepting and Tracking Navigational Systems
Instrument Approach Procedures	Non Precision Approach Precision Approach Missed Approach Circling Approach Landing from a Straight in or Circling Approach
Emergency Procedures	Approach with Loss of Primary Flight Instruments ² One Engine Inoperative during Straight-and-Level Flight and Turns ³ One Engine Inoperative – Instrument Approach ⁴

[back]

_

¹ AATDs can be utilized for the majority of the IPC as specified in the Letter of Authorization issued for the device. However, the circling approach, the landing task, and the multiengine airplane tasks must be accomplished in an aircraft or FFS (Level B, C, or D).

² Airplane category only requirement

³ Multiengine airplane only requirement

⁴ Multiengine airplane only requirement

Appendix 6: Safety of Flight

General

Safety of flight must be the prime consideration at all times. The evaluator, applicant, and crew must be constantly alert for other traffic. If performing aspects of a given maneuver, such as emergency procedures, would jeopardize safety, the evaluator will ask the applicant to simulate that portion of the maneuver. The evaluator will assess the applicant's use of visual scanning and collision avoidance procedures throughout the entire test.

Stall and Spin Awareness

During flight training and testing, the applicant and the instructor or evaluator must always recognize and avoid operations that could lead to an inadvertent stall or spin.

Use of Checklists

Throughout the practical test, the applicant is evaluated on the use of an appropriate checklist. In crew-served airplanes, the applicant as PIC (acting) should coordinate all checklists with the crew to ensure accomplishment of all items in a timely manner. As acting PIC, the applicant should manage the flight to include crew checklist performance, requiring standard callouts, announcing intentions, and initiating checklist procedures.

Assessing proper checklist use depends upon the specific Task. In all cases, the evaluator should determine whether the applicant appropriately divides attention and uses proper visual scanning. In some situations, reading the actual checklist may be impractical or unsafe. In such cases, the evaluator should assess the applicant's performance of published or recommended immediate action "memory" items along with his or her review of the appropriate checklist once conditions permit.

In a single-pilot airplane, the applicant should demonstrate the CRM principles described as single pilot resource management (SRM). Proper use is dependent on the specific Task being evaluated. The situation may be such that the use of the checklist while accomplishing elements of an Objective would be either unsafe or impractical in a single-pilot operation. In this case, a review of the checklist after the elements have been accomplished is appropriate. Use of a checklist should also consider visual scanning and division of attention at all times.

Use of Distractions

Numerous studies indicate that many accidents have occurred when the pilot has been distracted during critical phases of flight. The evaluator should incorporate realistic distractions during the flight portion of the practical test to evaluate the pilot's situational awareness and ability to utilize proper control technique while dividing attention both inside and outside the cockpit.

Positive Exchange of Flight Controls

There must always be a clear understanding of who has control of the aircraft. Prior to flight, the pilots involved should conduct a briefing that includes reviewing the procedures for exchanging flight controls.

The FAA recommends a positive three-step process for exchanging flight controls between pilots:

- When one pilot seeks to have the other pilot take control of the aircraft, he or she will say, "You have the flight controls."
- The second pilot acknowledges immediately by saying, "I have the flight controls."
- The first pilot again says, "You have the flight controls."

Pilots should follow this procedure during any exchange of flight controls, including any occurrence during the practical test. The FAA also recommends that both pilots use a visual check to verify that the exchange has occurred. There must never be any doubt as to who is flying the aircraft.

Aeronautical Decision Making, Risk Management, CRM and SRM

Throughout the practical test, the evaluator must assess the applicant's ability to use sound aeronautical decision making procedures in order to identify hazards and mitigate risk. The evaluator must accomplish this requirement by reference to the risk management elements of the given Task(s), and by developing scenarios that incorporate and combine Tasks appropriate to assessing the applicant's risk management in making safe aeronautical decisions. For example, the evaluator may develop a scenario that incorporates weather decisions and performance planning.

In assessing the applicant's performance, the evaluator should take note of the applicant's use of CRM and, if appropriate, Single Pilot Resource Management (SRM). CRM/SRM is the set of competencies that includes situational awareness, communication skills, teamwork, task allocation, and decision making within a comprehensive framework of standard operating procedures (SOP). SRM specifically refers to the management of all resources onboard the aircraft as well as outside resources available to the single pilot.

Deficiencies in CRM/SRM almost always contribute to the unsatisfactory performance of a Task. While evaluation of CRM/SRM may appear to be somewhat subjective, the evaluator should use the risk management elements of the given Task(s) to determine whether the applicant's performance of the Task(s) demonstrates both understanding and application of the associated risk management elements.

The evaluator must also assess the applicant's understanding and application of CRM-related practices set forth in the aircraft manufacturers or the operator's FAA-approved operating or training manuals. These include required briefings, radio calls, and instrument approach callouts. The applicant should provide a crew briefing before each takeoff/departure and approach/landing. If the operator or aircraft manufacturer has not specified a briefing, it must cover items such as departure runway, DP/STAR/IAP, power settings, speeds, abnormal or emergency procedures prior to or after reaching decision speed (i.e., V₁ or V_{MC}), emergency return intentions, missed approach procedures, FAF, altitude at FAF, initial rate of descent, DA/DH/MDA, time to missed approach, and expectations of other crewmembers during the takeoff/DP and approach/landing. If the first takeoff/departure and approach/landing briefings are satisfactory, the evaluator may allow the applicant to brief only the changes during the remainder of the flight.

Multiengine Considerations

On multiengine practical tests, where the failure of the most critical engine after liftoff is required, the evaluator must consider local atmospheric conditions, terrain, and type of aircraft used. The evaluator must not simulate failure of an engine until attaining at least V_{SSE}/V_{YSE} and an altitude not lower than 400 feet AGL.

For multiengine practical tests conducted in the airplane, the evaluator will set zero thrust after the applicant has simulated feathering the propeller following a simulated engine failure. The applicant must demonstrate feathering one propeller in flight unless the manufacturer prohibits this action. The applicant must also demonstrate at least one landing with a simulated feathered propeller with the engine set to zero thrust.

Practical tests conducted in a flight simulation training device (FSTD) can only be accomplished as part of an approved curriculum or training program. Any limitations on powerplant failure will be noted in that program.

VII. Emergency Procedures- Powerplant Failure—Multiengine Airplane

In a multiengine airplane or FSTD equipped with propellers (including turboprop), the applicant must demonstrate feathering one propeller and engine shutdown unless:

- The practical test is for a type rating, and
- The airplane used for the practical test was not certificated with inflight unfeathering capability.

In this situation, the applicant may perform a simulated powerplant failure. In all other cases, the applicant must demonstrate the ability to safely feather and unfeather the propeller while airborne.

In a multiengine jet airplane or FSTD representing a jet airplane, the applicant must demonstrate the shutdown and restart of one engine while airborne.

For safety reasons, when the practical test is conducted in the airplane, the applicant should perform Tasks that require feathering or shutdown only under conditions and at a position and altitude (i.e., no lower than 3,000 feet AGL) where it is possible to make a safe landing on an established airport if there is difficulty in unfeathering the propeller or restarting the engine. If it is not possible to unfeather the propeller or restart the engine while airborne, the applicant and the evaluator should treat the situation as an emergency.

Also for safety reasons, at any altitude lower than 3,000 feet AGL, the evaluator will perform simulated engine failure by setting the powerplant controls to simulate zero thrust when the practical test is conducted in the airplane.

Practical tests conducted in a FSTD can only be accomplished as part of an approved curriculum or training program. Any limitations on powerplant failure will be noted in that program.

Single-Engine Considerations

VII. Emergency Procedures- Powerplant Failure—Single-Engine Airplane

For safety reasons, the evaluator will not request a simulated powerplant failure in a single engine airplane unless it is possible to safely complete a landing.

Appendix 7: Aircraft, Equipment, and Operational Requirements & Limitations

Aircraft Requirements & Limitations

Section 61.45 prescribes the required aircraft and equipment for a practical test. The regulation states the minimum aircraft registration and airworthiness requirements as well as the minimum equipment requirements, to include the minimum required controls.

Multiengine practical tests require normal engine shutdowns and restarts in the air, to include propeller feathering and unfeathering. The AFM must not prohibit these procedures, but low power settings for cooling periods prior to the actual shutdown in accordance with the AFM are acceptable and encouraged. For a type rating in an airplane not certificated with inflight unfeathering capability, a simulated powerplant failure is acceptable.

If the multiengine airplane used for the practical test does not publish a V_{MC} , then the "Limited to Centerline Thrust" limitation will be added to the certificate issued from this check, unless the applicant has already demonstrated competence in a multiengine airplane with a published V_{MC} .

Any equipment inoperative in an aircraft with a minimum equipment list (MEL) shall be placarded in accordance with the approved MEL procedures. The applicant shall describe the procedures accomplished, the resulting operational restrictions, and the documentation for the inoperative item(s).

Equipment Requirements & Limitations

The equipment examination should be administered before the flight portion of the practical test, but it must be closely coordinated and related to the flight portion. In a training core curriculum that has been approved under 14 CFR 142, the evaluator may accept written evidence of the equipment exam, provided that the Administrator has approved the exam and authorized the individual who administers it.

Consistent with section 61.45(b) and (d), the aircraft must have the flight instruments necessary for controlling the aircraft without outside references, and the radio equipment required for ATC communications and to perform instrument approach procedures. GPS equipment must be instrument certified and contain the current database.

To assist in management of the aircraft during the practical test, the applicant is expected to demonstrate automation management skills by utilizing installed equipment such as autopilot, avionics and systems displays, and/or flight management system (FMS). The evaluator is expected to test the applicant's knowledge of the systems that are installed and operative during both the oral and flight portions of the practical test.

If the practical test is conducted in an aircraft, the applicant is required by section 61.45(d) (2) to provide an appropriate view limiting device acceptable to the evaluator. The applicant and the evaluator should establish a procedure as to when and how this device should be donned and removed, and brief this procedure before the flight. The device must be used during all testing that requires flight "solely by reference to instruments." This device must prevent the applicant from having visual reference outside the aircraft, but it must not restrict the evaluator's ability to see and avoid other traffic.

Operational Requirements & Limitations

A localizer performance with vertical guidance (LPV) approach with a decision altitude (DA) greater than 300 feet height above terrain (HAT) may be used as a nonprecision approach; however, due to the precision of its glidepath and localizer-like lateral navigation characteristics, an LPV can be used to demonstrate precision approach proficiency (AOA VI Task B) if the DA is equal to or less than 300 feet HAT.

Appendix 8: Use of Flight Simulation Training Devices (FSTD) and Aviation Training Devices (ATD): Airplane Single-Engine, Multi Engine Land and Sea

Use of FSTDs

Title 14 of the Code of Federal Regulations (14 CFR) § 61.4, Qualification and approval of flight simulators and flight training devices, states in paragraph (a) that each full flight simulator (FFS) and flight training device (FTD) used for training, and for which an airman is to receive credit to satisfy any training, testing, or checking requirement under this chapter, must be qualified and approved by the Administrator for—

- (1) The training, testing, and checking for which it is used;
- (2) Each particular maneuver, procedure, or crewmember function performed; and
- (3) The representation of the specific category and class of aircraft, type of aircraft, particular variation within the type of aircraft, or set of aircraft for certain flight training devices.

14 CFR part 60 prescribes the rules governing the initial and continuing qualification and use of all FSTDs used for meeting training, evaluation, or flight experience requirements for flight crewmember certification or qualification.

An FSTD is defined in 14 CFR part 60 as an FFS or FTD:

Full Flight Simulator (FFS)—a replica of a specific type, make, model, or series aircraft. It includes the equipment and computer programs necessary to represent aircraft operations in ground and flight conditions, a visual system providing an out-of-the-flight deck view, a system that provides cues at least equivalent to those of a three-degree-of-freedom motion system, and has the full range of capabilities of the systems installed in the device as described in part 60 of this chapter and the QPS for a specific FFS qualification level. (part 1)

Flight Training Device (FTD)—a replica of aircraft instruments, equipment, panels, and controls in an open flight deck area or an enclosed aircraft flight deck replica. It includes the equipment and computer programs necessary to represent aircraft (or set of aircraft) operations in ground and flight conditions having the full range of capabilities of the systems installed in the device as described in part 60 of this chapter and the qualification performance standard (QPS) for a specific FTD qualification level. (part 1)

The FAA National Simulator Program (NSP) qualifies Level A-D FFSs and Level 4 – 7⁵ FTDs. In addition, each operational rule part identifies additional requirements for the approval and use of FSTDs in a training program⁶. Use of an FSTD for the completion of the instrument-airplane rating practical test is permitted only when accomplished in accordance with an FAA approved curriculum or training program. Use of an FSTD for the completion of an instrument proficiency check is also permitted when accomplished in accordance with an FAA approved curriculum or training program.

Use of ATDs

14 CFR § 61.4(c) states the Administrator may approve a device other than an FFS or FTD for specific purposes. Under this authority, the FAA's General Aviation and Commercial Division provide approval for aviation training devices (ATD).

[back]

-

⁵ The FSTD qualification standards in effect prior to part 60 defined a Level 7 FTD for airplanes which is no longer defined in the part 60 standards (see Advisory Circular 120-45A, Airplane Flight Training Device Qualification, 1992). This device required high fidelity, airplane specific aerodynamic and flight control models similar to a Level D FFS, but did not require a motion cueing system or visual display system. In accordance with the "grandfather rights" of part 60 (§ 60.17), these previously qualified devices will retain their qualification basis as long as they continue to meet the standards under which they were originally qualified. There is only one Level 7 FTD with grandfather rights that remains in the U.S.

⁶ §§ 121.407, 135.335, 141.41, and 142.59

Advisory Circular (AC) 61-136A, *FAA Approval of Aviation Training Devices and Their Use for Training and Experience*, provides information and guidance for the required function, performance, and effective use of ATDs for pilot training and aeronautical experience (including currency). FAA issues a letter of authorization (LOA) to an ATD manufacturer approving an ATD as a basic aviation training device (BATD) or an advanced aviation training device (AATD). The LOA will be valid for a 5-year period with a specific expiration date and include the amount of credit a pilot may take for training and experience.

Aviation Training Device (ATD)—a training device, other than an FFS or FTD, that has been evaluated, qualified, and approved by the Administrator. In general, this includes a replica of aircraft instruments, equipment, panels, and controls in an open flight deck area or an enclosed aircraft cockpit. It includes the hardware and software necessary to represent a category and class of aircraft (or set of aircraft) operations in ground and flight conditions having the appropriate range of capabilities and systems installed in the device as described within the AC for the specific basic or advanced qualification level.

Basic Aviation Training Device (BATD)—provides an adequate training platform for both procedural and operational performance tasks specific to instrument experience and the ground and flight training requirements for the private pilot certificate and instrument rating per 14 CFR parts 61 and 141.

Advanced Aviation Training Device (AATD)—provides an adequate training platform for both procedural and operational performance tasks specific to the ground and flight training requirements for the private pilot certificate, instrument rating, commercial pilot certificate, airline transport pilot (ATP) certificate, and flight instructor certificate per 14 CFR parts 61 and 141. It also provides an adequate platform for tasks required for instrument experience and the instrument proficiency check.

ATDs cannot be used for practical tests, aircraft type specific training, or for an aircraft type rating; therefore the use of an ATD for the instrument – airplane rating practical test is not permitted. An AATD, however, may be used for an instrument proficiency check.

Credit for Time in an FSTD

14 CFR § 61.65 specifies the minimum aeronautical experience requirements for a person applying for an instrument rating. Paragraph (d) specifies the time requirements for an instrument-airplane rating, which includes specific experience requirements that must be completed in an airplane. Paragraph (h) of this section specifies the amount of credit a pilot can take for time in an FFS or FTD. For those that received training in programs outside of part 142, reference § 61.65(h) (2)⁷. For those pilots that received training through a part 142 program, reference § 61.65(h) (1).

Credit for Time in an ATD

14 CFR § 61.65 specifies the minimum aeronautical experience requirements for a person applying for an instrument rating. Paragraph (d) specifies the time requirements for an instrument-airplane rating, which includes specific experience requirements that must be completed in an airplane. Paragraph (i) specifies the maximum instrument time a pilot may credit towards the instrument rating aeronautical experience requirements. In order to credit the time, the ATD must be FAA-approved and the instrument time must be provided by an authorized instructor. AC 61-136A, states the LOA for each approved ATD will indicate the credit allowances for pilot training and experience, as provided under parts 61 and 141. Time with an instructor in a BATD and an AATD may be credited towards the aeronautical experience requirements for the instrument-airplane rating as specified in the LOA for the device used. It is recommended that applicants who intend to take credit for time in a BATD or an AATD towards the aeronautical experience requirements for the instrument-airplane rating obtain a copy of the LOA for each device used so they have a record for how much credit may be taken. For additional information on the logging of ATD time reference AC 61-136A, Appendix 4.

[back]

-

⁷ As part of program approval, part 141 training providers must also adhere to the requirements for permitted time in an FFS or FTD per Appendix C to part 141.

Instrument Experience

14 CFR § 61.57 provides the recent flight experience requirements to serve as a PIC. Paragraph (c) specifies the necessary instrument experience required to serve as a PIC under IFR. The experience may be gained in an airplane, an FSTD, or an ATD. Refer to the subparagraphs of §61.57(c) to determine the experience needed, which varies depending upon whether an airplane, FSTD, ATD, or combination of airplane and training devices is used.

Instrument Proficiency Check

If a person fails to meet the experience requirements of § 61.57(c), a pilot may only establish instrument currency through an instrument proficiency check as described in § 61.57(d). An FSTD may be used as part of an approved curriculum to accomplish all or portions of this check. If specified in its LOA, an AATD may be used to complete most of the required tasks. A BATD cannot be used for an instrument proficiency check.

Use of an FSTD on a Practical Test

14 CFR § 61.45 specifies the required aircraft and equipment that must be provided for a practical test unless permitted to use an FFS or FTD for the flight portion. 14 CFR § 61 64 provides the criteria for using an FSTD for a practical test. Specifically, paragraph (a) states –

If an applicant for a certificate or rating uses a flight simulator or flight training device for training or any portion of the practical test, the flight simulator and flight training device—

- (1) Must represent the category, class, and type (if a type rating is applicable) for the rating sought; and
- (2) Must be qualified and approved by the Administrator and used in accordance with an approved course of training under part 141 or part 142 of this chapter; or under part 121 or part 135 of this chapter, provided the applicant is a pilot employee of that air carrier operator.

Therefore, practical tests or portions thereof, when accomplished in an FSTD, may only be conducted by FAA aviation safety inspectors (ASI), aircrew program designees (APD) authorized to conduct such tests in FSTDs in parts 121 or 135, qualified personnel and designees authorized to conduct such tests in FSTDs for part 141 pilot school graduates, or appropriately authorized part 142 Training Center Evaluators (TCE).

In addition, § 61.64(b) states if an airplane is not used during the practical test for a type rating for a turbojet airplane (except for preflight inspection), an applicant must accomplish the entire practical test in a Level C or higher FFS and the applicant must meet the specific experience criteria listed. If the experience criteria cannot be met, the applicant can either—

- (f)(1) [...] complete the following tasks on the practical test in an aircraft appropriate to category, class, and type for the rating sought: Preflight inspection, normal takeoff, normal instrument landing system approach, missed approach, and normal landing; or
- (f)(2) The applicant's pilot certificate will be issued with a limitation that states: "The [name of the additional type rating] is subject to pilot in command limitations," and the applicant is restricted from serving as pilot in command in an aircraft of that type.

When flight Tasks are accomplished in an airplane, certain Task elements may be accomplished through "simulated" actions in the interest of safety and practicality. However, when accomplished in an FFS or FTD, these same actions would not be "simulated." For example, when in an airplane, a simulated engine fire may be addressed by retarding the throttle to idle, simulating the shutdown of the engine, simulating the discharge of the fire suppression agent, if applicable, and simulating the disconnection of associated electrical, hydraulic, and pneumatics systems. However, when the same emergency condition is addressed in a FSTD, all Task elements must be accomplished as would be expected under actual circumstances.

Similarly, safety of flight precautions taken in the airplane for the accomplishment of a specific maneuver or procedure (such as limiting altitude in an approach to stall or setting maximum airspeed for an engine failure expected to result in a rejected takeoff) need not be taken when a FSTD is used. It is important to understand that, whether accomplished in an airplane or FSTD, all Tasks and elements for each maneuver or procedure shall have the same performance standards applied equally for determination of overall satisfactory performance.

Appendix 9: References

This ACS is based on the following 14 CFR parts, FAA guidance documents, manufacturer's publications, and other documents.

Reference	Title
14 CFR part 39	Airworthiness Directives
14 CFR part 43	Maintenance, Preventive Maintenance, Rebuilding, and Alteration
14 CFR part 61	Certification: Pilots, Flight Instructors, and Ground Instructors
14 CFR part 91	General Operating and Flight Rules
14 CFR part 97	NDB, NDB/DME, VOR, and VOR/DME Instrument Approach Procedures
AC 00-6	Reporting of Aircraft Accidents and Incidents
AC 00-45	Aviation Weather
AC 60-28	English Language Skill Standards Required by 14 CFR parts 61, 63 and 65
AC 61-27	Aviation Weather Services
AC 61-84	Role of Preflight Preparation
AC 90-48	Pilot's Role in Collision Avoidance
AC 91-74	Pilot Guide: Flight in Icing Conditions
AFD	Airport Facility Directory
AIM	Aeronautical Information Manual
AIM P/C Glossary	Aeronautical Information Manual Pilot/Controller Glossary
FAA-H-8083-2	Risk Management Handbook
FAA-H-8083-3	Airplane Flying Handbook
FAA-H-8083-15	Instrument Flying Handbook
FAA-H-8083-16	Instrument Procedures Handbook
FAA-H-8025	Pilot's Operating Handbook
IAP	Instrument Approach Procedure
POH/AFM	Pilot's Operating Handbook/FAA-Approved Airplane Flight Manual

Note: Users should reference the current edition of the reference documents listed above. The current edition of all FAA publications can be found at www.faa.gov.

Appendix 10: Abbreviations and Acronyms

The following abbreviations and acronyms are used in this ACS.

Abb./Acronym	Definition
14 CFR	Title 14 of the Code of Federal Regulations
AATD	Advanced Aviation Training Device
AC	Advisory Circular
ACS	Airman Certification Standards
ADF	Automatic Direction Finder
ADM	Aeronautical Decision-Making
AFS	Flight Standards Service
AELP	Aviation English Language Proficiency
A/FD	Airport/Facility Directory
AFM	Airplane Flight Manual
AFS	Flight Standards Service
AGL	Above Ground Level
AIM	Aeronautical Information Manual
ALD	Alternative Lighting Devices
AMEL	Airplane Multiengine Land
AMES	Airplane Multiengine Sea
AOA	Angle of Attack
AOO	Area of Operation
ASEL	Airplane Single Engine Land
ASES	Airplane Single Engine Sea
ASI	Aviation Safety Inspector
ATC	Air Traffic Control
ATD	Advanced Training Device
ATP	Airline Transport Pilot
BATD	Basic Advanced Training Device
CDI	Course Deviation Indicator
CFIT	Controlled Flight Into Terrain
CG	Center of Gravity
СР	Completion Phase
CRM	Crew Resource Management
CTP	Certification Training Program
DA	Decision Altitude
DH	Decision Height
DPE	Designated Pilot Examiner
ELT	Emergency Locator Transmitter
FAA	Federal Aviation Administration
FADEC	Full Authority Digital Engine Control
FFS	Full Flight Simulator

Abb./Acronym	Definition
FMS	Flight Management System
FSB	Flight Standardization Board
FSDO	Flight Standards District Office
FSTD	Flight Simulation Training Device
FTD	Flight Training Device
GBAS	Ground Based Augmentation System
GNSS	Global Navigation Satellite System
GLS	Ground Landing System
GPS	Global Positioning System
HAT	Height Above Threshold (Touchdown)
IA	Inspection Authorization
IAP	Instrument Approach Procedure
IFO	International Field Office
IFR	Instrument Flight Rules
IFU	International Field Unit
ILS	Instrument Landing System
IMC	Instrument Meteorological Conditions
KOEL	Kinds of Operation Equipment List
LAHSO	Land and Hold Short Operations
LDA	Localizer-Type Directional Aid
LOA	Letter of Authorization
LOC	ILS Localizer
LPV	Localizer Performance Vertical
NAS	National Airspace System
NOD	Notice of Disapproval
NOTAMs	Notices to Airmen
NPA	Notice of Proposed Amendment
NSP	National Simulator Program
NTSB	National Transportation Safety Board
PA	Private Airplane
PAR	Private Pilot Airplane
PAT	Private Pilot Airplane/Recreational Pilot – Transition
PCP	Private Pilot Canadian Conversion
PHAK	Pilot's Handbook of Aeronautical Knowledge
PIC	Pilot-in-Command
POA	Plan of Action
POH	Pilot's Operating Handbook
PTS	Practical Test Standards
QPS	Qualification Performance Standard
RAIM	Receiver Autonomous Integrity Monitoring
RMP	Risk Management Process

Abb./Acronym	Definition
RNAV	Area Navigation
RNP	Required Navigation Performance
SAE	Specialty Aircraft Examiner
SFRA	Special Flight Rules Area
SIAP	Standard Instrument Approach Procedure
SMS	Safety Management System
SOP	Standard Operating Procedures
SPRM	Single-Pilot Resource Management
SRM	Safety Risk Management
SUA	Special Use Airspace
TAEA	Track Advisory Environmental Assessment
TCH	Threshold Crossing Height
TEM	Threat and Error Management
TFR	Temporary Flight Restrictions
USCG	United States Coast Guard
UTC	Coordinated Universal Time
VFR	Visual Flight Rules
VMC	Visual Meteorological Conditions
VOR	Very High Frequency Omnidirectional Range
V _X	Best Angle of Climb Speed
V _Y	Best Rate of Climb Speed
V _{MC}	Minimum control speed with critical engine inoperative
V _{SSE}	Safe, intentional one-engine-inoperative speed. Originally known as safe single-engine speed
V _{XSE}	Best angle of climb speed with one engine inoperative
V _{so}	Stalling Speed or the Minimum Steady Flight Speed in the Landing Configuration