

### **UNIVERSITI PUTRA MALAYSIA**

# STABILITY ANALYSIS OF WEATHERED ROCK CUT SLOPE USING GEOLOGICAL MAPPING AND LABORATORY TESTS

**AZIMAN BIN MADUN** 

FK 2002 30



# STABILITY ANALYSIS OF WEATHERED ROCK CUT SLOPE USING GEOLOGICAL MAPPING AND LABORATORY TESTS

#### **AZIMAN BIN MADUN**

MASTER OF SCIENCE UNIVERSITI PUTRA MALAYSIA

2002



# STABILITY ANALYSIS OF WEATHERED ROCK CUT SLOPE USING GEOLOGICAL MAPPING AND LABORATORY TESTS

By

**AZIMAN BIN MADUN** 

Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia, in Fulfilment of the Requirement for the Degree of Master of Science

August 2002



## Specially Dedicated to My Family

Kamsiah Ahmad
Abdul Muiz Aziman
Muhammad Fauzan Aziman



Abstract of thesis presented to Senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Master of Science

# STABILITY ANALYSIS OF WEATHERED ROCK CUT SLOPE USING GEOLOGICAL MAPPING AND LABORATORY TESTS

By

#### **AZIMAN BIN MADUN**

#### August 2002

Chairman : Associate Professor Husaini bin Omar, Ph.D.

Faculty: Engineering

A study on determining the stability of weathered rock cut slope using geological mapping and laboratory tests. The study is divided into two parts: field work and laboratory testing. The field study focused on the measurement and analysis of the orientation and characteristics of discontinuity. Identification of rock types, weathering grades and observation of cut slope conditions were also included in the field study. Laboratory testing involved determination of natural moisture content, particle size distribution and shear strength. Discontinuity data were analyzed using stereographical method for identification of potential instabilities. A factor of safety (FOS) analysis was conducted on unstable cut slopes using SWEDGE software and manual calculation It is found that the geological mapping and laboratory tests are feasible for assessing slope stability. The FOS analysis has distinguished 10 slope to be considered as fail whilst the other 6 are consider stable same as field observation.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk Ijazah Master Sains.

#### ANALISA KESTABILAN CERUN BATUAN TERLULUHAWA MENGGUNAKAN PEMETAAN GEOLOGI DAN UJIAN MAKMAL

#### Oleh

#### **AZIMAN BIN MADUN**

#### **Ogos 2002**

Pengerusi : Profesor Madya Husaini Omar, Ph.D.

Fakulti : Kejuruteraan

Kajian telah dijalankan untuk mengenal pasti kestabilan cerun potongan dengan menggunakan pemetaan geologi dan ujian makmal. Kajian terbahagi kepada dua bahagian iaitu kajian di lapangan dan di makmal. Di lapangan, kajian terhadap ketakselanjaran iaitu menentukan orentasi dan sifat ketakselanjaran. Pengecaman litologi batuan, keadaan pengluluhawaan dan pencerapan keadaan cerun potongan juga termasuk di dalam kajian di lapangan. Di makmal, analisa kelembapan tanah semulajadi, pengredan saiz tanah dan kekuatan ricih. Data ketakselanjaran dianalisa menggunakan kaedah plot stereografikal bagi menentukan potensi ketidakstabilan. Cerun potongan yang tidak stabil akan dianalisa faktor keselamatan (FK) dengan menggunakan perisian SWEDGE dan secara pengiraan. Kajian mendapati pemetaan geologi dan ujian makmal dapat menilai kestabilan cerun. Analisa FK mendapati 10 cerun gagal dan 6 lagi stabil sama seperti cerapan di lapangan.



#### **ACKNOWLEDGEMENTS**

#### In the name of Allah Most Merciful and Most Compassionate

I wish to express my profound appreciation and gratitude to my supervisor Dr. Husaini Omar for his supervision, guidance and constructive suggestion and comments throughout this project until successful completion. I am greatly indebted to the supervisory committee, Dr. Rosely Ab. Malik and En. Zainuddin Md. Yusof for their affectionate guidance, prompt decisions and valuable assistance during this period.

Special thanks are also extended to my sponsor, MTD Capital Berhad for funding my studies, Dato' Ramli Ismail and Ir. Rozlan Ismail (General Manager of Terratech Consultants (M) Sdn. Bhd). Great appreciation is expressed to MTD-RC staff, En. Shukri Maail, En. Rozaini, Pn Juraidah, En. Sal Salsidu, En. Saiful, En. Zaidi and Cik Azura. En. Hammad Ismail and Aliz for prompt advice.

Lastly, my deep appreciation goes to the entire members of my family; beloved wife and children for their invaluable love and patience. Also to my dearly beloved mother, Rasimah Ahmad, for her constant prayers and blessing for my success.



I certify that an Examination Committee met on 29<sup>th</sup> August 2002 to conduct the final examination of Aziman Madun on his Master of Science thesis entitled "Stability Analysis of Weathered Rock Cut Slope Using Geological Mapping and Laboratory Tests" in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The Committee recommends that the candidate be awarded the relevant degree. Members of the Examination Committee are as follows:

#### Bujang bin Kim Huat, Ph.D.

Associate Professor, Faculty of Enginnering, Universiti Putra Malaysia. (Chairman)

#### Husaini Omar, Ph.D.

Associate Professor, Faculty of Enginnering, Universiti Putra Malaysia. (Member)

#### Rosely Ab. Malik, Ph.D.

Lecturer, Faculty of Enginnering, Universiti Putra Malaysia. (Member)

#### Zainuddin Md. Yusof

Lecturer, Faculty of Enginnering, Universiti Putra Malaysia. (Member)

SHAMSHER MOHAMAD RAMADILI, Ph.D.

Professor/Deputy Dean, School of Graduate Studies, Universiti Putra Malaysia

Date: 1 5 NOV 2002



This thesis submitted to the Senate of Universiti Putra Malaysia has been accepted as fulfilment of the requirement for the degree of Master of Science. The members of the Supervisory Committee are as follows:

#### Husaini Omar, Ph.D.

Associate Professor, Faculty of Enginnering, Universiti Putra Malaysia. (Chairman)

#### Rosely Ab. Malik, Ph.D.

Lecturer, Faculty of Enginnering, Universiti Putra Malaysia. (Member)

#### Zainuddin Md. Yusof

Lecturer, Faculty of Enginnering, Universiti Putra Malaysia. (Member)

AINI IDERIS, Ph.D.

Professor/Dean, School of Graduate Studies, Universiti Putra Malaysia

Date: 9 JAN 2013

#### **DECLARATION**

I hereby declare that the thesis is based on my original work except for quotations and citations which have been duly acknowledge. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.

**AZIMAN MADUN** 

Date: 12/11/02



### TABLE OF CONTENTS

|      |   | Page   |
|------|---|--|
| DEL  | DICATION  | ii   |
|      | STRACT  | iii  |
|      |   |  |
|      | STRAK   | iv   |
| ACk  | KNOWLEDGEMENTS  | v  |
| APP  | PROVAL SHEET  | vi   |
| DEC  | CLARATION   | viii   |
| LIST | Γ OF TABLES   | xi   |
| LIST | Γ OF FIGURES  | xii  |
| LIST | Γ OF ABBREVIATIONS  | xvii   |
| CH   | APTER   |  |
| I    | INTRODUCTION Background Objective Scope and limitation Summary Expected outcome of the research   | 1<br>1<br>4<br>5<br>5<br>6                                 |
| II   | Introduction Slope Slope failures Slope stability Rock slope stability analysis Geological contribution to slope instability Weathering Engineering properties Geological structures Geological mapping Lithology | 7<br>7<br>7<br>9<br>13<br>18<br>24<br>24<br>31<br>35<br>37 |
|      | Discontinuity   | 30   |



| III | METHODOLOGY                     | 60  |
|-----|---------------------------------|-----|
|     | Introduction                    | 60  |
|     | Geological mapping              | 62  |
|     | Lithology                       | 63  |
|     | Weathering                      | 64  |
|     | Discontinuity                   | 65  |
|     | Engineering properties          | 69  |
|     | Natural moisture content        | 70  |
|     | Particle size distribution      | 70  |
|     | Shear strength                  | 72  |
|     | Rock slope stability analysis   | 75  |
| IV  | RESULTS AND DISCUSSIONS         | 79  |
|     | Introduction                    | 79  |
|     | Field study                     | 81  |
|     | Geology setting                 | 84  |
|     | Geological mapping              | 91  |
|     | Field observation               | 114 |
|     | Laboratory testing              | 131 |
|     | Rock slope stability analysis   | 139 |
|     | Discussion                      | 167 |
| V   | CONCLUSIONS AND RECOMMENDATIONS | 178 |
|     | Conclusion                      | 178 |
|     | Recommendations for future work | 179 |
| REF | ERENCES                         | 180 |
| APP | ENDICES                         |     |
|     | A Discontinuity mapping data    | 187 |
|     | B Factor of safety analysis     | 228 |
| VIT | <b>A</b>                        | 252 |



### LIST OF TABLES

| Table |   | Page |
|-------|---|------|
| 2.1   | Weathering classification system for granite and volcanic rocks                                     | 28   |
| 2.2   | Weathering classification system for sedimentary rocks  | 29   |
| 2.3   | The 15 aspects involved in engineering geological mapping   | 38   |
| 2.4   | Summary of the criteria should be met to give rise to circular, planar, wedge and toppling failures | 49   |
| 2.5   | Failure mechanisms involving relict discontinuities   | 49   |
| 4.1   | Study locations   | 81   |
| 4.2   | Granite found at six slopes while schist at ten slopes  | 85   |
| 4.3   | Step of testing   | 13   |
| 4.4   | Geological mapping results  | 168  |
| 4.5   | Condition of study slopes   | 170  |
| 4.6   | Engineering properties for study slopes   | 17   |
| 4.7   | Results of potential instability analysis   | 172  |
| 4.8   | Summary of factor of safety (FOS) analysis  | 173  |
| 4.9   | The summary of failure cut slopes   | 17:  |
| 4.10  | The summary of stable cut slopes  | 177  |



### **LIST OF FIGURES**

| Figu | Figure  |    |
|------|---|----|
| 1.1  | The location map  | 3  |
| 2.1  | Engineered hill slope   | 6  |
| 2.2  | Three basic types of slopes   | 9  |
| 2.3  | An example of slope failure occurring without human activity  | 11 |
| 2.4  | Survey of 322 slope failures in Hong Kong and Malaysia  | 12 |
| 2.5  | Vegetation reduces slope erosion and enhances the stability of soil slope by reinforcement of roots       | 14 |
| 2.6  | Factor of safety of 1.2 to 1.5 is save and economical   | 17 |
| 2.7  | Slope geometry and equations for calculating forces acting on a slope                                     | 20 |
| 2.8  | Geometry of wedge and water pressure distribution on the failure surface                                  | 22 |
| 2.9  | Stereoplot of data required for wedge stability analysis  | 23 |
| 2.10 | Bowen's series  | 25 |
| 2.11 | Colluvium resting over the residual soil is more prone to sliding rather than in-situ geological material | 26 |
| 2.12 | The rock cycle  | 39 |
| 2.13 | Definition of discontinuity in geometrical terms  | 41 |
| 2.14 | Sketch of different movements of rock mass i.e. along fault plane   | 42 |
| 2.15 | Major discontinuity sets dominate the behavior of slope   | 43 |



| 2.16 | Discontinuity set refers to the same inclination and orientation of discontinuity  | 44 |
|------|--|----|
| 2.17 | Slope movement along fault plane   | 45 |
| 2.18 | Relict discontinuity in weathered rock can induce stability problem                | 46 |
| 2.19 | The stereographic plot of potential instability analysis and types of failure mode | 48 |
| 2.20 | Schmidt net  | 52 |
| 2.21 | Method of construction of great circle and pole representing plane                 | 55 |
| 2.22 | Counting net of circle cells   | 57 |
| 2.23 | The presence of water causes the reduction of bonding between soil particles       | 58 |
| 3.1  | The methodology adopted for this research project                                  | 61 |
| 3.2  | Geological mapping study   | 63 |
| 3.3  | Field study tools  | 64 |
| 3.4  | Discontinuity data sheet   | 67 |
| 3.5  | Engineering properties study   | 70 |
| 3.6  | Apparatus for particle size distribution analysis                                  | 72 |
| 3.7  | Layout of tri-axial machine  | 73 |
| 3.8  | The front page of the SWEDGE program   | 76 |
| 3.9  | Input and results of the SWEDGE program  | 78 |
| 4.1  | Investigated cut slope locations   | 80 |
| 4.2  | The frequency of slope failures  | 82 |
| 13   | 82% of slone failures occurred in lithology schiet                                 | 82 |



| 4.4  | Granite lithology covers 63% and metamorphic rocks 37% of the study area                                       | 85  |
|------|--|-----|
| 4.5  | Granite rock located below schist rock   | 86  |
| 4.6  | Schist fragment inside the granite   | 87  |
| 4.7  | Aplite granite intruded along schist foliation   | 87  |
| 4.8  | Schist rock is indicates by a grey color, fine-grained mineral of mica, quartz and is dominated by foliation   | 88  |
| 4.9  | The granite rock is indicated by mineralogy of quartz, orthoclase, plagioclase and mica and dominated by joint | 89  |
| 4.10 | Weathered schist slope indicates that material is heterogeneous  | 90  |
| 4.11 | Scanline method for discontinuity mapping  | 92  |
| 4.12 | Discontinuity mapping at slope S1 to determine discontinuity set   | 94  |
| 4.13 | Discontinuity mapping at slope S2 to determine discontinuity set   | 95  |
| 4.14 | Discontinuity mapping at slope S3 to determine discontinuity set   | 96  |
| 4.15 | Discontinuity mapping at slope S4 to determine discontinuity set   | 97  |
| 4.16 | Discontinuity mapping at slope S5 to determine discontinuity set   | 99  |
| 4.17 | Discontinuity mapping at slope S6 to determine discontinuity set   | 100 |
| 4.18 | Discontinuity mapping at slope S7 to determine discontinuity set   | 101 |
| 4.19 | Discontinuity mapping at slope S8 to determine discontinuity set   | 102 |
| 4.20 | Discontinuity mapping at slope S9 to determine discontinuity set   | 104 |
| 4.21 | Discontinuity mapping at slope S10 to determine discontinuity set  | 105 |
| 4.22 | Discontinuity mapping at slope S11 to determine discontinuity set  | 107 |
| 4.23 | Discontinuity mapping at slope S12 to determine discontinuity set  | 108 |
| 4.24 | Discontinuity mapping at slope S13 to determine discontinuity set  | 109 |



| 4.25 | Discontinuity mapping at slope S14 to determine discontinuity set              | 110 |
|------|--|-----|
| 4.26 | Discontinuity mapping at slope S15 to determine discontinuity set              | 112 |
| 4.27 | Discontinuity mapping at slope S16 to determine discontinuity set              | 113 |
| 4.28 | Slope S1 failed with wedge mode of failure                                     | 115 |
| 4.29 | Slope S2 is stable   | 116 |
| 4.30 | Slope S3 failed with wedge mode of failure                                     | 117 |
| 4.31 | Slope S4 is stable   | 118 |
| 4.32 | Slope S5 is stable   | 119 |
| 4.33 | Slope S6 failed with wedge mode of failure                                     | 120 |
| 4.34 | Slope S7 failed with wedge mode of failure                                     | 121 |
| 4.35 | Slope S8 failed with wedge mode of failure                                     | 122 |
| 4.36 | Slope S9 failed with wedge mode of failure                                     | 123 |
| 4.37 | Slope S10 failed with wedge mode of failure                                    | 124 |
| 4.38 | Slope S11 failed with wedge mode of failure                                    | 125 |
| 4.39 | Slope S12 failed with wedge mode of failure                                    | 126 |
| 4.40 | Slope S13 failed with wedge mode of failure                                    | 127 |
| 4.41 | Slope S14 failed with wedge mode of failure                                    | 128 |
| 4.42 | Slope S15 is stable  | 129 |
| 4.43 | Slope S16 is stable  | 130 |
| 4.44 | A, B, C and D are steps involved in sample preparation prior to tri-axial test | 132 |
| 4.45 | Soil samples after completion of tri-axial tests                               | 138 |
| 4.46 | Menu of input data   | 141 |



| 4.47 | Examples of factor of safety analysis for wedge | 141 |
|------|---|-----|
| 4.48 | Potential instability analysis for slope S1     | 142 |
| 4.49 | Potential instability analysis for slope S2     | 144 |
| 4.50 | Potential instability analysis for slope S3     | 146 |
| 4.51 | Potential instability analysis for slope S4     | 147 |
| 4.52 | Potential instability analysis for slope S5     | 149 |
| 4.53 | Potential instability analysis for slope S6     | 150 |
| 4.54 | Potential instability analysis for slope S7     | 152 |
| 4.55 | Potential instability analysis for slope S8     | 153 |
| 4.56 | Potential instability analysis for slope S9     | 155 |
| 4.57 | Potential instability analysis for slope S10    | 157 |
| 4.58 | Potential instability analysis for slope S11    | 158 |
| 4.59 | Potential instability analysis for slope S12    | 160 |
| 4.60 | Potential instability analysis for slope S13    | 162 |
| 4.61 | Potential instability analysis for slope S14    | 163 |
| 4.62 | Potential instability analysis for slope S15    | 165 |
| 4.63 | Potential instability analysis for slope S16    | 167 |



#### LIST OF ABBREVIATIONS

FOS Factor of safety

deg Degree

CH Chainage

RHS Right hand side

LHS Left hand side

QU Quick undrained

UU Unconsolidated undrained

CD Consolidated drained

CU Consolidated undrained

σ1 Lateral pressure + principal stress-pore pressure

σ3 Lateral pressure

σ Normal stress

τ Shear stress

 $\Phi$  Friction angle

A<sub>p</sub> Area of failure plane

C Cohesion

U Uplift water pressure

V Horizontal water pressure

W Weight of failure block

 $\psi_p$  Angle of failure plane

 $\psi_f$  Angle of slope

Z Depth of tension crack

Z<sub>w</sub> Depth of water in tension crack.

γ Rock density

γ<sub>w</sub> Water density



#### **CHAPTER I**

#### INTRODUCTION

#### **Background**

The search for human needs such as food, shelter and communication has lead to civilization. Thus civilization was the basis for development in the world for centuries. It has led to improve standards of living for mankind. Building technology is part of civilization. As a result, a modern network of roads is one of its products that has enabled connectivity and communication between one colony of people to another. Roadways are vital infrastructure to promote development in any area. It triggers economic development and prospers a nation from the biggest to the most remote.

Unfortunately, construction development often fails to synchronize with the requirements of nature. Intrusion into nature usually results in catastrophes, especially when construction occurs on hilly and mountainous terrain.

The reasons for failure are many and range from natural slope development process often referred to as 'Acts of God' or the inappropriate design of engineered slopes. The reasons for the failure of engineered slopes can be the result of non-recognition of certain factors controlling stability in the design



process or the application of inappropriate methods in the assessment of actual stability conditions (Othman et al., 1997).

In the past, studies by many researchers like Komoo, (1985), Komoo and Abdullah (1983), Komoo et al. (1985) and Tajul (1991) were directed towards developing engineering geological mapping in Malaysia. They studied the geological structure that cause slope instability in various places in Malaysia.

For this study, the author will focus on geological mapping and engineering properties. These geological mapping and engineering properties will then be used in rock slope stability analysis. The field study was conducted on cut slopes at Pos Selim Highway in Perak, the western part of Peninsular Malaysia (Figure 1.1).

The highway which is part of the East West Second Link project has been divided into a total of eight packages. Package 1 has been completed while packages 2, 3, 4 and 7 are currently in progress. This study covers package 2, which cover the area from Pos Selim in the state of Perak to Ladang Blue Valley at Cameron Highlands, Pahang. The highway will link Perak on the West Coast and Terengganu in the East Coast. The completed product will hopefully enhance economic development in the central state of Perak, North Pahang, South Kelantan and Hulu Terengganu areas.



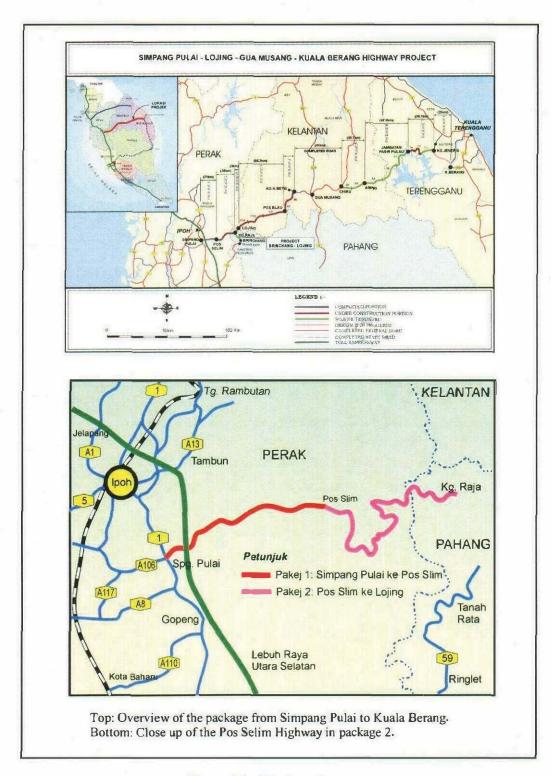


Figure 1.1: The location map

The construction work for package 2 was awarded to MTD Construction Sdn. Bhd. under a Fixed Turnkey Lump Sum contract for a total of RM 282 million. The length of the proposed road is approximately 35 kilometers and was designed as a two-lane single carriageway with a design speed of 50 km/h. The road crosses over the Titiwangsa Main Range bordering Pahang and Perak.

The road begins at Pos Selim at an elevation of 496 meters in Perak and transverses over the mountainous terrain for 27 km to the Pahang border at an elevation of 1440 meters. The route continues through rolling terrain over several plantations before it ends at Ladang Blue Valley at km 35.5 at an elevation of 1402 meters.

The idea to carry out this study cause from the occurrence of a number of cut slope failures during construction along Pos Selim to Ladang Blue Valley Highway project. This study will investigate the geological structures and engineering properties that affect cut slope instability.

#### **Objectives**

The objective of the research is to study the contribution of geological structures and engineering properties in slope stability of weathered rock. The approach of this study is by means:



- 1. To study the geological structures by geological mapping.
- 2. To determine the engineering properties.
- 3. To carry out factor of safety analysis of cut slope.

#### Scope and Limitation

The study focuses on two aspects, which are geological mapping and laboratory study for engineering properties. First, geological mapping was undertaken in the field of 16 cut slope along Pos Selim to Ladang Blue Valley Highway to determine potential instability of slopes. Secondly, laboratory testing were conducted on 16 cut slope materials to determine the engineering properties. Subsequently, all data related to slope stability was used for the factor of safety analysis.

#### **Summary**

A literature review of research work conducted in various areas related to this research is presented in Chapter 2. The literature review begins with introduction of slopes and slope failures problem. The survey will look at slope stability and rock slope stability analysis. Next, a review of literature will be undertaken on geological contribution to slope instability such as weathering, engineering properties and geological structures. Next will be a review of literature related to geological mapping. The methodology of this study is discussed in



Chapter 3. Chapter 4 presents a complete account of results and discussions of findings and data obtained from both field and laboratory tests. The conclusions and recommendations of this study are presented in Chapter 5.

#### **Expected outcome of the research**

The expected outcome of the research is to obtain information and better understanding of the geological structures and engineering properties that affect cut slope instability.

