



## WORLD-CLASS STARTER BOARDS™

Build it right, start<sup>er</sup> to finish™

**FASTER, STRONGER AND BETTER  
THAN BACK WRAPPING**

IBC Code Approved ESR-2931, Full Dryvit Warranty



# WHY DRYVIT SHAPES BY ACROCORE

## WARRANTY:



### = FULL DRYVIT SYSTEM WARRANTY

An additional two (2) years of warranty coverage is available when Dryvit Shapes by Acrocore or Starter Boards are used with an Outsulation® system.

## CODE COMPLIANT

Complies with NFPA 285 and other building code requirements for use in Construction Types I-V.

## EVERYONE BENEFITS:

### ARCHITECTS

Have the ability to specify a complete Outsulation® system using pre-coated starter boards and architectural shapes with a single source warranty.


### BUILDING OWNERS

Have unlimited design options and possibilities, a full Dryvit system warranty and better quality finished product.

### CONTRACTORS

Will save time, labor, money and create a higher quality job.

## FTL SHIPPING LOGISTICS

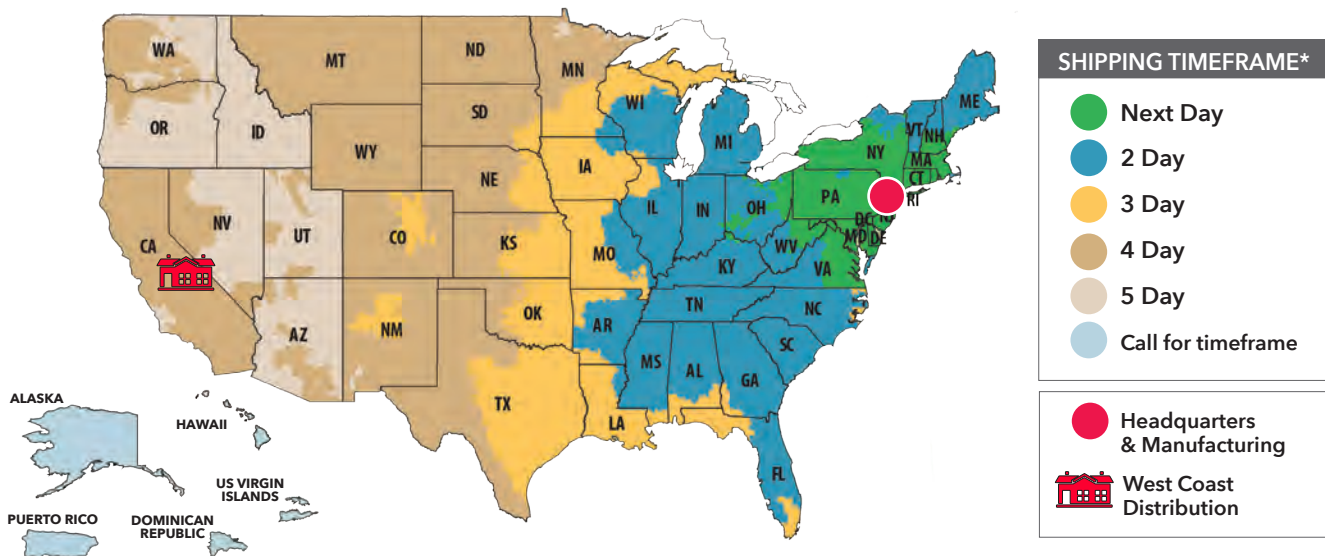

Dryvit Starter Boards can arrive at any destination coast to coast within 5 days.

Contact us for international rates and delivery schedule.

\*Shipping dates may vary based on inventory availability, weekends and holidays.

**TO PLACE AN ORDER, PLEASE CONTACT YOUR LOCAL DRYVIT® DISTRIBUTOR**

## STARTER BOARDS®:



- Not only eliminate the need to back wrap\* mesh at termination details, they provide 3 sides of "Polymer Modified Cement"
- Provides a proper surface for sealant at expansion joints
- Provides closure at system terminations
- Eliminate the need for the Dryvit Drainage Strip™ with moisture drainage systems

\* Where Starter Boards abut each other, the joint must be back wrapped with Dryvit Detail Mesh® and Dryvit Base Coat.

## PRODUCT BENEFITS:

- **LABOR SAVINGS** (3x Faster)
- **IMPACT RESISTANT**  
(Pliable / Polymer Modified Cement)
- **LONGER LASTING** (3x Thicker Base Coat)
- **BUILDING CODE COMPLIANT**  
*Approved for use in Types I-V Construction - ICC ESR-2931*
- **FULL DRYVIT WARRANTY**

### SUPPLIED IN 8' LENGTHS

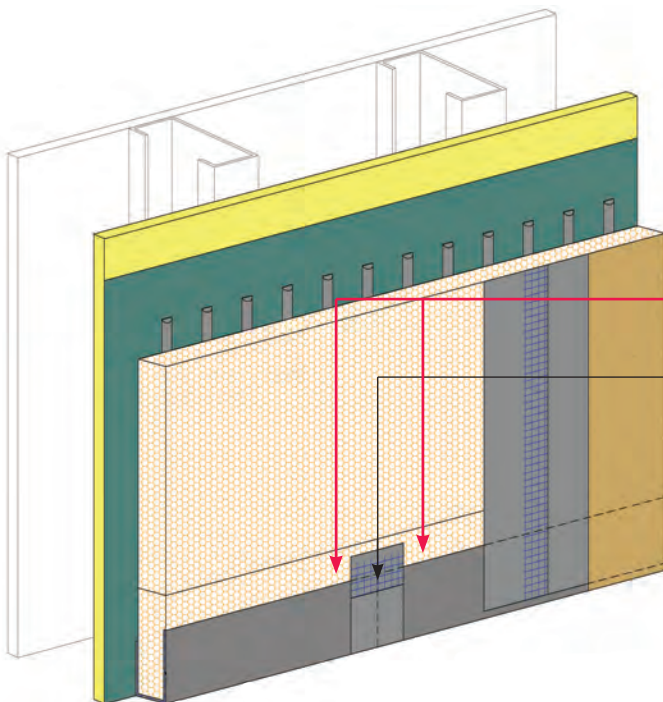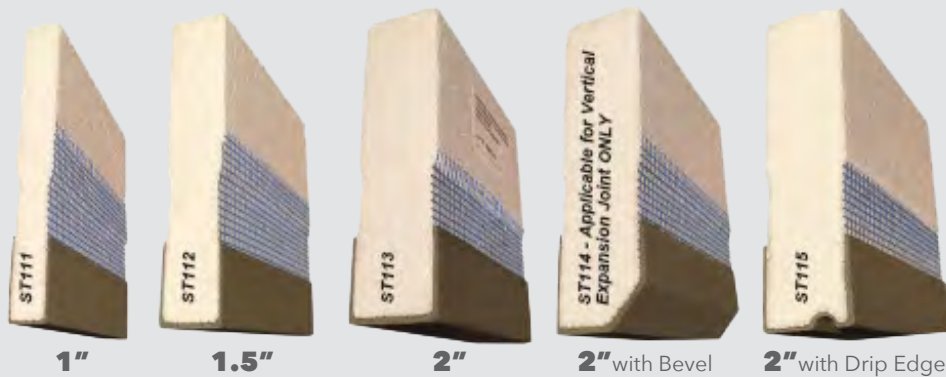

## HOW IT WORKS:


- Typical OUTSULATION® system
  - Dryvit Shapes by Acrocore Starter Board™
- Dryvit Detail Mesh® embedded in Dryvit Base Coat at starter board joints. Overlap Detail Mesh 2 1/2" (64mm) minimum onto each board and wrap to backside 2" (51mm) minimum

The architecture, engineering, and design of the project using Acrocore Exterior Mouldings LLC and/or Dryvit Systems, Inc. products is the responsibility of the project's design professional. All systems must comply with local building codes and standards. This detail is for general information and guidance only and Acrocore Exterior Mouldings LLC and/or Dryvit Systems, Inc., specifically disclaims any liability for the use of this detail and for the architecture, design, engineering or workmanship of any project. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. Use of a functionally equivalent detail does not violate the Dryvit's Systems, Inc. warranty. This detail is subject to change without notice. Contact Dryvit Systems, Inc. to ensure you have the most recent version.




# STARTER BOARDS ASSURE PROPER SYSTEM TERMINATIONS - WHILE SAVING TIME

1

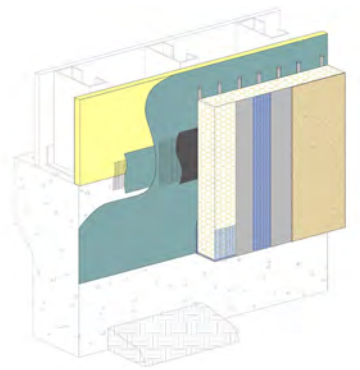


**Grade Termination**

2

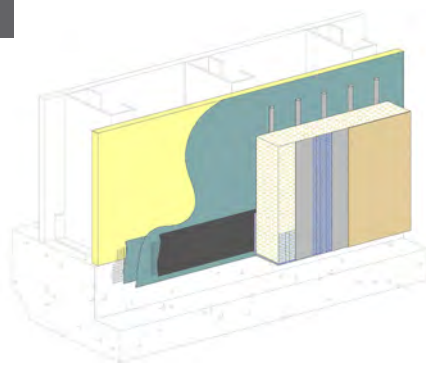


**Termination at Concrete Curb**

3

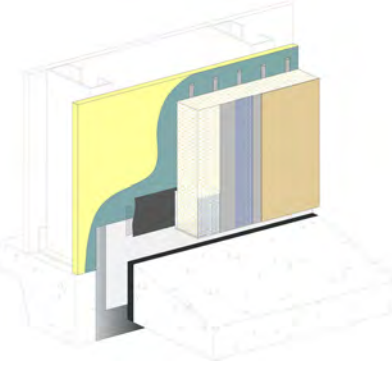

**Termination at ADA Compliant Sidewalk**

4

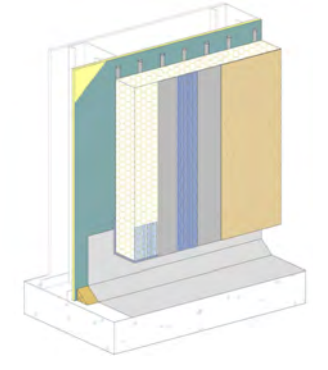


**Termination at Waterproof Deck**

5




**Termination at Parapet - Cap Flashing**

6




**Termination at Parapet - Solid Substrate**

7

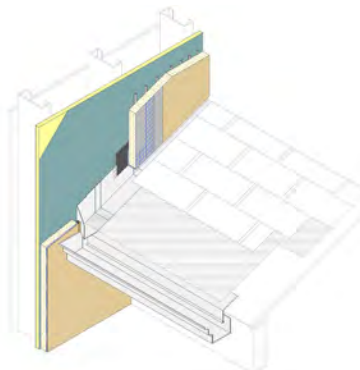


**Termination at Sloped Roof**

8

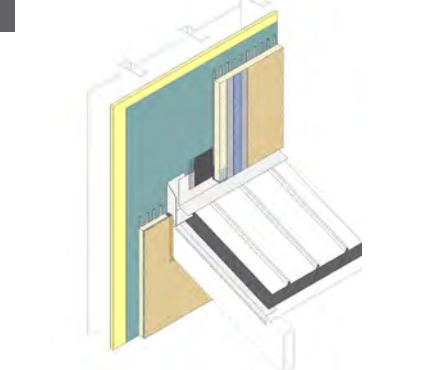

**Termination at Roof Stop Flashing**

9

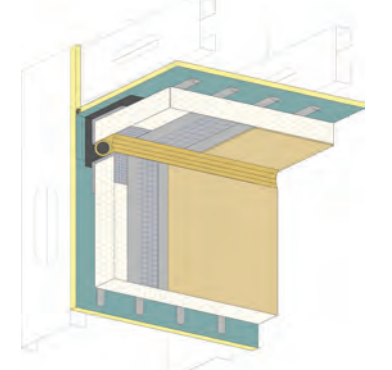

**Vertical wall/Suspended Soffit Transition**

10




**Termination at Soffit/Facia intersection**

11




**Facia/Uninsulated Soffit Transition**

12

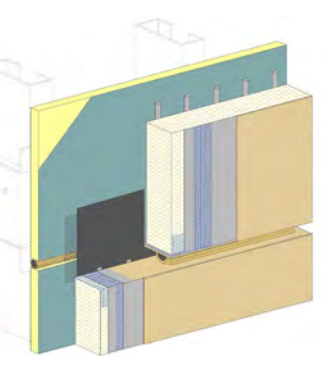


**Horizontal Slip Joint without Weeps**

13

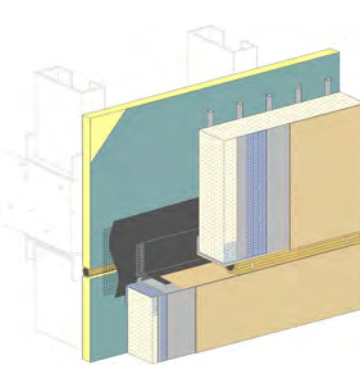


**Horizontal Slip Joint with Weeps**

14

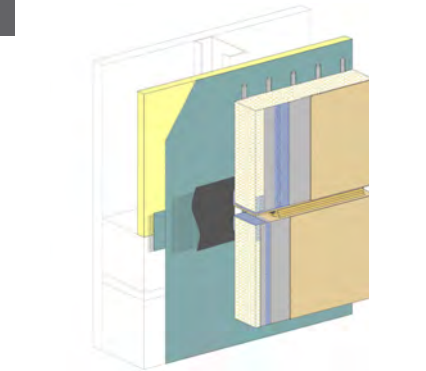


**Horizontal Joint Substrate Change**

15

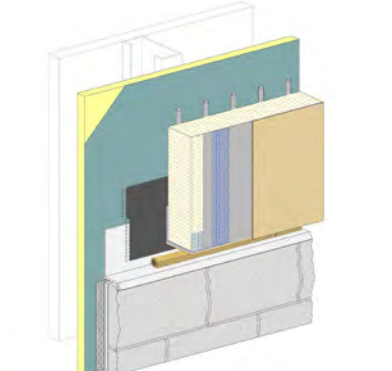


**Horizontal Termination at Stone Veneer**

16

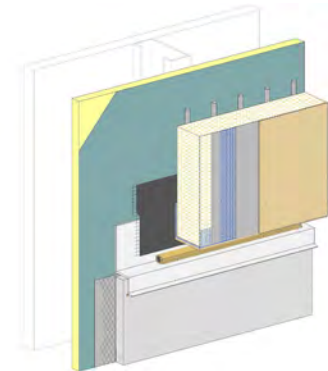


**Horizontal Termination at Stucco**

17

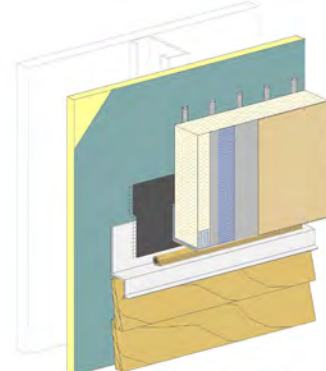

**Horizontal Termination at Wood Siding**

18

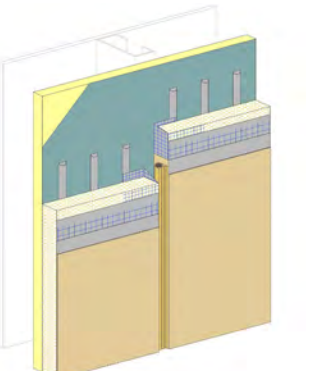


**Vertical Expansion Joint - EIFS**

19



**Through Wall Expansion Joint**

20

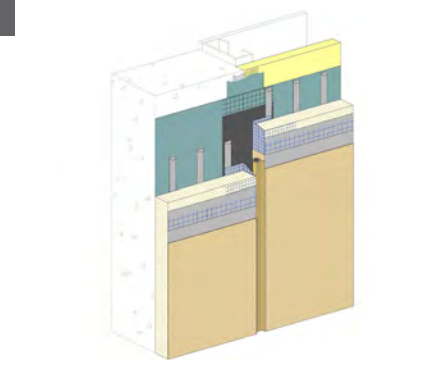

**Vertical Expansion Joint Flush Option**

21




**Vertical Expansion Joint Recessed Option**

22



**Vertical Expansion Joint Double Seal Option**

23

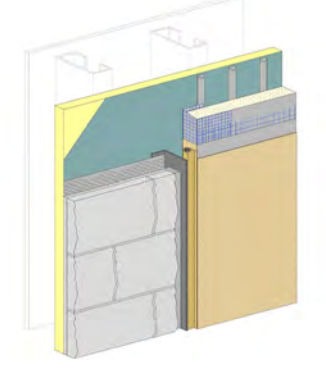

**Vertical Termination at Stone Veneer**

**Outsulation Plus MD System details shown for clarity. Additional information is available at: [www.dryvit.com](http://www.dryvit.com)**



Additional information is available at: [www.dryvit.com](http://www.dryvit.com)

**To place an order, please contact your local Dryvit® Distributor**

**[www.dryvitshapes.com](http://www.dryvitshapes.com) ■ 800-213-2183**

Acrocore Exterior Mouldings, LLC  
One Ackerman Avenue, Clifton, NJ 07011