



For Earth, For Life
Kubota

ZD

**KUBOTA DIESEL ZERO-TURN MOWER
ZD326**

Kubota's ZD326 zero-turn mower delivers the performance and high quality demanded by commercial operators.





Cutting grass is the commercial operator's livelihood. And Kubota's ZD326 delivers the power, durability, and performance professionals want.



Day in and day out, you need a professional turf mower that handles non-stop use—a mower that's manoeuvrable, cost effective, and loaded with the features to make your job easier. That's why Kubota developed the ZD326 zero-turn commercial mower—to deliver the results your business demands. The ZD326 offers a state-of-the-art Kubota diesel engine, a high-capacity HST transmission, a deep mower deck, and an ultra-comfortable operating area. In short, the ZD326 delivers.

COMFORT

The ZD326 boasts a wide array of features designed to make work easier. Wider control levers and a full-flat operator platform allow greater legroom; the angled panel helps to prevent glare for easier indicator and control viewing. In addition, the ZD326 offers an ergonomic, 4-control adjustable seat to prevent fatigue and a conveniently placed cup holder so you can quench your thirst.

HIGH-BACK DELUXE SUSPENSION SEAT

Outstanding comfort is what you'll feel with Kubota's standard deluxe link-type suspension seat with adjustable armrests. The extra-wide seat features weight adjustment, adjustable arm rests, and much more to give the operator a custom fit.




LUMBAR SUPPORT




SUSPENSION SEAT ADJUSTMENT LEVER



RECLINING DIAL

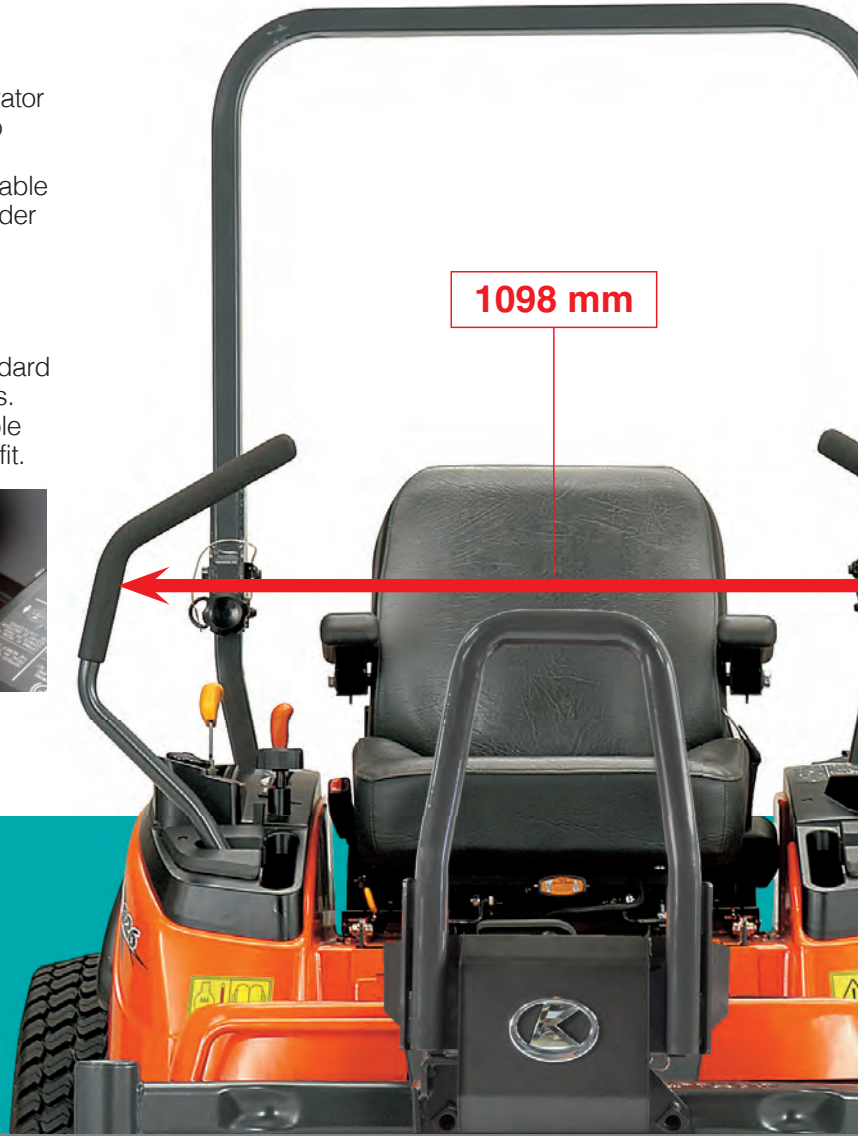

1098 mm

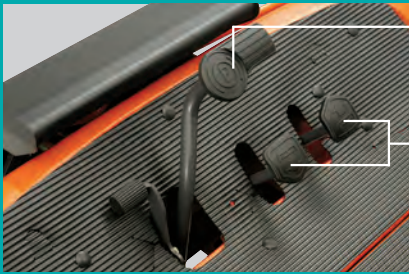

PARKING BRAKE (Hands-free)

HANDS-FREE HYDRAULIC DECK LIFT


MOWER DECK

PRO COMMERCIAL MOWER DECK

To ensure superior cutting performance, even at faster speeds, our newly developed, deeper mower deck utilizes a flat design and our unique new baffling system, which forces grass through all three cutting blades. And, to meet the needs of varying job sizes, the ZD326 mower deck is available in side and rear discharge versions.



NEW
5.5-inch Deep
Mower Deck

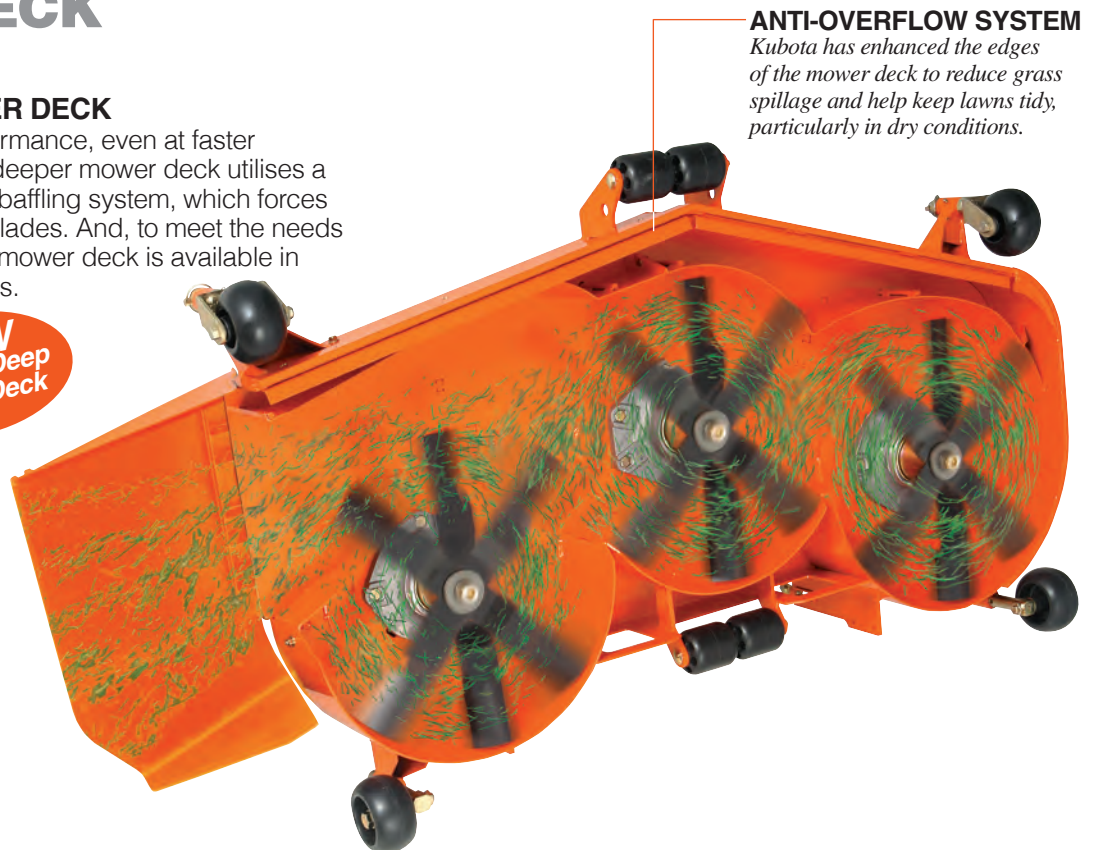

ANTI-OVERFLOW SYSTEM

Kubota has enhanced the edges of the mower deck to reduce grass spillage and help keep lawns tidy, particularly in dry conditions.

MAINTENANCE

Kubota has made maintenance of the ZD326 unbelievably simple. Thanks to a unique maintenance lift system, a tilt-up seat for quick and thorough access to the HST, and a new maintenance hatch on the full-flat platform, work can be completed on every key component without difficulty.




MAINTENANCE LIFT

For routine maintenance underneath the mower, Kubota's unique two-pin, tilt-up, lift feature allows the front of the ZD326 to be easily raised without having to remove the mid-mount mower. The system includes locks for the front tyres to ensure safety. It's like having a built-in jack right there when you need it.



RADIATOR SCREEN

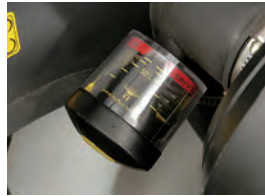


AIR CLEANER INDICATOR




ENGINE COOLANT ALERT



TIE DOWN

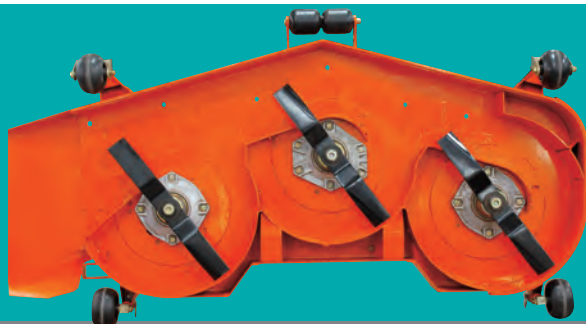

SIDE DISCHARGE MOWER
(AVAILABLE BY SPECIAL ORDER)

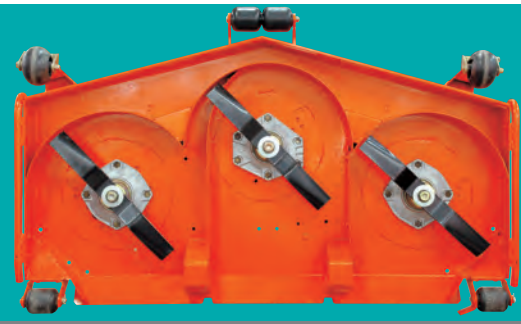


REAR DISCHARGE MOWER



SPINDLE BEARINGS AND PULLEYS

Kubota has improved the durability of the mower pulley holder bearings to provide maximum strength and support.

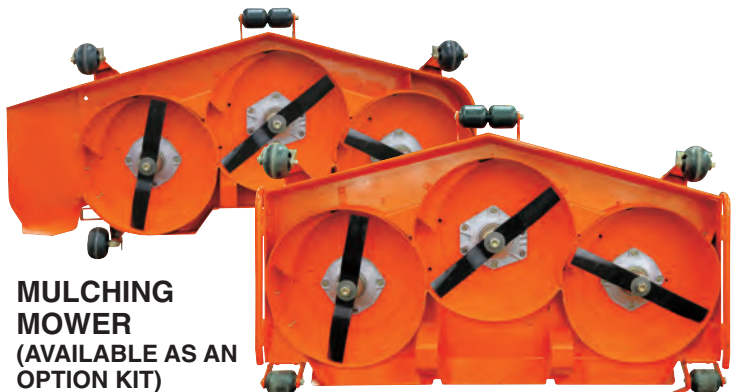

MULCHING MOWER
(AVAILABLE AS AN OPTION KIT)



1/4" INCREMENT CUTTING HEIGHT ADJUSTMENT

Cutting height can be easily changed, from 1" to 5" in 1/4" increments, with the 1/4" adjustment dial. Located conveniently on the control panel, the adjustment dial is easily accessed to increase or decrease cutting height.



MOWER LIFT LINK

The ZD326 features stronger lift link components, including an enhanced lift shaft, a thicker lift arm, and a wider shaft diameter.


KUBOTA DIESEL ENGINE

Kubota diesel engines are known for their durability, high performance, energy efficiency and reliability. Kubota diesels offer many advantages over gasoline engines: as much as 30%* more fuel efficiency, higher torque, fewer emissions and quieter operation, among others. Kubota engines can aggressively take on heavy mowing jobs for extended periods. And, our 19 kW engine promises to exceed the high expectations of the commercial landscaper.



DUAL-ELEMENT AIR CLEANER

Kubota ZD326 mower comes equipped with a dual-element air cleaner which features a vacuum sensor to tell you when to service the air cleaner.

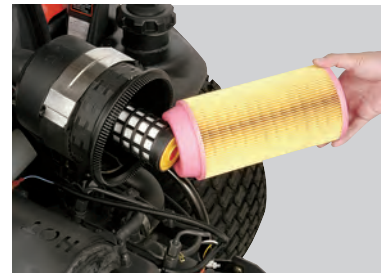

LARGE FUEL TANK

Kubota has increased the fuel capacity for the ZD326 to 45 L by including two fuel tanks. This allows the operator to work longer and more efficiently without stopping to refuel. This feature is especially handy for those big jobs.




LARGE RADIATOR

The radiator on the ZD326 mower is built to improve cooling performance and prevent the engine from overheating.

KUBOTA DIESEL ZERO-TURN MOWER


ZD326

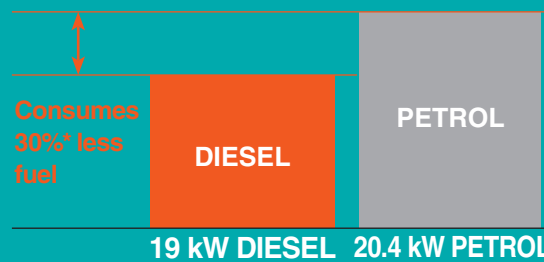

*Results vary by the engine settings, grass conditions, terrain, etc.

DURABILITY

The ZD326 is extremely reliable, thanks in no small part to the new Kubota integral-type HST transmission system. It's designed with strong components and the high capacity an HST system needs to assure outstanding commercial mowing performance and productivity.

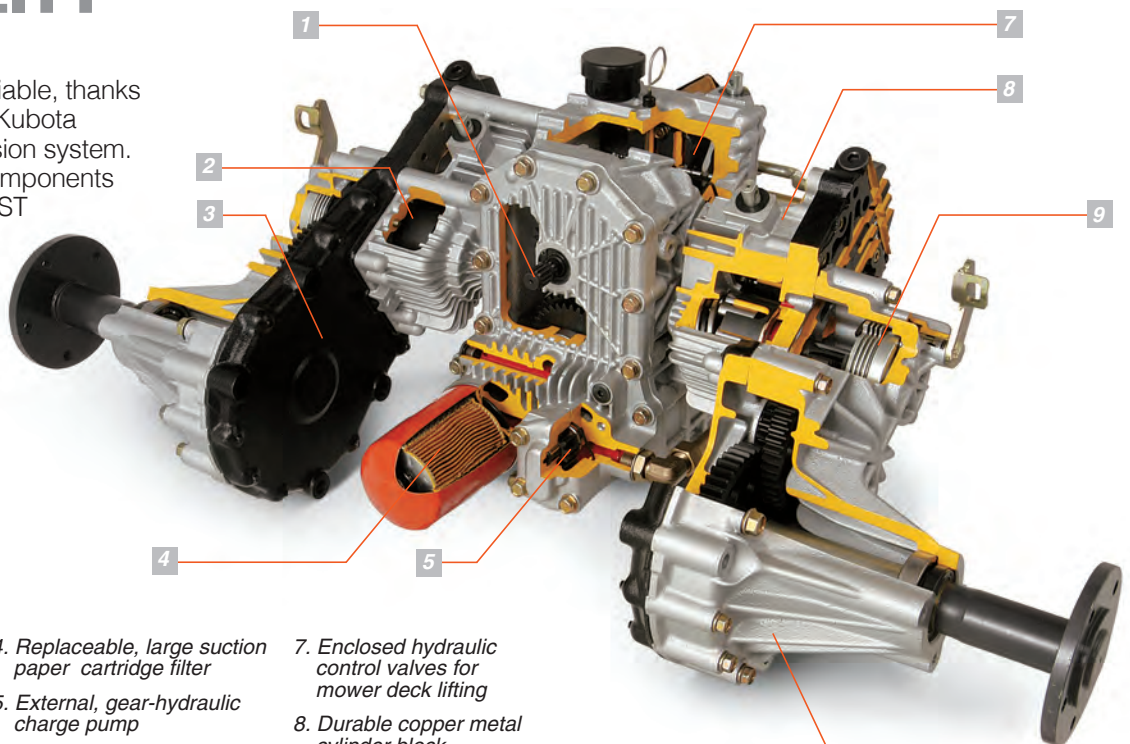

1. Wet-type hydraulic PTO clutch; 30% increase in transfer capacity
2. 120% increase in HST capacity
3. Strong casting rear shaft cover
4. Replaceable, large suction paper cartridge filter
5. External, gear-hydraulic charge pump
6. Extended rear tyre axle for added strength
7. Enclosed hydraulic control valves for mower deck lifting
8. Durable copper metal cylinder block
9. Wet-type multi-disk brake (on parking brake)

Specifications

Model		ZD326		
		ZD326-60-EU/ZD326-60R-EU		
Engine	Model	Kubota D1005		
	Type	Diesel, liquid-cooled (3 cyl.)		
	Total displacement	cm ³	1001	
	Engine gross power*	kW	19	
	Maximum operating engine speed	min ⁻¹ (rpm)	3320 to 3420	
	Starting system	Key switch - super glow		
Dimensions	Overall length	mm	2220	
	Overall width	(w/ mower)	mm	1854 (side) / 1604 (rear)
		(w/o mower)	mm	1460
	Overall height	(w/ ROPS upright)	mm	1915
(w/ ROPS folded)		mm	1555	
Wheel base	mm		1405	
Tread	Front	mm	975	
	Rear	mm	1150	
Tyre size	Front	15 × 6.0-6 pneumatic		
	Rear	26 × 12.0-12		
Weight (w/ mower) (without fuel)	kg	790		
Transmission system	2-HST w/ Gear			
Speed control	2-hand lever			
Travel speed range	Forward	km/h	0-15.0	
	Reverse	km/h	0-8.3	
Brake type	Wet multi disks, foot operated			
PTO	Type	Shaft drive		
	Clutch type	Wet multi disk		
	PTO brake	Wet single disk		
Mower deck	Model	RCK60P-326Z-EU/RCK60R-326Z-EU		
	Mower lift system	Hydraulic		
	Mower deck type	Fabricated deck		
	Deck depth	mm	140	
	Deck steel thickness	mm	4.2, 4.6	
	Anti-scalp roller	Swivel		
	Cutting width of mower	cm (in.)	152.4 (60)	
	Number of blades	3 blades		
	Cutting height	in.	1 ~ 5 / 1/4 increments	
	Mounting system of mower	Parallel linkage		
Blade tip speed (max.)	ft/min	15100		
Seat adjustment	One touch system (weight, armrests, reclining, and lumbar support)			
Step deck	Full flat			
Engine stop system	Key stop			
Fuel tank capacity	ltrs.	45		
Battery	V	12, 51R, 450CAA@0°F, 70 min. RC.		
Alternator capacity	V / Amp	14 / 14		
Water temperature indicator	Standard			
Hour meter	Standard			
Fuel gauge	Electric			

* Manufacturer's estimate

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional, and not standard equipment.

Please contact your local Kubota dealer for warranty, safety or product information.

©2015 Kubota Corporation



KUBOTA (U.K.) LIMITED

Dormer Road Thame, Oxfordshire, OX9 3UN.

Phone (01844) 268000 Fax (08702) 429677

E-mail: kuk_g.tractors@kubota.com

Web site: <http://www.kubota.co.uk>