



UniFi[®] XG SERVER

10G Rack-Mountable
Application Server

Model: UAS-XG

QUICK START GUIDE

Introduction

Thank you for purchasing the Ubiquiti® UniFi® Application Server. This Quick Start Guide is designed to guide you through installation and also includes warranty terms.

Package Contents



UniFi Application Server



Rack-Mount Brackets
(Qty. 2)



Bracket Screws
(Qty. 8)



Mounting Screws
(Qty. 4)



Cage Nuts
(Qty. 4)



Power Cord



U Logo Stickers
(Qty. 2)



Quick Start Guide


System Requirement

Web Browser: Google Chrome (Other browsers may have limited functionality.)

Network Topology Example


The UniFi Server requires a DHCP-enabled network to obtain an IP address. Here is a sample network diagram using these devices:

- **UAS-XG** The UniFi Application Server hosts the UniFi Network Controller and UniFi Video software applications.
- **US-16-XG** Connect the 10G Ethernet ports from the UAS-XG to the US-16-XG or other 10G-capable switches for maximum throughput. Note that the UAS-XG's Ethernet ports are backwards-compatible with standard 1G ports if 10G is not available.
- **USG-PRO-4** The UniFi Security Gateway Pro acts as the DHCP server and connects to the internet.

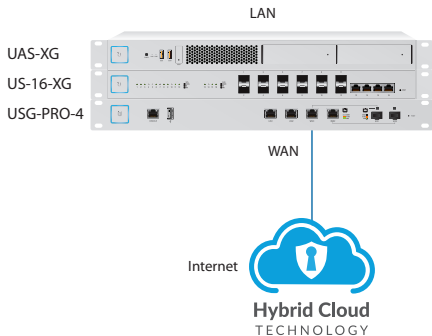


Hardware Overview

Back Panel Ports



Port	Description
Power	Connect the included <i>Power Cord</i> to the <i>Power</i> port.
IPMI LAN	(Optional) The dedicated RJ45 port supports IPMI (Intelligent Platform Management Interface) for monitoring and control.
USB1-2	(Optional) Connect USB 3.0 devices. Maximum power per port is 5W (5V, 1A).
LAN1-2	RJ45 ports support 1/10 Gbps Ethernet connections.
VGA	(Optional) Connect a monitor for console access.

Back Panel LEDs

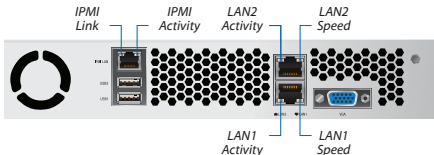

IPMI LAN LEDs

LED	State	Status
Link	Off	No Link
	Amber	Link Established
Activity	Off	No Activity
	Red	Activity

LAN1/2 LEDs

LED	State	Status
Activity	Off	No Link
	Amber	Flashing Indicates Activity
Speed	Off	No Connection or Link Established at 10/100 Mbps
	Amber	Link Established at 1 Gbps
	Green	Link Established at 10 Gbps

Front Panel LEDs



System LED

Color	State	Status
White	Flashing	Initializing
Blue	Steady	Functioning Properly

LAN1/2 LEDs

Color	State	Status
Green	Steady	Link Established at 1/10 Gbps
	Flashing	Indicates Activity

HDD1/2 LEDs


Color	State	Status
Green	Flashing	Indicates Read/Write Activity
Amber	Steady	Indicates HDD Error

Front Panel Ports



USB3-4 (Optional) Connect USB 2.0 devices. Maximum power per port is 5W (5V, 1A).

Front Panel Buttons

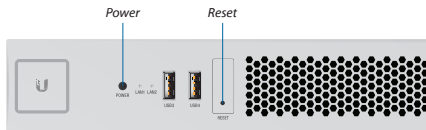

Button	Description
Power	Press to turn the UniFi Server on or off.
Reset	The UniFi Server should be running after bootup is complete, and the <i>System</i> LED is blue. Press the Reset button for a soft reboot.

Front Panel HDD Bays

One 8 TB HDD is pre-installed. If you want to replace the HDD, follow these instructions:

1. Before replacing the HDD, ensure that the UniFi Server is powered off to prevent any software disruption.
2. To replace the HDD, press the HDD bay door.



3. Once the door is released, rotate the door and pull the HDD bay out.



4. Replace the pre-installed HDD with another HDD (optional) and then close the HDD bay door.

Before You Begin

Remove the labels that secure the HDD bay doors.

1. Before removing the labels, ensure that the UniFi Server is powered off to avoid disconnecting the hard drives while the UniFi Server is powered on.
2. Pull the white part of the label.



3. Press the HDD bay door.



4. Once the door is released, rotate the door and pull the HDD bay out.



5. Remove the rest of the label.




6. Push the HDD bay back in and close the HDD bay door.
7. Repeat steps 2-6 for the other label.

Hardware Installation

The UniFi Server can be placed on a horizontal surface, mounted on a wall, or mounted in a rack.

Mounting in a Rack (Optional)

1. Attach the *Rack-Mount Brackets* to the UniFi Server using the eight *Bracket Screws*.

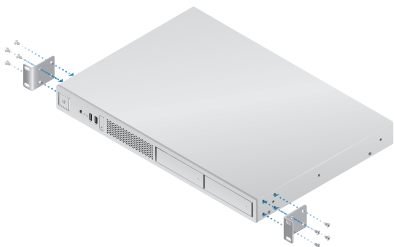

2. Attach the UniFi Server to the rack using the four *Mounting Screws*. (If the rack has square slots, then use the *Cage Nuts* with the *Mounting Screws*.)




Connecting Power

1. Connect the *Power Cord* to the *Power* port of the UniFi Server.



2. Connect the other end of the *Power Cord* to a UPS (Uninterruptible Power Supply) to prevent possible data loss from power outages.



3. Press the *Power* button to turn on the UniFi Server.



Connecting Ethernet

1. Connect an Ethernet cable from your switch to the *LAN1* port of the UniFi Server.



Note: We recommend connecting to the bottom port, *LAN1*, if you are only connecting a single Ethernet cable.



2. For an aggregate link, connect another Ethernet cable from your switch to the top port, *LAN2*, of the UniFi Server.



640-00281-07

Connecting VGA

The VGA port is only used for console access in conjunction with a USB keyboard; it does not need to be connected for normal operation of the UniFi Server.

1. (Optional) Connect a VGA cable (not included) from your monitor to the VGA port of the UniFi Server.



Initial Setup via Bluetooth


Use the UniFi Network app to configure the UniFi Server.

1. Download the UniFi Network app from the App Store® (iOS) or Google Play™ (Android).



2. Enable Bluetooth on your mobile device.
3. Launch the app and hold your mobile device within 1.5 m (5') of the UniFi Server.

4. Tap **Add Controller**.



5. When the UniFi Server has been discovered, tap **Set up this controller**.



6. Configure the following settings:

- **Use SSO Credentials** Toggle **On**.



Note: To manually configure the credentials, tap **See credentials in detail** and go to step 7.


- **Email** Enter your email address.
- **Username** Enter the username for your UBNT Single Sign-On (SSO) account.
- **Password** Enter the password for your UBNT SSO account.
- **Retype Password** Confirm your password.



Note: The password configured in this step will also be used for SSH and IPMI access.

- **Country** Select the appropriate country.
- **Time Zone** Select the appropriate time zone.

Tap **Set Up** and go to step 8.

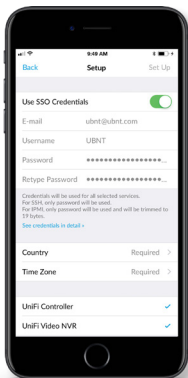


7. Configure the *UniFi Controller*, *UniFi Video NVR*, *SSH*, and/or *IPMI* credentials as needed:

- **Username** Enter the appropriate username.




Note: For the *SSH* and *IPMI* credentials, the username is always *ubnt* and cannot be changed.

- **Password** Enter the appropriate password. Tap the  icon to display the password in plaintext.




Note: For the *IPMI* credential, the password can be 19 bytes (or standard ASCII characters) maximum.

Tap **Done**.

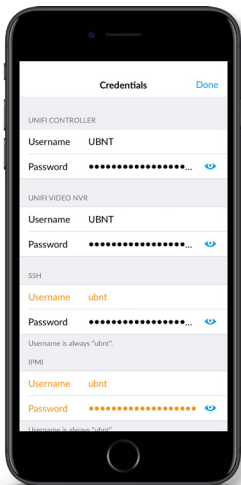

8. You will be notified when the settings have been saved. Tap **Done**.

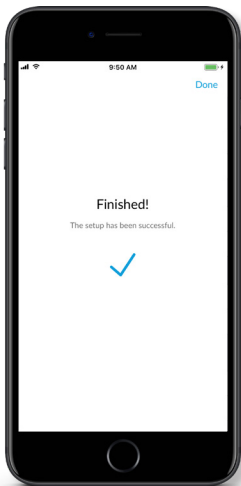

The username and password you configure in the UniFi Network app will be used for the pre-installed UniFi Network Controller and UniFi Video software.

UniFi Software

The UniFi Network Controller and UniFi Video software applications are pre-installed on the UniFi Server. Follow these instructions to launch either software:

1. Ensure that your host system is on the same Layer-2 network as the UniFi Server.
2. The UniFi Server is set to *DHCP* by default, so it will try to automatically obtain an IP address. Assign a specific IP address to the UniFi Server, or check the DHCP server for its IP address.
3. Launch the web browser. In the address field, type **https://** followed by the appropriate IP address and port number:
 - **UniFi Network Controller** Enter **8443** as the port number.



- **UniFi Video** Enter **7443** as the port number.



4. Press **enter** (PC) or **return** (Mac). Follow the on-screen instructions.

For information on configuring and using the UniFi Network Controller or UniFi Video software, refer to the appropriate User Guide on the website:

- www.ubnt.com/download/unifi
- www.ubnt.com/download/unifivideo

Specifications

UAS-XG	
Dimensions	442.4 x 305.5 x 43.7 mm (17.42 x 12.03 x 1.72")
Weight	6.5 kg (14.33 lb)
With Mount Brackets	6.6 kg (14.55 lb)
Max. Power Consumption	150W
Power Method	100-240VAC/50-60 Hz, Universal Input
Power Supply	100-240VAC, 2 to 4A, 50 to 60 Hz
Supported Voltage Range	100-240VAC
LEDs	
System	Bootup/Reset/Locate
Data Ports	Link/Activity
HDD Bays	Activity
Processor	Intel Xeon D-1521
System Memory	16 GB DDR
On-Board Flash Storage	M.2 SSD 120 GB
Hard Drive Capacity	(1) 8 TB HDD (Pre-Installed)
Operating Temperature	0 to 40° C (32 to 104° F)
Operating Humidity	5 to 90% Noncondensing
Rack Mount	Yes, 1U High
Interfaces	
Networking Interfaces	(2) 1/10 Gbps RJ45 Ethernet Ports
IPMI Interface	(1) 1 Gbps RJ45 Ethernet Port
USB	(2) USB 3.0 Ports (Back Panel), (2) USB 2.0 Ports (Front Panel)
Bluetooth Low Energy	Bluetooth 4.0
Certifications	CE, FCC, IC

Safety Notices

1. Read, follow, and keep these instructions.
2. Heed all warnings.
3. Only use attachments/accessories specified by the manufacturer.



WARNING: Do not use this product in location that can be submerged by water.



WARNING: Avoid using this product during an electrical storm. There may be a remote risk of electric shock from lightning.

Electrical Safety Information

1. Compliance is required with respect to voltage, frequency, and current requirements indicated on the manufacturer's label. Connection to a different power source than those specified may result in improper operation, damage to the equipment or pose a fire hazard if the limitations are not followed.
2. There are no operator serviceable parts inside this equipment. Service should be provided only by a qualified service technician.
3. This equipment is provided with a detachable power cord which has an integral safety ground wire intended for connection to a grounded safety outlet.
 - a. Do not substitute the power cord with one that is not the provided approved type. Never use an adapter plug to connect to a 2-wire outlet as this will defeat the continuity of the grounding wire.
 - b. The equipment requires the use of the ground wire as a part of the safety certification, modification or misuse can provide a shock hazard that can result in serious injury or death.
 - c. Contact a qualified electrician or the manufacturer if there are questions about the installation prior to connecting the equipment.
 - d. Protective earthing is provided by Listed AC adapter. Building installation shall provide appropriate short-circuit backup protection.
 - e. Protective bonding must be installed in accordance with local national wiring rules and regulations.

Limited Warranty

ui.com/support/warranty/

The limited warranty requires the use of arbitration to resolve disputes on an individual basis, and, where applicable, specify arbitration instead of jury trials or class actions.

Compliance

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This radio transmitter (FCC: SWX-UASPRO) has been approved by FCC.

ISED Canada

CAN ICES-3(A)/NMB-3(A)

This device complies with ISED Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

This radio transmitter (IC: 6545A-UASPRO) has been approved by ISED Canada.

CAN ICES-3(A)/NMB-3(A)

Le présent appareil est conforme aux CNR d'ISDE Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. l'appareil ne doit pas produire de brouillage;
2. l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Le présent émetteur radio (IC : 6545A-UASPRO) a été approuvé par ISDE Canada.

IMPORTANT NOTE:

Radiation Exposure Statement:

- This equipment complies with radiation exposure limits set forth for an uncontrolled environment.
- This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.
- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

AVIS IMPORTANT :

Déclaration sur l'exposition aux rayonnements :

- Cet équipement est conforme aux limites prévues pour l'exposition aux rayonnements dans un environnement non contrôlé.
- Lors de l'installation et de la mise en fonctionnement de l'équipement, assurez-vous qu'il y ait une distance minimale de 20 cm entre l'élément rayonnant et vous.
- Cet émetteur ne doit être installé à proximité d'aucune autre antenne ni d'aucun autre émetteur, et ne doit être utilisé conjointement à aucun autre de ces appareils.

Australia and New Zealand



Warning: This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

Brazil



Nota: Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados.

CE Marking

CE marking on this product represents the product is in compliance with all directives that are applicable to it.



RoHS/WEEE Compliance Statement



English

European Directive 2012/19/EU requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

Deutsch

Die Europäische Richtlinie 2012/19/EU verlangt, dass technische Ausrüstung, die direkt am Gerät und/oder an der Verpackung mit diesem Symbol versehen ist, nicht zusammen mit unsortiertem Gemeindeabfall entsorgt werden darf. Das Symbol weist darauf hin, dass das Produkt von regulärem Haushaltsmüll getrennt entsorgt werden sollte. Es liegt in Ihrer Verantwortung, dieses Gerät und andere elektrische und elektronische Geräte über die dafür zuständigen und von der Regierung oder örtlichen Behörden dazu bestimmten Sammelstellen zu entsorgen. Ordnungsgemäßes Entsorgen und Recyceln trägt dazu bei, potentielle negative Folgen für Umwelt und die menschliche Gesundheit zu vermeiden. Wenn Sie weitere Informationen zur Entsorgung Ihrer Altgeräte benötigen, wenden Sie sich bitte an die örtlichen Behörden oder städtischen Entsorgungsdienste oder an den Händler, bei dem Sie das Produkt erworben haben.

Español

La Directiva 2012/19/UE exige que los equipos que lleven este símbolo en el propio aparato y/o en su embalaje no deben eliminarse junto con otros residuos urbanos no seleccionados. El símbolo indica que el producto en cuestión debe separarse de los residuos domésticos convencionales con vistas a su eliminación. Es responsabilidad suya desechar este y cualesquiera otros aparatos eléctricos y electrónicos a través de los puntos de recogida que ponen a su disposición el gobierno y las autoridades locales. Al desechar y reciclar correctamente estos aparatos estará contribuyendo a evitar posibles consecuencias negativas para el medio ambiente y la salud de las personas. Si desea obtener información más

detallada sobre la eliminación segura de su aparato usado, consulte a las autoridades locales, al servicio de recogida y eliminación de residuos de su zona o pregunte en la tienda donde adquirió el producto.

Français

La directive européenne 2012/19/UE exige que l'équipement sur lequel est apposé ce symbole sur le produit et/ou son emballage ne soit pas jeté avec les autres ordures ménagères. Ce symbole indique que le produit doit être éliminé dans un circuit distinct de celui pour les déchets des ménages. Il est de votre responsabilité de jeter ce matériel ainsi que tout autre matériel électrique ou électronique par les moyens de collecte indiqués par le gouvernement et les pouvoirs publics des collectivités territoriales. L'élimination et le recyclage en bonne et due forme ont pour but de lutter contre l'impact néfaste potentiel de ce type de produits sur l'environnement et la santé publique. Pour plus d'informations sur le mode d'élimination de votre ancien équipement, veuillez prendre contact avec les pouvoirs publics locaux, le service de traitement des déchets, ou l'endroit où vous avez acheté le produit.

Italiano

La direttiva europea 2012/19/UE richiede che le apparecchiature contrassegnate con questo simbolo sul prodotto e/o sull'imballaggio non siano smaltite insieme ai rifiuti urbani non differenziati. Il simbolo indica che questo prodotto non deve essere smaltito insieme ai normali rifiuti domestici. È responsabilità del proprietario smaltire sia questi prodotti sia le altre apparecchiature elettriche ed elettroniche mediante le specifiche strutture di raccolta indicate dal governo o dagli enti pubblici locali. Il corretto smaltimento ed il riciclaggio aiuteranno a prevenire conseguenze potenzialmente negative per l'ambiente e per la salute dell'essere umano. Per ricevere informazioni più dettagliate circa lo smaltimento delle vecchie apparecchiature in Vostro possesso, Vi invitiamo a contattare gli enti pubblici di competenza, il servizio di smaltimento rifiuti o il negozio nel quale avete acquistato il prodotto.

Declaration of Conformity

български [Bulgarian] С настоящото UBIQUITI декларира, че това устройство UAS-XG е в съответствие със съществените изисквания и други приложими разпоредби на Директива 2014/53/ЕС, 2014/30/ЕС, 2014/35/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: ui.com/compliance

Hrvatski [Croatian] UBIQUITI ovim putem izjavljuje da je ovaj uređaj UAS-XG sukladan osnovnim zahtjevima i ostalim bitnim odredbama Direktiva 2014/53/EU, 2014/30/EU, 2014/35/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: ui.com/compliance

Čeština [Czech] UBIQUITI tímto prohlašuje, že toto UAS-XG zařízení, je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnic 2014/53/EU, 2014/30/EU, 2014/35/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: ui.com/compliance

Dansk [Danish] Hermed, UBIQUITI, erklærer at denne UAS-XG enhed, er i overensstemmelse med de væsentlige krav og øvrige relevante krav i direktiver 2014/53/EU, 2014/30/EU, 2014/35/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: ui.com/compliance

Nederlands [Dutch] Hierbij verklaart UBIQUITI, dat deze UAS-XG apparaat, in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijnen 2014/53/EU, 2014/30/EU, 2014/35/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: **ui.com/compliance**

English Hereby, UBIQUITI, declares that this UAS-XG device, is in compliance with the essential requirements and other relevant provisions of Directives 2014/53/EU, 2014/30/EU, 2014/35/EU. The full text of the EU declaration of conformity is available at the following internet address: **ui.com/compliance**

Eesti keel [Estonian] Käesolevaga UBIQUITI kinnitab, et antud UAS-XG seade, on vastavus olulistele nõuetele ja teistele asjakohastele sätetele direktiivide 2014/53/EU, 2014/30/EU, 2014/35/EU. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: **ui.com/compliance**

Suomi [Finnish] Täten UBIQUITI vakuuttaa, että tämä UAS-XG laite, on yhdenmukainen olennaisten vaatimusten ja muiden sitä koskevien direktiivien 2014/53/EU, 2014/30/EU, 2014/35/EU. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: **ui.com/compliance**

Français [French] Par la présente UBIQUITI déclare que l'appareil UAS-XG, est conforme aux exigences essentielles et aux autres dispositions pertinentes des directives 2014/53/UE, 2014/30/UE, 2014/35/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: **ui.com/compliance**

Deutsch [German] Hiermit erklärt UBIQUITI, dass sich dieses UAS-XG Gerät, in Übereinstimmung mit den grundlegenden Anforderungen und den anderen relevanten Vorschriften der Richtlinien 2014/53/EU, 2014/30/EU, 2014/35/EU befindet. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: **ui.com/compliance**

Ελληνικά [Greek] Δια του παρόντος, UBIQUITI, δηλώνει ότι αυτή η συσκευή UAS-XG, είναι σε συμμόρφωση με τις βασικές απαιτήσεις και τις λοιπές σχετικές διατάξεις των οδηγιών 2014/53/ΕΕ, 2014/30/ΕΕ, 2014/35/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: **ui.com/compliance**

Magyar [Hungarian] Ezennel UBIQUITI kijelenti, hogy ez a UAS-XG készülék megfelel az alapvető követelményeknek és más vonatkozó 2014/53/EU, 2014/30/EU, 2014/35/EU irányelvek rendelkezéseit. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: **ui.com/compliance**

Íslenska [Icelandic] Hér, UBIQUITI, því yfir að þetta UAS-XG tæki er í samræmi við grunnkröfur og önnur viðeigandi ákvæði tilskipana 2014/53/ESB, 2014/30/ESB, 2014/35/ESB. Fullur texti ESB samræmisýfirlýsing er að finna á eftirfarandi netfangi: **ui.com/compliance**

Italiano [Italian] Con la presente, UBIQUITI, dichiara che questo dispositivo UAS-XG, è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti delle direttive 2014/53/UE, 2014/30/UE, 2014/35/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: **ui.com/compliance**

Latviešu valoda [Latvian] Ar šo, UBIQUITI, deklarē, ka UAS-XG ierīce, ir saskaņā ar būtiskajām prasībām un citiem attiecīgiem noteikumiem Direktīvās 2014/53/ES, 2014/30/ES, 2014/35/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: **ui.com/compliance**

Lietuvių kalba [Lithuanian] UBIQUITI deklaruoja, kad šis UAS-XG įrenginys atitinka esminius reikalavimus ir kitas 2014/53/ES, 2014/30/ES, 2014/35/ES Direktyvų nuostatas. Visas ES atitikties deklaracijos teksto prieinamas šiuo interneto adresu: **ui.com/compliance**

Malti [Maltese] Hawnhekk, UBIQUITI, tiddikjara li dan il-mezz UAS-XG huwa konformi mar-rewkwiżiti essenzjali u dispożizzjonijiet rilevanti oħrajn ta' Direttivi 2014/53/UE, 2014/30/UE, 2014/35/UE. Id-dikjarazzjoni tal-konformità tista' tiġi kkonsultata minn **ui.com/compliance**

Norsk [Norwegian] Herved UBIQUITI, erklærer at denne UAS-XG enheten, er i samsvar med de grunnleggende kravene og andre relevante bestemmelser i direktivene 2014/53/EU, 2014/30/EU, 2014/35/EU. Den fulle teksten til EU-samsvarserklæringen er tilgjengelig på følgende internettadresse: **ui.com/compliance**

Polski [Polish] Niniejszym, UBIQUITI, oświadcza, że urządzenie UAS-XG, jest zgodny z zasadniczymi wymaganiami oraz pozostałymi stosownymi postanowieniami Dyrektyw 2014/53/UE, 2014/30/UE, 2014/35/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: ui.com/compliance

Português [Portuguese] UBIQUITI declara que este dispositivo UAS-XG, está conforme com os requisitos essenciais e outras disposições das Directivas 2014/53/UE, 2014/30/UE, 2014/35/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: ui.com/compliance

Română [Romanian] Prin prezenta, UBIQUITI declară că acest dispozitiv UAS-XG este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivelor 2014/53/UE, 2014/30/UE, 2014/35/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: ui.com/compliance

Slovenčina [Slovak] Týmto UBIQUITI, prehlasuje, že toto UAS-XG zariadenie, je v súlade so základnými požiadavkami a ďalšími relevantnými ustanoveniami smernice 2014/53/EÚ, 2014/30/EÚ, 2014/35/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: ui.com/compliance

Slovenščina [Slovenian] Družba UBIQUITI izjavlja, da je naprava UAS-XG v skladu z obveznimi zahtevami in drugimi ustreznimi določbami direktiv 2014/53/EU, 2014/30/EU in 2014/35/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: ui.com/compliance

Español [Spanish] Por medio de la presente UBIQUITI declara que este dispositivo UAS-XG, cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de las Directivas 2014/53/UE, 2014/30/UE, 2014/35/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: ui.com/compliance

Svenska [Swedish] Härmed UBIQUITI, intygar att denna UAS-XG enhet är i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiven 2014/53/EU, 2014/30/EU, 2014/35/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: ui.com/compliance

Online Resources

Website ui.com
Support help.ui.com
Community community.ui.com
Downloads downloads.ui.com

Ubiquiti Inc.
685 Third Avenue, 27th Floor
New York, NY 10017
USA



©2018-2019 Ubiquiti Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, and UniFi are trademarks or registered trademarks of Ubiquiti Inc. in the United States and in other countries. Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Android, Google, Google Play, the Google Play logo and other marks are trademarks of Google LLC. All other trademarks are the property of their respective owners.