



Cisco UCS B200 M3 Blade Server

CISCO SYSTEMS
170 WEST TASMAN DR.
SAN JOSE, CA, 95134
WWW.CISCO.COM

PUBLICATION HISTORY

REV A.8 JUNE 15, 2012

CONTENTS

OVERVIEW	3
DETAILED VIEWS	4
Blade Server Front View	4
BASE SERVER STANDARD CAPABILITIES and FEATURES	5
CONFIGURING the SERVER	7
STEP 1 VERIFY SERVER SKU	8
STEP 2 CHOOSE CPU(S)	9
STEP 3 CHOOSE MEMORY	11
STEP 4 CHOOSE HARD DISK DRIVES or SOLID STATE DRIVES (OPTIONAL)	15
STEP 5 CHOOSE MODULAR LOM and/or PCIe MEZZANINE CARDS	17
STEP 6 ORDER A TRUSTED PLATFORM MODULE	20
STEP 7 ORDER CISCO FLEXIBLE FLASH SECURE DIGITAL CARDS	21
STEP 8 ORDER OPTIONAL INTERNAL USB 2.0 DRIVE	22
STEP 9 CHOOSE OPERATING SYSTEM	23
STEP 10 CHOOSE OPERATING SYSTEM MEDIA KIT	26
STEP 11 CHOOSE OPTIONAL VALUE-ADDED SOFTWARE	27
STEP 12 CHOOSE SERVICE and SUPPORT LEVEL	28
ORDER OPTIONAL KVM LOCAL I/O CABLE*	32
SUPPLEMENTAL MATERIAL	33
System Board	33
CPUs and DIMMs	34
Physical Layout	34
Memory Population Rules	36
Recommended Memory Population Order	37
System Speed as a Function of DIMMs Per Channel (for a 3 DIMM Per Channel System)	37
Network Connectivity	38
Modular LOM Card	39
Mezzanine Cards	40
Connectivity using the Cisco UCS 2208XP Fabric Extender	41
Connectivity using the Cisco UCS 2204XP Fabric Extender	44
Connectivity using the Cisco UCS 2104XP Fabric Extender	47
TECHNICAL SPECIFICATIONS	48
Dimensions and Weight	48
Power Specifications	48

OVERVIEW

Delivering performance, versatility and density without compromise, the Cisco UCS B200 M3 Blade Server addresses the broadest set of workloads, from IT and web infrastructure through distributed database.

Building on the success of the Cisco UCS B200 M2, the enterprise-class Cisco UCS B200 M3 blade server further extends the capabilities of Cisco's Unified Computing System portfolio in a half-width blade form factor. The Cisco UCS B200 M3 harnesses the power of the latest Intel® Xeon® E5-2600 series processor family CPUs with up to 384 GB of RAM (using 16 GB DIMMs), 2 drives, and up to 80 Gbs throughput connectivity.

Figure 1 Cisco UCS B200 M3 Blade Server




DETAILED VIEWS

Blade Server Front View

Figure 2 is a detailed front view of the Cisco UCS B200 M3 Blade Server.

Figure 2 Blade Server Front View

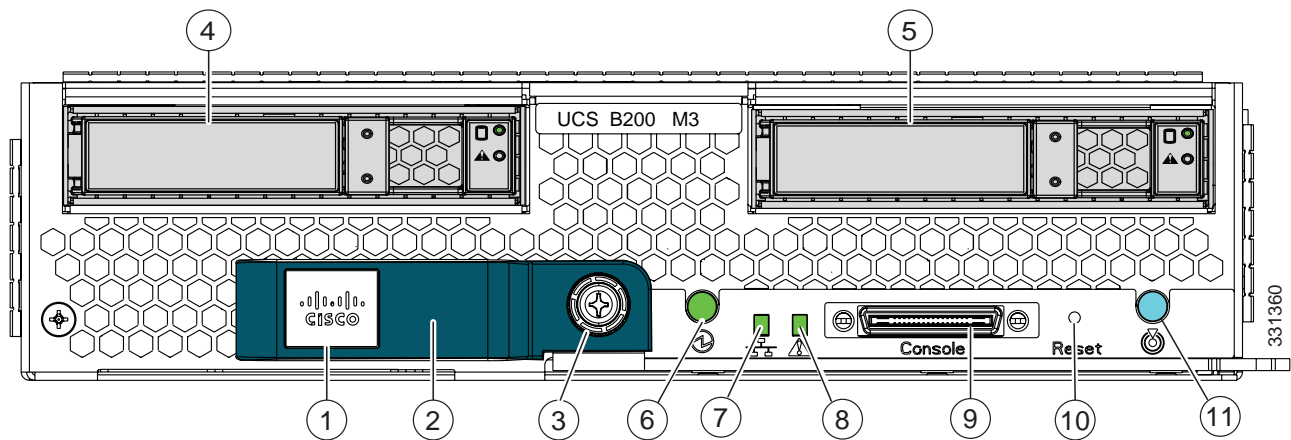

s

1	Asset pull handle (a blank asset tag is provided on which you can add your own label or sticker or you can use a marker to write your asset information on the tag)	7	Network link status LED
2	Blade ejector handle	8	Blade health LED
3	Ejector captive screw	9	Console connector ¹
4	Drive bay 1	10	Reset button access
5	Drive bay 2	11	Beaoning LED and button
6	Power button and LED		

Notes

- 1. For information about the KVM local I/O cable that plugs into the console connector (a cable is included with every Cisco UCS 5100 Series blade server chassis accessory kit), see [ORDER OPTIONAL KVM LOCAL I/O CABLE*](#) on page 32.

BASE SERVER STANDARD CAPABILITIES and FEATURES

Table 1 lists the capabilities and features of the base server. Details about how to configure the server for a particular feature or capability (for example, number of processors, disk drives, or amount of memory) are provided in [CONFIGURING the SERVER on page 7](#).

Table 1 Capabilities and Features


Capability/Feature	Description
Chassis	The UCS B200 M3 Blade Server mounts in a Cisco UCS 5100 series blade server chassis
CPU	Two Intel® E5-2600 series processor family CPUs (note that only 2-CPU configurations are supported on the UCS B200 M3)
Chipset	Intel® C600 series chipset
Memory	24 total slots for registered ECC DIMMs for up to 384 GB total memory capacity (using 16 GB DIMMs)
I/O	Mezzanine cards: <ul style="list-style-type: none"> ■ One connector for Cisco's modular LAN on motherboard (mLOM), which provides Ethernet and Fibre Channel over Ethernet (FCoE) ■ One connector for various types of Cisco or third-party network adapter cards
Storage controller	LSI Logic SAS 2004 integrated controller <ul style="list-style-type: none"> ■ SAS/SATA support ■ RAID 0 and 1 <div>  <p>NOTE: The integrated RAID controller does not implement a write cache. However, servers with two HDDs and RAID controllers with cache lack the ability to match the performance of RAID'ed SSD without cache.</p> </div>
Internal storage devices	Up to two optional, front-accessible, hot-swappable 2.5-inch small form factor (SFF) SAS or SATA solid-state disks (SSDs) or hard disk drives (HDDs). An internal USB 2.0 port is also supported. A 4 GB USB 2.0 device is available from Cisco.

Table 1 Capabilities and Features *(continued)*

Capability/Feature	Description
Video	<p>The Cisco Integrated Management Controller (CIMC) provides video:</p> <ul style="list-style-type: none">■ Matrox G200e video controller■ Integrated 2D graphics core with hardware acceleration■ Supports all display resolutions up to 1920 x 1200 x 16 bpp resolution at 60 Hz■ 24-bit color depth for all resolutions less than 1600x1200■ Up to 256 MB video memory
Interfaces	<ul style="list-style-type: none">■ Front panel<ul style="list-style-type: none">• One console connector (see ORDER OPTIONAL KVM LOCAL I/O CABLE* on page 32)
Power subsystem	Integrated in the Cisco UCS 5100 series blade server chassis
Fans	Integrated in the Cisco UCS 5100 series blade server chassis
Integrated management processor	The built-in Cisco Integrated Management Controller (CIMC) GUI or CLI interface enables you to monitor the server inventory, health, and system event logs.

CONFIGURING the SERVER

Follow these steps to configure the Cisco UCS B200 M3 Blade Server:

- [STEP 1 VERIFY SERVER SKU, page 8](#)
- [STEP 2 CHOOSE CPU\(S\), page 9](#)
- [STEP 3 CHOOSE MEMORY, page 11](#)
- [STEP 4 CHOOSE HARD DISK DRIVES or SOLID STATE DRIVES \(OPTIONAL\), page 15](#)
- [STEP 5 CHOOSE MODULAR LOM and/or PCIe MEZZANINE CARDS, page 17](#)
- [STEP 6 ORDER A TRUSTED PLATFORM MODULE, page 20](#)
- [STEP 7 ORDER CISCO FLEXIBLE FLASH SECURE DIGITAL CARDS, page 21](#)
- [STEP 8 ORDER OPTIONAL INTERNAL USB 2.0 DRIVE, page 22](#)
- [STEP 9 CHOOSE OPERATING SYSTEM, page 23](#)
- [STEP 10 CHOOSE OPERATING SYSTEM MEDIA KIT, page 26](#)
- [STEP 11 CHOOSE OPTIONAL VALUE-ADDED SOFTWARE, page 27](#)
- [STEP 12 CHOOSE SERVICE and SUPPORT LEVEL, page 28](#)

STEP 1 VERIFY SERVER SKU

Verify the product ID (PID) of the server as shown in [Table 2](#).

Table 2 PID of the Base UCS B200 M3 Blade Server

Product ID (PID)	Description
UCSB-B200-M3	UCS B200 M3 Blade Server w/o CPU, memory, HDD, mLOM/mezzanine cards

The base Cisco UCS B200 M3 blade server does not include the following components. They must be selected during product ordering:

- CPUs
- Memory
- Disk drives
- VIC 1240 modular LAN-on-Motherboard (LOM) card
- Mezzanine card



NOTE: Use the steps on the following pages to order servers with the configurable components that you want configured in your servers.

STEP 2 CHOOSE CPU(S)

The standard CPU features are:

- Intel Xeon processor E5-2600 series family CPUs
- Intel C600 series chipset
- Cache sizes of 10, 15, or 20 MB

Select CPUs

The supported Intel Xeon E5-2600 series family CPUs on the UCS B200 M3 are listed in [Table 3](#).

Table 3 Supported Intel CPUs: E5-2600 Series Processor Family CPUs

Product ID (PID)	Intel Number	Clock Freq (GHz)	Power (W)	Cache Size (MB)	Cores	QPI	Highest DDR3 DIMM Clock Support (MHz) ¹
UCS-CPU-E5-2690	E5-2690	2.90	135	20	8	8 GT/s	1600
UCS-CPU-E5-2680	E5-2680	2.70	130	20	8	8 GT/s	1600
UCS-CPU-E5-2670	E5-2670	2.60	115	20	8	8 GT/s	1600
UCS-CPU-E5-2665	E5-2665	2.40	115	20	8	8 GT/s	1600
UCS-CPU-E5-2660	E5-2660	2.20	95	20	8	8 GT/s	1600
UCS-CPU-E5-2650	E5-2650	2.00	95	20	8	8 GT/s	1600
UCS-CPU-E5-2640	E5-2640	2.50	95	15	6	7.2 GT/s	1333
UCS-CPU-E5-2620	E5-2620	2.00	95	15	6	7.2 GT/s	1333
UCS-CPU-E5-2643	E5-2643	3.30	130	10	4	8 GT/s	1600

Notes

1. If higher or lower speed DIMMs are selected than what is shown in the table for a given CPU, the DIMMs will be clocked at the lowest common denominator of CPU clock and DIMM clock. For example:

Selecting lower-speed DIMMs: If you use an E5-2643 CPU (which can support up to 1600-MHz DIMMs) with 1333-MHz DIMMs, the DIMMs will be clocked at the lower speed of 1333 MHz.

Selecting higher-speed DIMMs: If you use 1600-MHz DIMMs with an E5-2620 CPU (which can support up to 1333-MHz DIMMs), the DIMMs will be clocked at the lower speed of 1333 MHz.

Supported Configurations

(1) Two-CPU Configuration

- Choose two identical CPUs from any one of the rows of [Table 3 on page 9](#).



NOTE: 1-CPU configurations are not supported

Caveats


- You must configure two identical CPUs per UCS B200 M3 server.
- For optimal performance, select DIMMs with the highest clock speed for a given processor.
- System speed is dependent on how many DIMMs are populated per channel. See [System Speed as a Function of DIMMs Per Channel \(for a 3 DIMM Per Channel System\) on page 37](#) for details.

STEP 3 CHOOSE MEMORY

The standard memory features are:

- DIMMs
 - Clock speed: 1600 or 1333 MHz
 - Ranks per DIMM: 1 or 2
 - Operational voltage: dual (1.5 or 1.35 V)
 - Registered
- DDR3 ECC registered DIMMs (RDIMMs)
- Memory is organized with four memory channels per CPU, with up to three DIMMs per channel (DPC), as shown in [Figure 3](#). Maximum memory capacity is 384 GB (with 16 GB DIMMs).

Figure 3 UCS B200 M3 Memory Organization

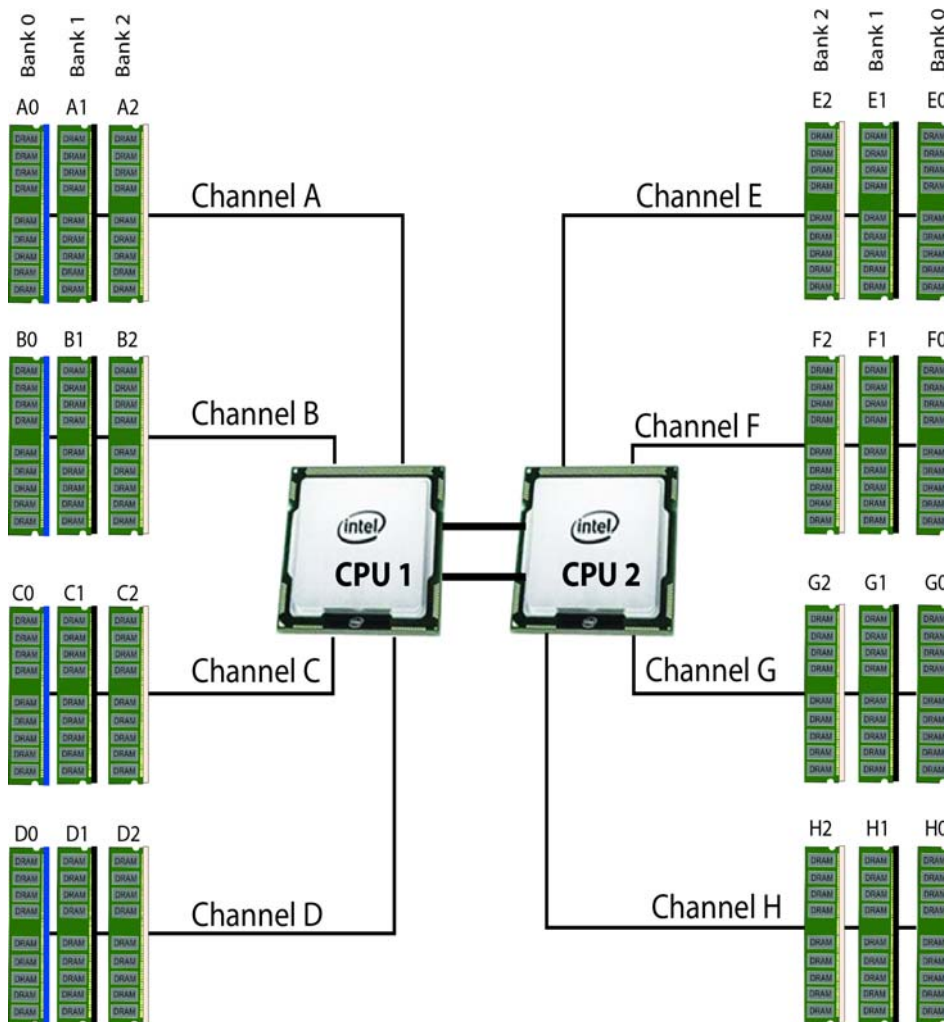

Choose DIMMs and Memory Mirroring

Select the memory configuration and whether or not you want the memory mirroring option. The supported memory DIMMs and the mirroring option are listed in [Table 4](#).



NOTE: When memory mirroring is enabled, the memory subsystem simultaneously writes identical data to two adjacent channels. If a memory read from one of the channels returns incorrect data due to an uncorrectable memory error, the system automatically retrieves the data from the other channel. A transient or soft error in one channel does not affect the mirrored data, and operation continues unless there is a simultaneous error in exactly the same location on a DIMM and its mirrored DIMM. Memory mirroring reduces the amount of memory available to the operating system by 50% because only one of the two populated channels provides data.

The supported memory DIMMs in the UCS B200 M3 are listed in [Table 4](#).

Table 4 Supported DDR3 DIMMs and Memory Mirroring Option

Product ID (PID)	PID Description	Voltage	Ranks /DIMM
DIMM Options			
UCS-MR-1X162RY-A	16GB DDR3-1600-MHz RDIMM/PC3-12800/2R/x4/1.35v/35nm	1.35/1.5 V	2
UCS-MR-1X082RY-A	8GB DDR3-1600-MHz RDIMM/PC3-12800/2R/x4/1.35v/35nm	1.35/1.5 V	2
UCS-MR-1X082RX-A	8GB DDR3-1333-MHz RDIMM/PC3-10600/2R/x4/1.35v/35nm	1.35/1.5 V	2
UCS-MR-1X041RY-A	4GB DDR3-1600-MHz RDIMM/PC3-12800/1R/x8/ 1.35v/35nm	1.35/1.5 V	1
Memory Mirroring Option			
N01-MMIRROR	Memory mirroring option		

Supported Configurations

(1) Without memory mirroring:

- Select from 1 to 12 DIMMs per CPU (note that there are 12 DIMM slots per CPU)

(2) With memory mirroring:

- Select 2, 4, 6, 8, 10, or 12 DIMMs per CPU. The DIMMs will be placed by the factory as shown in [Table 5](#):

Table 5 DIMM Placement With Memory Mirroring

Number of DIMMs per CPU	DIMM Placement in Channels (with memory mirroring implemented)	
	CPU 1	CPU 2
2	1 DIMM in Channel A (A0), 1 DIMM in Channel B (B0)	1 DIMM in Channel E (E0), 1 DIMM in Channel F (F0)
4	2 DIMMs in Channel A (A0, A1), 2 DIMMs in Channel B (B0, B1)	2 DIMMs in Channel E (E0, E1), 2 DIMMs in Channel F (F0, F1)
6	3 DIMMs in Channel A (A0, A1, A2), 3 DIMMs in Channel B (B0, B1, B2)	3 DIMMs in Channel E (E0, E1, E2), 3 DIMMs in Channel F (F0, F1, F2)
8	3 DIMMs in Channel A (A0, A1, A2), 3 DIMMs in Channel B (B0, B1, B2), 1 DIMM in Channel C (C0), 1 DIMM in Channel D (D0)	3 DIMMs in Channel E (E0, E1, E2), 3 DIMMs in Channel F (F0, F1, F2), 1 DIMM in Channel G (G0), 1 DIMM in Channel H (H0)
10	3 DIMMs in Channel A (A0, A1, A2), 3 DIMMs in Channel B (B0, B1, B2), 2 DIMMs in Channel C (C0, C1), 2 DIMMs in Channel D (D0, D1)	3 DIMMs in Channel E (E0, E1, E2), 3 DIMMs in Channel F (F0, F1, F2), 2 DIMMs in Channel G (G0, G1), 2 DIMMs in Channel H (H0, H1)
12	3 DIMMs in Channel A (A0, A1, A2), 3 DIMMs in Channel B (B0, B1, B2), 3 DIMMs in Channel C (C0, C1, C2), 3 DIMMs in Channel D (D0, D1, D2)	3 DIMMs in Channel E (E0, E1, E2), 3 DIMMs in Channel F (F0, F1, F2), 3 DIMMs in Channel G (G0, G1, G2), 3 DIMMs in Channel H (H0, H1, H2)

- Select the memory mirroring option (N01-MMIRROR) as shown in [Table 4 on page 12](#).



NOTE: System performance is optimized when the DIMM type and quantity are equal for both CPUs, and when all channels are filled equally across the CPUs in the server.

Caveats

- For optimum performance, do not mix DIMMs with different frequencies. If you mix DIMM frequencies, the system defaults to the lower frequency.
- DIMMs for CPU 1 and CPU 2 (when populated) must always be configured identically.
- Memory mirroring reduces the amount of available memory by 50% (quantity of DIMMs must be even for mirroring).
- By default, all DIMMs run at 1.35 V, which yields 1333-MHz memory speeds. To run the memory DIMMS at 1600 MHz, you need to go into the BIOS or set the policy with UCSM (service profile) to run in Performance Mode. This forces the DIMMs to operate at 1.5 V and yields 1600-MHz speeds provided:
 - The DIMMs are 1600-MHz devices
 - The CPUs chosen support 1600-MHz operation
 - Memory is populated at less than 3 DIMMs per channel
- With 3 DIMMs populated per channel, memory always runs at 1.5 V regardless if the BIOS setting is low-power mode (1.35 V) or performance mode (1.5 V).



NOTE: Memory speed is limited to 1066 MHz for 3 DPC configurations.

For more information regarding memory, see [CPUs and DIMMs on page 34](#).

STEP 4 CHOOSE HARD DISK DRIVES or SOLID STATE DRIVES (OPTIONAL)

The UCS B200 M3 can be ordered with or without drives. The standard disk drive features are:

- 2.5-inch small form factor
- Hot-pluggable
- Sled-mounted



NOTE: The UCS B200 M3 blade server meets the external storage target and switch certifications as described in the following link:

<http://www.cisco.com/en/US/docs/switches/datacenter/mds9000/interoperability/matrix/Matrix8.html#wp323852>

Choose Drives

The supported drives in the UCS B200 M3 are listed in [Table 6](#).

Table 6 Supported Hot-Pluggable Sled-Mounted HDDs and SSDs

Product ID (PID)	PID Description	Drive Type	Capacity
HDDs			
A03-D1TBSATA	1 TB 6 Gb SATA 7.2K RPM SFF HDD	SATA	1 TB
A03-D500GC3	500 GB 6 Gb SATA 7.2K RPM SFF HDD	SATA	500 GB
UCS-HDD900GI2F106	900 GB 6 Gb SAS 10K RPM SFF HDD	SAS	900 GB
A03-D600GA2	600 GB 6 Gb SAS 10K RPM SFF HDD	SAS	600 GB
UCS-HDD300GI2F105	300 GB 6 Gb SAS 15K RPM SFF HDD	SAS	300 GB
A03-D300GA2	300 GB 6 Gb SAS 10K RPM SFF HDD	SAS	300 GB
A03-D146GC2	146 GB 6 Gb SAS 15K RPM SFF HDD	SAS	146 GB
SSDs			
UCS-SD300G0KA2-E	300 GB Std Height 15mm SATA SSD	SATA	300 GB
UCS-SD200G0KA2-E	200 GB Std Height 15mm SATA SSD	SATA	200 GB
UCS-SD100G0KA2-E	100 GB Std Height 15mm SATA SSD	SATA	100 GB



NOTE: The integrated RAID controller supports hard disk drives (HDDs) or solid state drives (SSDs). Write cache is not implemented. SSDs are recommended for applications requiring high-speed local storage, which is an order of magnitude faster than HDDs.

Supported Configurations

(1) 1-Drive System

- Select one of the drives listed in [Table 6](#).

(1) 2-Drive System

- Select two identical drives from [Table 6](#). There is no support for mixing of drive types or capacities.

Caveats

- If you select two drives, they must be identical in type and capacity.

STEP 5 CHOOSE MODULAR LOM and/or PCIe MEZZANINE CARDS

The card offerings are:

- Virtual Interface Cards (VICs)

Cisco developed Virtual Interface Cards (VICs) to provide flexibility to create multiple NIC and HBA devices. The VICs also support adapter Fabric Extender and Virtual Machine Fabric Extender technologies.

- Converged Network Adapters (CNAs)

Industry-standard Converged Network Adapters (CNAs) consolidate Ethernet and Storage (FC) traffic on the Unified Fabric by supporting FCoE.

- Network Interface Cards (NICs)

Industry-standard Network Interface Cards (NICs) provide Ethernet connectivity to the server.



NOTE: There are two connectors on the server to accommodate mezzanine cards. One is a connector that accommodates third-party PCIe CNA and NIC cards as well as other options, and one is a dedicated modular LAN-on-motherboard (mLOM) connector for the VIC 1240 card only. [Table 7](#) shows which cards plug into each of the two connectors. Only the VIC 1240 card plugs into the mLOM connector. All other cards plug into the PCIe connector.

Choose a Mezzanine Option Card or Cards

The supported mezzanine option cards in the UCS B200 M3 are listed in [Table 7](#).

Table 7 Supported Mezzanine Option Cards

Product ID (PID)	PID Description	Connector
Virtual Interface Cards (VICs)		
UCSB-MLOM-40G-01	Cisco UCS VIC 1240 modular LOM for M3 blade servers. Plugs into the dedicated mLOM connector only. This is the only card that can be plugged into the mLOM connector.	mLOM
UCS-VIC-M82-8P	Cisco UCS VIC 1280 dual 40Gb capable Virtual Interface Card	PCIe
Converged Network Adapter (CNAs)		PCIe
UCSB-MEZ-QLG-03	Cisco UCS CNA M73KR-Q Qlogic Adapter	PCIe
Expander Option		
UCSB-MLOM-PT-01	Cisco UCS Port Expander Card (mezz) for VIC 1240 modular LOM. This is a hardware option to enable an additional 4 ports of the VIC 1240, bringing the total capability of the VIC 1240 to dual 4 x 10 GbE	PCIe

Supported Configurations

(1) Select One modular LOM and/or One PCIe Mezzanine Cards

Select one or two cards as desired in accordance with [Table 8](#).

Table 8 Modular LOM and Mezzanine Card Options

Fabric Extender Compatibility	Card in modular LOM Connector	Card in Mezzanine Connector (PCIe)	Ports	Reference
2208XP (PIDs UCS-IOM-2208XP, UCS-IOM2208-16FET)				
2208XP	VIC 1240	None	4 x 10 Gb	Figure 10 on page 41
2208XP	VIC 1240	VIC 1280	8 x 10 Gb	Figure 11 on page 42
2208XP	VIC 1240	3rd-party Mezzanine Card ¹	6 x 10 Gb	Figure 12 on page 42
2208XP	VIC 1240	Port Expander Card for VIC 1240	8 x 10 Gb	Figure 13 on page 43
2208XP	None	3rd-party Mezzanine Card ¹	2 x 10 Gb	Figure 14 on page 43
2204XP (PIDs UCS-IOM-2204XP, UCS-IOM2204-8FET)				
2204XP	VIC 1240	None	2 x 10 Gb	Figure 15 on page 44
2204XP	VIC 1240	VIC 1280	4 x 10 Gb	Figure 16 on page 45
2204XP	VIC 1240	3rd-party Mezzanine Card ¹	4 x 10 Gb	Figure 17 on page 45
2204XP	VIC 1240	Port Expander Card for VIC 1240	4 x 10 Gb	Figure 18 on page 46
2204XP	None	3rd-party Mezzanine Card ¹	2 x 10 Gb	Figure 19 on page 46
2104XP (PID N20-I6584)				
2104XP	VIC 1240	None ²	2 x 10 Gb	Figure 20 on page 47

Notes

1. Supported in the near future
2. The 2104XP fabric extender is not compatible with any I/O card installed in the mezzanine connector.

Also see [Network Connectivity on page 38](#) for more information.

To help ensure that your operating system is compatible with the cards you have selected, please check the Hardware Compatibility List at this URL:

http://www.cisco.com/en/US/products/ps10477/prod_technical_reference_list.html

Caveats

- If a VIC 1240 modular LOM card is not installed, you must choose a CNA or network card to be installed in the mezzanine card slot (see also [Network Connectivity on page 38](#))

STEP 6 ORDER A TRUSTED PLATFORM MODULE

Trusted Platform Module (TPM) is a computer chip (microcontroller) that can securely store artifacts used to authenticate the platform (server). These artifacts can include passwords, certificates, or encryption keys. A TPM can also be used to store platform measurements that help ensure that the platform remains trustworthy. Authentication (ensuring that the platform can prove that it is what it claims to be) and attestation (a process helping to prove that a platform is trustworthy and has not been breached) are necessary steps to ensure safer computing in all environments.

The TPM ordering information is listed in [Table 9](#).

Table 9 **Trusted Platform Module**

Product ID (PID)	PID Description
UCSX-TPM1-001	Trusted Platform Module for UCS

STEP 7 ORDER CISCO FLEXIBLE FLASH SECURE DIGITAL CARDS



NOTE: Cisco Flexible Flash secure digital cards are currently orderable; however, they will be enabled only with future firmware and software updates.

Dual SDHC flash card sockets are provided on the front left side of the server.

The SDHC card ordering information is listed in [Table 10](#).

Table 10 Future Supported Configurations - Secure Digital Card(s)

Product ID (PID)	PID Description
UCS-SD-16G	16GB SD Card module for UCS Servers



NOTE: The SD card transfer rates are:

- Sequential reads: 23 MB/s
- Sequential writes: 20 MB/s

Future Supported Configurations

- (1) Select one or two Cisco Flexible Flash secure digital cards

STEP 8 ORDER OPTIONAL INTERNAL USB 2.0 DRIVE


You may order one optional internal USB 2.0 drive. The USB drive ordering information is listed in [Table 11](#).

Table 11 USB 2.0 Drive

Product ID (PID)	PID Description
UCS-USBFLSH-S-4GB	4GB Flash USB Drive (shorter) for all M3 servers



NOTE: A clearance of 0.950 inches (24.1 mm) is required for the USB device to be inserted and removed (see the following figure).

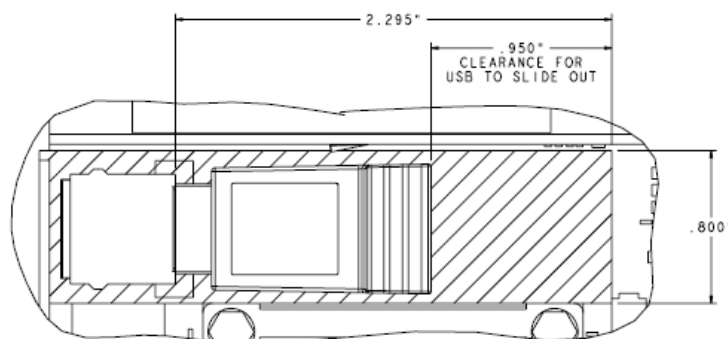

See [Figure 5 on page 33](#) for the location of the USB connector.



NOTE: When the Cisco 4GB USB key is purchased with a server, it is pre-installed into the internal USB port and held firmly in place with a clip to protect it from shock and vibration during shipment and transportation. This clip also prevents the USB key from undergoing shock and vibration during ongoing customer operational use.

STEP 9 CHOOSE OPERATING SYSTEM

Several operating systems are available from which to choose. Choose one of the operating systems listed in [Table 12](#).

Table 12 Operating Systems

PID Description	Product ID (PID)
SUSE Linux Enterprise Server	
SLES-1A	SLES/1yr subscription/svcs required/0 media
SLES-3A	SLES/3yr subscription/svcs required/0 media
Red Hat Enterprise Linux	
RHEL-2S-1G-1A	RHEL/2 Socket/1 Guest/1Yr Svcs Required
RHEL-2S-1G-3A	RHEL/2 Socket/1 Guest/3Yr Svcs Required
RHEL-2S-4G-1A	RHEL/2 Socket/4 Guest/1Yr Svcs Required
RHEL-2S-4G-3A	RHEL/2 Socket/4 Guest/3Yr Svcs Required
RHEL-2S-UG-1A	RHEL/2 Socket/U Guest/1Yr Svcs Required
RHEL-2S-UG-3A	RHEL/2 Socket/U Guest/3Yr Svcs Required
RHEL-2S-1G-1A-RS	RHEL/2 Socket/1 Guest/1Yr Subscription/Redhat Svcs Included
RHEL-2S-1G-3A-RS	RHEL/2 Socket/1 Guest/3Yr Subscription/Redhat Svcs Included
RHEL-2S-4G-1A-RS	RHEL/2 Socket/4 Guest/1Yr Subscription/Redhat Svcs Included
RHEL-2S-4G-3A-RS	RHEL/2 Socket/4 Guest/3Yr Subscription/Redhat Svcs Included
RHEL-2S-UG-1A-RS	RHEL/2 Socket/U Guest/1Yr Subscription/Redhat Svcs Included
RHEL-2S-UG-3A-RS	RHEL/2 Socket/U Guest/3Yr Subscription/Redhat Svcs Included
RHEL Add-Ons	
RHEL-HA-2S-1A	RHEL Option/High-Availability/2 Socket/1Yr Svcs Required
RHEL-RS-2S-1A	RHEL Option/Resilient w/Ha /2 Socket/1 Yr Svcs Required
RHEL-SFS-2S-1A	RHEL Option/Scalable File System/2 Socket/1 Yr Svcs Required
RHEL-HA-2S-3A	RHEL Option/High-Availability/2 Socket/3Yr Svcs Required
RHEL-RS-2S-3A	RHEL Option/Resilient Storage w/ HA /2 Socket/3 Yr Svcs Req'd
RHEL-SFS-2S-3A	RHEL Option/Scalable File System/2 Socket/3 Yr Svcs Required
RHEL-HA-2S-1A-RS	RHEL Option/High-Availability/2 Socket/1Yr Redhat Svcs Incl'd
RHEL-RS-2S-1A-RS	RHEL Option/Resilient Storage/2 Socket/1 Yr Redhat Svcs Incl'd

Table 12 Operating Systems *(continued)*

PID Description	Product ID (PID)
RHEL-SFS-2S-1A-RS	RHEL Option/Scalable File Sys/2 Socket/1 Yr Redhat Svcs Incl
RHEL-HA-2S-3A-RS	RHEL Option/High-Availability/2 Socket/3Yr Redhat Svcs Incl
RHEL-RS-2S-3A-RS	RHEL Option/Resilient Storage/2 Socket/3 Yr Redhat Svcs Incl
RHEL-SFS-2S-3A-RS	RHEL Option/Scalable File Sys/2 Socket/3 Yr Redhat Svcs Incl
Windows Server	
MSWS-08R2-STHV	Windows Svr 2008 R2 ST media R2 ST (1-4CPU, 5CAL)
MSWS-08R2-ENHV	Windows Svr 2008 R2 EN media R2 EN (1-8CPU, 25CAL)
MSWS-08R2-DCHV2S	Windows Svr 2008 R2-2 CPU-Data Center
MSWS-08R2-DCHV4S	Windows Svr 2008 R2-4 CPU-Data Center
VMware Server	
VMW-VS5-STD-1A	VMware vSphere 5 Standard for 1 Processor, 1 Year, Support Required
VMW-VS5-STD-2A	VMware vSphere 5 Standard for 1 Processor, 2 Year, Support Required
VMW-VS5-STD-3A	VMware vSphere 5 Standard for 1 Processor, 3 Year, Support Required
VMW-VS5-STD-4A	VMware vSphere 5 Standard for 1 Processor, 4 Year, Support Required
VMW-VS5-STD-5A	VMware vSphere 5 Standard for 1 Processor, 5 Year, Support Required
VMW-VS5-ENT-1A	VMware vSphere 5 Enterprise for 1 Processor, 1 Year Support Required
VMW-VS5-ENT-2A	VMware vSphere 5 Enterprise for 1 CPU, 2 Yr Support Required
VMW-VS5-ENT-3A	VMware vSphere 5 Enterprise for 1 CPU, 3 Yr Support Required
VMW-VS5-ENT-4A	VMware vSphere 5 Enterprise for 1 Processor, 4 Year Support Required
VMW-VS5-ENT-5A	VMware vSphere 5 Enterprise for 1 CPU, 5 Yr Support Required
VMW-VS5-ENTP-1A	VMware vSphere 5 Enterprise Plus for 1 Processor, 1 Year, Support Required
VMW-VS5-ENTP-2A	VMware vSphere 5 Enterprise Plus for 1 CPU, 2 Yr Support Required
VMW-VS5-ENTP-3A	VMware vSphere 5 Enterprise Plus for 1 Processor, 3 Year, Support Required
VMW-VS5-ENTP-4A	VMware vSphere 5 Enterprise Plus for 1 Processor, 4 Year Support Required
VMW-VS5-ENTP-5A	VMware vSphere 5 Enterprise Plus for 1 Processor, 5 Year, Support Required
VMW-VC5-ST-1A	VMware vCenter 5 Standard for 1 Processor, 1 Year, Support Required
VMW-VC5-ST-2A	VMware vCenter 5 Standard for 1 Processor, 2 Year, Support Required
VMW-VC5-ST-3A	VMware vCenter 5 Standard for 1 Processor, 3 Year, Support Required
VMW-VC5-ST-4A	VMware vCenter 5 Standard for 1 Processor, 4 Year, Support Required

Table 12 Operating Systems *(continued)*

PID Description	Product ID (PID)
VMW-VC5-ST-5A	VMware vCenter 5 Standard for 1 Processor, 5 Year, Support Required



NOTE: For additional information, see OS/hypervisor support matrix at the following link:

http://www.cisco.com/en/US/products/ps10477/prod_technical_reference_list.html

STEP 10 CHOOSE OPERATING SYSTEM MEDIA KIT

Choose the optional operating system media listed in [Table 13](#).

Table 13 OS Media

Product ID (PID)	PID Description
RHEL-6	RHEL 6 Recovery Media Only (Multilingual)
SLES-11	SLES 11 media only (multilingual)
MSWS-08R2-STHV-RM	Windows Svr 2008 R2 ST (1-4CPU, 5CAL), Media
MSWS-08R2-ENHV-RM	Windows Svr 2008 R2 EN (1-8CPU, 25CAL), Media
MSWS-08R2-DCHV-RM	Windows Svr 2008 R2 DC (1-8CPU, 25CAL), Media

STEP 11 CHOOSE OPTIONAL VALUE-ADDED SOFTWARE

You can select from a variety of value-added software listed in [Table 13.s](#)

Table 14 Value Added Software

Product ID (PID)	PID Description
N1K-CSK9-UCS-404	Cisco Nexus 1000V VSM Virtual Appliance Software
BMC-012	BMC BPPM Per Server
BMC-SE-4C	BMC BladeLogic Standard Edition, 4 Cores, Support Required
BMC-SE-6C	BMC BladeLogic Standard Edition, 6 Cores, Support Required
BMC-SE-8C	BMC BladeLogic Standard Edition, 8 Cores, Support Required
BMC-SE-10C	BMC BladeLogic Standard Edition, 10 Cores, Support Required
BMC-AE-4C	BMC BladeLogic Advanced Edition, 4 Cores, Support Required
BMC-AE-6C	BMC BladeLogic Advanced Edition, 6 Cores, Support Required
BMC-AE-8C	BMC BladeLogic Advanced Edition, 8 Cores, Support Required
BMC-AE-10C	BMC BladeLogic Advanced Edition, 10 Cores, Support Required

STEP 12 CHOOSE SERVICE and SUPPORT LEVEL

Unified Computing Warranty, No Contract

If you have noncritical implementations and choose no service contract, the following coverage is supplied:

- Three-year parts coverage.
- Next business day (NBD) onsite parts replacement eight hours a day, five days a week.
- 90-day software warranty on media.
- Downloads of BIOS, drivers, and firmware updates.
- UCSM updates for systems with Unified Computing System Manager. These updates include minor enhancements and bug fixes that are designed to maintain the compliance of UCSM with published specifications, release notes, and industry standards.

Please visit [Cisco Unified Computing Warranty](#) for more information on the Cisco Unified Computing Warranty.

Unified Computing Warranty Plus Service

For faster parts replacement than is provided with the standard Cisco Unified Computing System warranty, Cisco offers the Cisco Unified Computing Warranty Plus Service. You can choose from several levels of advanced parts replacement coverage, including onsite parts replacement in as little as two hours. Warranty Plus provides remote access any time to Cisco support professionals who can determine if a return materials authorization (RMA) is required. See [Table 15](#).

Table 15 UCS Computing Warranty Plus Service

Product ID (PID)	On Site?	Description
CON-UCW2-B200M3	No	UC Warranty Plus 8x5x4
CON-UCW3-B200M3	No	UC Warranty Plus 24x7x4
CON-UCW4-B200M3	No	UC Warranty Plus 24x7x2
CON-UCW5-B200M3	Yes	UC Warranty Plus 8X5XNBD
CON-UCW6-B200M3	Yes	UC Warranty Plus 8X5X4
CON-UCW7-B200M3	Yes	UC Warranty Plus 24x7x4
CON-UCW8-B200M3	Yes	UC Warranty Plus 24x7x2

Unified Computing Support Service

For support of the entire Cisco Unified Computing System, Cisco offers the Cisco Unified Computing Support Service. This service provides expert software and hardware support to help sustain performance and high availability of the unified computing environment. Access to the Cisco Technical Assistance Center (TAC) is provided around the clock, from anywhere in the world. As a part of this service, Cisco will assist in issues involving third-party software that have been certified for use on the Cisco Unified Computing System

For Cisco UCS servers under Cisco Unified Computing System Manager (UCSM), you get Smart Call Home, which provides proactive, embedded diagnostics and real-time alerts. For systems that include Unified Computing System Manager, the support service includes downloads of UCSM upgrades. The Unified Computing Support Service includes flexible hardware replacement options, including replacement in as little as two hours. There is also access to Cisco's extensive online technical resources to help maintain optimal efficiency and uptime of the unified computing environment. You can choose a desired service listed in [Table 16](#).

Table 16 UCS Computing Support Service

Product ID (PID)	On Site?	Description
CON-UCS1-B200M3	No	UC Support 8X5XNBD
CON-UCS2-B200M3	No	UC Support 8X5X4
CON-UCS3-B200M3	No	UC Support 24x7x4
CON-UCS4-B200M3	No	UC Support 24x7x2
CON-UCS5-B200M3	Yes	UC Support 8X5XNBD
CON-UCS6-B200M3	Yes	UC Support 8X5X4
CON-UCS7-B200M3	Yes	UC Support 24x7x4
CON-UCS8-B200M3	Yes	UC Support 24x7x2

Unified Computing Drive Retention Service

With the Cisco Unified Computing Drive Retention (UCDR) Service, you can obtain a new disk drive in exchange for a faulty drive without returning the faulty drive. In exchange for a Cisco replacement drive, you provide a signed Certificate of Destruction (CoD) confirming that the drive has been removed from the system listed, is no longer in service, and has been destroyed.

Sophisticated data recovery techniques have made classified, proprietary, and confidential information vulnerable, even on malfunctioning disk drives. The UCDR service enables you to retain your drives and ensures that the sensitive data on those drives is not compromised, which reduces the risk of any potential liabilities. This service also enables you to comply with regulatory, local, and federal requirements.

If your company has a need to control confidential, classified, sensitive, or proprietary data, you might want to consider one of the Drive Retention Services listed in [Table 17](#).



NOTE: Cisco does not offer a certified drive destruction service as part of this service.

Table 17 Drive Retention Service Options

Service Description	Service Program Name	Service Level GSP	Service Level	Product ID (PID)
UCS Mission Critical Support Service With Drive Retention	UC CRIT DR	UCMD7	24x7x4 Onsite	CON-UCMD7-B200M3
		UCMD8	24x7x2 Onsite	CON-UCMD8-B200M3
UCS Support Service With Drive Retention	UC SUPP DR	UCSD1	8x5xNBD	CON-UCSD1-B200M3
		UCSD2	8x5x4	CON-UCSD2-B200M3
		UCSD3	24x7x4	CON-UCSD3-B200M3
		UCSD4	24x7x2	CON-UCSD4-B200M3
		UCSD5	8x5xNBD Onsite	CON-UCSD5-B200M3
		UCSD6	8x5x4 Onsite	CON-UCSD6-B200M3
		UCSD7	24x7x4 Onsite	CON-UCSD7-B200M3
		UCSD8	24x7x2 Onsite	CON-UCSD8-B200M3
UCS Warranty Plus With Drive Retention	UC PLUS DR	UCWD2	8x5x4	CON-UCWD2-B200M3
		UCWD3	24x7x4	CON-UCWD3-B200M3
		UCWD4	24x7x2	CON-UCWD4-B200M3
		UCWD5	8x5xNBD Onsite	CON-UCWD5-B200M3
		UCWD6	8x5x4 Onsite	CON-UCWD6-B200M3
		UCWD7	24x7x4 Onsite	CON-UCWD7-B200M3
		UCWD8	24x7x2 Onsite	CON-UCWD8-B200M3

Mission Critical Support Service

This service delivers personalized technical account management, expedited technical support, and expert field support engineering for the Cisco Unified Computing System (UCS).

The Mission Critical Support Service provides a designated technical account manager (TAM) who acts as a strategic resource to help ensure that the unified computing environment runs at peak efficiency. If a problem arises that threatens business continuity, the TAM provides crisis management leadership, and your IT staff receives expedited access to Cisco's Technical Assistance Center (TAC).

Mission Critical Support Service is a layered service available for all Cisco data center products already support by a UCS Support Service or SMARTnet service contract. For further information

about Cisco Mission Critical Support Service, please visit [Data Center Technical Support and Operations Management CEC site](#) and [Service Description](#) or contact your Cisco account Manager.

For more service and support information, see this URL:

http://www.cisco.com/en/US/services/ps2961/ps10312/ps10321/Cisco_UC_Warranty_Support_DS.pdf

For a complete listing of available services for Cisco Unified Computing System, see this URL:

http://www.cisco.com/en/US/products/ps10312/serv_group_home.html

ORDER OPTIONAL KVM LOCAL I/O CABLE*


The KVM local I/O cable ships with every UCS 5100 Series blade server chassis accessory kit. The KVM local I/O cable provides a connection into the server, providing a DB9 serial connector, a VGA connector for a monitor, and dual USB ports for a keyboard and mouse. With this cable, you can create a direct connection to the operating system and the BIOS running on the server.

The KVM local I/O cable ordering information is listed in [Table 18](#).

Table 18 KVM Local I/O Cable

Product ID (PID)	PID Description
N20-BKVM=	KVM local IO cable for UCS servers console port

Figure 4 KVM Local I/O Cable

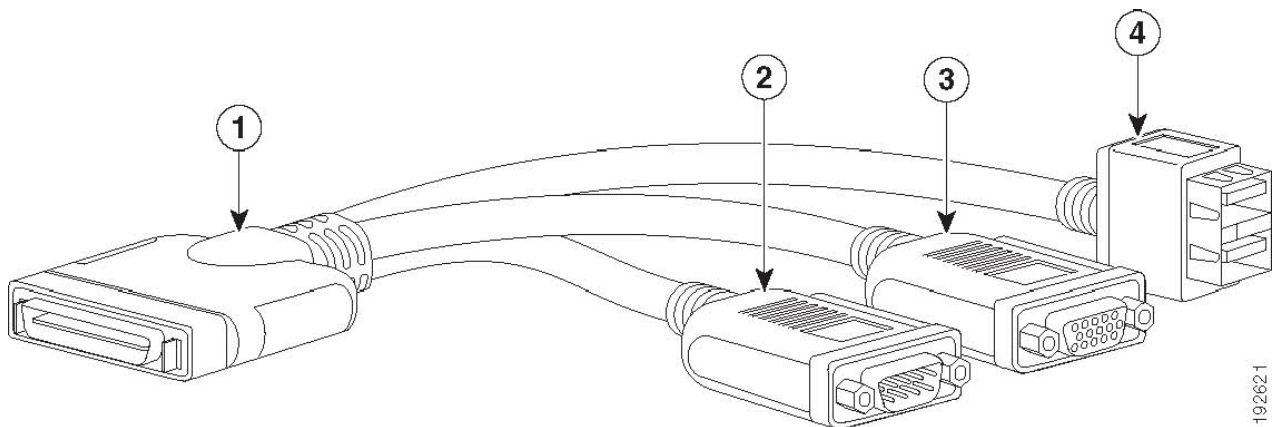

1	Connector (to server front panel)	3	VGA connector (for a monitor)
2	DB-9 serial connector	4	Two-port USB connector (for a mouse and keyboard)




NOTE: *The blade chassis ships with the KVM local I/O cable.

SUPPLEMENTAL MATERIAL

System Board

A top view of the UCS B200 M3 system board is shown in [Figure 5](#).

Figure 5 UCS B200 M3 System Board

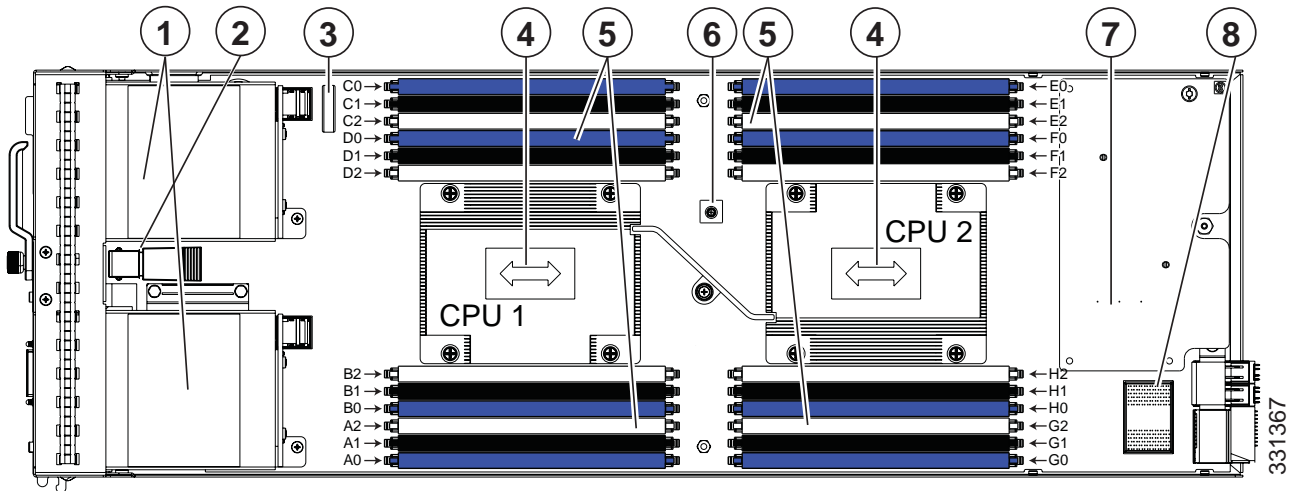

1	Drive bays	5	DIMM slots
2	Internal USB connector ¹	6	Diagnostic button
3	Battery	7	Modular LOM (shown installed)
4	CPU and heat sink	8	Mezzanine Card connector (Mezzanine card not shown installed)

Notes


1. A USB device installed in this connector must have sufficient clearance to easily slide in and out. The Cisco USB device clearance is 0.950 inches (24.1 mm), which is a sufficient amount of clearance.

CPUs and DIMMs

Physical Layout

Memory is organized as shown in [Figure 6](#).

Figure 6 UCS B200 M3 Memory Organization

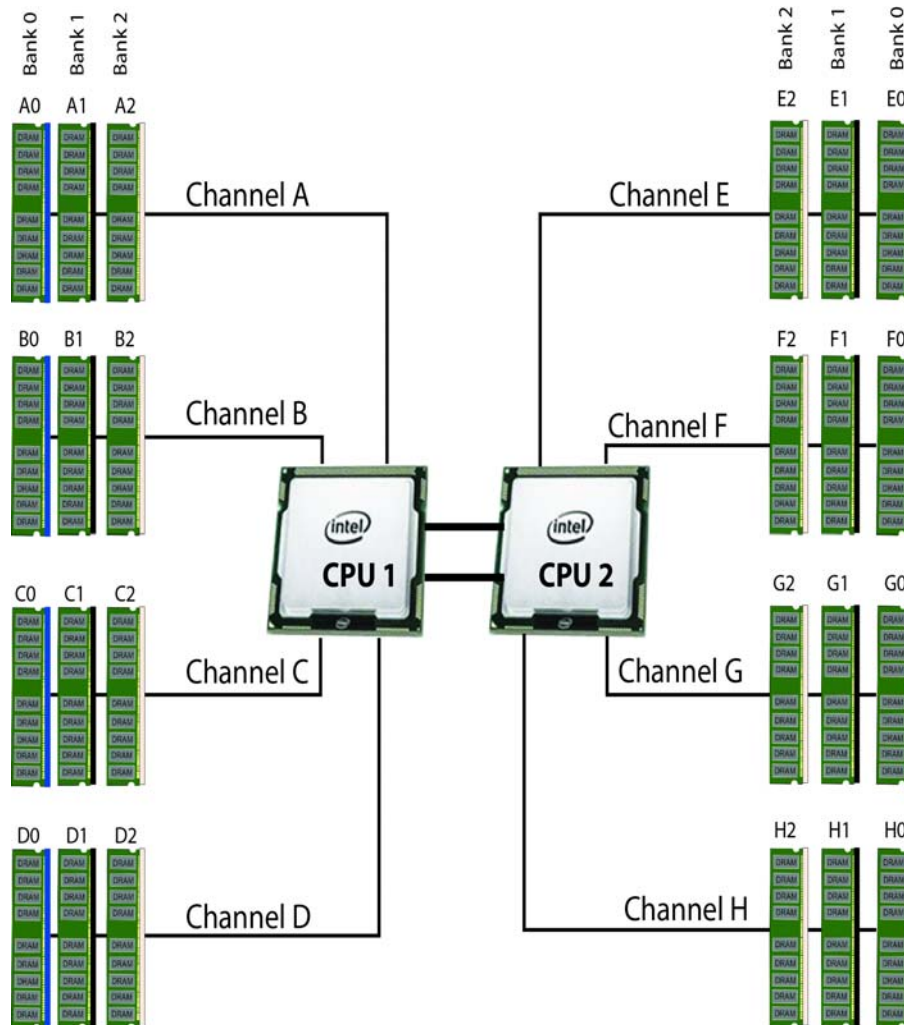


Each CPU controls four memory channels, as follows:

- CPU1: Channels A, B, C, and D
 - Bank 0 - A0, B0, C0, and D0 (blue DIMM slots)
 - Bank 1 - A1, B1, C1, and D1 (black DIMM slots)
 - Bank 2 - A2, B2, C2, and D2 (white DIMM slots)
- CPU2: Channels E, F, G, and H
 - Bank 0 - E0, F0, G0, and H0 (blue DIMM slots)

- Bank 1 - E1, F1, G1, and H1 (black DIMM slots)
- Bank 2 - E2, F2, G2, and H2 (white DIMM slots)

The DIMM and CPU physical layout is shown in [Figure 7](#). The 12 DIMM slots at the left are controlled by CPU 1 and the 12 DIMM slots on the right are controlled by CPU 2.

Figure 7 DIMM and CPU Layout

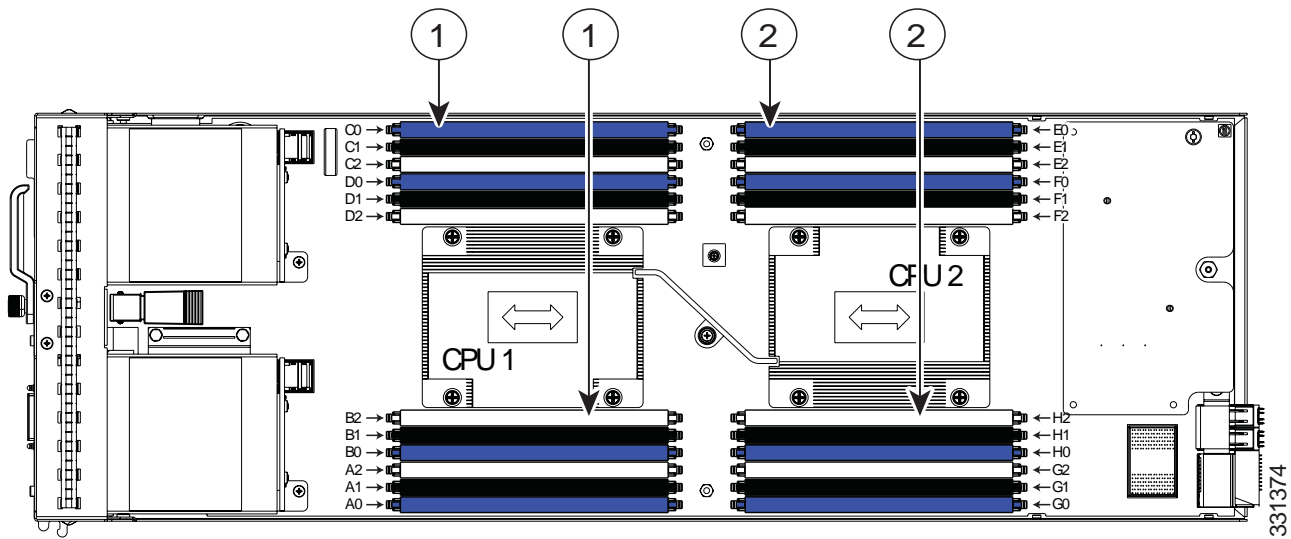

1	Channels A-D for CPU 1	2	Channels E-H for CPU 2
---	------------------------	---	------------------------

Memory Population Rules

When considering the memory configuration of your server, you should take into account the following:

- For optimum performance, populate at least one DIMM per memory channel per CPU.
- Each channel has three DIMM slots (for example, channel A = slots A0, A1, and A2).
 - A channel can operate with one, two, or three DIMMs installed.
 - If a channel has only one DIMM, populate slot 0 first (the blue slot).
- When both CPUs are installed, populate the DIMM slots of each CPU identically.
 - Fill bank 0 blue slots in the channels first: A0, E0, B0, F0, C0, G0, D0, H0
 - Fill bank 1 black slots in the channels second: A1, E1, B1, F1, C1, G1, D1, H1
 - Fill bank 2 white slots in the channels third: A2, E2, B2, F2, C2, G2, D2, H2
- Observe the DIMM mixing rules shown in [Table 19](#)

Table 19 DIMM Mixing Rules for B200 M3 Server

DIMM Parameter Mixed	Mix Across a Single Bank?	Mix Across Multiple Bank?
DIMM Size (4, 8, 16 GB)	No—Must be same size in the same bank.	Yes—Different banks can use different DIMM sizes (as long as all DIMMs in a single bank use the same DIMM size).
DIMM Speed (1333 or 1600 MHz) ¹	No—Must be same speed in the same bank.	No—All DIMMs in the server must be same speed.

Notes

1. Only 1333 and 1600 MHz DIMMs are currently available for the B200 M3 server.

Recommended Memory Population Order

This section explains the recommended DIMM population order rules for the B200 M3 server.

- All DIMMs must be Cisco DDR3 DIMMs qualified for the B200 M3 server.
- Mixing of DIMMs with different timing parameters within one channel is allowed.
- With 3 DIMMs per channel, the maximum memory speed is 1066 MHz.
- When single- and dual-rank DIMMs are populated for 3DPC, always populate the dual-rank DIMM in the blue DIMM slot first (blue slot) and the single-rank DIMM last (in the black or white DIMM slots).

Follow [Table 20](#) when populating DIMMs in the server.

Table 20 Recommended DIMM Population Order Rules

DIMM Socket DIMM Slot Numbers												
BLUE			A0	E0	A0	E0	A0	E0	A0	E0	A0	E0
BLACK							A1	E1	A1	E1	A1	E1
WHITE									A2	E2	A2	E2
BLUE	B0	F0	B0	F0	B0	F0	B0	F0	B0	F0	B0	F0
BLACK					B1	F1	B1	F1	B1	F1	B1	F1
WHITE											B2	F2
Number of DIMMs Per CPU	2 DIMMs on CPU1	2 DIMMs on CPU2	4 DIMMs on CPU1	4 DIMMs on CPU2	6 DIMMs on CPU2	6 DIMMs on CPU2	8 DIMMs on CPU1	8 DIMMs on CPU2	10 DIMMs on CPU2	10 DIMMs on CPU2	12 DIMMs on CPU1	12 DIMMs on CPU2
WHITE											D2	H2
BLACK					D1	H1	D1	H1	D1	H1	D1	H1
BLUE	D0	H0	D0	H0	D0	H0	D0	H0	D0	H0	D0	H0
WHITE									C2	G2	C2	G2
BLACK							C1	G1	C1	G1	C1	G1
BLUE			C0	G0	C0	G0	C0	G0	C0	G0	C0	G0



NOTE: Columns in yellow have DIMM configurations that do not support memory mirroring. They do, however, offer superior performance. Columns highlighted in green do support memory mirroring.


System Speed as a Function of DIMMs Per Channel (for a 3 DIMM Per Channel System)

The number of DIMMs per channel (DPC) affects system speed. For example, with 2 DIMMs per channel, the maximum memory speed is 1600 MHz. With 3 DIMMs per channel, the maximum memory speed is 1066 MHz.

Network Connectivity

This section explains how the UCS B200 M3 server connects to Fabric Interconnects using the network cards in the UCS B200 M3 blade server and the Fabric Extender modules in the UCS 5108 blade server chassis. The UCS B200 M3 server plugs into the front of the UCS 5108 blade server chassis. The Fabric Extender modules plug into the back of the UCS 5108 series blade server chassis. A midplane connects the UCS B200 M3 blade server to the Fabric Extenders. [Figure 8](#) shows an example configuration where 2 x 10G KR ports are routed from the VIC 1240 modular LAN-on-motherboard (LOM) card to the Fabric Extender modules and the remaining 2 x 10G KR ports are routed from the mezzanine card to the Fabric Extender modules.

Figure 8 UCS B200 M3 Connections to the Fabric Extenders

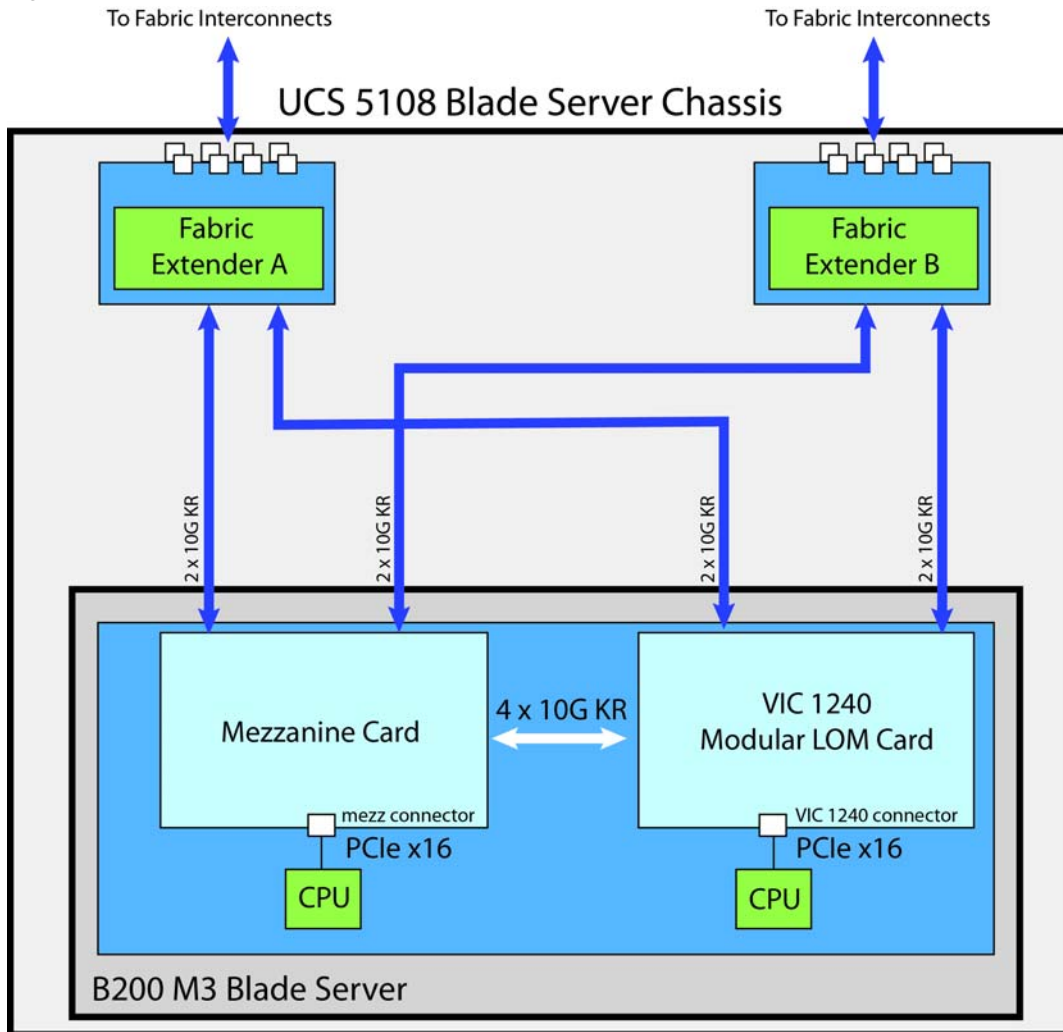

The server accommodates two types of network cards. One is the Cisco VIC 1240 modular LAN-on-motherboard (mLOM) card. The other type is a mezzanine card. The VIC 1240 is the only card that can be used in the modular LOM connector. All other types of cards plug into the mezzanine PCIe connector.

The network card options are:

- VIC 1240 modular LOM card. This card is natively capable of 4x10Gb ports and 256 PCIe devices. The capabilities of the card can easily be expanded by using the Port Expander Card for VIC 1240 in the mezzanine slot.
- VIC 1280 Mezzanine Card. This VIC card is capable of 4x10Gb ports in the UCS B200 M3 server, depending on the Fabric Extender chosen (see [Table 8 on page 18](#)) and 256 PCIe devices.
- Port Expander Card for VIC 1240. This I/O expander card enables full second-generation VIC functionality with the VIC 1240. Using the Port Expander Card for VIC 1240 with the VIC 1240 allows you to have 8 ports of 10Gb each (depending on the Fabric Extender option chosen - see [Table 8 on page 18](#)).
- Third-party Mezzanine Cards. See [Table 7 on page 17](#) for descriptions.




NOTE: The bandwidth/port count on these cards depends on the Fabric Extender. For example, the VIC 1280 only supports up to 4x10Gb in this blade because each mezzanine slot (or mLOM slot) only supports up to 4x10Gb.

Modular LOM Card

The only card that can be plugged in to the modular LOM connector is the VIC 1240, a Cisco-designed PCIe based card that provides up to eight (depending on the Fabric Extender option chosen) 10 Gigabit Data Center Ethernet (DCE) network interfaces.

There are two groups of four ports on the card. Two ports of the first group and two ports of the second group are wired through the UCS 5108 Blade Server chassis to Fabric Extender A and Fabric Extender B. The other two ports of each group are wired to the mezzanine connector slot, as represented in [Figure 9](#).

Figure 9 Modular LOM Card Port Connectivity

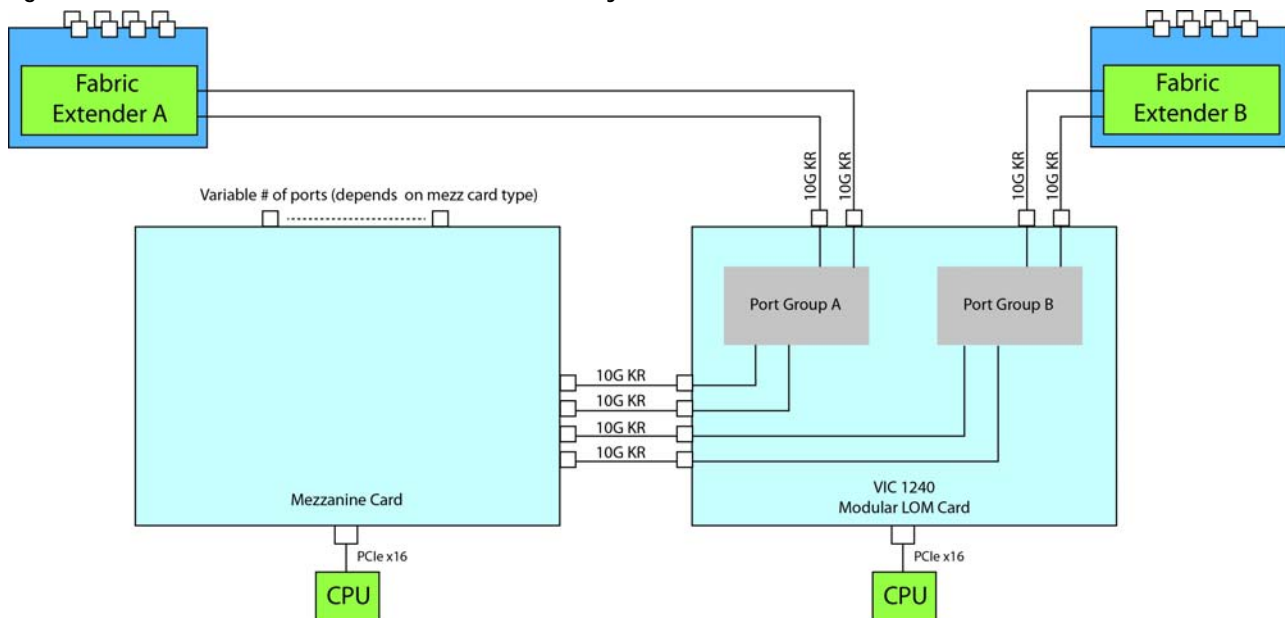

The number of ports available at the mezzanine card depend on the type of mezzanine card that is plugged into the mezzanine connector on the system board. The maximum number of ports is four. The VIC 1240 card senses the type of card plugged into the mezzanine slot. In the event a Port Expander Card for VIC 1240 card occupies the mezzanine slot, the four 10G KR ports between the cards are used for port expansion; otherwise, they are unused.

Mezzanine Cards

There are multiple options for the mezzanine slot:

- I/O-based PCIe cards (such as network adapters), or
- Non I/O-based cards (such as memory cards)



NOTE: If a UCS B200 M3 blade server does not have a modular LOM card installed, the mezzanine slot is required to have a network adapter installed.

Specific examples of mezzanine cards are:

- PCIe third-party adapters
 - Qlogic M73KR-Q
 - Emulex M73KR-E
- Cisco adapters
 - VIC 1280
 - Port Expander Card for VIC 1240

The following sections explain the various I/O options that are possible with the different Fabric Extenders (Cisco UCS 2208XP, 2204XP, and 2104XP) and the modular LOM and mezzanine cards.

Connectivity using the Cisco UCS 2208XP Fabric Extender


The Cisco UCS 2208XP is the second-generation Fabric Extender, and shares the same form factor as the current UCS 2100 series. The 2208XP is backwards compatible with the UCS 5108 Blade serve chassis.

The options shown in [Figure 10](#) through [Figure 14](#) demonstrate how the server uses these options:

- VIC 1240 to 2208XP
- VIC 1240 and VIC 1280 to 2208XP
- VIC 1240 and PCIe 3rd party mezzanine (QLogic, Emulex) to 2208XP
- VIC 1240 plus Port Expander Card for VIC 1240 to 2208XP
- PCIe 3rd party mezzanine (QLogic, Emulex) to 2208XP


In [Figure 10](#), two ports from the VIC 1240 are channeled to 2208XP Fabric Extender A and two are channeled to 2208XP Fabric Extender B. The result is 20 Gbps of bandwidth to each Fabric Extender.

Figure 10 Option 1 - VIC 1240 to UCS 2208XP Fabric Extender (no mezzanine card)

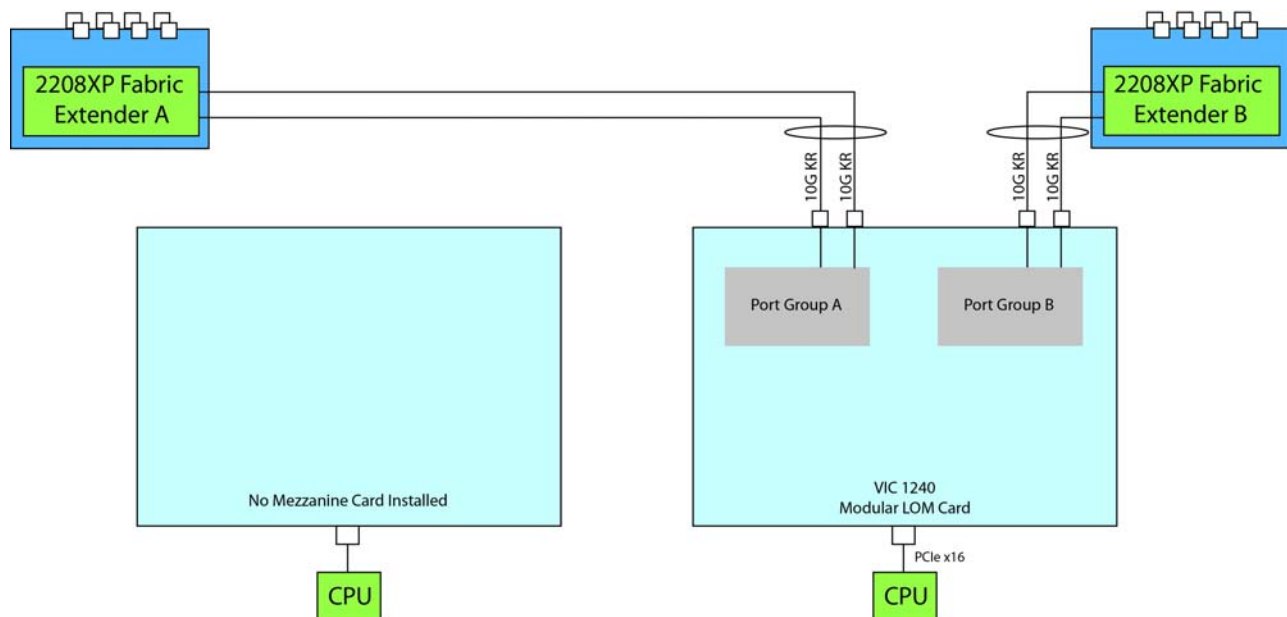


In [Figure 11](#), two ports from the VIC 1240 are channeled to 2208XP Fabric Extender A and two are channeled to 2208XP Fabric Extender B. The VIC 1280 installed in the mezzanine slot also channels two ports to each of the Fabric Extenders. The result is 40 Gbps of bandwidth to each Fabric Extender.

Figure 11 Option 2 - VIC 1240 and VIC 1280 to UCS 2208XP Fabric Extender

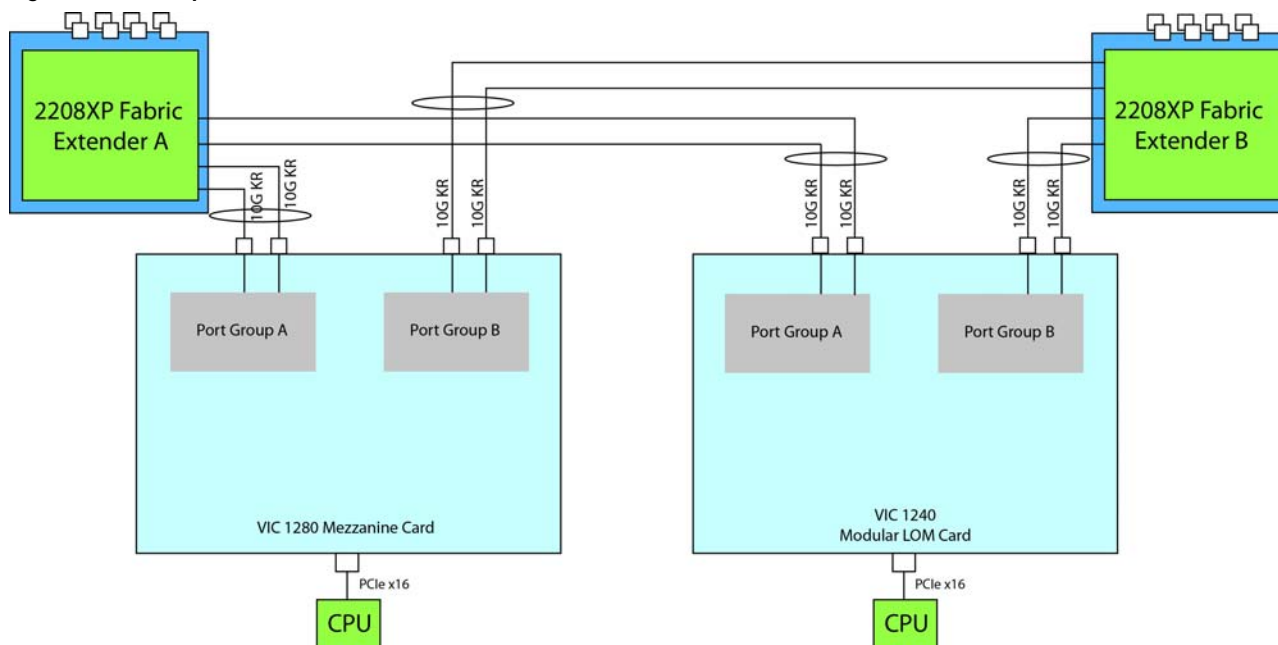


In [Figure 12](#), two ports from the VIC 1240 are channeled to 2208XP Fabric Extender A and two are channeled to 2208XP Fabric Extender B. The PCIe card installed in the mezzanine slot also channels one port to each of the Fabric Extenders. The result is 30 Gbps of bandwidth to each Fabric Extender.

Figure 12 Option 3 - VIC 1240 and PCIe Mezzanine Card to UCS 2208XP Fabric Extender

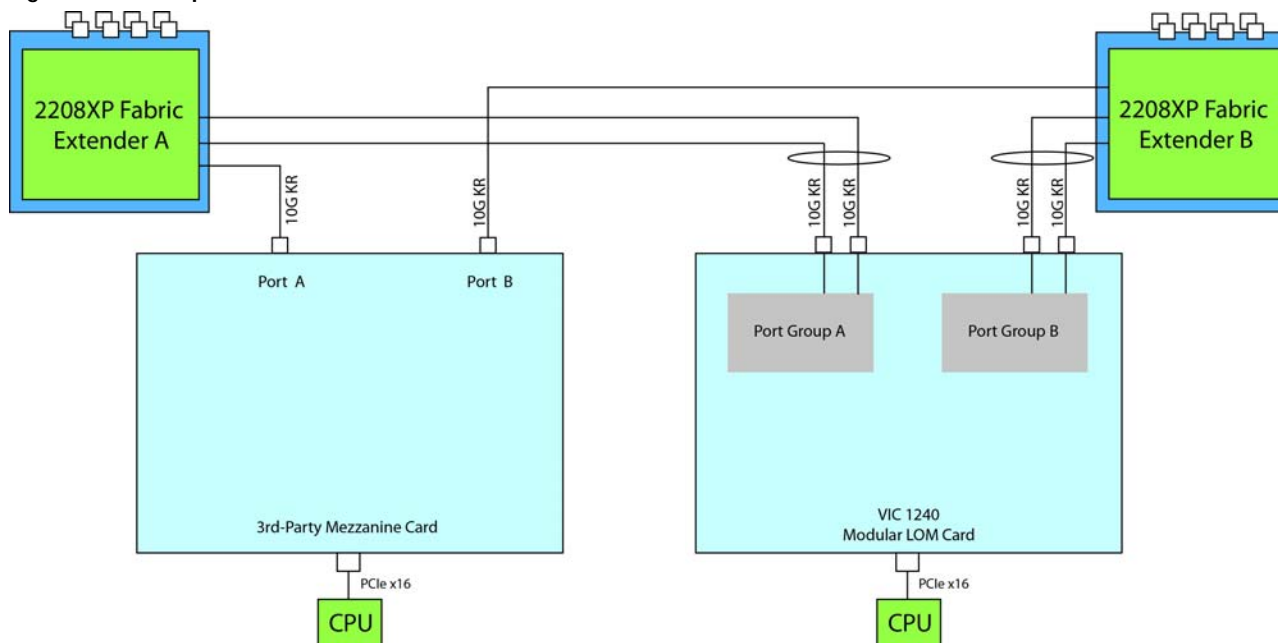


In [Figure 13](#), two ports from the VIC 1240 are channeled to 2208XP Fabric Extender A and two are channeled to 2208XP Fabric Extender B. The Port Expander Card for VIC 1240 installed in the mezzanine slot acts as a pass-through device to channel two ports to each of the Fabric Extenders. The result is 40 Gbps of bandwidth to each Fabric Extender.

Figure 13 Option 4 - VIC 1240 and Port Expander Card for VIC 1240 to UCS 2208XP Fabric Extender

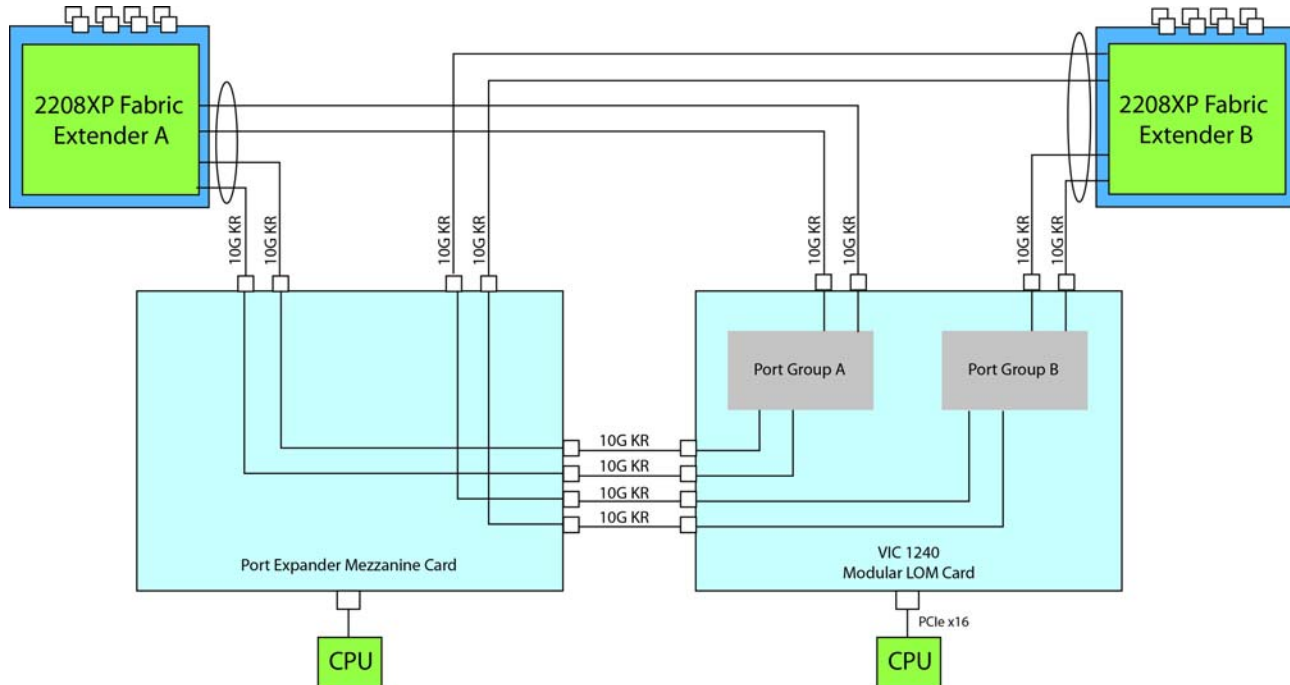

In [Figure 14](#), there is no modular LOM card installed. In this case, a network card must be installed in the mezzanine slot. Port A and B of the mezzanine card connect to the Fabric Extenders, providing 10 Gbps per port.

Figure 14 Option 5 - Mezzanine Card to UCS 2208XP Fabric Extender (no modular LOM card)

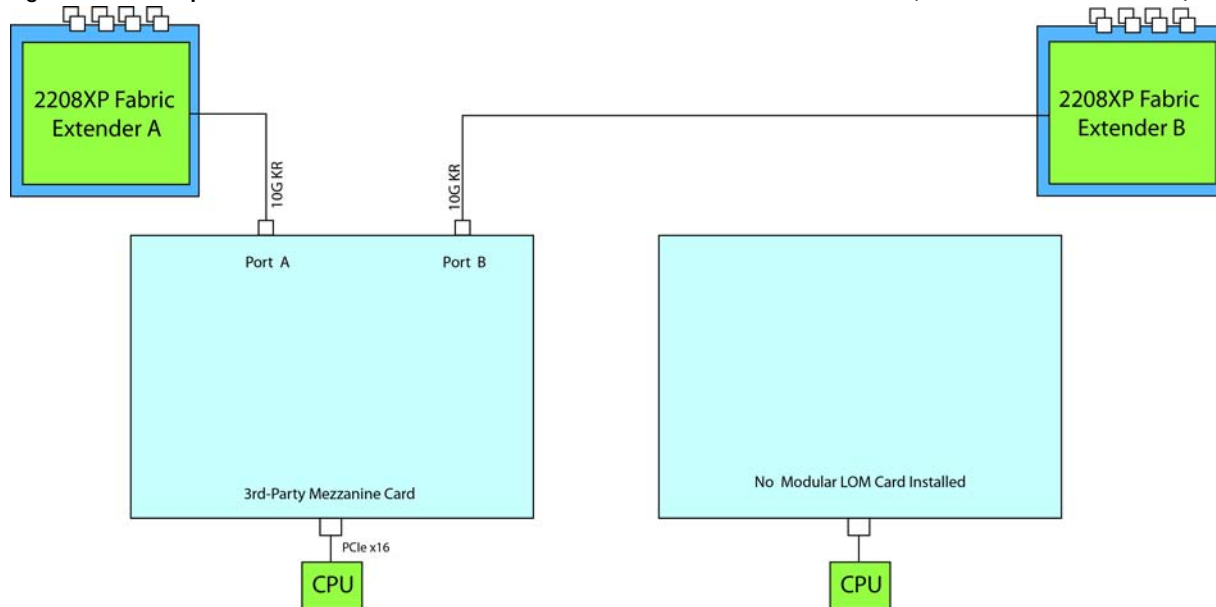

Connectivity using the Cisco UCS 2204XP Fabric Extender


The Cisco UCS 2204XP is a second-generation Fabric Extender, and shares the same form factor as the current UCS 2100 series. The 2204XP is backwards compatible with the UCS 5108 Blade serve chassis.

The options shown in [Figure 15](#) through [Figure 19](#) demonstrate how the server uses these options:

- VIC 1240 to 2204XP
- VIC 1240 and VIC 1280 to 2204XP
- VIC 1240 and PCIe 3rd party mezzanine (QLogic, Emulex) to 2204XP
- VIC 1240 plus Port Expander Card for VIC 1240 to 2204XP
- PCIe 3rd party mezzanine (QLogic, Emulex) to 2204XP


In [Figure 15](#), one port from the VIC 1240 is channeled to 2204XP Fabric Extender A and one is channeled to 2204XP Fabric Extender B. The result is 10 Gbps of bandwidth to each Fabric Extender.

Figure 15 Option 1 - VIC 1240 to UCS 2204XP Fabric Extender (no mezzanine card)

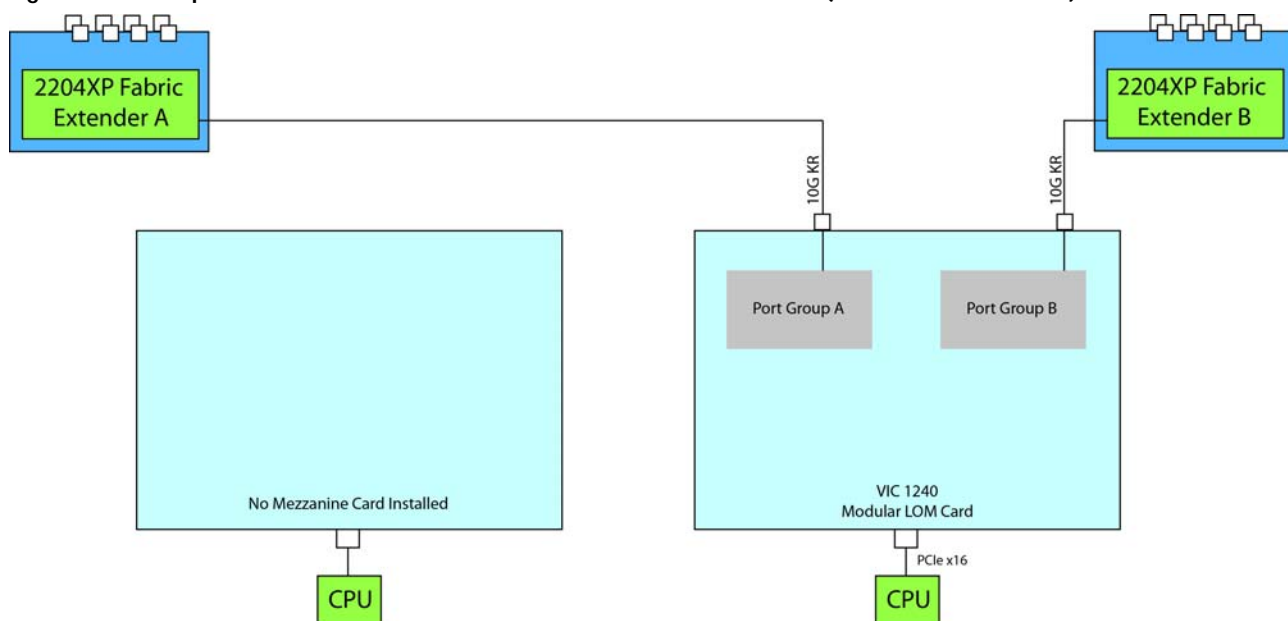


In [Figure 16](#), one port from the VIC 1240 is channelled to 2204XP Fabric Extender A and one is channelled to 2204XP Fabric Extender B. The VIC 1280 installed in the mezzanine slot also channels one port to each of the Fabric Extenders. The result is 20 Gbps of bandwidth to each Fabric Extender.

Figure 16 Option 2 - VIC 1240 and VIC 1280 to UCS 2204XP Fabric Extender

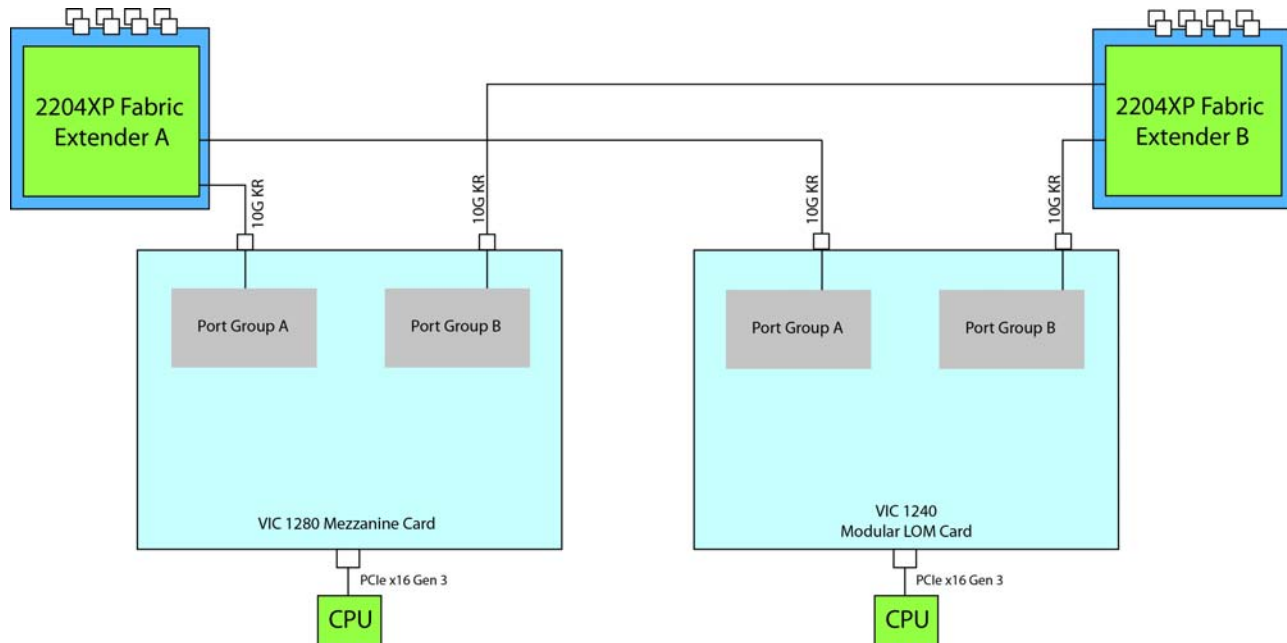


In [Figure 17](#), one port from the VIC 1240 is channelled to 2204XP Fabric Extender A and one is channelled to 2204XP Fabric Extender B. The PCIe card installed in the mezzanine slot also channels one port to each of the Fabric Extenders. The result is 20 Gbps of bandwidth to each Fabric Extender.

Figure 17 Option 3 - VIC 1240 and PCIe Mezzanine Card to UCS 2204XP Fabric Extender

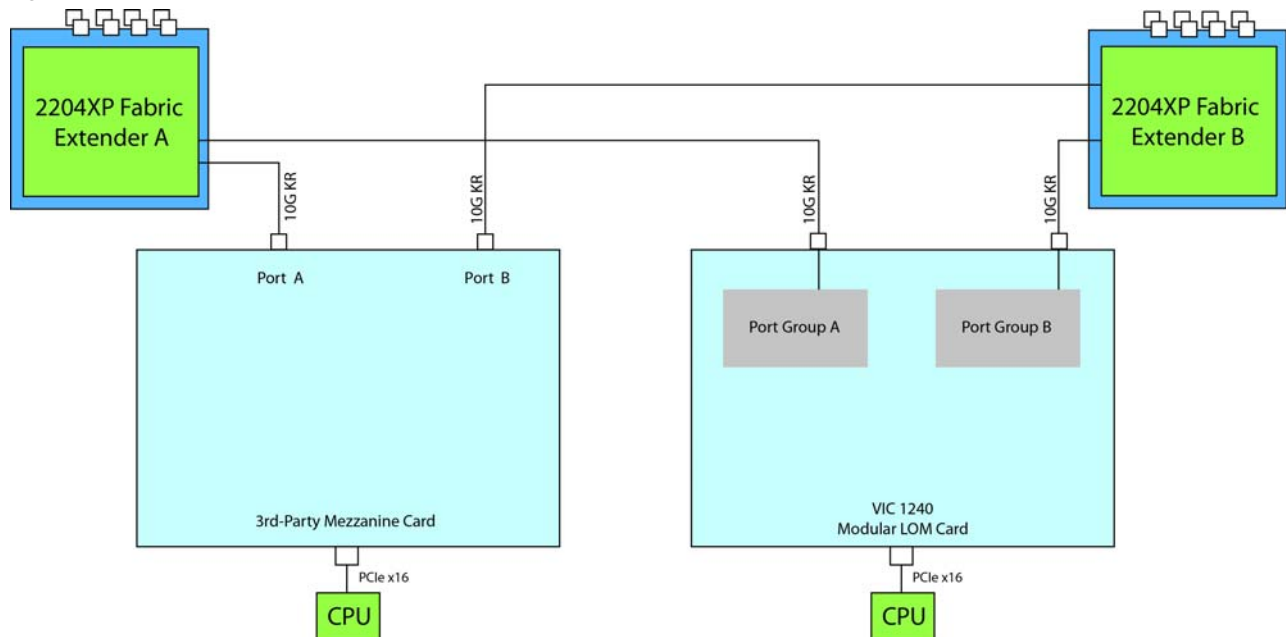


In [Figure 18](#), one port from the VIC 1240 is channeled to 2204XP Fabric Extender A and one is channeled to 2204XP Fabric Extender B. The Port Expander Card for VIC 1240 installed in the mezzanine slot acts as a pass-through device to channel one port to each of the Fabric Extenders. The result is 20 Gbps of bandwidth to each Fabric Extender.

Figure 18 Option 4 - VIC 1240 and Port Expander Card for VIC 1240 to UCS 2204XP Fabric Extender

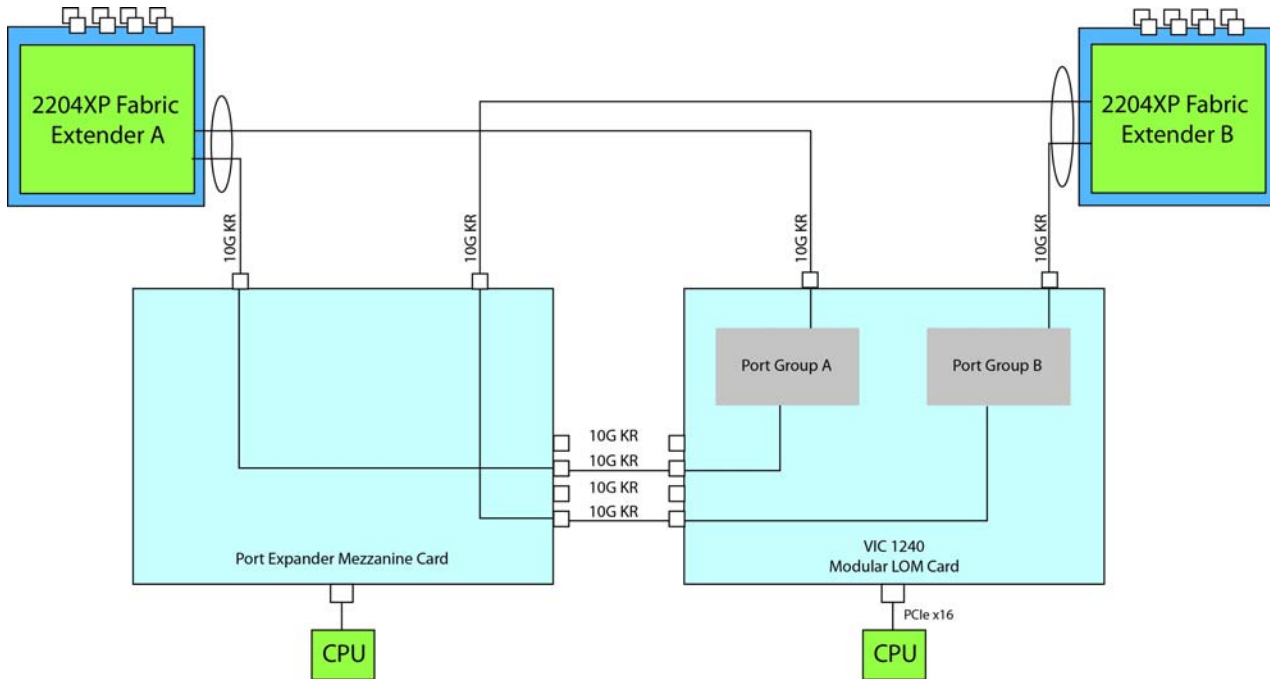

In [Figure 19](#), there is no modular LOM card installed. In this case, a network card must be installed in the mezzanine slot. Port A and B of the mezzanine card connect to the Fabric Extenders, providing 10 Gbps per port.

Figure 19 Option 5 - Mezzanine Card to UCS 2204XP Fabric Extender (no modular LOM card)

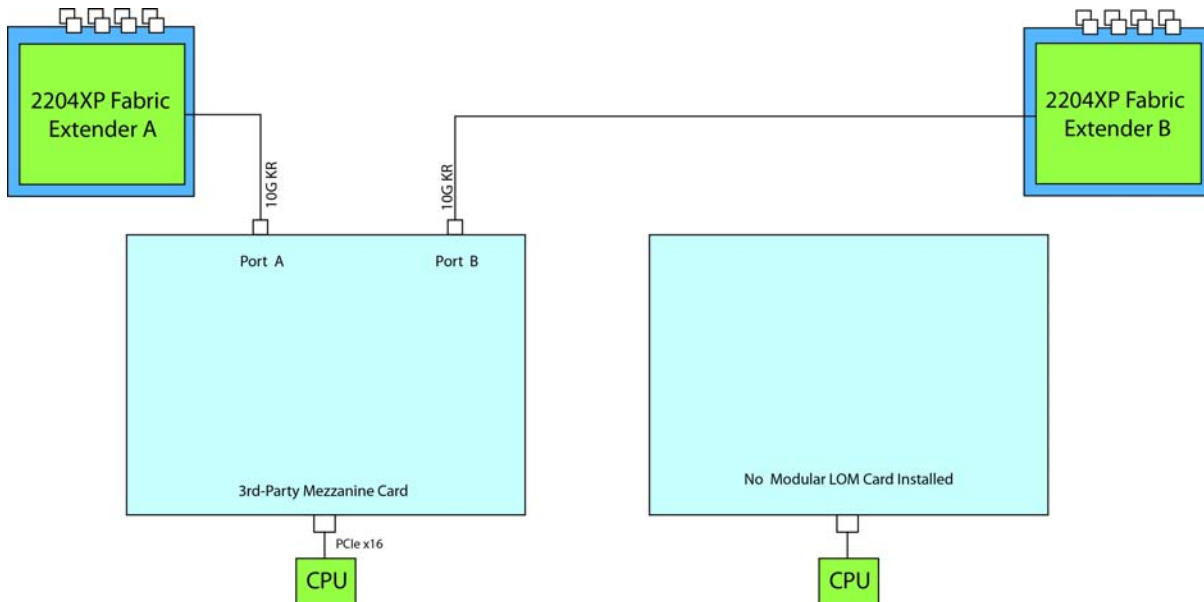


Connectivity using the Cisco UCS 2104XP Fabric Extender

The option shown in [Figure 20](#) demonstrates how the UCS B200 M3 blade server connects to a UCS 2104XP Fabric Extender.

In [Figure 15](#), one port from the VIC 1240 is channeled to 2104XP Fabric Extender A and one is channeled to 2104XP Fabric Extender B. The result is 10 Gbps of bandwidth to each Fabric Extender.

Figure 20 Option 1 - VIC 1240 to UCS 2104XP Fabric Extender (no mezzanine card)

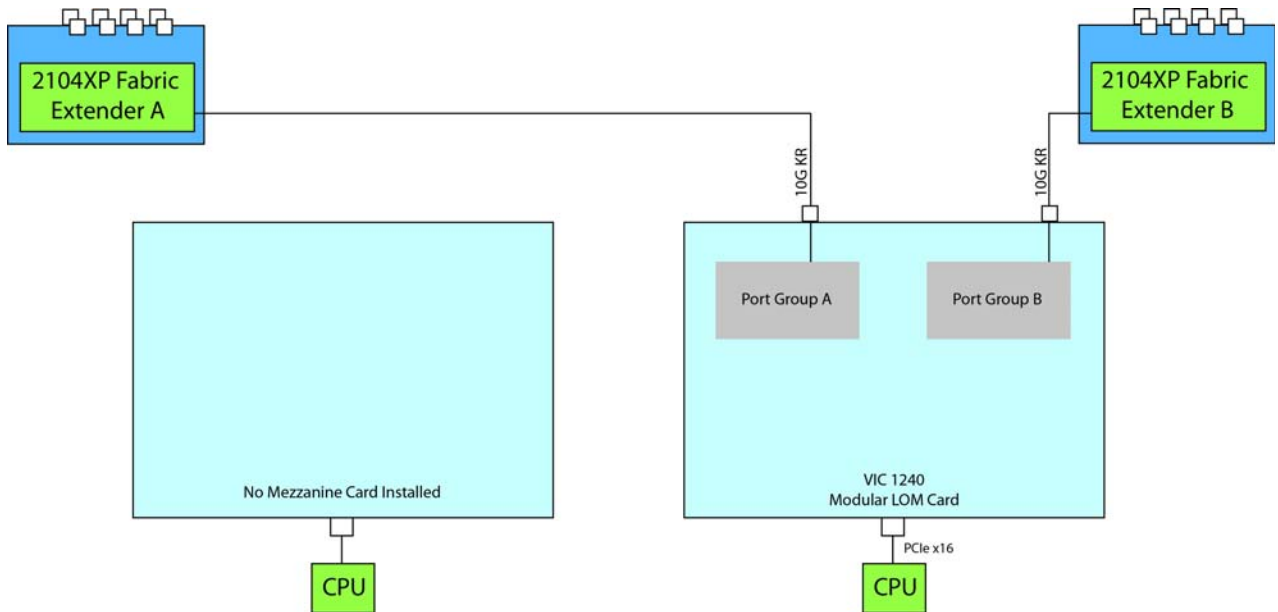

TECHNICAL SPECIFICATIONS

Dimensions and Weight

Table 21 UCS B200 M3 Dimensions and Weight

Parameter	Value
Height	1.95 in. (50 mm)
Width	8.00 in. (203 mm)
Depth	24.4 in. (620 mm)
Weight	<ul style="list-style-type: none"> ■ Base server weight (no CPUs, no HDDs, no mezz cards or memory) = 9.62 lbs (4.36 kg) ■ Minimally configured server (1 HDD, 2 CPUs, an mLOM but no mezz) = 12.50 lbs (5.67 kg) ■ Fully configured server (2 HDDs, 2 CPUs, all memory, mLOM and mezz both populated) = 14.98 lbs (6.79 kg)

Power Specifications

For configuration-specific power specifications, use the Cisco UCS Power Calculator at:

<https://express.salire.com/Go/Cisco/Cisco-UCS-Power-Calculator.aspx>



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)