# NMB24-3 Technical Data Sheet On/Off, Floating Point, Non-Spring Return, 24 V







| Technical Data                            |   |
|---|---|
| Power Supply                              | 24 VAC, ±20%, 50/60 Hz, 24 VDC, ±10%  |
| Power consumption in operation            | 2 W   |
| Power consumption in rest                 | 0.2 W   |
| position                                  |   |
| Transformer sizing                        | 4 VA (class 2 power source)   |
| Shaft Diameter                            | 9/163/4" round  |
| Electrical Connection                     | 695   |
| Overload Protection                       | electronic throughout 095° rotation   |
| Input Impedance                           | 600 Ω   |
| Angle of rotation                         | Max. 95°, adjustable with mechanical stop   |
| Torque motor                              | 90 in-lb [10 Nm]  |
| Direction of motion motor                 | selectable with switch 0/1  |
| Position indication                       | Mechanically, 3065 mm stroke  |
| Manual override                           | external push button  |
| Running Time (Motor)                      | 95 s, constant, independent of load   |
| Ambient humidity                          | max. 95% r.H., non-condensing   |
| Ambient temperature                       | -22122°F [-3050°C]  |
| Storage temperature                       | -40176°F [-4080°C]  |
| Degree of Protection                      | IP54, NEMA 2, UL Enclosure Type 2   |
| Housing material                          | UL94-5VA  |
| Agency Listing                            | CULus acc. to UL60730-1A/-2-14, CAN/CSA<br>E60730-1:02, CE acc. to 2014/30/EU and<br>2014/35/EU |
| Noise level, motor                        | 45 dB(A)  |
| Servicing                                 | maintenance-free  |
| Quality Standard                          | ISO 9001  |
| Weight                                    | 2.9 lb [0.94 kg]  |
| +Dated Impulse Voltage 800V Type action 1 |   |

†Rated Impulse Voltage 800V, Type action 1, Control Pollution Degree 3.

## Torque min. 90 in-lb, for control of damper surfaces up to 22 sq. ft.

#### Application

For on/off and floating point control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications.


The actuator is mounted directly to a damper shaft up to 1.05" in diameter by means of its universal clamp. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft.

#### Operation

The actuator is not provided with and does not require any limit switches, but is electronically protected against overload. The anti-rotation strap supplied with the actuator will prevent lateral movement.

The NMB(X) series provides 95° of rotation and a visual indicator indicates position of the actuator. When reaching the damper or actuator end position, the actuator automatically stops. The gears can be manually disengaged with a button on the actuator cover.

The NMB(X)24-3... actuators use a sensorless brushless DC motor, which is controlled by an Application Specific Integrated Circuit (ASIC). The ASIC monitors and controls the actuator's rotation and provides a digital rotation sensing (DRS) function to prevent damage to the actuator in a stall condition. Power consumption is reduced in holding mode.

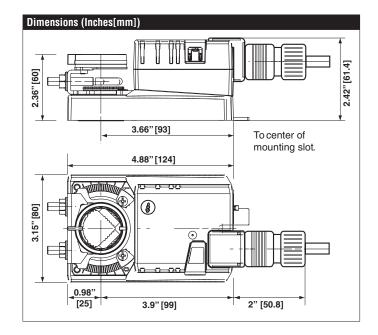



| Accessories |  |  |
|-------------|--|--|
| K-NA        | Shaft clamp reversible   |  |
| ZG-100      | Univ. right angle bracket 17"x11-1/8"x6" (HxWxbase).             |  |
| ZG-101      | Univ. right angle bracket 13x11x7-7/16" (HxWxbase).              |  |
| ZG-103      | Univ. right angle bracket 7-1/2x11x2-3/4" (HxWxbase).            |  |
| ZG-104      | Univ. right angle bracket 13-5/8x7-1/2x4" (HxWxbase).            |  |
| ZG-NMA      | Mounting kit for linkage operation                               |  |
| AV8-25      | Shaft extension  |  |
| ZG-NMSA-1   | Shaft extension for 1/2" diameter shafts (3.8" L).               |  |
| ZS-T        | Terminal-strip cover for NEMA 2 rating (-T models).              |  |
| ZS-100      | Weather shield - galvaneal 13x8x6" (LxWxD).                      |  |
| ZS-150      | Weather shield - PC w/ foam seal 16x8-3/8x4" (LxWxD).            |  |
| T00L-06     | 8 mm and 10 mm wrench.   |  |
| S1A         | Auxiliary switch for damper actuators and rotary actuators       |  |
| S2A         | Auxiliary switch for damper actuators and rotary actuators       |  |
| P10000A GR  | Feedback potentiometer for damper actuators and rotary actuators |  |
| P1000A GR   | Feedback potentiometer for damper actuators and rotary actuators |  |
| P140A GR    | Feedback potentiometer for damper actuators and rotary actuators |  |
| P2800A GR   | Feedback potentiometer for damper actuators and rotary actuators |  |
| P5000A GR   | Feedback potentiometer for damper actuators and rotary actuators |  |
| P500A GR    | Feedback potentiometer for damper actuators and rotary actuators |  |

# **Typical Specification**

Floating point, on/off control damper actuators shall be electronic directcoupled type, which require no crank arm and linkage and be capable of direct mounting to a shaft up to 1.05" diameter. Actuators shall have brushless DC motor technology and be protected from overload at all angles of rotation. Actuators shall have reversing switch and manual override on the cover. If required, actuators will be provided with a screw terminal strip for electrical connections (NMX24-3-T). Run time shall be constant and independent of torque. Actuators shall be cULus listed, have a 5-year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

## Wiring Diagrams

A

/6\

/11

Actuators with appliance cables are numbered.

Provide overload protection and disconnect as required.


Actuators may also be powered by 24 VDC.

Actuators Hot wire must be connected to the control board common. Only connect common to neg. (-) leg of control circuits. Terminal models (-T) have no-feedback.

Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

NMB24-3 Technical Data Sheet

On/Off, Floating Point, Non-Spring Return, 24 V

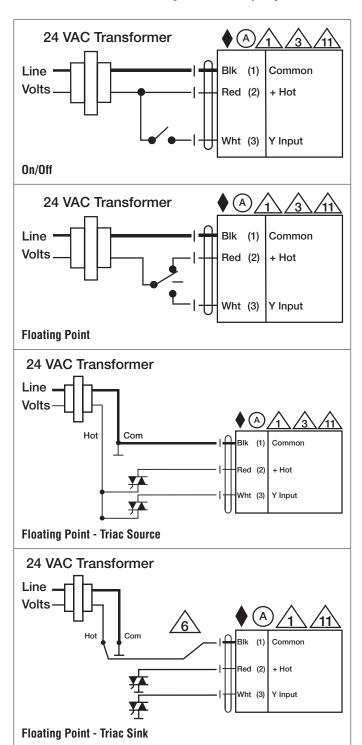

Date created, 02/10/2020 - Subject to change. 

Belimo Aircontrols (USA), Inc.







| Technical Data                 |   |
|--------------------------------|---|
| Power Supply                   | 24 VAC, ±20%, 50/60 Hz, 24 VDC, ±10%              |
| Power consumption in operation | 2.5 W   |
| Power consumption in rest      | 0.4 W   |
| position                       |   |
| Transformer sizing             | 5 VA (class 2 power source)                       |
| Shaft Diameter                 | 1/21.05" round, centers on 1/2" and 3/4"          |
|                                | with insert, 1.05" without insert                 |
| Electrical Connection          | 18 GA plenum cable with 1/2" conduit              |
|                                | connector, degree of protection NEMA 2 /          |
| Quartered Ductoretics          | IP54, 3 ft [1 m] 10 ft [3 m] and 16ft [5 m]       |
| Overload Protection            | electronic throughout 095° rotation               |
| Operating Range                | 210 V, 420 mA w/ ZG-R01 (500 Ω, 1/4               |
| Input Impedance                | W resistor)<br>100 kΩ (0.1 mA), 500 Ω             |
| Position Feedback              | 210 V. Max. 0.5 mA                                |
| Angle of rotation              | Max. 95°, adjustable with mechanical stop         |
| Torque motor                   | 90 in-lb [10 Nm]                                  |
| Direction of motion motor      | selectable with switch 0/1                        |
| Position indication            | Mechanically, 3065 mm stroke                      |
| Manual override                | external push button                              |
| Running Time (Motor)           | 95 s, constant, independent of load               |
| Ambient humidity               | max. 95% r.H., non-condensing                     |
| Ambient temperature            | -22122°F [-3050°C]                                |
|                                |   |
| Storage temperature            | -40176°F [-4080°C]                                |
| Degree of Protection           | IP54, NEMA 2, UL Enclosure Type 2                 |
| Housing material               | UL94-5VA  |
| Agency Listing                 | cULus acc. to UL60730-1A/-2-14, CAN/CSA           |
|                                | E60730-1:02, CE acc. to 2014/30/EU and 2014/35/EU |
| Noise level, motor             | 45 dB(A)  |
| Servicing                      | maintenance-free                                  |
| 0                              | ISO 9001  |
| Quality Standard               |   |
| Weight                         | 2.1 lb [0.96 kg]                                  |

†Rated Impulse Voltage 800V, Type action 1, Control Pollution Degree 3.

## Torque min. 90 in-lb, for control of damper surfaces up to 22 sq. ft.

#### Application

For proportional modulation of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications.

The actuator is mounted directly to a damper shaft up to 1.05" in diameter by means of its universal clamp, 1/2" self centered default. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft.


The actuator operates in response to a 2 to 10 VDC, or with the addition of a 500  $\Omega$  resistor, a 4 to 20 mA control input from an electronic controller or positioner. A 2 to 10 VDC feedback signal is provided for position indication or master-slave applications.

#### Operation

The actuator is not provided with and does not require any limit switches, but is electronically protected against overload. The anti-rotation strap supplied with the actuator will prevent lateral movement.

The NMB(X) series provides 95° of rotation and a visual indicator indicates position of the actuator. When reaching the damper or actuator end position, the actuator automatically stops. The gears can be manually disengaged with a button on the actuator cover.

The NMB(X)24-SR... actuators use a sensorless brushless DC motor, which is controlled by an Application Specific Integrated Circuit (ASIC). The ASIC monitors and controls the actuator's rotation and provides a digital rotation sensing (DRS) function to prevent damage to the actuator in a stall condition. Power consumption is reduced in holding mode.

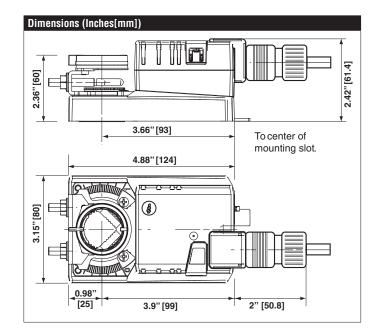



# **NMB24-SR Technical Data Sheet**

Modulating, Non-Spring Return, 24 V, for DC 2...10 V or 4...20 mA

| Accessories |  |  |
|-------------|--|--|
| K-NA        | Shaft clamp reversible   |  |
| ZG-100      | Univ. right angle bracket 17"x11-1/8"x6" (HxWxbase).   |  |
| ZG-101      | Univ. right angle bracket 13x11x7-7/16" (HxWxbase).  |  |
| ZG-103      | Univ. right angle bracket 7-1/2x11x2-3/4" (HxWxbase).  |  |
| ZG-104      | Univ. right angle bracket 13-5/8x7-1/2x4" (HxWxbase).  |  |
| ZG-NMA      | Mounting kit for linkage operation   |  |
| AV8-25      | Shaft extension  |  |
| ZG-NMSA-1   | Shaft extension for 1/2" diameter shafts (3.8" L).   |  |
| ZS-T        | Terminal-strip cover for NEMA 2 rating (-T models).  |  |
| ZS-100      | Weather shield - galvaneal 13x8x6" (LxWxD).  |  |
| ZS-150      | Weather shield - PC w/ foam seal 16x8-3/8x4" (LxWxD).  |  |
| T00L-06     | 8 mm and 10 mm wrench.   |  |
| S1A         | Auxiliary switch for damper actuators and rotary actuators   |  |
| S2A         | Auxiliary switch for damper actuators and rotary actuators   |  |
| P10000A GR  | Feedback potentiometer for damper actuators and rotary actuators                                       |  |
| P1000A GR   | Feedback potentiometer for damper actuators and rotary actuators                                       |  |
| P140A GR    | Feedback potentiometer for damper actuators and rotary actuators                                       |  |
| P2800A GR   | Feedback potentiometer for damper actuators and rotary actuators                                       |  |
| P5000A GR   | Feedback potentiometer for damper actuators and rotary actuators                                       |  |
| P500A GR    | Feedback potentiometer for damper actuators and rotary actuators                                       |  |
| SGA24       | Positioners suitable for use with the modulating damper<br>actuators LMA-SR, NMA-SR, SMA-SR and GMA-SR |  |
| PTA-250     | Pulse width modulation interface for modulating actuators.   |  |
| IRM-100     | Input rescaling module for modulating actuators.   |  |
| ZG-R01      | 4 to 20 mA adaptor, 500 $\Omega$ , 1/4 W resistor w 6" pigtail wires.                                  |  |
| NSV24 US    | Battery back-up module for non-spring return actuators.  |  |
| ZG-X40      | 120 to 24 VAC, 40 VA transformer.  |  |
|             | -  |  |

### Typical Specification

Proportional control damper actuators shall be electronic direct-coupled type, which require no crank arm and linkage and be capable of direct mounting to a shaft from 1/4" to 1/2" diameter. Actuators must provide proportional damper control response to a 2 to 10 VDC or, with the addition of a 500 $\Omega$  resistor, a 4 to 20 mA control input from an electronic controller or positioner. Actuators shall have brushless DC motor technology and be protected from overload at all angles of rotation. Actuators shall have manual override on the cover. Run time shall be constant and independent of torque. Actuators shall be cULus listed, have a 5-year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

## Wiring Diagrams

| $\Lambda$      |
|----------------|
| $\overline{3}$ |
| $\overline{5}$ |
| $\triangle$    |
| /11            |


Provide overload protection and disconnect as required.

Actuators may also be powered by 24 VDC.

Only connect common to negative (-) leg of control circuits.

A 500  $\Omega$  resistor (ZG-R01) converts the 4 to 20 mA control signal to 2 to 10 VDC.

Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

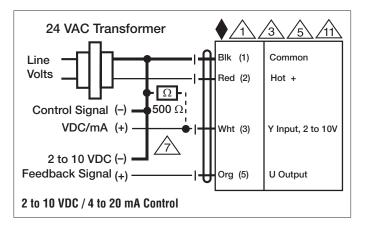







| Technical Data                 |   |
|--------------------------------|---|
| Power Supply                   | 100240 VAC, -15% / +10%, 50/60 Hz   |
| Power consumption in operation | 3.5 W   |
| Power consumption in rest      | 0.6 W   |
| position                       |   |
| Transformer sizing             | 5.5 VA (class 2 power source)   |
| Shaft Diameter                 | 1/21.05" round, centers on 1/2" and 3/4"                                  |
|                                | with insert, 1.05" without insert   |
| Electrical Connection          | 18 GA appliance cable, 3ft [1m] 10ft [3m]                                 |
|                                | and 16ft [5m], with 1/2" conduit connector,                               |
| Overload Protection            | degree of protection NEMA 2 / IP54<br>electronic throughout 095° rotation |
|                                | <u> </u>  |
| Input Impedance                | 600 Ω   |
| Angle of rotation              | Max. 95°, adjustable with mechanical stop                                 |
| Torque motor                   | 90 in-lb [10 Nm]  |
| Direction of motion motor      | selectable with switch 0/1  |
| Position indication            | Mechanically, 3065 mm stroke  |
| Manual override                | external push button  |
| Running Time (Motor)           | default 95 s, variable 45, 60, 150 s,                                     |
|                                | constant, independent of load   |
| Ambient humidity               | max. 95% r.H., non-condensing   |
| Ambient temperature            | -22122°F [-3050°C]  |
| Storage temperature            | -40176°F [-4080°C]  |
| Degree of Protection           | IP54, NEMA 2, UL Enclosure Type 2   |
| Housing material               | UL94-5VA  |
| Agency Listing                 | cULus acc. to UL60730-1A/-2-14, CAN/CSA                                   |
|                                | E60730-1:02, CE acc. to 2014/30/EU and                                    |
|                                | 2014/35/EU  |
| Noise level, motor             | 45 dB(A)  |
| Servicing                      | maintenance-free  |
| Quality Standard               | ISO 9001  |
| Weight                         | 1.1 lb [0.51 kg]  |
|                                |   |

†Rated Impulse Voltage 4kV, Type of action 1, Control Pollution Degree 3.

### Torque min. 90 in-lb, for control of damper surfaces up to 22 sq. ft.

#### Application

For on/off and floating point control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications.


The actuator is mounted directly to a damper shaft up to 1.05" diameter by means of its universal clamp, 1/2" self-centered default. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft.

#### Operation

The actuator is not provided with and does not require any limit switches, but is electronically protected against overload. The anti-rotation strap supplied with the actuator will prevent lateral movement.

The NMX series provides 95° of rotation and a visual indicator indicates position of the actuator. When reaching the damper or actuator end position, the actuator automatically stops. The gears can be manually disengaged with a button on the actuator cover.

The NMX120-3... actuators use a sensorless brushless DC motor, which is controlled by an Application Specific Integrated Circuit (ASIC). The ASIC monitors and controls the actuator's rotation and provides a digital rotation sensing (DRS) function to prevent damage to the actuator in a stall condition. Power consumption is reduced in holding mode.

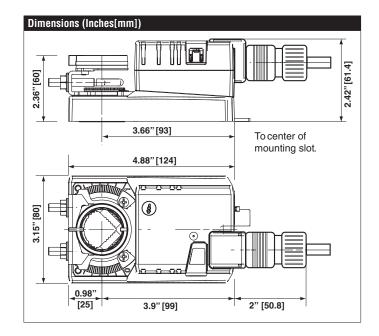



| Accessories<br>K-NA | Shaft clamp reversible   |
|---------------------|--|
| ZG-100              | Univ. right angle bracket 17"x11-1/8"x6" (HxWxbase).             |
| ZG-101              | Univ. right angle bracket 13x11x7-7/16" (HxWxbase).              |
| ZG-103              | Univ. right angle bracket 7-1/2x11x2-3/4" (HxWxbase).            |
| ZG-104              | Univ. right angle bracket 13-5/8x7-1/2x4" (HxWxbase).            |
| ZG-NMA              | Mounting kit for linkage operation                               |
| AV8-25              | Shaft extension  |
| ZG-NMSA-1           | Shaft extension for 1/2" diameter shafts (3.8" L).               |
| ZS-100              | Weather shield - galvaneal 13x8x6" (LxWxD).                      |
| ZS-150              | Weather shield - PC w/ foam seal 16x8-3/8x4" (LxWxD).            |
| T00L-06             | 8 mm and 10 mm wrench.   |
| S1A                 | Auxiliary switch for damper actuators and rotary actuators       |
| S2A                 | Auxiliary switch for damper actuators and rotary actuators       |
| P10000A GR          | Feedback potentiometer for damper actuators and rotary actuators |
| P1000A GR           | Feedback potentiometer for damper actuators and rotary actuators |
| P140A GR            | Feedback potentiometer for damper actuators and rotary actuators |
| P2800A GR           | Feedback potentiometer for damper actuators and rotary actuators |
| P5000A GR           | Feedback potentiometer for damper actuators and rotary actuators |
| P500A GR            | Feedback potentiometer for damper actuators and rotary actuators |

# **Typical Specification**

Floating point, on/off control damper actuators shall be electronic type, with integrated linear stroking arm. Actuators shall have brushless DC motor technology and be protected from overload at all positions of linear stroke. Actuators shall have reversing switch and manual override on the cover. Run time shall be constant and independent of torque. Actuators shall be cUL listed, have a 5-year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

# Wiring Diagrams

A) Actuators with appliance cables are numbered.


Provide overload protection and disconnect as required.



Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

# NMX120-3 Technical Data Sheet

On/Off, Floating Point, Non-Spring Return, AC 100...240 V

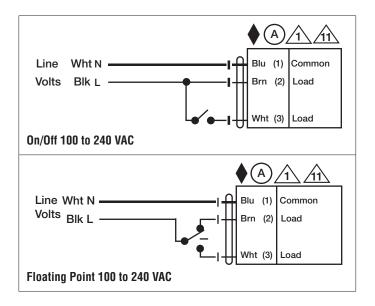







| Technical Data                 |  |
|--------------------------------|--|
| Power Supply                   | 100240 VAC, -15% / +10%, 50/60 Hz  |
| Power consumption in operation | 3.5 W  |
| Power consumption in rest      | 1 W  |
| position                       |  |
| Transformer sizing             | 6.5 VA (class 2 power source)  |
| Shaft Diameter                 | 1/21.05" round, centers on 1/2" and 3/4"                                       |
|                                | with insert, 1.05" without insert  |
| Electrical Connection          | 18 GA appliance cable, 3ft [1m] 10ft [3m]                                      |
|                                | and 16ft [5m], with 1/2" conduit connector, degree of protection NEMA 2 / IP54 |
| Overload Protection            | electronic throughout 095° rotation  |
| Operating Range                | 210 V, 420 mA w/ ZG-R01 (500 Ω, 1/4  |
| Operating Mange                | W resistor)  |
| Input Impedance                | 100 kΩ (0.1 mA), 500 Ω   |
| Position Feedback              | 210 V, Max. 0.5 mA   |
| Angle of rotation              | Max. 95°, adjustable with mechanical stop                                      |
| Torque motor                   | 90 in-lb [10 Nm]   |
| Direction of motion motor      | selectable with switch 0/1   |
| Position indication            | Mechanically, 3065 mm stroke   |
| Manual override                | external push button   |
| Running Time (Motor)           | default 95 s, variable 45, 60, 150 s,  |
|                                | constant, independent of load  |
| Ambient humidity               | max. 95% r.H., non-condensing  |
| Ambient temperature            | -22122°F [-3050°C]   |
| Storage temperature            | -40176°F [-4080°C]   |
| Degree of Protection           | IP54, NEMA 2, UL Enclosure Type 2  |
| Housing material               | UL94-5VA   |
| Agency Listing                 | cULus acc. to UL60730-1A/-2-14, CAN/CSA  |
|                                | E60730-1:02, CE acc. to 2014/30/EU and   |
|                                | 2014/35/EU   |
| Noise level, motor             | 45 dB(A)   |
| Servicing                      | maintenance-free   |
| Quality Standard               | ISO 9001   |
| Weight                         | 1.2 lb [0.56 kg]   |

†Rated Impulse Voltage 4kV, Type of action 1, Control Pollution Degree 3.

## Torque min. 90 in-lb, for control of damper surfaces up to 22 sq. ft.

#### Application

For proportional modulation of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications.

The actuator is mounted directly to a damper shaft up to 1.05" diameter by means of its universal clamp, 1/2" self centered default. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft.


The actuator operates in response to a 2 to 10 VDC, or with the addition of a 500  $\Omega$  resistor, a 4 to 20 mA control input from an electronic controller or positioner. A 2 to 10 VDC feedback signal is provided for position indication or master-slave applications.

#### Operation

The actuator is not provided with and does not require any limit switches, but is electronically protected against overload. The anti-rotation strap supplied with the actuator will prevent lateral movement.

The NMX series provides 95° of rotation and a visual indicator indicates position of the actuator. When reaching the damper or actuator end position, the actuator automatically stops. The gears can be manually disengaged with a button on the actuator cover.

The NMX120-SR actuators use a sensorless brushless DC motor, which is controlled by an Application Specific Integrated Circuit (ASIC). The ASIC monitors and controls the actuator's rotation and provides a digital rotation sensing (DRS) function to prevent damage to the actuator in a stall condition. Power consumption is reduced in holding mode.

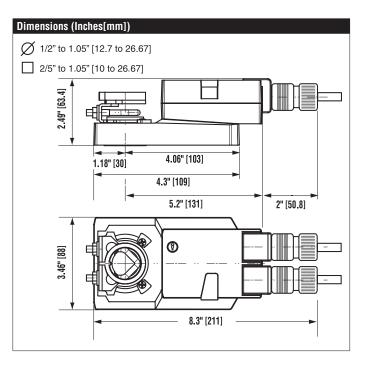



# NMX120-SR Technical Data Sheet

Modulating, Non-Spring Return, AC 100...240 V, for DC 2...10 V or 4...20 mA

| Accessories |   |  |
|-------------|---|--|
| K-NA        | Shaft clamp reversible  |  |
| ZG-100      | Univ. right angle bracket 17"x11-1/8"x6" (HxWxbase).  |  |
| ZG-101      | Univ. right angle bracket 13x11x7-7/16" (HxWxbase).   |  |
| ZG-103      | Univ. right angle bracket 7-1/2x11x2-3/4" (HxWxbase).   |  |
| ZG-104      | Univ. right angle bracket 13-5/8x7-1/2x4" (HxWxbase).   |  |
| ZG-NMA      | Mounting kit for linkage operation  |  |
| AV8-25      | Shaft extension   |  |
| ZG-NMSA-1   | Shaft extension for 1/2" diameter shafts (3.8" L).  |  |
| ZS-100      | Weather shield - galvaneal 13x8x6" (LxWxD).   |  |
| ZS-150      | Weather shield - PC w/ foam seal 16x8-3/8x4" (LxWxD).   |  |
| T00L-06     | 8 mm and 10 mm wrench.  |  |
| S1A         | Auxiliary switch for damper actuators and rotary actuators  |  |
| S2A         | Auxiliary switch for damper actuators and rotary actuators  |  |
| P10000A GR  | Feedback potentiometer for damper actuators and rotary actuators                                    |  |
| P1000A GR   | Feedback potentiometer for damper actuators and rotary actuators                                    |  |
| P140A GR    | Feedback potentiometer for damper actuators and rotary actuators                                    |  |
| P2800A GR   | Feedback potentiometer for damper actuators and rotary actuators                                    |  |
| P5000A GR   | Feedback potentiometer for damper actuators and rotary actuators                                    |  |
| P500A GR    | Feedback potentiometer for damper actuators and rotary actuators                                    |  |
| SGA24       | Positioners suitable for use with the modulating damper actuators LMA-SR, NMA-SR, SMA-SR and GMA-SR |  |
| PTA-250     | Pulse width modulation interface for modulating actuators.  |  |
| IRM-100     | Input rescaling module for modulating actuators.  |  |
| ZG-R01      | 4 to 20 mA adaptor, 500 $\Omega$ , 1/4 W resistor w 6" pigtail wires.                               |  |
| NSV24 US    | Battery back-up module for non-spring return actuators.   |  |
| -           |   |  |

# Typical Specification

Proportional control damper actuators shall be electronic direct-coupled type, which require no crank arm and linkage and be capable of direct mounting to a shaft from 1/4" to 1/2" diameter. Actuators must provide proportional damper control response to a 2 to 10 VDC or, with the addition of a 500 $\Omega$  resistor, a 4 to 20 mA control input from an electronic controller or positioner. Actuators shall have brushless DC motor technology and be protected from overload at all angles of rotation. Actuators shall have manual override on the cover. Run time shall be constant and independent of torque. Actuators shall be cULus listed, have a 5-year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

### Wiring Diagrams

Actuators with appliance cables are numbered.

Provide overload protection and disconnect as required.

Only connect common to negative (-) leg of control circuits.

A 500  $\Omega$  resistor (ZG-R01) converts the 4 to 20 mA control signal to 2 to 10 VDC.

Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

