

# **Clinical Procedures (CP)**

## **Technical Manual and Package Security Guide**



**Version 1.0**

**April 2004**

**Revised December 2018**

**Department of Veterans Affairs**

**Office of Information and Technology (OI&T)**

**Product Development**



## Revision History

Description	Date	Author
Patch MD*1.0*65 High Volume Procedure Edit option update and Consult to CP Conversion utilities	December 2018	REDACTED
Patch MD*1.0*60 Updated CP Instrument File table and Option list.	July 2018	REDACTED
<sup>1</sup> Patch MD*1.0*42: Updated cover page and Revision History. Added new CONSULT KEEP OPEN field to CP Instrument File table on page <a href="#">5-9</a> .	March 2016	REDACTED
<sup>2</sup> Patch MD*1.0*29 – Updated for ICD-10 release. Updated Title page Added Revision History, pp. i-ii Updated Table of Contents, pp. iii-iv Updated option to read the generic ICD in place of ICD-9, pp. <a href="#">6-9</a> .	August 2014	REDACTED
<sup>3</sup> Patch MD*1.0*20 released. Added new Exported Options and Updated the Routine Descriptions. Added new Parameter Definitions.	November 2010	REDACTED
<sup>4</sup> Patch MD*1.0*21 released. Updated Routine Description, Parameter Definition, and Menu Options By Name.	June 2010	REDACTED
<sup>5</sup> Patch MD*1.0*11 released. Updated Routine Description, File and Field Description, Parameter Definition, and	June 2009	REDACTED

<sup>1</sup> Patch MD\*1.0\*42 March 2016 Patch 42 release added

<sup>2</sup> Patch MD\*1.0\*29 August 2014 Patch 29 release added

<sup>3</sup> Patch MD\*1.0\*20 November 2010 Patch 20 release added

<sup>4</sup> Patch MD\*1.0\*21 June 2010 Patch 21 release added.

<sup>5</sup> Patch MD\*1.0\*11 June 2009 Patch 11 release added.

Revision History

Menu Options By Name.		
<sup>1</sup> Patch MD*1.0*6 released. Added description of Hemodialysis module and 508 Compliance to Introduction; updated Routine Descriptions, File List, Package Default Definition, Remote Procedure Calls, Parameter Definitions, menu options, Cross References, Callable Routines, External Relations, Internal Relations, and Glossary. Removed individual vendor contact information from Ch.15.	May 2008	REDACTED
<sup>2</sup> Patch MD*1.0*14 released. Updated Routine Descriptions, File List, Parameter Definitions, Protocols, menu options, and Cross References. Deleted bad references to Sample Reports in Ch. 15.	March 2008	REDACTED
<sup>3</sup> Patch MD*1.0*5 released August 2006. Updated File List, Package Default Definition, Parameter Definitions, and menu options.	Documented February 2008	REDACTED
Patch MD*1.0*2 released.	August 2006	
<sup>4</sup> Patch MD*1.0*1 released.	July 2004	
Originally released.	April 2004	

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Patch 6 release added.

<sup>2</sup> Patch MD\*1.0\*14 March 2008 Patch 14 release added.

<sup>3</sup> Patch MD\*1.0\*5 August 2006 Patch 5 release added.

<sup>4</sup> Patch MD\*1.0\*1 and MD\*1.0\*2 July 2004 Patch 2 release added.

# Table of Contents

<b>1. Introduction</b> .....	<b>1-1</b>
<b>Benefits</b> .....	<b>1-1</b>
<b>508 Compliance</b> .....	<b>1-2</b>
<b>2. Implementation and Maintenance</b> .....	<b>2-1</b>
<b>3. Clinical Instrument Interface Specifications</b> .....	<b>3-1</b>
<b>4. Routine Descriptions</b> .....	<b>4-1</b>
<b>5. File List and Related Information</b> .....	<b>5-1</b>
<b>File and Field Descriptions</b> .....	<b>5-1</b>
<b>Package Default Definition</b> .....	<b>5-18</b>
<b>6. Exported Options</b> .....	<b>6-1</b>
<b>Delphi Components</b> .....	<b>6-1</b>
<b>Remote Procedure Calls (RPC)</b> .....	<b>6-3</b>
<b>Parameter Definitions</b> .....	<b>6-20</b>
<b>Protocols</b> .....	<b>6-28</b>
<b>HL7 Application Parameters</b> .....	<b>6-29</b>
<b>HL Logical Links</b> .....	<b>6-30</b>
<b>Menu Options by Name</b> .....	<b>6-31</b>
<b>7. Cross-References</b> .....	<b>7-1</b>
<b>8. Archiving and Purging</b> .....	<b>8-1</b>
<b>9. Callable Routines</b> .....	<b>9-1</b>
<b>10. External Relations</b> .....	<b>10-1</b>
<b>11. Internal Relations</b> .....	<b>11-1</b>
<b>12. Package-wide Variables</b> .....	<b>12-1</b>
<b>13. SAC Exemptions</b> .....	<b>13-1</b>
<b>14. Software Product Security</b> .....	<b>14-1</b>
<b>Security Management</b> .....	<b>14-1</b>
<b>Security Features</b> .....	<b>14-1</b>
<b>15. Vendor Interfaces</b> .....	<b>15-1</b>
<b>List of Vendor Interfaces</b> .....	<b>15-1</b>
<b>Device Setup Instructions</b> .....	<b>15-1</b>
Clinivision.....	15-2
Endoworks.....	15-6
Muse.....	15-8
Sensormedics V-MAX.....	15-9
B. Braun.....	15-12
Fresenius Medical Care.....	15-13
Gambro.....	15-14
<b>16. Glossary</b> .....	<b>16-1</b>

## Table of Contents

# 1. Introduction

CP is a conduit for passing final patient results, using Health Level 7 (HL7) messaging, between vendor clinical information systems (CIS) and Veterans Health Information Systems and Technology Architecture (VistA). The patient's test result or report is displayed through the Computerized Patient Record System (CPRS). The report data is stored on the Imaging Redundant Array of Inexpensive Disks (RAID) and in some instances, discrete data is stored in the Medicine database.

CP provides features that can be used across clinical departments such as general medicine, cardiology, pulmonary, women's health, neurology, and rehabilitation medicine.

<sup>1</sup>Hemodialysis is a new module of the Clinical Procedures (CP) package that provides features specific to hemodialysis treatment. The Hemodialysis module allows you to collect hemodialysis treatment information from the medical device, and manually enter treatment data into the application.

Pre-dialysis vitals, information obtained during treatment, and post-dialysis vitals can be entered into the Hemodialysis data entry screens. A Treatment Summary is created and used to fill out Centers for Medicare & Medicaid Services (CMS)/End Stage Renal Disease (ESRD) forms.

## Benefits

### a. Standardized and Common User Interface

Clinicians can go through the same program, CPRS, to enter, review, interpret, and sign CP orders. CP documents in TIU obey Authorization Subscription Utility (ASU) Business Rules. The update users functionality currently used by Consults determines which users are allowed to access or edit CP documents.

### b. Integration

The ordering process of a CP procedure is initiated by CPRS and processed through the Consult/Request Tracking Package (Consults). The interpretation of the data is entered and displayed through TIU. The final result of the CP procedure is displayed by VistA Imaging. The ordering, viewing, reviewing, interpreting, and signing of the CP medical record is accessed through one location, the Consults tab in CPRS.

### c. Variety of Accepted File Types

CP is able to accept data/final result report files from automated instruments in .txt, .rtf, .jpg, .jpeg, .bmp, .tiff, .pdf, and .html file types. CP allows additional automated instruments and file types to be added to interface with CP in the future.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Hemodialysis introduction added.

**d. Links to Other Packages**

CP interfaces with packages such as Computerized Patient Record System (CPRS), Consult/Request Tracking Package, Text Integration Utility Package (TIU), and VistA Imaging. New Health Summary components shall be available in the future.

**e. Interface Between CP and Imaging**

Certain images such as consent forms and report objects are acquired, processed, stored, transmitted, and displayed by the VistA Imaging package. This interface will replace existing capture interface between Medicine 2.3 and VistA Imaging.

**f. Inpatient and Outpatient Workloads**

CP Definition file (#702.01) allows for defining the Hospital Location where the procedure is performed. This determines which Encounter Form is presented to the end user. CPRS and TIU parameters allow for the configuration of TIU software to prompt users to enter workload data which is then passed to the Patient Care Encounter software (PCE) for both inpatients and outpatients.

## **1508 Compliance**

**Note:** The following notice applies only to Patch MD\*1.0\*6.

The Clinical Procedures Hemodialysis Software is exempt from coverage under the Section 508 standards. The definition of "electronic and information technology" in the Section 508 standards specifically excludes "medical equipment where information technology is integral to its operation." 36 C.F.R. Section 1194.4. VHA's use of the Clinical Procedures Hemodialysis Software also does not violate Section 508 because it will not affect access to the data or information provided by that software. 29 U.S.C. Section 794d(a). The data or information collected by the software is immediately made available through the CPRS system, which is accessible to people with disabilities.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 508 Compliance notice added.



## 2. Implementation and Maintenance

Refer to Chapter 1 – Introduction of the Clinical Procedures Implementation Guide for implementation and maintenance issues.



### 3. Clinical Instrument Interface Specifications

Refer to Chapter 10 of the Clinical Procedures Implementation Guide for information on Setting up HL7 Parameters.

<sup>1</sup>Refer to the Clinical Instrument Bi-Directional Interface Specifications document for information on Clinical Procedures instrument interface specifications. Directions for locating the document follow:

1. Access the Clinical Procedures website:  
<http://vista.med.va.gov/clinicalspecialties/clinproc/>
2. On the navigation bar found on the left-hand side of the page, hover your mouse pointer over **Clinical Procedures Project**, then click **Documentation**.
3. Click **Clinical Procedures Documents**.

Click the **Clinical Procedures Bi-Directional Communication Specification** link to view the document or save a copy.

---

<sup>1</sup> Patch MD\*1.0\*14 March 2008 Outdated link removed and replaced with directions to document.



## 4. Routine Descriptions

```

MDAPI      ; HOIFO/DP/NCA - CP API Calls ; [05-05-2003 10:28]
           ;;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDAPI1     ; HOIFO/NCA - Electrocardiogram Data Extraction ;12/4/02 12:32
           ;;1.0;CLINICAL PROCEDURES;**1**;Apr 01, 2004
MDAR7M     ; HOIFO/NCA - Get Text Impression ;2/27/09 12:38
           ;;1.0;Clinical Procedures;**21,24**;Apr 01, 2004;Build 8
MDARP3     ; HOIFO/NCA - Get Procedures for Medicine ;1/13/04 14:35
           ;;1.0;CLINICAL PROCEDURES;**10,13,24**;Apr 01, 2004;Build 8
MDARSET    ; HOIFO/NCA - High Volume Check-In Setup ; 7/11/18 1:14pm
           ;;1.0;CLINICAL PROCEDURES;**21,65**;Apr 01, 2004;Build 1
MDCA01     ; HINES OIFO/DP/BJ/TJ - HL7 Build Admit/Visit Message (A01);15-AUG-2007
           ;;1.0;CLINICAL PROCEDURES;**16,12**;Apr 01, 2004;Build 318
MDCA02     ; HINES OIFO/DP/BJ/TJ - HL7 Build Transfer a Patient (A02) Message;21-JUN-2007
           ;;1.0;CLINICAL PROCEDURES;**16,12**;Apr 01, 2004;Build 318
MDCA03     ; HINES OIFO/DP/BJ/TJ - HL7 Build Discharge/End Visit (A03) Message;21-JUN-2007
           ;;1.0;CLINICAL PROCEDURES;**16,12**;Apr 01, 2004;Build 318
MDCA08     ; HINES OIFO/DP/BJ/TJ - HL7 Build Update Patient Info (A08) Message;21-JUN-2007
           ;;1.0;CLINICAL PROCEDURES;**16,12**;Apr 01, 2004;Build 318
MDCA11     ; HINES OIFO/DP/BJ/TJ - HL7 Build Cancel Admit/Visit Notice (A11) Message;21-JUN-2007
           ;;1.0;CLINICAL PROCEDURES;**16,12**;Apr 01, 2004;Build 318
MDCA12     ; HINES OIFO/DP/BJ/TJ - HL7 Build Cancel Transfer (A12) Message;21-JUN-2007
           ;;1.0;CLINICAL PROCEDURES;**16,12**;Apr 01, 2004;Build 318
MDCA13     ; HINES OIFO/DP/BJ/TJ - HL7 Build Cancel Discharge/Visit End (A13) Message;21-JUN-2007
           ;;1.0;CLINICAL PROCEDURES;**16,12**;Apr 01, 2004;Build 318
MDCADT     ; HINES OIFO/DP/BJ/TJ - HL7 Build ADT Axx Messages;10 Aug 2007
           ;;1.0;CLINICAL PROCEDURES;**16,12**;Apr 01, 2004;Build 318
MDCEVN     ; HINES OIFO/DP/BJ/TJ - Wrapper to create HL7 EVN segment;30 May 2006
           ;;1.0;CLINICAL PROCEDURES;**16,12,23**;Apr 01, 2004;Build 281
MDCLIO     ; HINES OIFO/DP - CliO backend driver;02 Feb 2005
           ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDCLIO1    ; HINES OIFO/DP - CliO backend driver (Continuation);02 Sep 2005
           ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDCLIOV    ; HINES OIFO/DP - CliO Vitals Link;15 Nov 2010
           ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDCLN      ; HIOFO/NCA - Cleanup Disabled Studies ;4/19/01 11:52
           ;;1.0;Clinical Procedures;**21**;Apr 01, 2004;Build 30
MDCONUTL   ; WOIFO/KLM - CP Conversion Utility ; 7/11/18 1:08pm
           ;;1.0;CLINICAL PROCEDURES;**65**;Apr 01, 2004;Build 2
MDCPHL7A   ; HINES OIFO/BJ - CliO HL7 Handler/validator;09 Aug 2006
           ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDCPHL7B   ; HINES OIFO/BJ - CliO HL7 Handler/validator;09 Aug 2006
           ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDCPHL7C   ; HINES OIFO/BJ - CP Outbound message record maintenance routine.;26OCT 2011
           ;;1.0;CLINICAL PROCEDURES;**23**;OCT 26, 2011;Build 281
MDCPID     ; HINES OIFO/DP/BJ - Wrapper for PID Segment Builder;23 Nov 2005
           ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDCPMESQ   ; HINES OIFO/TJ - CP Outbound message queue routine.;30 Jul 2007 ;10/5/11 15:39
           ;;1.0;CLINICAL PROCEDURES;**12,23**;Apr 01, 2004;Build 281
MDCPROTD   ; ASMR/BLJ,SRG - CliO backend driver;02 Feb 2005 ; 12/10/15 10:58am
           ;;1.0;CLINICAL PROCEDURES;**38**;Sep 25, 2015;Build 290
MDCPSIGN   ; HINES OIFO/BJ - CliO HL7 Handler/validator;23 Aug 2006
           ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDCPURG    ; HINES OIFO/DP - CP Nightly Purge Options;27 Jan 2008
           ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDCPV1     ; HINES OIFO/DP/BJ - PV1 Segment Routine;08 Aug 2007
           ;;1.0;CLINICAL PROCEDURES;**16,23**;Apr 01, 2004;Build 281
MDCPVDEF   ; HINES OIFO/BJ/TJ - CP Outbound message record maintenance routine.;30 Jul 2007
           ;;1.0;CLINICAL PROCEDURES;**16,12,23**;Apr 01, 2004;Build 281
MDCSPV1    ; HINES OIFO/DP/BJ - Build Segment PV1 Routine;17 Aug 2007
           ;;1.0;CLINICAL PROCEDURES;**16,23**;Apr 01, 2004;Build 281
MDCUTL     ; HINES OIFO/DP/BJ/TJ - HL7 Message Utilities;07 June 2007
           ;;1.0;CLINICAL PROCEDURES;**16,12,23**;Apr 01, 2004;Build 281
MDCVT      ; HOIFO/DP/NCA - Medicine Package Conversion ;10/20/04 12:49
           ;;1.0;CLINICAL PROCEDURES;**5**;Apr 01, 2004;Build 1
MDCVT1     ; HOIFO/NCA - Medicine Package Conversion (Cont.) ;1/6/05 15:12
           ;;1.0;CLINICAL PROCEDURES;**5**;Apr 01, 2004;Build 1
MDCVTU     ; HOIFO/NCA - Medicine Conversion Verification Utility ; [08-28-2003 11:34]

```

## Routine Descriptions

```

MDDEVCL ;;1.0;CLINICAL PROCEDURES;**5**;Apr 01, 2004;Build 1
;HOIFO/NCA - Collect Device Data ;8:34 AM 9 Jun 2005
;1.0;CLINICAL PROCEDURES;**20**;Apr 01, 2004;Build 9
MDESPRT ;HOIFO/NCA - ELECTRONIC SIGNATURE PRINT ;12/21/04 09:24
;1.0;CLINICAL PROCEDURES;**5**;Apr 01, 2004;Build 1
MDHL7A ; HOIFO/WAA - Routine to Decode HL7 for CP ;05/21/09 15:57
;1.0;CLINICAL PROCEDURES;**6,11,21**;Apr 01, 2004;Build 30
MDHL7B ; HOIFO/WAA -Bi-directional interface routine ;7/23/01 11:41
;1.0;CLINICAL PROCEDURES;**41**;Apr 01, 2004;Build 3
MDHL7BH ; HOIFO/WAA,WOIFO/PMK -Bi-directional interface (HL7) routine ;15 Jun 2018 12:46 PM
;1.0;CLINICAL PROCEDURES;**11,21,20,60**;Apr 01, 2004;Build 11
MDHL7D ; HOIFO/WAA -B-Braun, Fresenius Dialysis ; 06/08/00
;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDHL7E ; HOIFO/WAA -Olympus/CMore/Pentax Endoscopy ; 06/08/00
;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDHL7K1 ; HOIFO/WAA-KenitDx Interface ; 06/08/00
;1.0;CLINICAL PROCEDURES;**21**;Apr 01, 2004;Build 30
MDHL7K2 ; HOIFO/WAA -HP EnConcert Echo ; 06/08/00
;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDHL7M1 ; HOIFO/WAA - Muse EKG ; [02-06-2002 16:13]
;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDHL7M3 ; HOIFO/WAA-GE IMAGE VAULT INTERFACE ; 08/08/07
;1.0;CLINICAL PROCEDURES;**37**;Apr 15, 2003;Build 4
MDHL7MCA ; HOIFO/REL-Routine to Decode HL7 for MEDICINE ; [05-07-2001 10:38]
;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDHL7MCX ; HIRMF/WAA - Generate HL7 Error Message for MEDICINE ; [05-07-2001 10:38]
;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDHL7P1 ; HOIFO/WAA-Sensormedics,Jaeger Pulmonary ; 06/08/00
;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDHL7R1 ; HOIFO/WAA -Clinivision Respiratory ; 06/13/02
;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDHL7U ; HOIFO/WAA -Routine utilities for CP ;7/23/01 11:41
;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDHL7U1 ; HOIFO/WAA -Routine utilities for CP PROCESSING OBX ; 7/26/00
;1.0;CLINICAL PROCEDURES;**11**;Apr 01, 2004;Build 67
MDHL7U2 ; HOIFO/WAA -Utilities for CP PROCESSING OBX text ; 7/26/00
;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDHL7U3 ;HOIFO/WAA - Utilities for CP to process HL7 messages ;02/17/10 15:59
;1.0;CLINICAL PROCEDURES;**6,21,29**;Apr 01, 2004;Build 22
MDHL7X ; HOIFO/WAA -Generate HL7 Error Message ; 06/08/00
;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDHL7XXX ; HOIFO/DP - Loopback device for CP ;4/10/09 09:20
;1.0;CLINICAL PROCEDURES;**21,34**;Apr 01, 2004;Build 1
MDIPS60 ;WOIFO/DAC - Install code for MD*1.0*60 ;18 Apr 2018 7:38 AM
;3.0;IMAGING;**60**;Mar 19, 2002;Build 2
MDKRPC1 ;HIOFO/FT-RPC to return patient data ;8/12/16 10:45am
;1.0;CLINICAL PROCEDURES;**6,47**;Apr 01, 2004;Build 3
MDKRPC2 ; HOIFO/DP - RPC Calls (Cont.) ;11/27/07 09:42
;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDKUTL ; HOIFO/DP - Renal Utilities ;11/29/07 14:45
;1.0;CLINICAL PROCEDURES;**14**;Apr 01, 2004;Build 20
MDKUTLR ; HOIFO/DP - Renal Utilities RPC;11/29/07 14:45
;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDNCHK ; HOIFO/NCA - CP Multiple Result Check ;7/26/10 14:27
;1.0;CLINICAL PROCEDURES;**11,21,20**;Apr 01, 2004;Build 9
MDOUTOR ; HOIFO/NCA - Post Conversion Routine ; [04-14-2003 10:51]
;1.0;CLINICAL PROCEDURES;**5**;Apr 01, 2004;Build 1
MDPCE ; HIRMF/NCA - Routine For Data Extract ;6/9/08 13:29
;1.0;CLINICAL PROCEDURES;**5,21**;Apr 01, 2004;Build 30
MDPCE1 ; HOIFO/NCA - Updated Routine For Data Extract ; [05-28-2002 12:55]
;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDPCE2 ; HOIFO/NCA - Routine For Data Extract For Hemo Dialysis ;1/20/10 10:00
;1.0;CLINICAL PROCEDURES;**6,21,29**;Apr 01, 2004;Build 22
MDPFTP1 ;HOIFO/NCA - PFT REPORT-DEMO INFO ;3/15/04 11:55
;1.0;CLINICAL PROCEDURES;**2**;Apr 01, 2004
MDPFTP2 ; HOIFO/NCA - PFT REPORT-VOLUMES ;3/15/04 10:00
;1.0;CLINICAL PROCEDURES;**2**;Apr 01, 2004
MDPFTP2A ; HOIFO/NCA - PFT REPORT-FLOWS ;3/17/04 08:22
;1.0;CLINICAL PROCEDURES;**2**;Apr 01, 2004
MDPFTP3 ; HOIFO/NCA - PFT REPORT-SPECIAL STUDIES (PT 2) ;3/17/04 12:48
;1.0;CLINICAL PROCEDURES;**2**;Apr 01, 2004

```

```

MDPOST      ; HOIFO/DP - Post Init ;2/18/04 11:39
            ;;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDPOST04    ; HOIFO/DP - Post Init ; 2/18/04 11:39
            ;;1.0;CLINICAL PROCEDURES;**4**;Apr 01, 2004;Build 3
MDPOST06    ; HOIFO/DP - Post Init ;2/7/07 16:15
            ;;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDPOST1     ; HOIFO/NCA/DP - Build CP DEFINITION file (#702.01) - Optional Post
            Init ; [12-04-2002 13:06]
            ;;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDPOST16    ; HINES OIFO/DP - Post Installation Tasks;02 Mar 2008
            ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDPOST21    ; HOIFO/NCA - Post Init ;2/7/07 16:15
            ;;1.0;CLINICAL PROCEDURES;**21**;Apr 01, 2004;Build 30
MDPOST23    ; HINES OIFO/DP/BJ - Post Installation Tasks;06 OCTOBER 2011
            ;;1.0;CLINICAL PROCEDURES;**23**;Apr 01, 2004;Build 281
MDPOST38    ; ASMR/MKB - Post Installation Tasks;02 Mar 2008 ; 12/12/13 8:52pm
            ;;1.0;CLINICAL PROCEDURES;**38**;Sep 25, 2015;Build 290
MDPOST49    ; MNTVBB/RRA - Post Installation Tasks;01/07/17
            ;;1.0;CLINICAL PROCEDURES;**49**;Apr 01, 2004;Build 2
MDPOST50    ; MNTVBB/RRA - Post Installation Tasks;01/07/17
            ;;1.0;CLINICAL PROCEDURES;**50**;Apr 01, 2004;Build 2
MDPOST51    ; MNTVBB/RRA - Post Installation Tasks;01/07/17
            ;;1.0;CLINICAL PROCEDURES;**51**;Apr 01, 2004;Build 8
MDPOST52    ; MNTVBB/RRA - Post Installation Tasks;01/07/17
            ;;1.0;CLINICAL PROCEDURES;**52**;Apr 01, 2004;Build 6
MDPOST61    ; Post Installation Tasks ; 4/30/18 8:41am
            ;;1.0;CLINICAL PROCEDURES;**61**;Apr 01, 2004;Build 1
MDPOST6A    ; HOIFO/NCA-Convert Existing Notes to New File ;11/28/07 14:31
            ;;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDPRE12     ; HINES OIFO/TJ - Pre Installation Tasks;02 Mar 2008
            ;;1.0;CLINICAL PROCEDURES;**12**;Apr 01, 2004;Build 318
MDPRE16     ; HINES OIFO/DP - Installation Tasks;02 Mar 2008
            ;;1.0;CLINICAL PROCEDURES;**16**;Apr 01, 2004;Build 280
MDPRE23     ; HINES OIFO/BJ - Installation Tasks;07 OCTOBER 2011
            ;;1.0;CLINICAL PROCEDURES;**23**;Apr 01, 2004;Build 281
MDPS1       ; HOIFO/NCA - CP/Medicine Report Generator ;5/17/10 08:57
            ;;1.0;CLINICAL PROCEDURES;**2,10,13,21,24**;Apr 01, 2004;Build 8
MDPS2       ; HOIFO/NCA - CP/Medicine Report Generator (Cont.) ;5/18/04 09:41
            ;;1.0;CLINICAL PROCEDURES;**2**;Apr 01, 2004
MDPS3       ; HOIFO/NCA - Remote Data View Data Retriever for CP ;8/26/05 14:37
            ;;1.0;CLINICAL PROCEDURES;**2,5,13,24**;Apr 01, 2004;Build 8
MDPS4       ; HOIFO/NCA - Retrieve List of Consult Procedures ;1/26/06 12:45
            ;;1.0;CLINICAL PROCEDURES;**13,24**;Apr 01, 2004;Build 8
MDPS5       ; HOIFO/NCA - Retrieve List of Consult Procedures for RDV ;3/4/05 13:29
            ;;1.0;CLINICAL PROCEDURES;**13**;Apr 01, 2004;Build 19
MDPSU       ; HOIFO/NCA - CP/Medicine Report Generator Utility;5/18/04 09:48
            ;;1.0;CLINICAL PROCEDURES;**21**;Apr 01, 2004;Build 30
MDPSUL      ; HOIFO/NCA - HS Component Utility;5/18/04 09:48 ;10/5/09 09:33
            ;;1.0;CLINICAL PROCEDURES;**21**;Apr 01, 2004;Build 30
MDPURGE     ; HOIFO/NCA - Study Clean-Up process ;6/18/08 10:15
            ;;1.0;CLINICAL PROCEDURES;**11**;Apr 01, 2004;Build 67
MDRPCNT     ; HOIFO/NCA - Document Handler Object (TMDNOTE) ;5/23/05 15:50
            ;;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDRPCNT1    ; HOIFO/NCA - Object RPCs (TMDNOTE) Continued 2;10/29/04 12:20 ;2/25/09 16:08
            ;;1.0;CLINICAL PROCEDURES;**6,21**;Apr 01, 2004;Build 30
MDRPCOD     ; HOIFO/DP - Object RPCs (TMDProcedureDef) ; [01-09-2003 15:20]
            ;;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDRPCOG     ; HOIFO/DP - CP Gateway ; [01-09-2003 15:20]
            ;;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDRPCOL     ; HOIFO/DP - Object RPCs (Logfile) ; [02-11-2002 13:41]
            ;;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDRPCOO     ; HOIFO/DP - Object RPCs (TMDOutput) ; [03-24-2003 15:44]
            ;;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDRPCOP     ; HOIFO/DP - Object RPCs (TMDPatient) ;8/3/09 10:39
            ;;1.0;CLINICAL PROCEDURES;**4,6,11,20,42**;Apr 01, 2004;Build 12
MDRPCOP1    ; HOIFO/DP - Object RPCs (TMDPatient) - Cont. ; 01-09-2003 15:21
            ;;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDRPCOR     ; HOIFO/DP - Object RPCs (TMDRecordId) ; [01-10-2003 09:14]
            ;;1.0;CLINICAL PROCEDURES;**17,20**;Apr 01, 2004;Build 9
MDRPCOT     ; HOIFO/DP/NCA - Object RPCs (TMDTransaction) ;10/26/09 10:23
            ;;1.0;CLINICAL PROCEDURES;**5,6,11,21**;Apr 01, 2004;Build 30

```

## Routine Descriptions

```

MDRPCOT1 ; HOIFO/NCA/DP,WOIFO/PMK - Object RPCs (TMDTransaction) - Continued ;03 Jul 2018 9:09
AM
; ;1.0;CLINICAL PROCEDURES;**5,11,21,41,60**;Apr 01, 2004;Build 11
MDRPCOT2 ; HOIFO/NCA - Object RPCs (TMDTransaction) Continued 2;10/29/04 12:20 ;3/12/08 09:18
; ;1.0;CLINICAL PROCEDURES;**6,21,20**;Apr 01, 2004;Build 9
MDRPCOTA ; HOIFO/NCA - Object RPCs (TMDTransaction) Continued 2;10/29/04 12:20 ;3/12/08 09:18
; ;1.0;CLINICAL PROCEDURES;**20**;Apr 01, 2004;Build 9
MDRPCOTH ; HOIFO/NCA - Process High Volume Procedure Results ;2/1/12 16:39
; ;1.0;CLINICAL PROCEDURES;**21,24**;Apr 01, 2004;Build 8
MDRPCOU ; HOIFO/DP - Object RPCs (TMDUser) ; [01-09-2003 15:21]
; ;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDRPCOV ; HOIFO/DP - Object RPCs (TMDParameter) ; [04-15-2003 12:42]
; ;1.0;CLINICAL PROCEDURES;;Apr 01, 2004
MDRPCOW ; HOIFO/DP/NCA - Billing Widget ;10/3/05 12:17
; ;1.0;CLINICAL PROCEDURES;**6,29**;Apr 01, 2004;Build 22
MDRPCU ; HOIFO/DP - Object RPC Utilities ; [05-23-2003 10:16]
; ;1.0;CLINICAL PROCEDURES;**4**;Apr 01, 2004;Build 3
MDRPCW ; HOIFO/NCA - Calls to AICS ;01/21/10 11:51
; ;1.0;CLINICAL PROCEDURES;**6,21,20,29**;Apr 01, 2004;Build 22
MDRPCW1 ; HOIFO/NCA - MD TMDENCOUNTER Object ;2/16/10 16:17
; ;1.0;CLINICAL PROCEDURES;**6,21,20,29**;Apr 01, 2004;Build 22
MDRPCWU ; HOIFO/NCA - CPT Code Query ;2/16/10 16:17
; ;1.0;CLINICAL PROCEDURES;**21,29**;Apr 01, 2004;Build 22
MDSTATU ; HOIFO/NCA - Print List of Document Titles Needed ;10/21/04 13:44
; ;1.0;CLINICAL PROCEDURES;**5**;Apr 01, 2004;Build 1
MDSTUDL ; HOIFO/NCA - Clinical Procedures Studies List ;10/26/05 11:46
; ;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDSTUDW ; HOIFO/NCA - Print a List of Procedures With Incomplete Workload ;3/2/09 10:00
; ;1.0;CLINICAL PROCEDURES;**21**;Apr 01, 2004;Build 30
MDTERM ; HINES OIFO/DP - Terminology Utilities;04 Jan 2006
; ;1.0;CLINICAL PROCEDURES;**16,23**;Apr 01, 2004;Build 281
MDTERMX ; HINES OIFO/DP - Installation Tasks;02 Mar 2008 ; 8/4/17 6:45am
; ;1.0;CLINICAL PROCEDURES;**48**;Aug 2, 2012;Build 5
MDUXML ; HOIFO/WAA -Utilities for XML text ; 7/26/00
; ;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDUXMLM ; HOIFO/WAA -Utilities for XML text ; 7/26/00
; ;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDUXMLOX ; HOIFO/WAA -OBX converter XML text ; 7/26/00
; ;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDUXMLU1 ; HOIFO/WAA -Utilities for XML text ; 7/26/00
; ;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDWCAN ; HOIFO/NCA - Process No-Shows and Cancels ;7/29/08 09:50
; ;1.0;CLINICAL PROCEDURES;**11,21**;Apr 01, 2004;Build 30
MDWCHK ; HOIFO/NCA - Create CP Studies for Existing Procedures ;12/13/07 15:52
; ;1.0;CLINICAL PROCEDURES;**14**;Apr 01,2004;Build 20
MDWOR ; HOIFO/NCA - Main Routine to Decode HL7 ;9/8/08 15:20
; ;1.0;CLINICAL PROCEDURES;**14,11,21,20,37,42**;Apr 01,2004;Build 12
MDWORC ; HOIFO/NCA - Main Routine to Decode HL7 from Consult ;1/8/08 15:00
; ;1.0;CLINICAL PROCEDURES;**14**;Apr 01,2004;Build 20
MDWORSR ; HOIFO/NCA - Daily Schedule Studies;7/2/04 12:39 ;26 Sep 2017 2:24 PM
; ;1.0;CLINICAL PROCEDURES;**14,11,21,20**;Apr 01,2004;Build 9
MDWSETUP ; HOIFO/NCA - Auto Study Check-In Setup ;3/18/08 14:14
; ;1.0;CLINICAL PROCEDURES;**14,11,37,45**;Apr 01, 2004;Build 1
MDXMLFM ; HOIFO/DP - Fileman -> XML Utilities ; [01-10-2003 09:14]
; ;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102
MDXMLFM1 ; HOIFO/DP/NCA - Data -> XML Utilities ; [01-10-2003 09:14]
; ;1.0;CLINICAL PROCEDURES;**6**;Apr 01, 2004;Build 102

```



## 5. File List and Related Information

### File and Field Descriptions

#### CP Transaction File - #702

This file contains the studies between the instruments and user generated data as it is matched to a consult order and a TIU document is created for the results. It also manages the interface between the images and the Imaging RAID.

Field Name	Field Number	Format	Description
Patient	702,.01	Pointer to Patient (#2) file	This field contains a pointer to the Patient (#2) file for this study.
SSN	702,.011	Computed	This field contains the computed value of the patient's SSN from the Patient (#2) file.
DOB	702,.012	Computed	This field contains the computed value of the patient's date of birth from the Patient (#2) file.
Created Date/Time	702,.02	Date	This field contains the date/time the study was created within the CP User executable.
Created By	702,.03	Pointer to New Person (#200) file	This field contains the DUZ of the user that created this study.
CP Definition	702,.04	Pointer to CP Definition (#702.01) file	This field contains a pointer to the CP Definition (#702.01) file of the procedure definition that this study represents.
Consult Number	702,.05	Free Text 1-20 characters in length	This field contains an IEN of the Consult (#123) file representing the Consult order that is matched up to this study.
TIU Note	702,.06	Pointer to TIU Document (#8925) file	This field contains a pointer to the TIU Document (#8925) file representing the note that contains the interpretation of this study as well as the links to the associated images.
Vstring	702,.07	Free Text 1-50 characters in length	This field contains This field contains the vstring. The vstring is in the following format: Visit Type_";" _Visit Date/Time_";" _Hospital Location (internal entry number of the visit).

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Transaction Message	702,.08	Free Text 1-80 characters in length	Contains the message returned from the VistA Imaging API's for storing the images on the server.
Transaction Status	702,.09	Set: 0 - New 1 - Submitted 2 - Error 3 - Complete	This field contains the status of this study.
Error Messages (multiple)	702.091,.01	Number between 1-9999, 0 decimal digits	Error message number.
Date Received	702.091,.02	Date	Date and time this error message was generated.
Received From	702.091,.03	Free Text 1-30 characters in length	Where the error was generated.
Message	702.091,.09	Free Text 1-150 characters in length	Text of the error message.
Image (multiple)	702.1,.01	Number between 1-999, 0 decimal digits	Index of attached image for this study.
Type	702.1,.02	Set: I - Instrument data U - User supplied file	Type of attachment to be processed.
Result Report	702.1,.03	Pointer to CP Result Report (#703.1) file	Pointer to the CP Result Report (#703.1) file containing the attachment from the instrument.
Status	702.1,.09	Set: 0 - Submitted to server 1 - Error in submission 2 - Error in filing 3 - Copied to server	Status of this image.
UNC	702.1,.1	Free Text 1-245 characters in length	Contains the Universal naming Convention (UNC) for this attachment.
Submitted to Instrument	702,.11	Pointer to CP Instrument (#702.09) file	Points to the instrument definition that this study was submitted to at the time of check-in.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Instrument Order Number	702,,12	Free Text 1-22 characters in length	Contains the unique order number for this study that is sent to the bi-directional instrument.
<sup>1</sup> Visit	702,,13	Pointer to Visit (#9000010) file	This is the Visit number returned from PCE. Reference IA# 1902.
<sup>2</sup> Scheduled Date/Time	702,,14	Date	This field contains the date/time when the HL7 message should be sent by CP to the device for this CP transaction.
<sup>3</sup> Conversion ID Reference	702,,3	Free text 1-30 characters in length.	This field is the Reference Conversion ID. It is a variable Pointer to the Medicine files. It indicates which converted Medicine report record is associated with the CP Transaction study. This field helps to keep track which CP Transaction study was created for the Medicine report conversion.
Image Count	702,,991	Computed	Computed field to return the number of images associated with this study.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Field added to support the storing of the Clinical Indicator questions, CPT and ICD9 codes in the CP Transaction file.

<sup>2</sup> Patch MD\*1.0\*14 March 2008 Field added to support the auto study check-in with scheduled appointment date/time.

<sup>3</sup> Patch MD\*1.0\*5 August 2006 Field added.

**<sup>1</sup>CP\_Transaction\_TIU\_History File - #702.001**

This CP Transaction TIU History file stores all TIU notes that is associated with the CP Transaction study. This will keep track of multiple notes associated with one CP study.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Study_ID	702.001,.01	Pointer To CP Transaction File (#702)	This field contains a pointer to the CP Transaction file (#702).
TIU_Note_ID	702.001,.02	Pointer To TIU Document File (#8925)	This field contains a pointer to the TIU Document file (#8925) representing the note that contains the interpretation of this CP Transaction. (Reference IA #3376)
Date_Assigned	702.001,.03	Date	This field contains the date/time when the TIU note was assigned to this transaction.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 File 702.001 added.

**CP Definition File - #702.01**

This file defines all the procedures used by the Clinical Procedures package. All elements that define a procedure are in this file. This file is exported with data, but entries may be added by the site.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Name	702.01,.01	Free Text 3-30 characters in length	This field contains the name of the procedure. It should be descriptive of the procedure and contain 3-30 alphanumeric characters. The first character <b>MUST</b> be a letter. To maintain consistency it is recommended that all procedures be entered in <b>UPPERCASE</b> letters as well.
Treating Specialty	702.01,.02	Pointer to Facility Treating Specialty (#45.7) file	This field defines the specialty that this procedure falls under.
Require External Data	702.01,.03	Set: 0 - No 1 - Yes	Setting this field to Yes will force a consult for this procedure to be processed via the CP User executable for matching whether or not there are instruments associated with it.
Default TIU Note	702.01,.04	Pointer to TIU Document Definition (#8925.1) file	This field contains a TIU Note Title to use as the default when CP creates a note for interpretation for this procedure.
Hospital Location	702.01,.05	Pointer to Hospital Location (#44) file	This is the location that will be used when creating the TIU Note for interpretation.
<sup>1</sup> Processing Application	702.01,.06	Set: 1 - Default 2 - Hemodialysis	This field is used to indicate if this is a Hemodialysis procedure or not. The field is a set of codes, 1=DEFAULT so it will be processed by Clinical Procedures or 2=HEMODIALYSIS and the procedure will be processed by the Hemodialysis application.
Auto Submit	702.01,.07	Set: 0 - No 1 - Yes	This field only applies to bi-directional instruments. It is used to indicate whether or not the

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Field added to the CP Definition file.

			image attachment should be automatically submitted to VistA Imaging once the procedure is performed and the result is passed to CP.
External Data Directory	702.01,.08	Free Text 3-150 characters in length	This field contains a reference to a network share where user supplied attachments are located for this procedure.
Active	702.01,.09	Set: 0 - No 1 - Yes	Yes/No to indicate active procedures that can be linked to Consults.
Instrument (multiple)	702.011,.01	Pointer to CP Instrument (#702.09) file	Contains a pointer to an instrument that generates results for this procedure.
<sup>1</sup> Processed Result	702.01,.12	Set: 0 - Final Result 1 - Multiple Results 2 - Cumulative Result	This field is a flag which indicates whether a final result, multiple results, or cumulative result is associated with this procedure.

---

<sup>1</sup> Patch MD\*1.0\*11 June 2009 New field added.

**CP Instrument File - #702.09**

This file contains the list of instruments used by the Clinical Procedures package. This file is exported with data.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Name	702.09,.01	Free Text 3-30 characters in length	Name or mnemonic of instrument. Used by vendor in HL7 message header.
Notification Mailgroup	702.09,.02	Pointer to Mail Group (#3.8) file	Mail group that will receive error messages and other notifications dealing with this device from the interface routines.
Description	702.09,.03	Free Text 1-50 characters in length	This field contains a short informational description for the instrument.
Delete when Submitted	702.09,.05	Set: 0 - No 1 - Yes	Select Yes if you want files created by this instrument deleted once they are successfully copied to the VistA Imaging RAID. Deletion will be performed by the VistA Imaging application.
Printable Name	702.09,.06	Free Text 3-30 characters in length	Name of instrument that is printed on the reports, etc.
Default File Ext	702.09,.07	Free Text (e.g., .txt)	Default file extension for vendor instrument reports (e.g., .doc, .pdf).
Serial Number	702.09,.08	Free Text 1-50 characters in length	Vendor serial number of the instrument (for reference only).
Active	702.09,.09	Set: 0 - No 1 - Yes	Whether or not the instrument is active on the network.
Processing Routine	702.09,.11	Free Text 1-8 characters in length	MUMPS routine used to process interface information.
Processing Code	702.09,.12	Set: M - Medicine C - CP V. 1.0 B - Both	Where data is to be processed: M - Medicine C - Clinical Procedures B - Both
Bi-directional	702.09,.13	Set: 0 - No 1 - Yes	This field indicates whether or not this device can accept HL7 messages from VistA.
IP Address	702.09,.14	Free Text 7-15 characters in length	This field contains the IP address of this instrument.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Port	702.09,.15	Number between 1000-99999, 0 decimal digits	This field contains the port number for this instrument.
HL7 Instrument ID	702.09,.16	Free Text 3-30 characters in length	This is the name of the actual device where the device name can be "SMC St Louis".
HL7 Universal Service ID	702.09,.17	Free Text 1-48 characters in length	This field defines what type of procedure the device can perform if the device can perform multiple types of procedures.
HL7 Logical Link	702.09,.18	Pointer to the HL Logical Link (#870) file	This field contains the HL7 logical link.
CP - DICOM Interoperability	702.09,.19	Set of Codes	0:No special action 1:Use VistA Imaging accession number sss-GMR-nnnnnnnn 2:Use VistA Imaging HL7 instead of CP's HL7
Server Name	702.09,.21	Free Text 1-30 characters in length	Network name of instrument server where the report is stored.
Server Share	702.09,.22	Free Text 1-30 characters in length	Share folder/drive of the instrument server where the report is stored.
Server Path	702.09,.23	Free Text 1-150 characters in length	Path on the network where the report is stored.
Server Executable	702.09,.24	Free Text 1-30 characters in length	Name of server program that is run to create the report for the interface.
Process UNC	702.09,.301	Set: 0 - No 1 - Yes	Enter Yes if this instrument produces UNC type data.
Process Text	702.09,.302	Set: 0 - No 1 - Yes	Enter Yes if this instrument produces text type data.
Process URL	702.09,.303	Set: 0 - No 1 - Yes	Enter Yes if this instrument produces URL type data.
Process DLL	702.09,.304	Set: 0 - No 1 - Yes	Enter Yes if this instrument produces DLL type data.
Process UUEncode	702.09,.305	Set: 0 - No 1 - Yes	Enter Yes if this instrument produces UUEncode type data.



<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Process XML	702.09,.306	Set: 0 - No 1 - Yes	Enter Yes if this instrument produces XML type data.
Process XMS	702.09,.307	Set: 0 - No 1 - Yes	Enter Yes if this instrument produces XMS type data.
Consult Keep Open	702.09,.401	Set: 0 - No 1 - Yes	Enter Yes to keep consult note open or No to close consult note.

**CP Result Report File - #703.1**

This file contains the information for the results uploaded from the medical instruments used by Clinical Procedures. It is distributed without any data. All fields are automatically stuffed by Clinical Procedures. There is no user input.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Upload ID	703.1,.01	Free Text 1-30 characters in length	Unique identifier assigned for each upload.
Patient	703.1,.02	Pointer to Patient (#2) file	Pointer to the Patient (#2) file of the patient uploaded from the result of the instrument.
Date/Time Performed	703.1,.03	Date	Date/time the procedure was performed on the instrument.
Instrument	703.1,.04	Pointer to CP Instrument (#702.09) file	Pointer to the CP Instrument (#702.09) file of the instrument that produced these reports.
Study Reference Number	703.1,.05	Pointer to CP Transaction file (#702)	This field is used as a reference to the transaction.
HL7 Reference Number	703.1,.06	Free Text 1-30 characters in length	This field is used to keep the IEN of the HL7 message. It serves as a reference to the message that will be purged once the data has been successfully moved to the VistA Imaging server.
Status	703.1,.09	Set: U - Unmatched M - Matched	Status of the results: U - Unmatched M - Matched
Upload Item (multiple)	703.11,.01	Set: 1 - Impression Text 2 - Report Text 3 - Attachment UNC 4 - Attachment URL 5 - UUEncoded Data 6 - DLL 7 - XML Data 8 - XML Style Sheet	This field contains the type of data element that was uploaded from the instrument.
Attachment UNC	703.11,.02	Free Text 1-240 characters in length	This field contains the Universal Naming Convention (UNC) for this attachment. This indicates where the attachment is located.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Item Value	703.11,.1	Free Text 1-245 characters in length	If the uploaded item is a single string value, it is stored here.
Item Text	703.11,.2	Word-Processing	If the uploaded data is multi-lined, it is stored here.

**<sup>1</sup>CP Conversion File- #703.9**

This file is used for storing the site parameters needed and used to convert Medicine reports to CP Text reports. This file also stores the status of the conversion process for each converted Medicine report.

Field Name	Field Number	Format	Description
Name	703.9,.01	Free Text (Required)	This field contains the name of the CP conversion. It is only accessible by the CP conversion routine. It is exported with one "DEFAULT" entry.
Mode	703.9,.02	Set: 0 - test 1 - real	This field indicates if the CP conversion is in test or real mode.
Administrative Closure User	703.9,.03	Pointer to new person file (#200)	This field points to the New Person file (#200). It is used to indicate the Administrative Closure person used to close the TIU documents for the CP conversion.
Scratch HFS Directory	703.9,.1	Free Text	This field stores the scratch HFS directory used for the CP conversion. CP conversion program will use this directory to convert Medicine reports.
Medicine File Parameters	703.91,.01	Pointer to File file (#1)	This field points to the File file (#1). It is used to store the Medicine file number that this parameter is pertaining to. (Reference IA #4507)
CP Definition	703.91,.02	Point to CP Definition File (#702.01)	This field contains the CP Definition to which the Medicine Report will be mapped.
Convert Y/N	703.91,.03	Set: 0 - No 1 - Yes	This field is used as a flag to mark the Medicine Report. Enter 0 for 'to not convert' or 1 for 'to convert'.
Convert if No Status	703.91,.04	Set: 0 - No 1 - Yes	This field is used as a flag to indicate whether the Medicine report should be converted or not be converted, if there is no status for the report. The field is 0 for 'not to convert' or 1 for 'to convert'.
Use TIU Note Title	703.91,.05	Pointer to TIU Document Definition File (#8925.1)	This field stores the Historical TIU note title used for the conversion of the Medicine reports to CP reports. (Reference IA #3377 and 3568)
Conversion ID	703.92,.01	Free Text	This field is the Conversion ID. It is a

<sup>1</sup> Patch MD\*1.0\*5 August 2006 CP Conversion File #703.9 added.

			<p>variable pointer to the Medicine files. This field will store an entry for each Medicine file record converted. This field is a variable pointer to the following files:</p> <p>691 ECHO          691.1 CARDIAC CATHETERIZATION          691.5 ELECTROCARDIOGRAM (EKG)          691.6 HOLTER          691.7 EXERCISE TOLERANCE TEST          691.8 ELECTROPHYSIOLOGY (EP)          694 HEMATOLOGY          694.5 CARDIAC SURGERY RISK ASSESSMENT          698 GENERATOR IMPLANT          698.1 V LEAD IMPLANT          698.2 A LEAD IMPLANT          698.3 PACEMAKER SURVEILLANCE          699 ENDOSCOPY/CONSULT          699.5 GENERALIZED PROCEDURE/CONSULT          700 PULMONARY FUNCTION TESTS          701 RHEUMATOLOGY</p>
Status	703.92,.02	<p>Set:          CR - Converted Real Mode          CT - Converted Test Mode          E - Error          S - Skipped          R - Ready to Convert</p>	<p>This is the status field of the conversion log. There are five set of codes:          CR - Converted Real Mode          CT - Converted Test Mode          E - Error          S - Skipped          R - Ready to Convert</p>

New TIU Document IEN	703.92,.03	Free Text	This field contains a pointer to the TIU Document file (#8925). (Reference IA #4796). This will hold the internal entry number of the document of the converted medicine report.
Lines	703.92,.04	Number	This field contains the line count of the Medicine report that was converted.
Bytes	703.92,.05	Number	This field contains the number of bytes of the Medicine report that was converted.
Error Msg	703.92,.1	Free Text	This field stores the error message during the conversion of the Medicine report.

**<sup>1</sup>Hemodialysis Access Points File - #704.201**

This new file contains information on access points used by the Hemodialysis application.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Patient_ID	704.201,.01	Pointer to patient file (#2)	This field contains the patient DFN. (Required)
Access Points	704.201,.1	Word Processing	This field holds the XML in UUEncoded format for this patient's access points for dialysis treatments.
Access History	704.201,.2	Word Processing	This field holds the XML in UUEncoded format for this patient's access history for dialysis treatments.
Infection History	704.201,.3	Word Processing	This field holds the XML in UUEncoded format for this patient's infection history for dialysis treatments.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 File 704.201 added.

**<sup>1</sup>Hemodialysis Study File - #704.202**

This new file contains information on hemodialysis studies used by the Hemodialysis application.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
ID	704.202,.01	Pointer to CP Transaction file (#702)	This field contains the IEN of the CP STUDY (File #702) for this dialysis treatment. (Required)
Patient	704.202,.02	Pointer to Patient file (#2)	Pointer to the PATIENT (File #2) of the patient for this dialysis treatment.
Study_DateTime	704.202,.03	Computed date	Computed field used to allow automated XML creation with appropriate tag/value pairs.
Study_Location	704.202,.04	Computed	Computed field used to allow automated XML creation with appropriate tag/value pairs.
Status	704.202,.09	Set: 0 - Closed 1 - Active	Contains the status of this procedure.
Study Data	704.202,.1	Word Processing	Contains the study data XML document in UUEncoded format.
Summary	704.202,.2	Word Processing	Contains the summary data XML document in UUEncoded format.
Flowsheet	704.202,.3	Word Processing	Contains the flowsheet data XML document in UUEncoded format.
Med Log	704.202,.4	Word Processing	Contains the med log data XML document in UUEncoded format.
Note List	704.202,.5	Word Processing	This field contains the Note List data XML document in UUEncoded format.
Event Log	704.202,.6	Word Processing	This field contains the Event Log data XML document in UUEncoded format.

<sup>1</sup> Patch MD\*1.0\*6 May 2008 File 704.202 added.



**<sup>1</sup>Hemodialysis Setting File - #704.209**

This new file contains information on hemodialysis settings used by the Hemodialysis application.

<b>Field Name</b>	<b>Field Number</b>	<b>Format</b>	<b>Description</b>
Setting Name	704.209,.01	Free Text 3-30 characters in length. Not numeric or starting with punctuation.	Contains the descriptive name of the data contained in this setting.
Owner	704.209,.02	Pointer to new person file (#200)	If this setting is user specific, this field will contain that user's DUZ.
User	704.209,.03	Pointer to new person file (#200)	This field displays the user name that is locking the Hemodialysis setting option.
Date/Time of Lock	704.209,.04	Input transform: S %DT="ET" D ^%DT S X=Y K:Y<1 X	This field will store the date and time of when the Hemodialysis setting option was locked for use.
Process ID	704.209,.05	Free text 3-40 characters in length. Input transform: K:\$L(X)>40!(\$L(X)<3) X	This field will store the JOB ID of the process that is locking the Hemodialysis setting option.
XML Document	704.209,.1	Word Processing	Contains the XML document for this setting in UUEncoded format.

<sup>1</sup> Patch MD\*1.0\*6 May 2008 File 704.209 added.

## Package Default Definition

FILE #	NAME	UP DATE DD	SEND SEC. CODE	DATA COMES W/FILE	SITE DATA	RSLV PTS	USER OVER RIDE
702	CP TRANSACTION	YES	YES	NO			
<sup>1</sup> 702.001	CP_TRANSACTION_TIU_HISTORY	YES	YES	NO			
702.01	CP DEFINITION	YES	YES	NO			
702.09	CP INSTRUMENT	YES	YES	YES	ADD	NO	NO
703.1	CP RESULT REPORT	YES	YES	NO			
<sup>2</sup> 703.9	CP CONVERSION	YES	YES	NO			
<sup>3</sup> 704.201	HEMODIALYSIS ACCESS POINTS	YES	YES	NO			
704.202	HEMODIALYSIS STUDY	YES	YES	NO			
704.209	HEMODIALYSIS SETTINGS	YES	YES	NO			

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Default definition added for 702.001.

<sup>2</sup> Patch MD\*1.0\*5 August 2006 Default definitions added for 703.9.

<sup>3</sup> Patch MD\*1.0\*6 May 2008 Default definitions added for 704.201, 704.202, and 704.209.

## 6. Exported Options

### Delphi Components

Clinical Procedures uses RPC Broker and custom Delphi Components in the display and navigation of screens. Below is a list of the Delphi components this application currently uses along with a short description.

#### **TMDRecordSource = class(TComponent)**

This is the primary component that all others interact with. This component represents a record within FileMan via the Data Dictionary Number and the IEN. In the event that the record is a sub-file then this component will point to another TMDRecordSource that represents the parent record of the sub-record. There is no limit to the number of sub-records that can be linked together.

#### **TMDEdit = Class(TEdit)**

This component is designed to manage FileMan Free-Text and Numeric type fields. Other types may be used here with the exception of word-processing but they will require exact data input (i.e. non-ambiguous entries must be entered in the case of pointers or set of codes types). All input and output transforms are applied to the field on validation.

#### **TMDEditPointer = Class(TComboBox)**

This component is designed to manage FileMan Pointer types. This component currently handles screens via hard coded screens on the server side in routine MDRPCOR.

#### **TMDLabel = Class(TLabel)**

This component is a static component that can display one of three data elements for a FileMan field. These are 1) Data value 2) Field Title or 3) Field Help Text. There is no server update associated with this component.

#### **TMDMemo = Class(TMemo)**

This component manages FileMan word-processing data types only. It will validate the data upon leaving the component.

#### **TMDComboBox = Class(TComboBox)**

This component was designed for either set of codes or pointer type fields. If using a pointer type field the developer must be aware that the entire pointed to file will be retrieved so large files such as the Patient file (#2) is not possible to represent with this component. Files such as the State file (#5) are handled quite well if there are approximately 100 or less entries and the pointed to file does not have complex output transforms on the .01 field.

**TMDRadioGroup = Class(TRadioGroup)**

This field was designed specifically for the FileMan set of codes field. It loads the appropriate codes into the radio group and displays the 'Stands For' portion of the codes while storing to the database the internal value of the code.

**TMDCheckBox = Class(TCheckBox)**

This component was designed for a set of codes that are restricted to only two codes (i.e. Yes/No, True/False, On/Off).

## Remote Procedure Calls (RPC)

**NAME: MD GATEWAY** TAG: RPC  
 ROUTINE: MDRPCOG RETURN VALUE TYPE: GLOBAL ARRAY  
 AVAILABILITY: RESTRICTED WORD WRAP ON: TRUE  
 VERSION: 1

**NAME: MD TMDOUTPUT** TAG: RPC  
 ROUTINE: MDRPCOG RETURN VALUE TYPE: GLOBAL ARRAY  
 AVAILABILITY: RESTRICTED WORD WRAP ON: TRUE  
 DESCRIPTION:  
 Manages the output of VistA data to the client via the default HFS device.

INPUT PARAMETER: OPTION PARAMETER TYPE: LITERAL  
 MAXIMUM DATA LENGTH: 30 REQUIRED: YES  
 SEQUENCE NUMBER: 1  
 DESCRIPTION:  
 Currently set to EXECUTE as the only option.

INPUT PARAMETER: RTN PARAMETER TYPE: LITERAL  
 MAXIMUM DATA LENGTH: 30 REQUIRED: YES  
 SEQUENCE NUMBER: 2  
 DESCRIPTION:  
 Contains the routine to produce the output. Currently to client produces this parameter in the form of TAG^ROUTINE(needed parameters) to simplify the calling process.

RETURN PARAMETER DESCRIPTION:  
 Text of the requested report.

**NAME: MD TMDPARAMETER** TAG: RPC  
 ROUTINE: MDRPCOV RETURN VALUE TYPE: GLOBAL ARRAY  
 AVAILABILITY: RESTRICTED WORD WRAP ON: TRUE  
 DESCRIPTION:  
 Used to set/retrieve/modify parameters in the Kernel Toolkit PARAMETERS (XPAR) files.

RPC is called as follows:

Param[0] := OPTION  
 Param[1] := Entity  
 Param[2] := Parameter name  
 Param[3] := Instance  
 Param[4] := Value

INPUT PARAMETER: OPTION PARAMETER TYPE: LITERAL  
 MAXIMUM DATA LENGTH: 10 REQUIRED: YES  
 SEQUENCE NUMBER: 1  
 DESCRIPTION:  
 Contains the option for the RPC. RPC is called as shown:

Options and other required parameters include:

ENTVAL ENT  
 GETPAR ENT, PAR, INST  
 GETLST ENT, PAR  
 GETWP ENT, PAR, INST

## Exported Options

```
SETPAR    ENT, PAR, INST, VAL
SETLST    ENT, PAR, , .VAL  (Uses instance 0-n)
SETWP     ENT, PAR, INST, .VAL
```

```

DELPAR      ENT, PAR, INST
DELLST      ENT, PAR
INPUT PARAMETER: ENTITY          PARAMETER TYPE: LITERAL
  MAXIMUM DATA LENGTH: 20      REQUIRED: NO
  SEQUENCE NUMBER: 2

```

## DESCRIPTION:

An entity is a level at which you can define a parameter. The entities allowed are stored in the Parameter Entity file (#8989.518). The list of allowable entities at the time this utility was released were:

Prefix	Message	Points to File
PKG	Package	Package (9.4)
SYS	System	Domain (4.2)
DIV	Division	Institution (4)
SRV	Service	Service/Section (49)
LOC	Location	Hospital Location (44)
TEA	Team	Team (404.51)
CLS	Class	Usr Class (8930)
USR	User	New Person (200)
BED	Room-Bed	Room-Bed (405.4)
OTL	Team (OE/RR)	OE/RR List (101.21)

The entity may be referenced as follows:

- 1) The internal variable pointer (nnn;GLO(123,))
- 2) The external format of the variable pointer using the 3 character prefix (prefix.entryname)
- 3) The prefix alone to set the parameter based on current entity selected. (prefix)

Method 3 uses the following values for the following entities:

```

USR      Current value of DUZ
DIV      Current value of DUZ(2)
SYS      System (domain)
PKG      Package to which the parameter belongs
INPUT PARAMETER: PAR          PARAMETER TYPE: LITERAL
  MAXIMUM DATA LENGTH: 30    REQUIRED: NO
  SEQUENCE NUMBER: 3

```

## DESCRIPTION:

A parameter is the actual name which values are stored under. The name of the parameter must be namespaced and it must be unique. Parameters can be defined to store the typical package parameter data (e.g. the default add order screen), but they can also be used to store GUI application screen settings a user has selected (e.g. font or window width). When a parameter is defined, the entities, which may set that parameter, are also defined. The definition of parameters is stored in the PARAMETER DEFINITION file (#8989.51).

NOTE: This utility restricts the parameter name to those in the Clinical Procedures namespace (MD\*).

```

INPUT PARAMETER: INST          PARAMETER TYPE: LITERAL
  MAXIMUM DATA LENGTH: 30    REQUIRED: NO
  SEQUENCE NUMBER: 4

```

## DESCRIPTION:

Most parameters will set instance to 1. Instances are used when more than one value may be assigned to a given entity/parameter combination. An example of this would be lab collection times at a division. A single division may have multiple collection times. Each collection time would

## Exported Options

be assigned a unique instance.  
INPUT PARAMETER: VAL                      PARAMETER TYPE: LITERAL  
MAXIMUM DATA LENGTH: 80                REQUIRED: NO







ROUTINE: MDRPCW	RETURN VALUE TYPE: GLOBAL ARRAY
AVAILABILITY: RESTRICTED	INACTIVE: ACTIVE
WORD WRAP ON: TRUE	VERSION: 1
DESCRIPTION:	
This RPC will do the following:	

## Exported Options

```
Input Parameter: RESULTS - (Both Input/Output) Passed in as the array to
                        return the results.
                        OPTION - (Input) PROC - obtain a list of Procedures
                                defined for a clinic.
                                DIAG - obtain a list of diagnosis
                                        defined for a clinic.
                                SCDISP - Obtain the patient's service
                                        connection and rated
disability.
                        DFN - (Input) Patient internal entry number
                        MDSTUD - (Input) CP Study internal entry number
RETURN PARAMETER DESCRIPTION:
> D RPC^MDRPCW(.RESULTS,"PROC",162,212)

> ZW RESULTS
RESULTS=^TMP("MDRPCW",539023945)

@RESULTS@(0)=count of array element (0 if nothing found)
@RESULTS@(1)=^group header
@RESULTS@(2) = P1 := cpt or icd code / ien of other items
                P2 := user defined text
                P6 := user defined expanded text to send to PCE
                P7 := second code or item defined for line item
                P8 := third code or item defined for line item
                P9 := associated clinical lexicon term

> D ^%G

Global ^TMP("MDRPCW",$J
        TMP("MDRPCW",$J

^TMP("MDRPCW",539023945,0) = 7
^TMP("MDRPCW",539023945,1) = ^PFT PROCEDURES
^TMP("MDRPCW",539023945,2) = G0125^Lung image (PET) ^^^^^^^
^TMP("MDRPCW",539023945,3) = S9473^Pulmonary rehabilitation pro^^^^^^^^
^TMP("MDRPCW",539023945,4) = S2060^Lobar lung transplantation ^^^^^^^
^TMP("MDRPCW",539023945,5) = S2060^Lobar lung transplantation ^^^^^^^
^TMP("MDRPCW",539023945,6) = A4480^Vabra aspirator ^^^^^^^
^TMP("MDRPCW",539023945,7) = 43450^DILAT ESOPH-SOUND/BOUGIE-1/M^^^^^^^^
Global ^

> D RPC^MDRPCW(.RESULTS,"DIAG",162,212)

> D ^%G

Global ^TMP("MDRPCW",$J
        TMP("MDRPCW",$J

^TMP("MDRPCW",539023945,0) = 31
^TMP("MDRPCW",539023945,1) = ^PFT
^TMP("MDRPCW",539023945,2) = 397.1^RHEUM PULMON VALVE DIS^^^^^^^^269587
^TMP("MDRPCW",539023945,3) = 417.1^PULMON ARTERY ANEURYSM^^^^^^^^269688
^TMP("MDRPCW",539023945,4) = 417.8^PULMON CIRCULAT DIS NEC^^^^^^^^269690
^TMP("MDRPCW",539023945,5) = 417.9^PULMON CIRCULAT DIS NOS^^^^^^^^269691
^TMP("MDRPCW",539023945,6) = 424.3^PULMONARY VALVE DISORDER^^^^^^^^101164
^TMP("MDRPCW",539023945,7) = 516.1^IDIO PULM HEMOSIDEROSIS^^^^^^^^61083
^TMP("MDRPCW",539023945,8) = 746.01^CONG PULMON VALV ATRESIA^^^^^^^^265805
^TMP("MDRPCW",539023945,9) = 673.82^PULM EMBOL NEC-DEL W P/P^^^^^^^^271756
```

```

^TMP ("MDRPCW",539023945,10) = 747.3^PULMONARY ARTERY ANOM^^^^^^27406
^TMP ("MDRPCW",539023945,11) = 770.3^NB PULMONARY HEMORRHAGE^^^^^^273240
^TMP ("MDRPCW",539023945,12) = 794.2^ABN PULMONARY FUNC STUDY^^^^^^273442
^TMP ("MDRPCW",539023945,13) = 901.41^INJURY PULMONARY
ARTERY^^^^^901.42^^275136
^TMP ("MDRPCW",539023945,14) = 162.3^MAL NEO UPPER LOBE
LUNG^^^^^162.4^162.5^73534
^TMP ("MDRPCW",539023945,15) = 235.7^UNC BEHAV NEO LUNG^^^^^^267754
^TMP ("MDRPCW",539023945,16) = 875.0^OPEN WOUND OF CHEST^^^^^^274991
^TMP ("MDRPCW",539023945,17) = 162.9^MAL NEO BRONCH/LUNG NOS^^^^^^73521
^TMP ("MDRPCW",539023945,18) = 786.6^CHEST SWELLING/MASS/LUMP^^^^^^273380
^TMP ("MDRPCW",539023945,19) = 518.89^OTHER DISEASE OF LUNG, NEC^^^^^^87486
^TMP ("MDRPCW",539023945,20) = ^BRONCHOSCOPY
^TMP ("MDRPCW",539023945,21) = 012.20^ISOL TRACHEAL TB-
UNSPEC^^^^^012.21^^266107
^TMP ("MDRPCW",539023945,22) = 012.22^ISOL TRACH TB-EXAM UNKN^^^^^^266109
^TMP ("MDRPCW",539023945,23) = 012.23^ISOLAT TRACH TB-MICRO DX^^^^^^266110
^TMP ("MDRPCW",539023945,24) = 012.24^ISOL TRACHEAL TB-CULT DX^^^^^^266111
^TMP ("MDRPCW",539023945,25) = 748.61^CONGEN BRONCHIECTASIS^^^^^^265478
^TMP ("MDRPCW",539023945,26) = 011.50^TB BRONCHIECTASIS-
UNSPEC^^^^^011.51^^266056
^TMP ("MDRPCW",539023945,27) = 784.1^THROAT PAIN^^^^^^276881
^TMP ("MDRPCW",539023945,28) = 784.8^HEMORRHAGE FROM THROAT^^^^^^273371
^TMP ("MDRPCW",539023945,29) = 034.0^STREP SORE THROAT^^^^^^114610
^TMP ("MDRPCW",539023945,30) = 466.11^AC. BRONCH/RESP SYNCYT V
(RSV)^^^^^466.19^
^304309
^TMP ("MDRPCW",539023945,31) = 530.10^ESOPHAGITIS, UNSP.^^^^^^295809
Global ^

> D RPC^MDRPCW(.RESULTS,"SCDISP",17,212)

    @RESULTS@(n)="Lines of text"

> D ^%G

Global ^TMP ("MDRPCW", $J
        TMP ("MDRPCW", $J
^TMP ("MDRPCW",539023945,1) = Service Connected: 50%
^TMP ("MDRPCW",539023945,2) = Rated Disabilities: NONE STATED
Global ^

NAME: MD TMDENCOUNTER                                TAG: GETENC
ROUTINE: MDRPCW1                                      RETURN VALUE TYPE: GLOBAL ARRAY
AVAILABILITY: RESTRICTED                             WORD WRAP ON: TRUE
VERSION: 1
DESCRIPTION:
This remote procedure will return the existing data in an encounter.
INPUT PARAMETER: STUDY                               PARAMETER TYPE: REFERENCE
REQUIRED: YES                                         SEQUENCE NUMBER: 1
DESCRIPTION:
This is the CP Study internal entry number.
RETURN PARAMETER DESCRIPTION:
The result is returned in ^TMP("MDENC",$J) global.

^TMP ("MDENC", $J,1)="SC";0/1^0/1;"AO";0/1^0/1;"IR";0/1^0/1;"EC";0/1^0/

```

## Exported Options

```
1;"MST";0/1^0/1;"HNC";0/1^0/1;"CV";0/1^0/1
  P1 = "SC" - Service Connected
  P2 = first "^" piece 1 if the condition can be answered
      0 if the condition should be null not asked
      second "^" piece - If Scheduling has the answer, 1 = yes 0 = no
  P3 = "AO" - Agent Orange Exposure
```

P4 = first "^" piece 1 if the condition can be answered  
       0 if the condition should be null not asked  
       second "^" piece - If Scheduling has the answer, 1 = yes 0 = no  
 P5 = "IR" - Ionizing Radiation Exposure  
 P6 = first "^" piece 1 if the condition can be answered  
       0 if the condition should be null not asked  
       second "^" piece - If Scheduling has the answer, 1 = yes 0 = no  
 P7 = "EC" - Environmental Contaminants  
 P8 = first "^" piece 1 if the condition can be answered  
       0 if the condition should be null not asked  
       second "^" piece - If Scheduling has the answer, 1 = yes 0 = no  
 P9 = "HNC" - Head and/or Neck Cancer  
 P10 = first "^" piece 1 if the condition can be answered  
       0 if the condition should be null not asked  
       second "^" piece - If Scheduling has the answer, 1 = yes 0 = no  
 P11 = "MST" - Military Sexual Trauma  
 P12 = first "^" piece 1 if the condition can be answered  
       0 if the condition should be null not asked  
       second "^" piece - If Scheduling has the answer, 1 = yes 0 = no  
 P13 = "CV" - Combat Veteran  
 P14 = first "^" piece 1 if the condition can be answered  
       0 if the condition should be null not asked  
       second "^" piece - If Scheduling has the answer, 1 = yes 0 = no

^TMP("MDENC", \$J, n) = "PRV" ^ CODE ^ ^ NARR ^ ^ Primary (1=Yes, 0=No)

P1 = "PRV" - Provider segment  
 P2 = CODE - New Person internal Entry Number  
 P3 = Null  
 P4 = NARR - Provider name  
 P5 = Null  
 P6 = Primary - 1/0/null (1=Yes, 0/Null=No)

      ="POV" ^ ICD IEN ^ ICD CODE ^ provider narrative category ^  
 provider narrative (Short Description) ^ Primary (1=Yes, 0/Null=No)

P1 = "POV" - ICD segment  
 P2 = ICD internal entry number  
 P3 = ICD Code  
 P4 = Provider Narrative Category  
 P5 = Short Description  
 P6 = Primary - 1/0/null (1=Yes, 0/Null=No)

      ="CPT" ^ CPT IEN ^ CPT CODE ^ provider narrative category ^  
 provider narrative (Short Description) ^ ^ Quantity

P1 = "CPT" - CPT segment  
 P2 = CPT internal entry number  
 P3 = CPT Code  
 P4 = Provider Narrative Category (CPT Category Grouping)  
 P5 = Short Description  
 P6 = null  
 P7 = Quantity

NAME: MD TMDLEX

TAG: LEX

ROUTINE: MDRPCW1

RETURN VALUE TYPE: GLOBAL ARRAY

AVAILABILITY: RESTRICTED

WORD WRAP ON: TRUE

VERSION: 1

## Exported Options

DESCRIPTION:

This RPC will return a list of CPT or ICD for a search typed in.

INPUT PARAMETER: MDSRCH

PARAMETER TYPE: REFERENCE



```

    REQUIRED: YES                      SEQUENCE NUMBER: 1
DESCRIPTION:
This is the text typed in for the look-up.
INPUT PARAMETER: MDAPP                PARAMETER TYPE: REFERENCE
    REQUIRED: YES                      SEQUENCE NUMBER: 2
DESCRIPTION:
This is the application indicator. It is either "CPT" or "ICD".
RETURN PARAMETER DESCRIPTION:

^TMP("MDLEX", $J, #)=P1 - CPT/ICD Code
                    P2 - Internal Entry Number
                    P3 - Lexicon text

>D LEX^MDRPCW1(.RESULTS, "BORE", "CPT")

>ZW RESULTS
RESULTS="^TMP("MDLEX", 539152953) "

>D ^%G

Global ^TMP("MDLEX", $J -- NOTE: translation in effect
^TMP("MDLEX", 539152953, 1)=86618^302213^Borella Burgdorferi (Lyme Disease)
Antibody (CP T-4 86618)

NAME: MD TMDNOTE                    TAG: RPC
ROUTINE: MDRPCNT                      RETURN VALUE TYPE: GLOBAL ARRAY
AVAILABILITY: RESTRICTED              INACTIVE: ACTIVE
WORD WRAP ON: TRUE                   VERSION: 1
DESCRIPTION:
This remote procedure call does the following:
Accepts the following Inputs:
    RESULTS - Both (Input and Output) - Passed in as the array to return
              results in.

    OPTION - NEWDOC = Add additional new document to the Hemodialysis
              study.

    NOTELIST = Returns a list of documents associated with the
              study. The pieces returned are: Note IEN, Note
              title, Date/Time Creation, Author, and Hospital
              Location.

    VIEWTIU = Return the text lines of a document from NOTELST.

MDSID - Study internal Entry Number.

MDTIU - TIU Document Internal Entry Number.

MDDTE - Date/Time of Document Creation.

MDAUTH - Author of document.

MDESIG - Encrypted Electronic Signature.

MDTXT - Text of the new document in an array.

```

## Exported Options

Return Results are the following:

```

OPTION = NEWDOC

> D RPC^MDRPCNT(.RESULTS,"NEWDOC",904,"",3050524.0915,679,74RHLld;flk,MDTXT)

> D ^%G

Global ^TMP("MDKUTL",$J
      TMP("MDKUTL",$J
^TMP("MDKUTL",538992716,0) = Note internal entry number   or -1^Error
Message

OPTION = NOTELIST

> D RPC^MDRPCNT(.RESULTS,"NOTELST",476)

> D ^%G

Global ^TMP("MDKUTL",$J
      TMP("MDKUTL",$J
^TMP("MDKUTL",538992716,1) = 968^PROCEDURE NOTE^OCT 10, 2001@17:08:36
^MDPROVIDER,ONE ^PROSTHETICS
^TMP("MDKUTL",538992716,2) = 969^PROCEDURE NOTE^OCT 10,
2001@17:10:44^^PROSTHET
I
CS
^TMP("MDKUTL",538992716,3) = 970^PROCEDURE NOTE^OCT 10,
2001@17:11:50^^PROSTHET
I
CS
^TMP("MDKUTL",538992716,4) = 971^PROCEDURE NOTE^OCT 10,
2001@17:15:45^^PROSTHET
I
CS
^TMP("MDKUTL",538992716,5) = 972^PROCEDURE NOTE^OCT 10,
2001@17:16:34^^PROSTHET
I
CS
^TMP("MDKUTL",538992716,6) = 974^PROCEDURE NOTE^OCT 11,
2001@10:56:03^^PROSTHET
I
CS
^TMP("MDKUTL",538992716,7) = 975^PROCEDURE NOTE^OCT 11,
2001@12:50:29^^PROSTHET
I
CS
Global ^

OPTION = VIEWTIU

> D RPC^MDRPCNT(.RESULTS,"VIEWTIU",476,968)

> D ^%G

Global ^TMP("TIUVIEW",$J
      TMP("TIUVIEW",$J
^TMP("TIUVIEW",538992716,1) =          TITLE: PROCEDURE NOTE

```

## Exported Options

```
^TMP("TIUVIEW",538992716,2) = DATE OF NOTE: OCT 10, 2001@17:08:36  ENTRY
DATE:
O
CT 10, 2001@17:08:36
^TMP("TIUVIEW",538992716,3) =          AUTHOR: MDPROVIDER,ONE   EXP COSIGNER:

^TMP("TIUVIEW",538992716,4) =          URGENCY:
STATUS:
C
COMPLETED
^TMP("TIUVIEW",538992716,5) =
^TMP("TIUVIEW",538992716,6) = PROCEDURE SUMMARY CODE: Abnormal

^TMP("TIUVIEW",538992716,7) = DATE/TIME PERFORMED: OCT 15, 2001
^TMP("TIUVIEW",538992716,8) =
^TMP("TIUVIEW",538992716,9) =      *** PROCEDURE NOTE Has ADDENDA ***
^TMP("TIUVIEW",538992716,10) =
^TMP("TIUVIEW",538992716,11) = Complete consult 1104. 6 attached images.
^TMP("TIUVIEW",538992716,12) =
^TMP("TIUVIEW",538992716,13) = /es/ MDPROVIDER,ONE
^TMP("TIUVIEW",538992716,14) =
^TMP("TIUVIEW",538992716,15) = Signed: 10/15/2001 13:02
^TMP("TIUVIEW",538992716,16) =
^TMP("TIUVIEW",538992716,17) = 10/15/2001 ADDENDUM
STATUS:

COMPLETED
^TMP("TIUVIEW",538992716,18) = aADDENDUM LA LA
^TMP("TIUVIEW",538992716,19) = LA LA LA
^TMP("TIUVIEW",538992716,20) =
^TMP("TIUVIEW",538992716,21) = /es/ MDPROVIDER,ONE
^TMP("TIUVIEW",538992716,22) =
^TMP("TIUVIEW",538992716,23) = Signed: 10/15/2001 13:04

NAME: MD TMDSUBMITU                TAG: RPC
ROUTINE: MDRPCOWU                    RETURN VALUE TYPE: GLOBAL ARRAY
AVAILABILITY: RESTRICTED              WORD WRAP ON: TRUE
VERSION: 1

NAME: MD TMDWIDGET                 TAG: RPC
ROUTINE: MDRPCOW                     RETURN VALUE TYPE: GLOBAL ARRAY
AVAILABILITY: RESTRICTED              WORD WRAP ON: TRUE
VERSION: 1

NAME: MDK GET VISTA DATA          TAG: RPC
ROUTINE: MDKRPC1                     RETURN VALUE TYPE: ARRAY
AVAILABILITY: RESTRICTED              INACTIVE: ACTIVE
INPUT PARAMETER: OPTION                PARAMETER TYPE: LITERAL
MAXIMUM DATA LENGTH: 8                REQUIRED: YES
SEQUENCE NUMBER: 1
DESCRIPTION:
```



## Parameter Definitions

**NAME: MD ALLOW EXTERNAL ATTACHMENTS**

DISPLAY TEXT: Allow non-instrument attachments

MULTIPLE VALUED: No

VALUE TERM: Allowed

VALUE DATA TYPE: yes/no

**DESCRIPTION:**

Set this value to Yes to allow users of CPUser.exe to attach documents to the transaction that are not created by an instrument.

PRECEDENCE: 1

ENTITY FILE: SYSTEM

<sup>1</sup>**NAME: MD APPOINT END DATE**

DISPLAY TEXT: End Date for Encounter Appointments

MULTIPLE VALUED: No

VALUE TERM: Days

VALUE DATA TYPE: numeric

VALUE DOMAIN: 0:365

VALUE HELP: Enter a number from 0 to 365.

**DESCRIPTION:**

Enter a number from 0 to 365 for the number of days that will be used to add to today as the end date range of the Encounter Appointments. If no value is entered, the default value used will be 0.

PRECEDENCE: 1

ENTITY FILE: SYSTEM

**NAME: MD APPOINT START DATE**

DISPLAY TEXT: Start Date for Encounter Appointments

MULTIPLE VALUED: No

VALUE TERM: Days

VALUE DATA TYPE: numeric

VALUE DOMAIN: 0:365

VALUE HELP: Enter a number from 0 to 365.

**DESCRIPTION:**

Enter a number from 0 to 365 for the number of days that will be used to subtract from today as the start date range of the Encounter Appointments. If no value is entered, the default value used will be 200.

PRECEDENCE: 1

ENTITY FILE: SYSTEM

**NAME: MD COMPL PROC DISPLAY DAYS**

DISPLAY TEXT: Completed Proc Display Days

MULTIPLE VALUED: No

VALUE TERM: Days

VALUE DATA TYPE: numeric

VALUE DOMAIN: 1:365

VALUE HELP: Enter the number of days from 1 to 365

**DESCRIPTION:**

The number of days the completed procedure requests will be displayed in the CP Check-in screen.

PRECEDENCE: 1

ENTITY FILE: SYSTEM

<sup>2</sup>**NAME: MD CHECK-IN PROCEDURE LIST**

DISPLAY TEXT: Check-in Procedure List

MULTIPLE VALUED: Yes

INSTANCE TERM: Procedure

VALUE TERM: Schedule Appointment?

VALUE DATA TYPE: set of codes

VALUE DOMAIN: 0:None;1:Outpatient;2:Inpatient;3:Both

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Parameter Definitions added.

<sup>2</sup> Patch MD\*1.0\*14 March 2008 Parameter Definitions added.



## Exported Options

Clinic internal entry number\_";"\_Procedure internal entry number  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

**NAME: MD CRC BYPASS** DISPLAY TEXT: Bypass CRC Checking  
MULTIPLE VALUED: No VALUE TERM: Bypass CRC Checking  
VALUE DATA TYPE: yes/no  
DESCRIPTION:  
Set this value to 'Yes' to prevent the client application from verifying  
its CRC Value at startup.  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

**NAME: MD CRC VALUES**  
DISPLAY TEXT: Clinical Procedures CRC Values  
MULTIPLE VALUED: Yes  
INSTANCE TERM: Executable or Library Name  
VALUE TERM: CRC Value PROHIBIT EDITING: No  
VALUE DATA TYPE: free text VALUE DOMAIN: 1:15  
INSTANCE DATA TYPE: free text INSTANCE DOMAIN: 1:30  
DESCRIPTION:  
This parameter is used to store the CRC values for the most recent  
versions of executable and libraries. Use the Tools menu on the CPManager  
program to calculate the needed CRC Values of the current versions.  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

**NAME: MD DAYS FOR INSTRUMENT DATA**  
DISPLAY TEXT: Temporary instrument data life (Days)  
MULTIPLE VALUED: No VALUE TERM: Days  
PROHIBIT EDITING: No VALUE DATA TYPE: numeric  
VALUE DOMAIN: 0:365  
DESCRIPTION:  
The number of days to keep data from the auto-instruments after  
the data has been associated with a Clinical Procedures report.  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

<sup>1</sup>**NAME: MD DAYS TO RETAIN COM STUDY**  
DISPLAY TEXT: Days to Retain Completed Study  
MULTIPLE VALUED: No VALUE TERM: Days  
PROHIBIT EDITING: No VALUE DATA TYPE: numeric  
VALUE DOMAIN: 1:365  
VALUE HELP: Enter the number of days from 1 to 365  
DESCRIPTION:  
The number of days after check-in date/time to display the study  
that has been complete in the CPUser application. Studies that have  
procedures with multiple or cumulative results are NOT included.  
Cumulative and multiple results studies will have a default value of  
365.  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Parameter Definition added.



<sup>1</sup>NAME: **MD DAYS TO RET COM MULT**  
 DISPLAY TEXT: Days to Retain Completed Multiple Study  
 MULTIPLE VALUED: No VALUE TERM: Days  
 VALUE DATA TYPE: numeric VALUE DOMAIN: 1:365  
 VALUE HELP: Enter the number of days from 1 to 365  
 DESCRIPTION:  
 The number of days after check-in date/time to display the study that has been completed in the CPUser application. This only pertains to studies that have procedures with multiple studies.  
 PRECEDENCE: 1 ENTITY FILE: SYSTEM

NAME: **MD DEVICE SURVEY TRANSMISSION** DISPLAY TEXT: Device Survey Transmission  
 MULTIPLE VALUED: No VALUE TERM: Yes/No  
 PROHIBIT EDITING: No VALUE DATA TYPE: yes/no  
 VALUE HELP: Enter 'Y' for 'YES' or 'N' for 'NO'.  
 DESCRIPTION:  
 Used to determine if the site wants to transmit the device survey to Hines. Enter 'Y' for 'YES' to send the survey or 'N' for 'NO' to suppress the transmission.  
 PRECEDENCE: 1 ENTITY FILE: SYSTEM

NAME: **MD FILE EXTENSIONS** DISPLAY TEXT: Imaging File Types  
 MULTIPLE VALUED: Yes INSTANCE TERM: Extension  
 VALUE TERM: File type PROHIBIT EDITING: No  
 VALUE DATA TYPE: free text VALUE DOMAIN: 1:80  
 VALUE HELP: Enter a description of this file type  
 INSTANCE DATA TYPE: free text INSTANCE DOMAIN: 2:10  
 INSTANCE HELP: Enter the extension of the file type with a '.'  
 INSTANCE VALIDATION CODE: K:X'?1'".9ULN X

DESCRIPTION:  
 This parameter stores a list of valid file types and the associated extensions of these files.  
 PRECEDENCE: 1 ENTITY FILE: SYSTEM

NAME: **MD GATEWAY** DISPLAY TEXT: CP Gateway Parameters  
 MULTIPLE VALUED: Yes INSTANCE TERM: Parameter Name  
 VALUE TERM: Parameter Value VALUE DATA TYPE: free text  
 VALUE DOMAIN: 1:255 INSTANCE DATA TYPE: free text  
 INSTANCE DOMAIN: 1:255  
 PRECEDENCE: 1 ENTITY FILE: SYSTEM

<sup>2</sup>NAME: **MD GET HIGH VOLUME** DISPLAY TEXT: Get High Volume  
 MULTIPLE VALUED: Yes INSTANCE TERM: Procedure  
 VALUE TERM: Get String VALUE DATA TYPE: free text  
 INSTANCE DATA TYPE: pointer INSTANCE DOMAIN: 702.01  
 INSTANCE HELP: Enter a high volume procedure.  
 INSTANCE SCREEN CODE: I  
 +\$P(^MDS(702.01,+Y,0),"^",6)'=2&(+\$P(^MDS(702.01,+Y,0)

<sup>1</sup> Patch MD\*1.0\*20 November 2010 Parameter Definitions Added.

<sup>2</sup> Patch MD\*1.0\*21 June 2010 Parameter Definition added.

## Exported Options

```
, "^", 11) '=2) & ($P (^MDS (702.01, +Y, 0), "^", 9) >0)
DESCRIPTION:
This parameter will contain a free text string that contains two pieces
of data delimited by a semicolon ';'. The two pieces of data are: 1)
1/0 (Yes/No) to indicate whether or not the text of the result should be
added to the note, 2) 1/0 (Yes/No) to enter the text of the result as the
significant finding of the Consult. (If you enter a 0, the note will be
auto closed with the text inside.)
Example string: 1;0
PRECEDENCE: 1                                ENTITY FILE: SYSTEM
```

```
NAME: MD HFS SCRATCH
  DISPLAY TEXT: Vista Scratch HFS Directory
  MULTIPLE VALUED: No                        VALUE TERM: Directory name
  VALUE DATA TYPE: free text                VALUE DOMAIN: 1:250
  VALUE HELP: Enter in an OS level directory
DESCRIPTION:
Contains the directory specification for the Kernel OPEN^%ZISH call. This
directory should be accessible for read/write operations by all CP users.
PRECEDENCE: 1                                ENTITY FILE: SYSTEM
```

```
NAME: MD IMAGING XFER                        DISPLAY TEXT: Imaging Network Share
  MULTIPLE VALUED: No                        VALUE TERM: Imaging Network Share
  VALUE DATA TYPE: free text                VALUE DOMAIN: 1:250
DESCRIPTION:
This parameter contains the name of a network server, share, and path
(UNC) to a location where Clinical Procedures can put files for pick-up by
the Imaging background processor for archiving.
PRECEDENCE: 1                                ENTITY FILE: SYSTEM
```

```
1 NAME: MDK APPLICATION INSTALL                DISPLAY TEXT: MDK Application
Install
  MULTIPLE VALUED: Yes
  INSTANCE TERM: Installation Distribution Info
  VALUE TERM: Distribution Info Value        PROHIBIT EDITING: No
  VALUE DATA TYPE: free text                VALUE DOMAIN: 1:250
  INSTANCE DATA TYPE: free text            INSTANCE DOMAIN: 1:250
DESCRIPTION:
This parameter is used to store the Hemodialysis application
distribution information. The information includes the following:
1) Date/Time when application first launched.
2) User Name
3) System Option Loaded (Y/N)
4) Workstation of where the application was launched.
PRECEDENCE: 1                                ENTITY FILE: SYSTEM
```

```
NAME: MDK GUI VERSION
  DISPLAY TEXT: Hemodialysis Version Compatibility
  MULTIPLE VALUED: Yes                        INSTANCE TERM: Application:Version
```

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Parameter Definition added.

VALUE TERM: Compatible with current server version  
 PROHIBIT EDITING: No VALUE DATA TYPE: yes/no  
 INSTANCE DATA TYPE: free text INSTANCE DOMAIN: 1:40

## DESCRIPTION:

This parameter is used to store the application:versions that are compatible with the current server version of Hemodialysis. Instance format of APPLICATION:VERSION (example: HEMODIALYSIS.EXE:0.0.0.0).

PRECEDENCE: 1 ENTITY FILE: SYSTEM

<sup>1</sup>NAME: **MD MEDICINE CONVERTED** DISPLAY TEXT: Medicine Package  
 Converted

MULTIPLE VALUED: No VALUE TERM: Yes/No  
 PROHIBIT EDITING: No VALUE DATA TYPE: yes/no

## DESCRIPTION:

Used to determine if the Medicine Package has been converted.

PRECEDENCE: 1 ENTITY FILE: SYSTEM

<sup>2</sup>NAME: **MD NOT ADMN CLOSE MUSE NOTE** DISPLAY TEXT: NOT ADMN Close Muse  
 Note

MULTIPLE VALUED: No VALUE TERM: Yes/No  
 PROHIBIT EDITING: No VALUE DATA TYPE: yes/no

## DESCRIPTION:

This parameter is used to indicate the note should not be administratively closed with the proxy user CLINICAL, DEVICE PROXY SERVICE but the interpreter of the procedure for the MUSE device. The default is "No".

PRECEDENCE: 1 ENTITY FILE: SYSTEM

NAME: **MD OFFLINE MESSAGE** DISPLAY TEXT: Offline message  
 MULTIPLE VALUED: No VALUE TERM: Offline Message

VALUE DATA TYPE: word processing

## DESCRIPTION:

This parameter contains a message to display to the users when the Clinical Procedures application is offline.

PRECEDENCE: 1 ENTITY FILE: SYSTEM

<sup>3</sup>NAME: **MD OLYMPUS 7** DISPLAY TEXT: MD OLYMPUS 7

MULTIPLE VALUED: No VALUE TERM: Yes/No  
 PROHIBIT EDITING: No VALUE DATA TYPE: yes/no  
 VALUE HELP: Enter Yes/No whether you have Olympus version 7.3.7.

## DESCRIPTION:

This parameter definition indicates whether the Olympus device is version 7.3.7. The value is Yes/No. The default value is "No".

PRECEDENCE: 1 ENTITY FILE: SYSTEM

NAME: **MD ONLINE**

DISPLAY TEXT: Clinical Procedure Online/Offline

<sup>1</sup> Patch MD\*1.0\*5 August 2006 Parameter Definition added.

<sup>2</sup> Patch MD\*1.0\*21 June 2010 Parameter Definition added.

<sup>3</sup> Patch MD\*1.0\*11 June 2009 Parameter Definition added.

## Exported Options

MULTIPLE VALUED: No  
VALUE TERM: Is Clinical Procedures Online  
PROHIBIT EDITING: No VALUE DATA TYPE: yes/no  
VALUE HELP: Enter 'Yes' to allow access to CP  
DESCRIPTION:  
This parameter controls access to the Clinical Procedures package.  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

<sup>1</sup>NAME: **MD USE APPOINTMENT** DISPLAY TEXT: Use Appointment  
Location  
MULTIPLE VALUED: No VALUE TERM: Use Appointment location  
VALUE DATA TYPE: yes/no  
DESCRIPTION:  
Set this value to Yes to allow CPUser to use the location of the  
appointment selected during CP study check-in for the workload.  
Otherwise, the hospital location of the CP Definition will be used.  
  
If no value is entered, the default value is No.  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

<sup>2</sup>NAME: **MD USE APPT WITH PROCEDURE**  
DISPLAY TEXT: Use Appointment With Procedure  
MULTIPLE VALUED: No  
VALUE TERM: Use appointment with procedure  
PROHIBIT EDITING: No VALUE DATA TYPE: yes/no  
DESCRIPTION:  
Enter "Y" or "N" for Yes/No on whether your site selects the appointment  
scheduled for outpatients during the procedure request in CPRS.  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

<sup>3</sup>NAME: **MD USE NOTE** DISPLAY TEXT: Use Note  
VALUE TERM: Yes/No VALUE DATA TYPE: yes/no  
DESCRIPTION:  
This parameter indicates that Clinical Procedures will use the note  
for the text of the result instead of the Significant Finding field in  
Consult.  
PRECEDENCE: 1 ENTITY FILE: SYSTEM

NAME: **MD USER DEFAULTS** DISPLAY TEXT: CP User Defaults  
MULTIPLE VALUED: Yes INSTANCE TERM: Parameter setting  
VALUE TERM: Parameter value PROHIBIT EDITING: No  
VALUE DATA TYPE: free text VALUE DOMAIN: 1:250  
INSTANCE DATA TYPE: free text INSTANCE DOMAIN: 1:250  
DESCRIPTION:  
This parameter is used to store a users default parameter settings. Each  
setting is defined on the client.  
PRECEDENCE: 1 ENTITY FILE: USER

---

<sup>1</sup> Patch MD\*1.0\*11 June 2009 Parameter Definition added.

<sup>2</sup> Patch MD\*1.0\*14 March 2008 Parameter Definition added.

<sup>3</sup> Patch MD\*1.0\*21 June 2010 Parameter Definition Added.



## Protocols

NAME: **MCAR Device Client** ITEM TEXT: Instrument Device Client  
TYPE: subscriber CREATOR: REDACTED

PACKAGE: MEDICINE  
DESCRIPTION: Subscriber protocol for sending data to Vista from clinical instruments.  
TIMESTAMP: 59276,54156 RECEIVING APPLICATION: MCAR-INST  
TRANSACTION MESSAGE TYPE: ORU EVENT TYPE: R01  
PROCESSING ID: P LOGICAL LINK: MCAR INST  
VERSION ID: 2.3 RESPONSE MESSAGE TYPE: ACK  
PROCESSING ROUTINE: D ^MDHL7A SENDING FACILITY REQUIRED?: NO  
RECEIVING FACILITY REQUIRED?: NO

NAME: **MCAR Device Server Driver** ITEM TEXT: Instrument HL7 Event  
TYPE: event driver CREATOR: REDACTED

PACKAGE: MEDICINE  
DESCRIPTION: This protocol is used by the HL7 package to send results to Vista from various clinical instrumentation.  
TIMESTAMP: 59276,54156 SENDING APPLICATION: INST-MCAR  
TRANSACTION MESSAGE TYPE: ORU EVENT TYPE: R01  
PROCESSING ID: P VERSION ID: 2.3  
SENDING FACILITY REQUIRED?: NO RECEIVING FACILITY REQUIRED?: NO  
SUBSCRIBERS: MCAR Device Client

NAME: **MCAR ORM CLIENT** TYPE: subscriber  
CREATOR: REDACTED  
RECEIVING APPLICATION: INST-MCAR  
EVENT TYPE: O02 RESPONSE MESSAGE TYPE: ORR  
SENDING FACILITY REQUIRED?: NO RECEIVING FACILITY REQUIRED?: NO  
SECURITY REQUIRED?: NO ROUTING LOGIC: Q

NAME: **MCAR ORM SERVER**  
ITEM TEXT: Clinical Procedures ORM Protocol Server  
TYPE: event driver CREATOR: REDACTED

TIMESTAMP: 59276,54156 SENDING APPLICATION: MCAR-INST  
TRANSACTION MESSAGE TYPE: ORM EVENT TYPE: O01  
VERSION ID: 2.3  
SUBSCRIBERS: MCAR ORM CLIENT

<sup>1</sup>NAME: **MD RECEIVE GMRC**  
ITEM TEXT: Clinical Procedures receives messages from Consult  
TYPE: action CREATOR: REDACTED  
PACKAGE: CLINICAL PROCEDURES  
DESCRIPTION: This protocol receives messages from Consult. (IA 3140)

<sup>1</sup> Patch MD\*1.0\*14 March 2008 Protocols added to support the auto study check-in.

ENTRY ACTION: D EN^MDWORC(.XQORMSG)      TIMESTAMP: 60934,38793

NAME: **MD RECEIVE OR**

ITEM TEXT: Clinical Procedures receives order msgs from CPRS  
 TYPE: action      CREATOR: REDACTED

PACKAGE: CLINICAL PROCEDURES

DESCRIPTION: This protocol receives order messages from CPRS. (IA 3135)

ENTRY ACTION: D EN^MDWOR(.XQORMSG)      TIMESTAMP: 60934,38793

## HL7 Application Parameters

NAME: **INST-MCAR**

COUNTRY CODE: USA

HL7 FIELD SEPARATOR: |

ACTIVE/INACTIVE: ACTIVE

HL7 ENCODING CHARACTERS: ^~\&

NAME: **MCAR-INST**

FACILITY NAME: VISTA

COUNTRY CODE: USA

HL7 FIELD SEPARATOR: |

ACTIVE/INACTIVE: ACTIVE

MAIL GROUP: POSTMASTER

HL7 ENCODING CHARACTERS: ^~\&

## HL Logical Links

**NODE: MCAR INST**

DEVICE TYPE: Single-threaded Server  
AUTOSTART: Enabled  
TASK NUMBER: 526320  
QUEUE SIZE: 100  
RE-TRANSMISSION ATTEMPTS: 3  
ACK TIMEOUT: 60  
TCP/IP PORT: 9026  
PERSISTENT: NO  
IN QUEUE BACK POINTER: 331  
OUT QUEUE BACK POINTER: 220

LLP TYPE: TCP  
STATE: Reading  
TIME STARTED: MAR 04, 2004@06:46:17  
SHUTDOWN LLP ?: NO  
READ TIMEOUT: 60  
EXCEED RE-TRANSMIT ACTION: ignore  
TCP/IP SERVICE TYPE: SINGLE LISTENER  
STARTUP NODE: DEV:ISC4A1  
IN QUEUE FRONT POINTER: 331  
OUT QUEUE FRONT POINTER: 210

**NODE: MCAR OUT**

DEVICE TYPE: Non-Persistent Client  
AUTOSTART: Enabled  
TASK NUMBER: 529066  
QUEUE SIZE: 100  
READ TIMEOUT: 60  
EXCEED RE-TRANSMIT ACTION: ignore  
TCP/IP PORT: 9028  
PERSISTENT: NO  
IN QUEUE BACK POINTER: 202  
OUT QUEUE BACK POINTER: 206

LLP TYPE: TCP  
STATE: Openfail  
TIME STARTED: MAR 04, 2004@06:45:47  
SHUTDOWN LLP ?: NO  
RE-TRANSMISSION ATTEMPTS: 3  
ACK TIMEOUT: 60  
TCP/IP ADDRESS: 10.3.17.157  
TCP/IP SERVICE TYPE: CLIENT (SENDER)  
STARTUP NODE: DEV:ISC4A1  
IN QUEUE FRONT POINTER: 202  
OUT QUEUE FRONT POINTER: 202



## Menu Options by Name

NAME: **MD GUI USER** MENU TEXT: MD GUI USER  
 TYPE: Broker (Client/Server) CREATOR: REDACTED

TIMESTAMP OF PRIMARY MENU: 59331,44145

RPC: MD TMDOUTPUT  
 RPC: MD TMDPARAMETER  
 RPC: MD TMDPATIENT  
 RPC: MD TMDPROCEDURE  
 RPC: MD TMDRECORDID  
 RPC: MD TMDTRANSACTION  
 RPC: MD TMDUSER  
 RPC: MD UTILITIES

UPPERCASE MENU TEXT: MD GUI USER

NAME: **MD GUI MANAGER** MENU TEXT: MD GUI MANAGER  
 TYPE: Broker (Client/Server) CREATOR: REDACTED

TIMESTAMP OF PRIMARY MENU: 59385,45622

RPC: MD TMDOUTPUT  
 RPC: MD TMDPARAMETER  
 RPC: MD TMDPATIENT  
 RPC: MD TMDPROCEDURE  
 RPC: MD TMDRECORDID  
 RPC: MD TMDTRANSACTION  
 RPC: MD TMDUSER  
 RPC: MD UTILITIES  
 RPC: MD GATEWAY

UPPERCASE MENU TEXT: MD GUI MANAGER

<sup>1</sup>NAME: **MD AUTO CHECK-IN SETUP** MENU TEXT: Auto Study Check-In Setup  
 TYPE: run routine CREATOR: REDACTED

PACKAGE: CLINICAL PROCEDURES

DESCRIPTION: This option is used to populate the XPAR parameters MD USE APPT WITH PROCEDURE, MD CHECK-IN PROCEDURE LIST, MD CLINIC QUICK LIST, and MD CLINICS WITH MULT PROC. The four XPAR parameters are used for the auto study

check-in. Users can use the option to indicate whether their site use and schedule appointments. They can populate a list of procedures and associated

clinics that need a CP study checked-in.

ROUTINE: EN1^MDWSETUP

UPPERCASE MENU TEXT: AUTO STUDY CHECK-IN SETUP

NAME: **MD SCHEDULED STUDIES** MENU TEXT: Scheduled Studies  
 TYPE: run routine CREATOR: REDACTED

PACKAGE: CLINICAL PROCEDURES

DESCRIPTION: This option is tasked to run daily. It will process the HL7 messages that need to be sent to the device on a daily basis for CP studies.

<sup>1</sup> Patch MD\*1.0\*14 March 2008 Options added to support the auto study check-in.





## Exported Options

ITEM: MDCVT BUILD CONVERSION LIST                   SYNONYM: 2  
  DISPLAY ORDER: 2  
  TIMESTAMP: 60459,53192                   TIMESTAMP OF PRIMARY MENU:  
59904,24363  
  UPPERCASE MENU TEXT: MEDICINE TO CP CONVERSION MANA

NAME: **MDCVT SETUP**                                   MENU TEXT: Conversion Setup  
  TYPE: run routine                               CREATOR: REDACTED

  PACKAGE: CLINICAL PROCEDURES                   X ACTION PRESENT: YES  
  DESCRIPTION: This option will bring up a setup screen for the site to  
setup  
the Medicine Report Conversion parameter setup. This parameter setup allows  
the site to control which Medicine reports will be converted and which CP  
Definition and TIU title to link to.  
  EXIT ACTION: K DDSFILE,DR,DA                   ROUTINE: SETUP^MDCVT  
  UPPERCASE MENU TEXT: CONVERSION SETUP

NAME: **MDCVT RUN**                                   MENU TEXT: Run the Conversion Process  
  TYPE: run routine                               CREATOR: REDACTED

  PACKAGE: CLINICAL PROCEDURES  
  DESCRIPTION: This option will start the Medicine Report conversion to  
Clinical Procedures. This option will only convert reports for procedures  
that have the "CONVERT Y/N" field set to "Yes" under the MEDICINE FILE  
PARAMETERS in the CP CONVERSION file (#703.9).  
  ROUTINE: EN^MDCVT  
  UPPERCASE MENU TEXT: RUN THE CONVERSION PROCESS

NAME: **MDCVT SUMMARY**                               MENU TEXT: Summary of Conversion  
Process  
  TYPE: print                                   CREATOR: REDACTED

  PACKAGE: CLINICAL PROCEDURES  
  DESCRIPTION: This option will generate a Medicine Report Conversion  
report.  
This report consists of a listing of all Medicine records that were  
processed  
in the conversion in variable pointer format and the status of the  
conversion  
whether the record was converted, skipped, or errored. If the record was  
converted, the total number of lines and bytes that the record was converted  
to in a TIU document will be displayed. If the record errored, the reason  
why  
it errored will be displayed. If the record was skipped, the reason why it  
was skipped will be displayed.  
  DIC {DIP}: MDD(703.9,                               L.: 0  
  FLDS: [MD CONVERSION SUMMARY]                   BY: [MD CONVERSION SUMMARY]  
  UPPERCASE MENU TEXT: SUMMARY OF CONVERSION PROCESS

NAME: **MDCVT DISK SPACE**                           MENU TEXT: Disk Space Requirements  
  TYPE: run routine                               CREATOR: REDACTED

PACKAGE: CLINICAL PROCEDURES  
 DESCRIPTION: This option will generate a summary of the Medicine report conversion. This summary consists of a list of the files converted to Clinical Procedures, the count of records converted, the total lines and Bytes the records were converted in each file.  
 ROUTINE: SUMMARY^MDCVT  
 UPPERCASE MENU TEXT: DISK SPACE REQUIREMENTS

NAME: **MDCVT LIST OF TIU TITLES** MENU TEXT: List of TIU Titles Needed  
 TYPE: run routine CREATOR: REDACTED

PACKAGE: CLINICAL PROCEDURES  
 DESCRIPTION: This option will allow the user to generate a list of Medicine procedures and the TIU titles needed to be created for the procedures that will be used for the Medicine report conversion. The PRINT NAME of the procedures in the PROCEDURE/SUBSPECIALTY file (#697.2) will be used in the display. This list will list the procedures and titles for a Medicine Package Procedure, if the "Convert Y/N" parameter is set to "Yes" and the "Use TIU Note Title" parameter is blank in the Conversion Setup option.  
 ROUTINE: DISP^MDSTATU  
 UPPERCASE MENU TEXT: LIST OF TIU TITLES NEEDED

NAME: **MDCVT TOTALS** MENU TEXT: Conversion Totals By Status  
 TYPE: run routine CREATOR: REDACTED

PACKAGE: CLINICAL PROCEDURES  
 DESCRIPTION: This option will verify that the Medicine reports conversion is complete and are in appropriate statuses.  
 ROUTINE: TOTALS^MDCVT  
 UPPERCASE MENU TEXT: CONVERSION TOTALS BY STATUS

NAME: **MDCVT ERROR LOG** MENU TEXT: Error Log  
 TYPE: print CREATOR: REDACTED

PACKAGE: CLINICAL PROCEDURES  
 DESCRIPTION: This option generates a log of all the errors that occurred with each Medicine report during the conversion. The listing consists of the CONVERSION ID and ERROR MESSAGE. The CONVERSION ID consists of the record # concatenated with a ";" and the global location (e.g., "345;MCAR(699)").  
 DIC {DIP}: MDD(703.9, L.: 0  
 FLDS: [MD CONVERSION ERRORS] BY: [MD CONVERSION ERRORS]  
 UPPERCASE MENU TEXT: ERROR LOG

NAME: **MDCVT CONVERSION LOCKOUT** MENU TEXT: Conversion Lockout  
 TYPE: run routine CREATOR: REDACTED



DESCRIPTION: This option will run the device survey collection routine and capture the data for transmission.

ROUTINE: COL^MDDEVCL

UPPERCASE MENU TEXT: MD DEVICE SURVEY TRANSMISSION

NAME: **MD COORDINATOR** MENU TEXT: CP Coordinator Menu

TYPE: menu

PACKAGE: CLINICAL PROCEDURES

DESCRIPTION: This is the menu for the person that is the ADPAC for Clinical

Procedures. It includes all of the user interface options.

ITEM: MD AUTO CHECK-IN SETUP

ITEM: MD HIGH VOLUME PROCEDURE SETUP

ITEM: MD DICOM

ITEM: MD CARTCL

ITEM: MD UTILITIES

NAME: **MD DICOM** MENU TEXT: CP - DICOM

Interoperability

TYPE: edit

PACKAGE: CLINICAL PROCEDURES

DESCRIPTION: This option improves interoperability between Clinical Procedures and VistA Imaging CPRS Consult Request Tracking DICOM. There are three capabilities:

First, the VistA Imaging consult accession number sss-GMR-nnnnnnnn can be used for the Clinical Procedures Instrument Order Number.

Second, the timing of the DICOM Modality Worklist creation is changed from order release to check-in, making it much more useful.

Third, the VistA Imaging HL7 message body can be used instead of the CP HL7 message body. (The VistA Imaging HL7 has much more information than the CP HL7.)

Note: This is for bidirectional CP instruments only. Also, the CP must have an entry in the CLINICAL SPECIALTY DICOM & HL7 file (#2006.5831) to have DICOM Modality Worklist and HL7.

DIC {DIC}: MDS(702.09,

DIC(0): AEQM

DIE: MDS(702.09,

DR {DIE}: .19

UPPERCASE MENU TEXT: CP - DICOM INTEROPERABILITY

NAME: **MD CARTCL** MENU TEXT: Keep Consult Open for CART-CL

TYPE: edit

PACKAGE: CLINICAL PROCEDURES

DESCRIPTION: This Clinical Procedures Uni-directional Configuration flag 'CONSULT KEEP OPEN' provides the following functionality:

The CP procedure is automatically placed in Completed status after the HL7 message is sent, thus preventing an "inbound" HL7 message containing the test results from being sent back to the CPRS Consult Note.

The physician can then edit the Consult Note by manually pasting in data from a test result reporting system to complete the Consult.





## 7. Cross-References

Included in this section is the information about the cross-references of the application.

<b>FILE NUMBER</b>	<b>FIELD NUMBER</b>	<b>CROSS REFERENCE</b>	<b>DESCRIPTION</b>
<sup>1</sup> 702	.05	ACON	Used for searches when the user knows the Consult order number.
	.3	ACONV	This cross reference is used to keep track of which CP transaction study was created during the Medicine report conversion and which Medicine record it is associated with.
	.06	ATIU	Used for searches when the user knows the TIU Note title.
	.01	B	Regular B Cross Reference of the .01 field, the patient name.
	.04	ACP	Used for searches when the user knows the CP definition.
	.11	AINST	Used for searches when the user knows if the study was submitted to Imaging.
	.12	AION	Used to quickly retrieve the study ien from the instrument order number.
	.09	AS	It is a cross reference on the status of the CP study and it is used for quick look up.
	.13	AVISIT	This cross reference is used to make sure that a Visit file entry is not deleted as long as there is an entry.
	.13	AUPNV	This cross reference tells Visit Tracking how many file entries are using (point to) a Visit file entry.

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Cross References added.

Cross-References

Subfile 702.091	.01	B	Regular B Cross Reference of the .01 field, error messages.
Subfile 702.1	.01	B	Regular B Cross Reference of the .01 field, image.
<b>702.01</b>	.02	ASPEC	Used for searches when the user knows the Treating Specialty.
	.01	B	Regular B Cross Reference of the .01 field, name of the procedure.
	.01	UC	Used to validate a new entry as unique without case sensitivity.
Subfile 702.011	.01	AINST	Used for searches when the user knows the name of the instrument.
	.01	B	Regular B Cross Reference of the .01 field, instrument.

<b>FILE NUMBER</b>	<b>FIELD NUMBER</b>	<b>CROSS REFERENCE</b>	<b>DESCRIPTION</b>
<sup>1</sup> 702.09	.01	B	Regular B Cross Reference of the .01 field, name of the instrument.
	.01	UC	Used to validate a new entry as unique without case sensitivity.
<b>703.1</b>	.02	ADFN	Used for searches when the user knows the patient name.
	.03	ADTP	Used for searches when the user knows the date/time performed.
	.04	AINST	Used for searches when the user knows the name of the instrument.
	.09	ASTATUS	Sets the status for the Gateway to find studies to process.
	.05	ASTUDYID	This cross reference provide a quick look up by the study reference ID.
	.01	B	Regular B Cross Reference of the .01 field, the upload ID.
Subfile 703.11	.01	B	Regular B Cross Reference of the .01 field, upload item.
<b>703.9</b>	.01	B	Regular B Cross Reference of the .01 field, Name.
Subfile 703.91	.01	B	Regular B Cross Reference of the .01 field, Medicine File Parameters.
Subfile 703.92	.01	B	Regular B Cross Reference of the .01 field, Conversion ID.
	.02	AS	Used for lookup by conversion status.
<b>704.201</b>	.01	B	Regular B Cross Reference of the .01 field, PATIENT ID.
<b>704.202</b>	.09	AS	Used for lookup of active hemodialysis studies.

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Cross References added.

Cross-References

	.01	B	Regular B Cross Reference of the .01 field, the hemodialysis ID.
	.02	C	C Cross Reference of the .02 field, PATIENT record number.
<b>704.209</b>	.01	B	Regular B Cross Reference of the .01 field, SETTING NAME.

## 8. Archiving and Purging

There is no archiving capability at this time. Purging is available in the CPGateway through the Set Maximum Log Entries option. See description below.

**Set Maximum Log Entries** allows the user to adjust the number of entries that are displayed in the log file. Once this value is reached, entries will be purged from the beginning of the log to keep the log file from growing too large. This value will take effect after the next polling operation so if the current poll value is 300 seconds it may take up to 5 minutes for the new value to be used. Allowable values are 100 to 10000 entries. When the CP Gateway is shut down, all entries are purged from the log file.

**Note:** Purging is also done daily while the CP Gateway is running. This purge deletes the raw data that comes across from the instrument. The CP Gateway keeps data for a specified number of days based on the entry in the system parameter “Days to keep Instrument Data”. Data older than this will be purged. The data to be deleted is already matched with a study. The fields purged are the Item Value field (#.1) and Item Text field (#.2) of the Upload Item multiple in the CP Results file (#703.1).

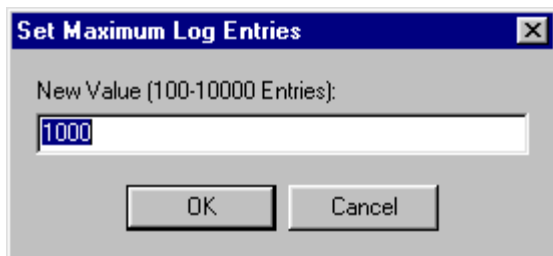


Figure 8-1



## 9. Callable Routines

<sup>1</sup>Entry points provided by the Clinical Procedures V. 1.0 package to other packages are listed below.

### **Routine: MDAPI (Controlled Subscription)**

COMPONENT: \$EXTDATA(MDPROC)

VARIABLES: MDPROC

Type: Input

The CP Definition IEN from CP DEFINITION  
file (702.01)

Type: Output

This is an extrinsic function and it  
returns: 1/0 for Yes/No.

Entry Point to check if a medical device is associated with  
the CP Definition.

COMPONENT: \$TIUCOMP(MDNOTE)

VARIABLES: MDNOTE Type: Input

The TIU Document IEN from TIU DOCUMENT  
file (#8925).

\$TIUCOMP Type: Output

This is an Extrinsic Function and it  
returns: 0/1 for fail/success of  
transaction completion.

Entry Point to complete a CP transaction.

COMPONENT: \$TIUDEL(MDNOTE)

VARIABLES: MDNOTE Type: Input

The TIU Document IEN from TIU DOCUMENT  
file (#8925).

Entry Point to clean up the CP Transaction file entry of  
the TIU Note that was deleted.

COMPONENT: ISTAT(MDARR)

VARIABLES: MDARR Type: Input

An array of the following:  
MDARR(0)="0^error message" or "1^success  
message"

MDARR(1)=TrackID (CP;Transaction IEN)

MDARR(2)=Image(s) Queue Number

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Description modified and callable routines added.

MDARR(3..N)=Warnings, if error(s) exist.  
Entry Point to update Clinical Procedures of the result of  
the image(s) that was copied to the Imaging Server.

COMPONENT: ITIU(RESULTS,DFN,CONSULT,VSTRING)

VARIABLES: RESULTS Type: Output

RESULTS(0) will equal one of the  
following (Required)

- ; IEN of the TIU note if successful
- ; or on failure one of the following status messages
- ; -1^No patient DFN
- ; -1^No Consult IEN
- ; -1^No VString
- ; -1^Error in CP transaction
- ; -1^Unable to create CP transaction
- ; -1^Unable to create the TIU document
- ; -1^No such consult for this patient.

DFN Type: Input  
Patient IEN. (Required)

CONSULT Type: Input  
Consult IEN. (Required)

VSTRING Type: Input  
VString data for TIU Note. (Required)

This entry point enables VistA Imaging to retrieve/create a  
TIU note for a consult for attaching images to.

COMPONENT:

\$\$TIUREAS(MDFN,MDOLDC,MDANOTE,MDNDFN,MDNEWC,MDNEWV,MDNTIU)

VARIABLES: MDFN Type: Input  
Patient DFN in Patient File (#2).

MDOLDC Type: Input  
The old consult number that the TIU note  
is being re-assigned from.

MDANOTE Type: Input  
The TIU Note internal Entry Number that  
is being re-assigned.

MDNDFN Type: Input  
The patient DFN who will be re-assigned  
to the TIU document.

MDNEWC Type: Input  
The new consult number that will be  
re-assigned to the TIU document.

MDNEWV Type: Input



The new visit for the TIU document assignment.

MDNTIU Type: Input

The new re-assigned TIU document internal entry number.

\$\$TIUREAS Type: Output

This is an extrinsic function and it returns: 1 for Success or 0^Error Message.

This entry point enables TIU to notify CP that a TIU note was reassigned and CP needs to clean up and update the TIU note re-assignment.

**ROUTINE: MDRPCOP (Private Subscription)**

COMPONENT: GETVST

VARIABLES: DFN Type: Input

Patient's dfn.

RESULTS Type: Output

A subscripted array that contains a list of visits:

1st piece has 3 pieces delimited by an ","

Patient DFN in Patient File (#2).

- type of visit ("A","I","V")

- date and time

- hospital location ien

2nd piece - date/time of visit

(internal format)

3rd & 4 piece - (external format)

hospital location and status.

This sub-module returns a list of visits for a given patient.

**ROUTINE: MDAPI1 (Private Subscription)**

COMPONENT: GET(RESULTS,MDARDFN,MDSDT,MDEDT,MDFLDS)

VARIABLES: RESULTS Type: Both

Input: The global ^TMP array in which to return results. (Required)

Output: Passed by Reference

Global array returned in the FM

DIQ call

format:

MDARDFN Type: Input

The patient DFN (Required).

MDSDT Type: Input

The start date of the date range to return the data in. This must be in FM internal format. (Required).

MDEDT Type: Input

The end date of the date range to return the data in. This must be in FM internal format. (Required).

MDFLDS Type: Input

A list of fields from file #691.5 to be returned in RESULTS. MDFLDS should contain a list of fields delimited by ";" (Required).

example: MDFLDS=".01;11;20..."

Example API call:

```
S RESULTS="^TMP("NAMESPACE",$J)"
D
GET^MDAPI1(.RESULTS,162,2900101,3021001,
".01;11")
```

return:

```
^TMP("NAMESPACE",$J,file #,record
ien_","
,field #,"E")=Data
^TMP("NAMESPACE",$J,subfile #,entry
#_","_
record ien field of the
multiple,"E")=data
```

^TMP("NAMESPACE",\$J,0) will equal one of the following,

If the call failed:

- 1^No Patient DFN.
- 1^No Start Date Range
- 1^No End Date Range.
- 1^Start Date greater than

End Date.

- 1^No fields defined.

If a local variable is defined in RESULTS,

- ^TMP("MDAPI",\$J,0) equals
- 1^Global TMP array only.

If no return array defined,  
 ^TMP("MDAPI", \$J, 0) equals  
 -1^No return array global.

If no data,  
 ^TMP("NAMESPACE", \$J, 0) equals  
 -1^No data for patient.

**ROUTINE: MDPS1 (Controlled Subscription)**

COMPONENT: CPA~MDPS1

VARIABLES: DFN Type: Input

Patient Internal Entry Number. (Required)

GMTS1 Type: Input

The ending date in inverse date format  
 (9999999-date/time). (Required)

GMTS2 Type: Input

The beginning date in inverse date format  
 (9999999-date/time). (Required)

GMTSNDM Type: Input

The maximum number of entries to return.  
 (Optional)

GMTSNPG Type: Input

The Page Number. (Optional)

GMTSQIT Type: Input

Quit indicator. (Optional)

This entry point will display Clinical Procedures result  
 report that have the Procedure Summary Code of ABNORMAL.  
 The result consists of the Display Result of the Consult  
 procedure request, if it exists, and the TIU document text.

COMPONENT: CPB~MDPS1

VARIABLES: DFN Type: Input

Patient Internal Entry Number. (Required)

GMTS1 Type: Input

The ending date in inverse date format  
 (9999999-date/time). (Required)

GMTS2 Type: Input

The beginning date in inverse date format  
 (9999999-date/time). (Required)

GMTSNDM Type: Input

The maximum number of entries to return.  
 (Optional)

GMTSNPG Type: Input

The Page Number. (Optional)

GMTSQIT Type: Input

Quit indicator. (Optional)

This entry point will display a brief summary of the Clinical Procedures result Report. It displays the Consults # (if it exists), Procedure Name, Date/Time Performed, and the Procedure Summary Code.

COMPONENT: CPF~MDPS1

VARIABLES: DFN Type: Input

Patient Internal Entry Number. (Required)

GMTS1 Type: Input

The ending date in inverse date format (9999999-date/time). (Required)

GMTS2 Type: Input

The beginning date in inverse date format (9999999-date/time). (Required)

GMTSNDM Type: Input

The maximum number of entries to return. (Optional)

GMTSNPG Type: Input

The Page Number. (Optional)

GMTSQIT Type: Input

Quit indicator. (Optional)

This entry point displays the full Clinical Procedures result report. The full report consists of the Display Result of the Consult procedure, if it exists, and the TIU document text.

COMPONENT: CPS~MDPS1

VARIABLES: DFN Type: Input

Patient Internal Entry Number. (Required)

GMTS1 Type: Input

The ending date in inverse date format (9999999-date/time). (Required)

GMTS2 Type: Input

The beginning date in inverse date format (9999999-date/time). (Required)

GMTSNDM Type: Input

The maximum number of entries to return. (Optional)

GMTSNPG Type: Input

The Page Number. (Optional)

GMTSQIT Type: Input

Quit indicator. (Optional)

This entry point displays a one line summary of the Clinical Procedures result report. The one line summary consists of the Consult Number, if it exists, Procedure

Name, Date/Time Performed, and the Procedure Summary Code.

COMPONENT:

EN1~MDPS1(MDGLO,MDDFN,MDSDT,MDEDT,MDMAX,MDPSC,MDALL)

VARIABLES: MDGLO Type: Both

Return Global Array (Required)

MDDFN Type: Input

Patient DFN (Internal Entry Number)  
(Required)

MDSDT Type: Input

Start Date in FM Internal Format  
(Optional)

MDEDT Type: Input

End Date in FM Internal Format (Optional)

MDMAX Type: Input

Number of studies to return (Optional)

MDPSC Type: Input

Procedure Summary Code to return. The four Procedure Summary Code are NORMAL, ABNORMAL, BRODERLINE, and INCOMPLETE. By passing this parameter, the entry point will pass studies with this Procedure Summary Code. (Optional)

MDALL Type: Input

MDALL is flag. If MDALL =1, it identifies that all text reports with the procedures list should be returned.

This entry point returns a global Array.

COMPONENT: PR690~MDPS1

VARIABLES: MCARGDA Type: Input

The internal entry number of the Medicine report record.

MCPRO Type: Input

The free text of the Medicine procedure name in the Procedure/Subspecialty file (#697.2).

DFN Type: Input

Patient internal entry number.

ORHFS Type: Input

Order Entry Host File.

Prints the free text of the Medicine report.

COMPONENT: PR702~MDPS1

VARIABLES: MCARGDA Type: Input

The internal entry number of the CP

Transaction record in file (#702).  
MCPRO Type: Input  
The free text of the CP Definition name  
in file (#702.01).  
DFN Type: Input  
Patient internal entry number.  
ORHFS Type: Input  
The Order Entry Host File.  
Prints the free text of the Clinical Procedures result  
interpretation.

COMPONENT: CPC~MDPS1

VARIABLES: DFN Type: Input  
Patient Internal Entry Number. (Required)  
GMTS1 Type: Input  
The ending date in inverse date format  
(9999999-date/time). (Required)  
GMTS2 Type: Input  
The beginning date in inverse date format  
(9999999-date/time). (Required)

GMTSNDM Type: Input  
The maximum number of entries to return.  
(Optional)

GMTSNPG Type: Input  
The Page Number. (Optional)

GMTSQIT Type: Input  
Quit indicator. (Optional)  
This entry point displays the Captioned Clinical Procedures  
result report. The captioned report displays the Display  
Result of the Consult procedure, if it exists, and the TIU  
document text.

## 10. External Relations

1. The following describes the installation environment for Version 1.0 of the Clinical Procedures package on the VistA server:
  1. VA FileMan V. 22 or greater
  2. Kernel V. 8.0 or greater
  3. Kernel Toolkit V. 7.3 or greater
  4. Kernel RPC Broker V. 1.1 or greater
  5. PIMS (Patient Information Management System) V. 5.3 or greater (including):
    - a. Registration V. 5.3
    - b. Scheduling V. 5.3
  6. Health Summary V. 2.7 or greater
  7. HL7 (Health Level 7) V. 1.6 or greater
  8. Consults/Request Tracking V. 3.0
  9. TIU (Text Integration Utility) V. 1.0
  10. Order Entry V. 3.0 (CPRS (Computerized Patient Record System) V. 1.0 (GUI V. 18.8)) or greater
  11. PCE (Patient Care Encounter) V. 1.0 or greater
  12. VistA Imaging V. 3.0 or greater (includes installation of background processor and jukebox)
  13. Medicine V. 2.3 (optional)
  14. Vitals V 5.0 (optional)

These packages must be patched up through and including the following patches before Clinical Procedures is installed:

1. Patch 17 of Consults/Request Tracking V. 3.0 (GMRC\*3.0\*17)
2. Patch 112 of Order Entry V. 3.0 (OR\*3.0\*112)
3. Patch 109 of Text Integration Utility V. 1.0 (TIU\*1.0\*109)
4. Patch 7 of Imaging V. 3.0 (MAG\*3.0\*7)
5. Patch 93 of HL7 V. 1.6 (HL\*1.6\*93)
6. Patch 98 of HL7 V. 1.6 (HL\*1.6\*98)
7. If Medicine V. 2.3 is installed, you must install Patch 24 of Medicine (MC\*2.3\*24), and Patch 146 of Kernel (XU\*8.0\*146).

2. <sup>1</sup>Interface Control Registrations (formerly known as Integration Agreements) between the Clinical Procedures software and other VistA applications exist. Database Interface Control Registrations (DICR) are available on the DBA menu on Forum. For complete information regarding the DICRs for Clinical Procedures V. 1.0, please refer to the *Integration Control Registrations (Agreements) Menu* [DBA IA ISC] option under the *DBA [DBA]* option on FORUM.

---

<sup>1</sup> Patch MD\*1.0\*14 March 2008 External Relations list removed. Integration Agreements renamed Interface Control Registrations.

<sup>1</sup>The following screen capture shows one way to access the DBA option in FORUM:

```
Select Software Services Primary Menu Option: DBA

Select DBA Option: IA  Integration Control Registrations (Agreements)

Select Integration Control Registrations (Agreements) Option: CUST
Custodial Package Menu

Select Custodial Package Menu Option: ?

    1      ACTIVE ICRs by Custodial Package
    2      Print ALL ICRs by Custodial Package
    3      Supported References Print All

Enter ?? for more options, ??? for brief descriptions, ?OPTION for help
text.

Select Custodial Package Menu Option: 1  ACTIVE ICRs by Custodial Package
Select PACKAGE NAME: MD  CLINICAL PROCEDURES      MD
DEVICE: HOME//
```

---

<sup>1</sup> Patch MD\*1.0\*14 March 2008 Screen capture added.



## 11. Internal Relations

<sup>1</sup>The following are the Clinical Procedures GUI Application menu option, the Clinical Procedures Site Files menu option, and the CP Hemodialysis menu option. Only the MD GUI MANAGER can be invoked independently. The MD GUI USER and MD HEMODIALYSIS USER menu option cannot be invoked independently. They are dependent upon each other. In order to use each module, please refer to the Clinical Procedures Implementation Guide to set up Clinical Procedures.

NAME: **MD GUI USER** MENU TEXT: MD GUI USER  
TYPE: Broker (Client/Server) CREATOR: REDACTED

TIMESTAMP OF PRIMARY MENU: 59331,44145  
RPC: MD TMDOUTPUT  
RPC: MD TMDPARAMETER  
RPC: MD TMDPATIENT  
RPC: MD TMDPROCEDURE  
RPC: MD TMDRECORDID  
RPC: MD TMDTRANSACTION  
RPC: MD TMDUSER  
RPC: MD UTILITIES  
UPPERCASE MENU TEXT: MD GUI USER

NAME: **MD GUI MANAGER** MENU TEXT: MD GUI MANAGER  
TYPE: Broker (Client/Server) CREATOR: REDACTED

TIMESTAMP OF PRIMARY MENU: 59385,45622  
RPC: MD TMDOUTPUT  
RPC: MD TMDPARAMETER  
RPC: MD TMDPATIENT  
RPC: MD TMDPROCEDURE  
RPC: MD TMDRECORDID  
RPC: MD TMDTRANSACTION  
RPC: MD TMDUSER  
RPC: MD UTILITIES  
RPC: MD GATEWAY  
UPPERCASE MENU TEXT: MD GUI MANAGER

<sup>2</sup>NAME: **MD HEMODIALYSIS USER** MENU TEXT: HEMODIALYSIS USER  
TYPE: Broker (Client/Server) CREATOR: REDACTED

TIMESTAMP OF PRIMARY MENU: 60387,39853  
RPC: MDK GET VISTA DATA  
RPC: MDK GET/SET RENAL DATA  
RPC: MDK UTILITY  
RPC: VAFCTFU CONVERT DFN TO ICN  
RPC: VAFCTFU CONVERT ICN TO DFN  
RPC: MD TMDWIDGET  
RPC: MD TMDNOTE  
RPC: MD TMDCIDC

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Description modified.

<sup>2</sup> Patch MD\*1.0\*6 May 2008 Hemodialysis User menu option added.

## Internal Relations

RPC: MD TMDLEX  
RPC: MD TMDENCOUNTER  
RPC: GMV MANAGER  
RPC: MD GATEWAY  
RPC: MD TMDSUBMITU  
RPC: ORWPT PTINQ  
RPC: GMV PTSELECT  
RPC: DG SENSITIVE RECORD ACCESS  
RPC: DG SENSITIVE RECORD BULLETIN  
RPC: MD TMDRECORDID  
UPPERCASE MENU TEXT: HEMODIALYSIS USER

## 12. Package-wide Variables

No package-wide variables are used in this application.



## 13. SAC Exemptions

There is one SAC exemption for Clinical Procedures.

1. STANDARD SECTION: 3A      Namespacing

DATE GRANTED: APR 25,2002

Since the Medicine package has become a child of the Clinical Procedures package, the Clinical Procedures package is exempt from being required to export the Medicine package as part of the Clinical Procedures package.



## 14. Software Product Security

### Security Management

No additional security measures are to be applied other than those implemented through Menu Manager and the package routines. Clinical Procedures uses the standard RPC broker log-in procedure to validate the user and allow access to the system.

No additional licenses are necessary to run the software.

Confidentiality of staff and patient data and the monitoring of this confidentiality is no different than with any other paper reference.

### Security Features

#### 1. Mail groups and alerts.

There is one mailgroup associated with this software. This mailgroup is called MD DEVICE ERRORS. The purpose of this mailgroup is to store a list of people who will be notified if a problem arises with an automated instrument. There is one alert in the software that occurs on the VistA server if the package installation does not finish. This alert is sent to the IRMS staff member who ran the installation.

#### 2. Remote systems.

The application does not transmit data to any remote system/facility database.

#### 3. Archiving/Purging.

Refer to the chapter on [Archiving and Purging](#), in this manual. Purging is available in the CPGateway, refer to the Clinical Procedures Gateway chapter in the Clinical Procedures Implementation Guide for more information.

#### 4. Contingency Planning.

It is the responsibility of the using service to develop a local contingency plan to be used in the event of application problems. It is recommended that the CP Gateway be installed on a second machine as a backup in case the initial workstation containing the CP Gateway fails.

#### 5. Interfacing.

No specialized (non VA) interfaces are used or required by the application.

6. Electronic signatures.

Electronic signatures are not used in the Clinical Procedures package.

7. Menus.

There are no options of special note for the Information Security Officers (ISO's) to view.

8. Security Keys.

The MD MANAGER key controls access to the 'Update Study Status' and the 'Delete Study' options. A user holding this key will be able to use the 'Update Study Status' option on any study currently displayed on the screen. Holders of this key will also be taken directly to the 'Update Study Status' option when opening a study marked in status 'Error'. The 'Update Study Status' option does not do any validation on the new status assigned to the study. The 'Delete Study' option will attempt to delete the study after checking the business rules on the VistA server for the study given its current status and state on the server. This key should be given only with extreme care and only to those users that fully understand the status structure, and the ramifications of changing the status or deletion of a study.

9. File Security.

NUMBER	NAME	GLOBAL NAME	DD ACC	RD ACC	WR ACC	DEL ACC	LAYGO ACC	AUD ACC
702	CP TRANSACTION	^MDD(702,	@			@		@
<sup>1</sup> 702.001	CP_TRANSACTION_TIU_HISTORY	^MDD(702.001,	@	@	@	@	@	@
702.01	CP DEFINITION	^MDS(702.01,	@		#	#	#	
702.09	CP INSTRUMENT	^MDS(702.09,	@		#	#	#	@
703.1	CP RESULT REPORT	^MDD(703.1,	@		@	@	@	@
<sup>2</sup> 703.9	CP CONVERSION	^MDD(703.9,	@	#	#	#	#	#
<sup>3</sup> 704.201	HEMODIALYSIS ACCESS POINTS	^MDK(704.201,	@			@		@
704.202	HEMODIALYSIS STUDY	^MDK(704.202	@			@		@
704.209	HEMODIALYSIS SETTINGS	^MDK(704.209	@			@		@

10. References.

There are no special reference materials for this package.

11. Official Policies.

There are no special official policies for this package.

<sup>1</sup> Patch MD\*1.0\*6 May 2008 File added.

<sup>2</sup> Patch MD\*1.0\*5 August 2006 Files added.

<sup>3</sup> Patch MD\*1.0\*6 May 2008 Files added.



## 15. <sup>1</sup>Vendor Interfaces

### List of Vendor Interfaces

<sup>2</sup>The Puritan Bennett Clinivision, Olympus Endoworks, GE Healthcare Muse and Cardinal Health Sensormedics V-max automated device interfaces are exported with CP. Many other device interfaces are also available and you can view the complete list by visiting the [Clinical Procedures website \(http://vista.med.va.gov/ClinicalSpecialties/clinproc\)](http://vista.med.va.gov/ClinicalSpecialties/clinproc). <sup>3</sup>From the Home page, select **Find a Device** and then search for devices by manufacturer, by type, or by name.

Visit the Clinical Procedures website to view specific information for a particular device. Click the **vendor** name to view the web page.

Device	Vendor	Type of Procedure Performed	Type of report with Discrete data included
<sup>4</sup> Clinivision	<a href="#">Puritan Bennett</a>	Respiratory	Text
Endoworks	<a href="#">Olympus</a>	Bronchoscopy, Colonoscopy, EGD, EGDPEG, Endoscopy, ERCP, Endo Ultrasound, Enteroscopy, Liver Biopsy, Paracentesis, Sigmoidoscopy	Text, GIF, JPG
Muse	<a href="#">GE Healthcare</a>	ECG, Exercise, Holter, Pacemaker ECG	PDF
Sensormedics V-max	<a href="#">Cardinal Health</a> (formerly Viasys/Sensormedics)	PFT	PDF
<sup>5</sup> Exalis	<a href="#">Gambro</a>	Dialysis	XML
UPF Hemodialysis	<a href="#">B.Braun</a> <a href="#">Melsungen AG</a>	Dialysis	XML
Hypercare	<a href="#">Fresenius Medical Care</a>	Dialysis	XML

For the latest vendor information, please see the [Clinical Procedures website \(http://vista.med.va.gov/ClinicalSpecialties/clinproc\)](http://vista.med.va.gov/ClinicalSpecialties/clinproc).

### Device Setup Instructions

<sup>1</sup> Patch MD\*1.0\*14 March 2008 Deleted vendor contact information for individual contacts.

<sup>2</sup> Patch MD\*1.0\*14 March 2008 Updated vendor name list.

<sup>3</sup> Patch MD\*1.0\*14 March 2008 Directions for finding a device on the CP website changed.

<sup>4</sup> Patch MD\*1.0\*14 March 2008 Device names unlinked due to unavailable links.

<sup>5</sup> Patch MD\*1.0\*6 May 2008 Hemodialysis exported new device entries.

Here are the setup instructions and vendor contact for each device.

## Clinivision

**Vendor:** Puritan Bennett **Type:** Respiratory

### Description:

The uni-directional interface for this instrument is currently available.

### Requirements:

This instrument requires a Clinivision vendor interface.

### Setup Instructions:

This section describes the installation setup for the Clinivision system. Note that a new Protocol and HL Logical Link will need to be created for this device since it is a Persistent connected device. Clinivision is not a bi-directional device. **Note:** Bi-Directional Capabilities checkbox is **not** checked. Therefore, no outbound HL Logical Link is needed and you do not need to enter any bi-directional information.

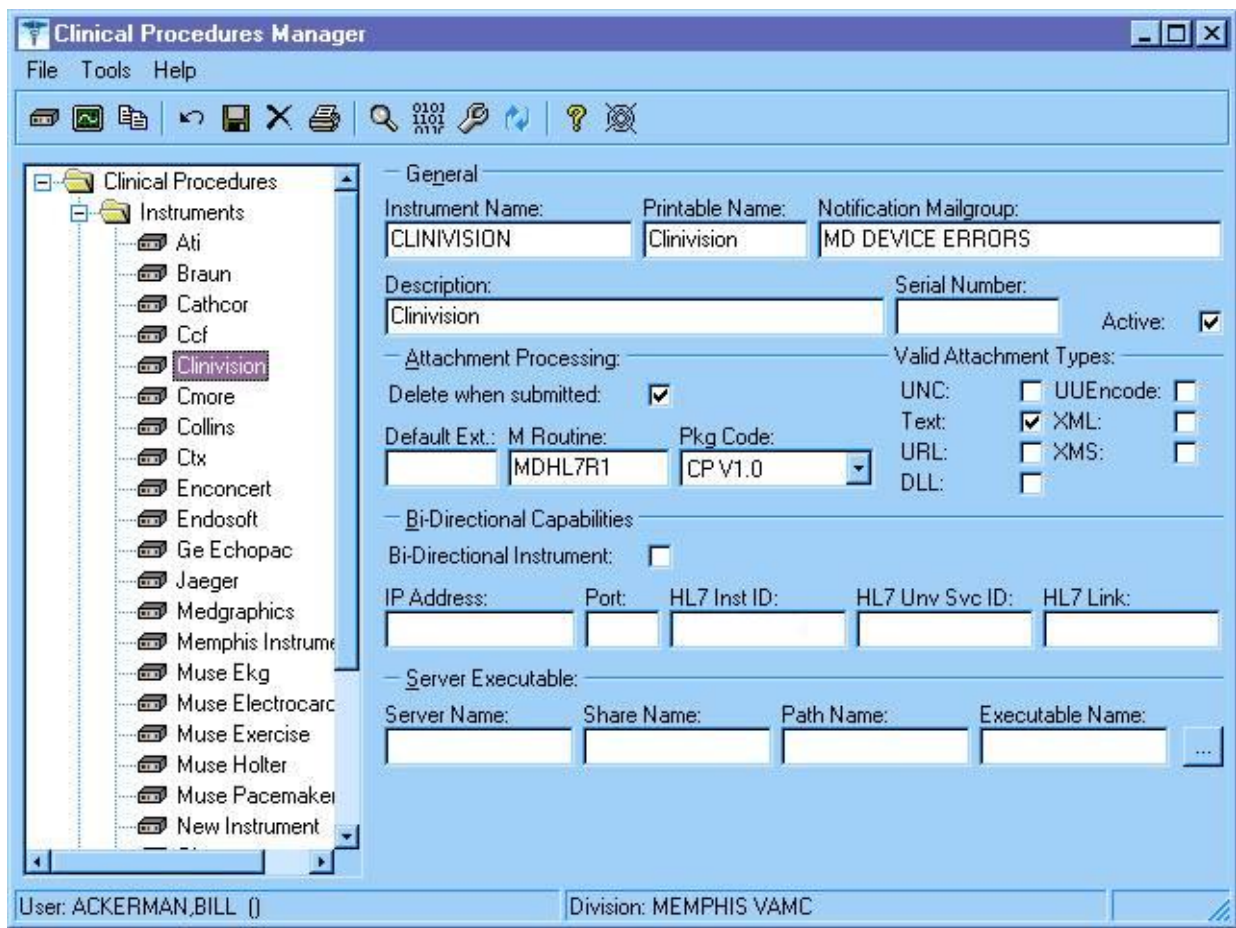


Figure 15-1

Figure 15-1 displays the settings for the Clinivision device in CP Manager.

```

NODE: MCAR3 INST          LLP TYPE: TCP

DEVICE TYPE: Single-threaded Server  STATE: Reading

TIME STARTED: SEP 18, 2002@11:45:27  TASK NUMBER: 321004

SHUTDOWN LLP ?: NO          QUEUE SIZE: 100

RE-TRANSMISSION ATTEMPTS: 3    READ TIMEOUT: 60

ACK TIMEOUT: 60             EXCEED RE-TRANSMIT ACTION: ignore

TCP/IP PORT: 1030          TCP/IP SERVICE TYPE: SINGLE LISTENER

PERSISTENT: YES            STARTUP NODE: ROU:614A01

IN QUEUE BACK POINTER: 1790    IN QUEUE FRONT POINTER: 1790

OUT QUEUE BACK POINTER: 1789    OUT QUEUE FRONT POINTER: 1789
    
```

**Figure 15-2**

Figure 15-2 shows an entry in the HL Logical Link file for the Clinivision device.

```

NAME: MCAR3 Device Client    ITEM TEXT: Instrument HL7 Event Driver

TYPE: subscriber            CREATOR: ACKERMAN,BILL

PACKAGE: CLINICAL PROCEDURES

DESCRIPTION: This Protocol is used by the HL7 Package to send results to Vista from the Clinivision
Instrument.

IDENTIFIER: E                TIMESTAMP: 59039,32152

SENDING APPLICATION: INST-MCAR    RECEIVING APPLICATION: MCAR-INST

TRANSACTION MESSAGE TYPE: ORU    EVENT TYPE: R01

PROCESSING ID: P              LOGICAL LINK: MCAR3 INST

VERSION ID: 2.3                RESPONSE MESSAGE TYPE: ACK

PROCESSING ROUTINE: D ^MDHL7A    SENDING FACILITY REQUIRED?: NO

RECEIVING FACILITY REQUIRED?: NO
    
```

**Figure 15-3**

Figure 15-3 shows the new Protocol that will need to be entered for the Link.

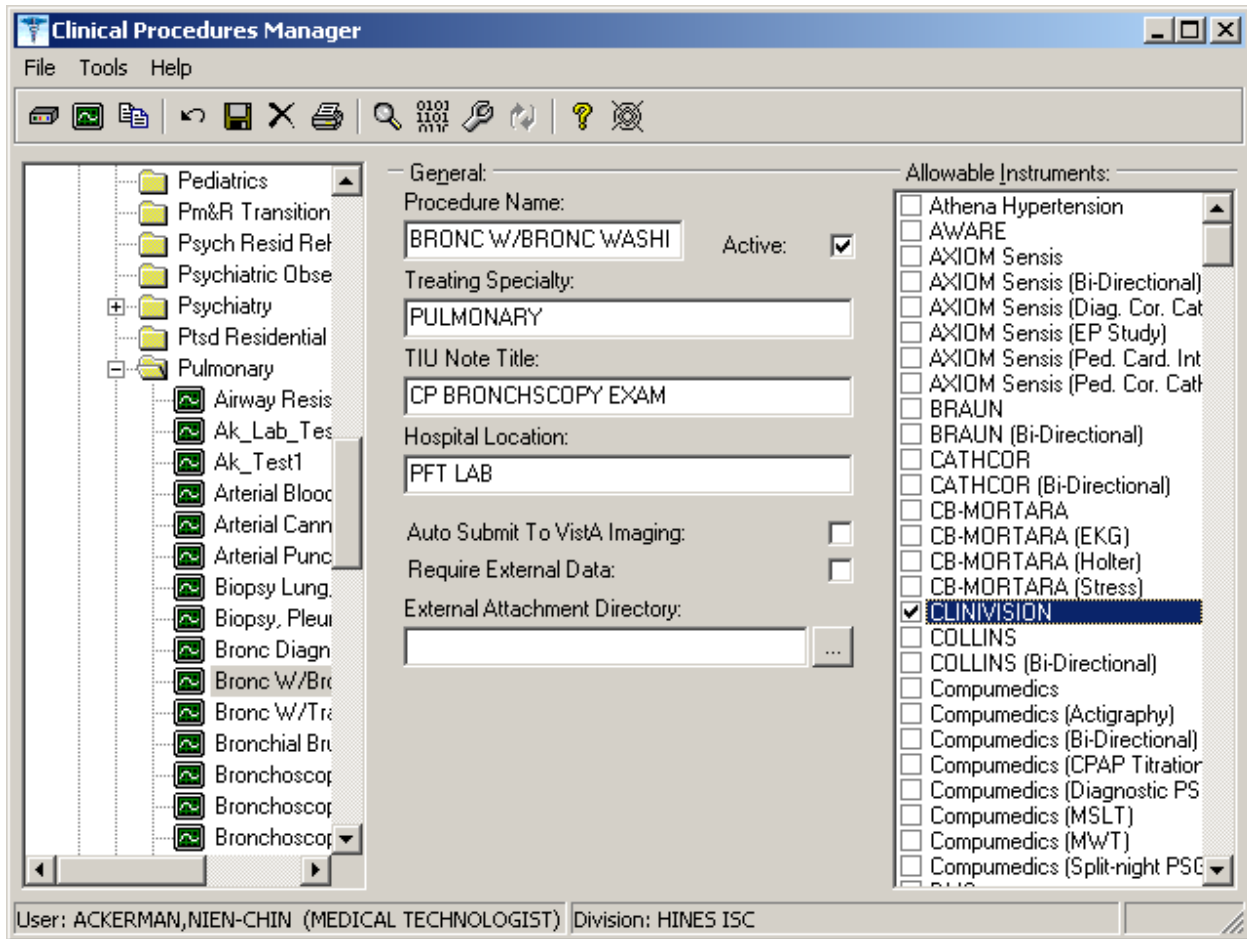


Figure 15-4

<sup>1</sup>Figure 15-4. The device will need to be linked to a procedure in CP Manager.

Contact Clinivision and ask the contact to report the device to the production account, port 1030.

#### Transmission Instructions:

No information available at this time.

#### Manuals:

No information available at this time.

#### Vendor Contacts:

<http://www.clinivision.com/contact/>

#### Trouble Shooting:

Is the machine plugged in?

Is the machine on?

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Screen capture updated to show new Processing Application field.

Are all cables connected correctly?

**Endoworks**

**Vendor:** Olympus    **Type:** Bronchoscopy, Colonoscopy, EGD, EGDPEG, Endoscopy, ERCP, Endo Ultrasound, Enteroscopy, Liver Biopsy, Paracentesis, Sigmoidoscopy

**Description:**

The bi-directional interface for this instrument is currently available.

**Requirements:**

This instrument requires an Advanced Gateway vendor interface.

**Setup Instructions:**

The Olympus Interface is a non-persistent interface and can share its TCP/IP port address with other non-persistent devices. To configure the Olympus (Endoworks) software, it is recommended that you consult Olympus. Olympus has the correct setting for the Endoworks software that is needed to interface with CP.

<sup>1</sup> The site will need to set up an Olympus type in CPManager.exe for each type of procedure, (such as Olympus (Bronchoscopy), Olympus (Colonoscopy), etc.). Please refer to the Clinical Procedures web site for the device settings for each type of procedure.

```
NODE: MCAR INST          LLP TYPE: TCP
DEVICE TYPE: Single-threaded Server  STATE: Reading
TIME STARTED: SEP 18, 2002@11:45:27  TASK NUMBER: 321004
SHUTDOWN LLP ?: NO          QUEUE SIZE: 100
RE-TRANSMISSION ATTEMPTS: 3      READ TIMEOUT: 60
ACK TIMEOUT: 60              EXCEED RE-TRANSMIT ACTION: ignore
TCP/IP PORT: 1030           TCP/IP SERVICE TYPE: SINGLE LISTENER
PERSISTENT: NO              STARTUP NODE: ROU:614A01
IN QUEUE BACK POINTER: 1790      IN QUEUE FRONT POINTER: 1790
OUT QUEUE BACK POINTER: 1789     OUT QUEUE FRONT POINTER: 1789
```

**Figure 15-5**

Figure 15-5 displays the settings for the standard non-persistent inbound HL Logical Link.

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Added information about setting up a type for each procedure.

NODE: M CAR OUT	LLP TYPE: TCP
DEVICE TYPE: Non-Persistent Client	STATE: Idle
AUTOSTART: Enabled	TIME STARTED: FEB 25, 2008@08:57:54
TASK NUMBER: 3231951	SHUTDOWN LLP ?: NO
QUEUE SIZE: 100	
RE-TRANSMISSION ATTEMPTS: 3	READ TIMEOUT: 60
ACK TIMEOUT: 60	EXCEED RE-TRANSMIT ACTION: ignore
TCP/IP ADDRESS: 10.3.17.141	TCP/IP PORT: 9027
TCP/IP SERVICE TYPE: CLIENT (SENDER)	PERSISTENT: NO
STARTUP NODE: DEV:DEVISC4A1	IN QUEUE BACK POINTER: 244
IN QUEUE FRONT POINTER: 244	OUT QUEUE BACK POINTER: 251
OUT QUEUE FRONT POINTER: 244	

Figure 15-6

Figure 15-6 displays the settings for the standard non-persistent outbound HL Logical Link.

**Transmission Instructions:**

No information available at this time

**Manuals:**

No information available at this time.

**Costs:**

No information available at this time.

**Trouble Shooting:**

Is the machine plugged in?

Is the machine on?

Are all cables connected correctly?

## Muse

**Vendor:** GE Healthcare    **Type:** ECG

### **Description:**

The bi-directional interface for this instrument is currently available.

### **Requirements:**

This instrument requires a Muse HL7 vendor interface.

### **Setup Instructions:**

The Muse Interface is a Persistent Interface and must have its own TCP/IP Port address. For configuring the Muse software, it is recommended that you consult with GE Healthcare. GE Healthcare has the correct setting for the Muse software that is needed to interface with CP.

<sup>1</sup>The Muse can be set up for different Cardiology procedures such as Holter and Exercise Tolerance Test. Please refer to the Clinical Procedures web page for the setup of the device in CPManager.exe for each type of procedure.

### **Transmission Instructions:**

To send data to Clinical Procedures once the results have been sent from the Cart to the MUSE server, follow these steps:

1. The MUSE generated hard copy is assigned to a cardiologist for over-reading (reviewing).
2. Changes are made on the interpretation, signed by the doctor and returned to the EKG Department.
3. EKG Tech logs on to the MUSE. (All users of the MUSE are assigned a number and password with certain levels of NECESSARY access.)
4. EKG Tech selects over reader (reviewing Cardiologist).
5. EKG Tech selects the patient.
6. EKG Tech selects and then edits the interpretation.
7. EKG Tech selects either Confirm and Print, or Confirm. If Confirm and Print is selected, the HL7 result is sent, and the report is printed. If only Confirm is selected, just the HL7 result is sent.

### **Manuals:**

No information available at this time.

### **Costs:**

No information available at this time.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Added information about setting up different procedures.



**Trouble Shooting:**

1. Is the machine plugged in?
2. Is the machine on?
3. Are all cables connected correctly?

**Sensormedics V-MAX**

**Vendor:** Cardinal Health   **Type:** PFT

**Description:**

The bi-directional interface for this instrument is currently available.

**Requirements:**

This instrument requires a Netlink vendor interface.

**<sup>1</sup>Configuration Files:**

This file contains the configuration parameters for the Vmax software. The vendor should already have a copy of this file.

**Setup Instructions:**

The Sensormedics Interface is a Non-Persistent Interface and can share TCP/IP ports with other Non-Persistent device interfaces. The Sensormedics V-MAX software must have a shared directory to hold the report document that is created. The directory might be on the PC or on a network share. The key point is that the directory must be accessible from the Sensormedics V-MAX software.

1. Start the Sensormedics V-MAX software.
2. Click on the Reports Button.
3. Select the Netlinks/IS menu from the menu bar.
4. Select TCP/IP from the File Menu on the menu bar.
5. Enter the TCP/IP and Port address to the listener that will be receiving the data from the Sensormedics V-MAX software.
6. Exit back to the Reports Screen.

---

<sup>1</sup> Patch MD\*1.0\*14 March 2008 References to Vmaxconfigfile.zip and sample reports were removed because they are no longer hosted on the Clinical Procedures website.

7. Select Setup from the File Menu and enter the Full NETWORK path to the Share directory where you want the PDF document to be stored.

### Transmission Instructions:

A path must be setup where the PDF report will be stored prior to being transmitted to VISTA Imaging. This path is usually preset to C:\PDFFiles\ and should be changed to \\(PC Network name)\PDFFiles\. Also, the directory C:\PDFFiles should have Share enabled with Read, Write, Delete permissions for both Imaging and the PC on which the share directory exists.

The following instructions are for transmitting the final patient report to Clinical Procedures.

**Note:** If the patient whose results you wish to send is already being displayed on the monitor, you can start at step 5.

1. From the Vmax Program Manager screen click the Find Patient Button.



The Find Patient window opens. No patients are displayed.

2. Set search criteria (Last Name, ID, etc.) if any, and click on F1. A list of patients matching your search criteria appears.
3. Select the patient whose results you wish to send by clicking on their name. The selected patient's name is highlighted.
4. Click the F3 button to load the selected patients results data. The Vmax Program Manager screen reappears.
5. From the Vmax Program Manager screen click the Reports Button.



The Reports screen appears.

6. Select the report to process for this patient from the Reports selection box on the left side of the screen. The selected report appears in the upper left box as the Default Patient Report.
7. From the Menu bar click the PrintPDF button to compile the PDF report. A dialog box appears momentarily, indicating the progress of the PDF file creation.
8. From the Menu bar click Netlink/IS® to open the Netlink Transmission Manager.



The Transmission Manager screen appears

### Files to be backed up:

You need to backup these files to preserve the operation of Vmax. These files should be backed up after the Vmax is working in production. This list was last updated on May 13, 2003.

### Vision folder files used in Netlink communications.

(Depending on software version and configuration, not all files may be present) All files are located in the C:\Vision folder

The following files **always exist** and have **user-modifiable** content

• Id_text.dbf	• Invalid.dbf
• Text_cfg.dbf	• Xmit_cfg.dbf
• Xmitcom.dbf	• Xmithdft.dbf
• Xmithost.dbf	• Xmitparm.dbf
• Xmitpath.dbf	• Xmitxref.dbf

The following files **sometimes exist** and have **user-modifiable** content: They should be manually copied if needed.

• Except	• Replace
• User_1.dbf	• User_2.dbf
• User_3.dbf	• User_4.dbf
• User_5.dbf	• User_6.dbf
• User_7.dbf	•

The following files are shipped **standard** with the software and are **NOT user-modifiable**. They should only be loaded from the software install disk.

• Batchesnd.dbf	• Ctrl_str.dbf
• Received.txt	• Response.txt
• Smascii.dbf	• Smhl7def.dbf
• Smvadeb.dbf	• Xexcept.dbf
• Xmiticon.dbf	• Xmitprm.dbf
• Xreplace	

The following files are **modified by the software** during operation and **should NOT be user-modified**: They should only be generated by running the software.

• Batchsnd.dbf	• Fileout1.txt
• Fileout2.txt	• Text_rpt.dbf
• Text_rpt.fpt	• Usehost

<sup>1</sup>Please refer to the Clinical Procedures web page for the device setup in CPManager.exe.

**Manuals:**

No information available at this time.

**Costs:**

No information available at this time.

**Trouble Shooting:**

Is the machine plugged in?

Is the machine on?

Are all cables connected correctly?

**<sup>2</sup>B. Braun**

**Vendor:** B. Braun Melsungen AG    **Type:** Hemodialysis

**Description:**

Both uni-directional and bi-directional interfaces for this instrument are currently available.

**Requirements:**

This device uses B. Braun's UPF Hemodialysis software.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Added reference to CP web page for device setup.

<sup>2</sup> Patch MD\*1.0\*6 May 2008 Added Hemodialysis vendor B. Braun.

**Setup Instructions (B. Braun Device Settings for CP Manager)**

<b>Setting For:</b>	Clinical Procedures Device Manager
<b>Procedure Type (HL7 Universal Service ID)</b>	BRAUN (Bi-Directional)
<b>Settings:</b>	Device Setup for the BRAUN (Bi-Directional) ----- NAME: BRAUN (Bi-Directional) PRINT NAME: BBRAUN DESCRIPTION: BBraun Dialysis Device Interface M ROUTINE: MDHL7D PACKAGE CODE: CP V1.0 ATTACH: UNC BI-DIRECTIONAL: YES HL7 INST: BRAUN HL7 UNIVERSAL SERVICE ID: ----- Verified at Hines By: W. A. Ackerman

**<sup>1</sup>Fresenius Medical Care**

**Vendor:** Fresenius Medical Care      **Type:** Hemodialysis

**Description:**

Both uni-directional and bi-directional interfaces for this instrument are currently available.

**Requirements:**

This device uses Fresenius's Hypercare software.

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Added Hemodialysis vendor Fresenius.

**Setup Instructions (Hypercare Device Settings for CP Manager)**

<b>Setting For:</b>	Clinical Procedures Device Manager
<b>Procedure Type (HL7 Universal Service ID)</b>	Fresenius (Bi-directional)
<b>Settings:</b>	Device Setup for the Fresenius (Bi-directional) ----- NAME: Fresenius (Bi-directional) PRINT NAME: Fresenius DESCRIPTION: Fresenius Dialysis Device Interface M ROUTINE: MDHL7D PACKAGE CODE: CP V1.0 ATTACH: UNC BI-DIRECTIONAL: YES HL7 INST: Fresenius HL7 UNIVERSAL SERVICE ID: ----- Verified at Hines By: W. A. Ackerman

**<sup>1</sup>Gambro**

**Vendor:** Gambro      **Type:** Hemodialysis

**Description:**

Both uni-directional and bi-directional interfaces for this instrument are currently available.

**Requirements:**

This device uses Gambro's Exalis software.

**Setup Instructions:****Interface Notes for Exalis to Hemodialysis**

- Exalis runs on a PC. VA-Exalis\_Interface runs on the same PC as Exalis. The PC must be networked so that there can be a TCP/IP connection between VistA and VA-Exalis\_Interface. The Exalis software runs as a standard application (not a service), thus requiring that the PC has been logged on with some user account rather than simply turned on. At this time VA-Exalis\_Interface, is a standard application. It may become a service if design and resource constraints allow.

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Added Hemodialysis vendor Gambro.

- VA-Exalis\_Interface is a .NET application and so requires the .NET Framework 1.1 Redistributable which is freely downloadable from Microsoft and will be included on the VA-Exalis\_Interface CDROM.

### B. Braun Device Settings for CP Manager

<b>Setting For:</b>	Clinical Procedures Device Manager
<b>Procedure Type (HL7 Universal Service ID)</b>	GAMBRO_EXALIS
<b>Settings:</b>	<p>Device Setup for the GAMBRO_EXALIS</p> <p>-----</p> <p>NAME: GAMBRO_EXALIS  PRINT NAME: Gambro Exalis  DESCRIPTION: Cobe Dialysis Device Interface  M ROUTINE: MDHL7D  PACKAGE CODE: CP V1.0  ATTACH: UNC  BI-DIRECTIONAL: NO  HL7 INST: GAMBRO_EXALIS  HL7 UNIVERSAL SERVICE ID:</p> <p>-----</p> <p>Verified at Hines By: W. A. Ackerman</p>





## 16. Glossary

**Access Code** A unique sequence of characters known by and assigned only to the user, the system manager and/or designated alternate(s). The access code (in conjunction with the verify code) is used by the computer to identify authorized users.

**Action** A functional process that a clinician or clerk uses in the TIU computer program. For example, “Edit” and “Search” are actions. Protocol is another name for Action.

**ADP Coordinator/ADPAC/Application Coordinator** Automated Data Processing Application Coordinator. The person responsible for implementing a set of computer programs (application package) developed to support a specific functional area such as clinical procedures, PIMS, etc.

**<sup>1</sup>API** Application programming interface, an interface that a computer system, library or application provides in order to accept requests for services from other programs, and/or to allow data to be exchanged between them.

**Application** A system of computer programs and files that have been specifically developed to meet the requirements of a user or group of users.

**Archive** The process of moving data to some other storage medium, usually a magnetic tape, and deleting the information from active storage in order to free-up disk space on the system.

**ASU** Authorization/Subscription Utility, an application that allows sites to associate users with user classes, allowing them to specify the level of authorization needed to sign or order specific document types and orderables. ASU is distributed with TIU in this version; eventually it will probably become independent, to be used by many VistA packages.

**Attachments** Attachments are files or images stored on a network share that can be linked to the CP study. CP is able to accept data/final result report files from automated instruments. The file types that can be used as attachments are the following:

.txt	Text files
.rtf	Rich text files
.jpg	JPEG Images
.jpeg	JPEG Images
.bmp	Bitmap Images
.tiff	TIFF Graphics (group 3 and group 4 compressed and uncompressed types)
.pdf	Portable Document Format
.html	Hypertext Markup Language

.DOC (Microsoft Word files) are not supported. Be sure to convert .doc files to .rtf or to .pdf format.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Glossary term added.

**Background Processing** Simultaneous running of a "job" on a computer while working on another job. Examples would be printing of a document while working on another, or the software might do automatic saves while you are working on something else.

**Backup Procedures** The provisions made for the recovery of data files and program libraries and for restart or replacement of ADP equipment after the occurrence of a system failure.

**Boilerplate Text** A pre-defined TIU template that can be filled in for Titles, Speeding up the entry process. TIU exports several Titles with boilerplate text which can be modified to meet specific needs; sites can also create their own.

**<sup>1</sup>Broker** Software which mediates between two objects, such as a client and a server or a repository and a requestor.

**Browse** Lookup the file folder for a file that you would like to select and attach to the study. (e.g., clicking the "...” button to start a lookup).

**Bulletin** A canned message that is automatically sent by MailMan to a user when something happens to the database.

**Business Rule** Part of ASU, Business Rules authorize specific users or groups of users to perform specified actions on documents in particular statuses (e.g., an unsigned CP note may be edited by a provider who is also the expected signer of the note).

**Class** Part of Document Definitions, Classes group documents. For example, "CLINICAL PROCEDURES" is a class with many kinds of Clinical Procedures notes under it. Classes may be subdivided into other Classes or Document Classes. Besides grouping documents, Classes also store behavior which is then inherited by lower level entries.

**Consult** Referral of a patient by the primary care physician to another hospital service/ specialty, to obtain a medical opinion based on patient evaluation and completion of any procedures, modalities, or treatments the consulting specialist deems necessary to render a medical opinion.

**Contingency Plan** A plan that assigns responsibility and defines procedures for use of the backup/restart/recovery and emergency preparedness procedures selected for the computer system based on risk analysis for that system.

**CP** Clinical Procedures.

**CP Definition** CP Definitions are procedures within Clinical Procedures.

**<sup>2</sup>CP Gateway** The service application that prepares the data contents of HL7 messages for use in CP Hemodialysis. It requires no direct user interaction.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Glossary term added.

<sup>2</sup> Patch MD\*1.0\*6 May 2008 Glossary term added.

**CP Study** A CP study is a process created to link the procedure result from the medical device or/and to link the attachments browsed from a network share to the procedure order.

**CPRS** Computerized Patient Record System. A comprehensive VistA program, which allows clinicians and others to enter and view orders, Progress Notes and Discharge Summaries (through a link with TIU), Problem List, view results, reports (including health summaries), etc.

**Data Dictionary** A description of file structure and data elements within a file.

<sup>1</sup>**DBIA** Database integration agreement.

**Delphi** A programming language, also known as Object Pascal.

**Device** A hardware input/output component of a computer system (e.g., CRT, printer).

<sup>2</sup>**DLL** Dynamically-Linked Library – provides the benefit of shared libraries.

**Document Class** Document Classes are categories that group documents (Titles) with similar characteristics together. For example, Cardiology notes might be a Document Class, with Echo notes, ECG notes, etc. as Titles under it. Or maybe the Document Class would be Endoscopy Notes, with Colonoscopy notes, etc. under that Document Class.

**Document Definition** Document Definition is a subset of TIU that provides the building blocks for TIU, by organizing the elements of documents into a hierarchy structure. This structure allows documents (Titles) to inherit characteristics (such as signature requirements and print characteristics) of the higher levels, Class and Document Class. It also allows the creation and use of boilerplate text and embedded objects.

<sup>3</sup>**DUZ** The internal entry number inside FileMan for a particular user.

**Edit** Used to change/modify data typically stored in a file.

**Field** A data element in a file.

**File** The M construct in which data is stored for retrieval at a later time. A computer record of related information.

**File Manager or FileMan** Within this manual, FileManager or FileMan is a reference to VA FileMan. FileMan is a set of M routines used to enter, edit, print, and sort/search related data in a file, a database.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Glossary terms added.

<sup>2</sup> Patch MD\*1.0\*6 May 2008 Glossary term added.

<sup>3</sup> Patch MD\*1.0\*6 May 2008 Glossary term added.

**File Server** A machine where shared software is stored.

**Gateway** The software that performs background processing for Clinical Procedures.

**Global** An M term used when referring to a file stored on a storage medium, usually a magnetic disk.

**GUI** Graphical User Interface - a Windows-like screen that uses pull-down menus, icons, pointer devices, and other metaphor-type elements that can make a computer program more understandable, easier to use, allow multi-processing (more than one window or process available at once), etc.

**<sup>1</sup>HFS** Host File System

**HL7** Health Level 7 messaging, a language which various healthcare systems use to interface with one another.

**IEN** Internal Entry Number

**Interpreter** Interpreter is a user role exported with USR\*1\*19 to support the Clinical Procedures Class. The role of the Interpreter is to interpret the results of a clinical procedure. Users who are authorized to interpret the results of a clinical procedure are sent a notification when an instrument report and/or images for a CP request are available for interpretation. Business rules are used to determine what actions an interpreter can perform on a document of a specified class, but the interpreter themselves are defined by the Consults application. These individuals are 'clinical update users' for a given consult service.

**IRMS** Information Resource Management Service.

**Kernel** A set of software utilities. These utilities provide data processing support for the application packages developed within the VA. They are also tools used in configuring the local computer site to meet the particular needs of the hospital. The components of this operating system include: MenuMan, TaskMan, Device Handler, Log-on/Security, and other specialized routines.

**LAYGO** An acronym for Learn As You Go. A technique used by VA FileMan to acquire new information as it goes about its normal procedure. It permits a user to add new data to a file.

**M** Formerly known as MUMPS or the Massachusetts (General Hospital) Utility Multi-Programming System. This is the programming language used to write all VistA applications.

**MailMan** An electronic mail, teleconferencing, and networking system.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Glossary terms added.

**Menu** A set of options or functions available to users for editing, formatting, generating reports, etc.

**Module** A component of a software application that covers a single topic or a small section of a broad topic.

**Namespace** A naming convention followed in the VA to identify various applications and to avoid duplication. It is used as a prefix for all routines and globals used by the application.

**Network Server Share** A machine that is located on the network where shared files are stored.

**Notebook** This term refers to a GUI screen containing several tabs or pages.

**OI** Office of Information, formerly known as Chief Information Office Field Office, Information Resource Management Field Office, and Information Systems Center.

**Option** A functionality that is invoked by the user. The information defined in the option is used to drive the menu system. Options are created, associated with others on menus, or given entry/exit actions.

**Package** Otherwise known as an application. A set of M routines, files, documentation and installation procedures that support a specific function within VistA.

**Page** This term refers to a tab on a GUI screen or notebook.

**Password** A protected word or string of characters that identifies or authenticates a user, a specific resource, or an access type (synonymous with Verify Code).

**Pointer** A special data type of VA FileMan that takes its value from another file. This is a method of joining files together and avoiding duplication of information.

**Procedure Request** Any procedure (EKG, Stress Test, etc.) which may be ordered from another service/specialty without first requiring formal consultation.

**Program** A set of M commands and arguments, created, stored, and retrieved as a single unit in M.

<sup>1</sup>**Protocol** A set of rules governing communication within and between computing endpoints.

**Queuing** The scheduling of a process/task to occur at a later time. Queuing is normally done if a task uses up a lot of computer resources.

<sup>2</sup>**RAID** Redundant array of inexpensive disks, a data storage scheme using multiple hard drives to share or replicate data among the drives.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Glossary term added.

<sup>2</sup> Patch MD\*1.0\*6 May 2008 Glossary term added.

**Result** A consequence of an order. Refers to evaluation or status results. When you use the Complete Request (CT) action on a consult or request, you are transferred to TIU to enter the results.

<**RET**> Carriage return.

**Routine** A set of M commands and arguments, created, stored, and retrieved as a single unit in M.

<sup>1</sup>**RPC** Remote Procedure Call, a protocol that allows a computer program running on one host to cause code to be executed on another host.

**SAC** Standards and Conventions.

**Security Key** A function which unlocks specific options and makes them accessible to an authorized user.

**Sensitive Information** Any information which requires a degree of protection and which should be made available only to authorized users.

**Site Configurable** A term used to refer to features in the system that can be modified to meet the needs of each site.

**Software** A generic term referring to a related set of computer programs. Generally, this refers to an operating system that enables user programs to run.

**Status Symbols** Codes used in order entry and Consults displays to designate the status of the order.

**Task Manager or TaskMan** A part of Kernel which allows programs or functions to begin at specified times or when devices become available. See Queuing.

**Title** Titles are definitions for documents. They store the behavior of the documents which use them.

**TIU** Text Integration Utilities.

<sup>2</sup>**UNC** Universal naming Convention.

**URL** Uniform Resource Locator – a means of finding a resource (such as a web page or a device) on the Internet.

**User** A person who enters and/or retrieves data in a system, usually utilizing a CRT.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Glossary terms added.

<sup>2</sup> Patch MD\*1.0\*6 May 2008 Glossary terms added.

**User Class** User Classes are the basic components of the User Class hierarchy of ASU (Authorization/Subscription Utility) which allows sites to designate who is authorized to do what to documents or other clinical entities.

**User Role** User Role identifies the role of the user with respect to the document in question (e.g., Author/Dictator, Expected Signer, Expected Cosigner, Attending Physician, etc.).

**Utility** An M program that assists in the development and/or maintenance of a computer system.

**<sup>1</sup>UUEncoded format** A form of binary to text encoding whose name derives from "Unix-to-Unix encoding."

**Verify Code** A unique security code which serves as a second level of security access. Use of this code is site specific; sometimes used interchangeably with a password.

**VistA** Veterans Health Information Systems and Technology Architecture.

**Workstation** A personal computer running the Windows 9x or NT operating system.

**<sup>2</sup>XML** Extensible Markup Language – A simplified subset of Standard Generalized Markup Language (SGML). Its primary purpose is to facilitate the sharing of data across different information systems.

**XMS** Extended Memory Specification – The specification describing the use of extended memory in real mode for storing data.

---

<sup>1</sup> Patch MD\*1.0\*6 May 2008 Glossary term added.

<sup>2</sup> Patch MD\*1.0\*6 May 2008 Glossary terms added.

