

VMware **EXAM - VCP510PSE**

VMware Certified Professional on vSphere 5

Buy Full Product

<http://www.examskey.com/VCP510PSE.html>


Examskey VMware VCP510PSE exam demo product is here for you to test the quality of the product. This VMware VCP510PSE demo also ensures that we have this product ready unlike most companies, which arrange the product for you as you order. These VCP510PSE exam questions are prepared by VMware subject matter specialists. Hence these are most accurate version of the VCP510PSE exam questions that you can get in the market.

We also offer bundle discount packages for every VMware certification track, so you can buy all related exam questions in one convenient bundle. And for corporate clients we also offer bundles for VMware certification exams at huge discount.

Check out our [VCP510PSE Exam Page](#) and [VMware Certification Page](#) for more details of these bundle packages.

Question: 1

Click the Exhibit button.

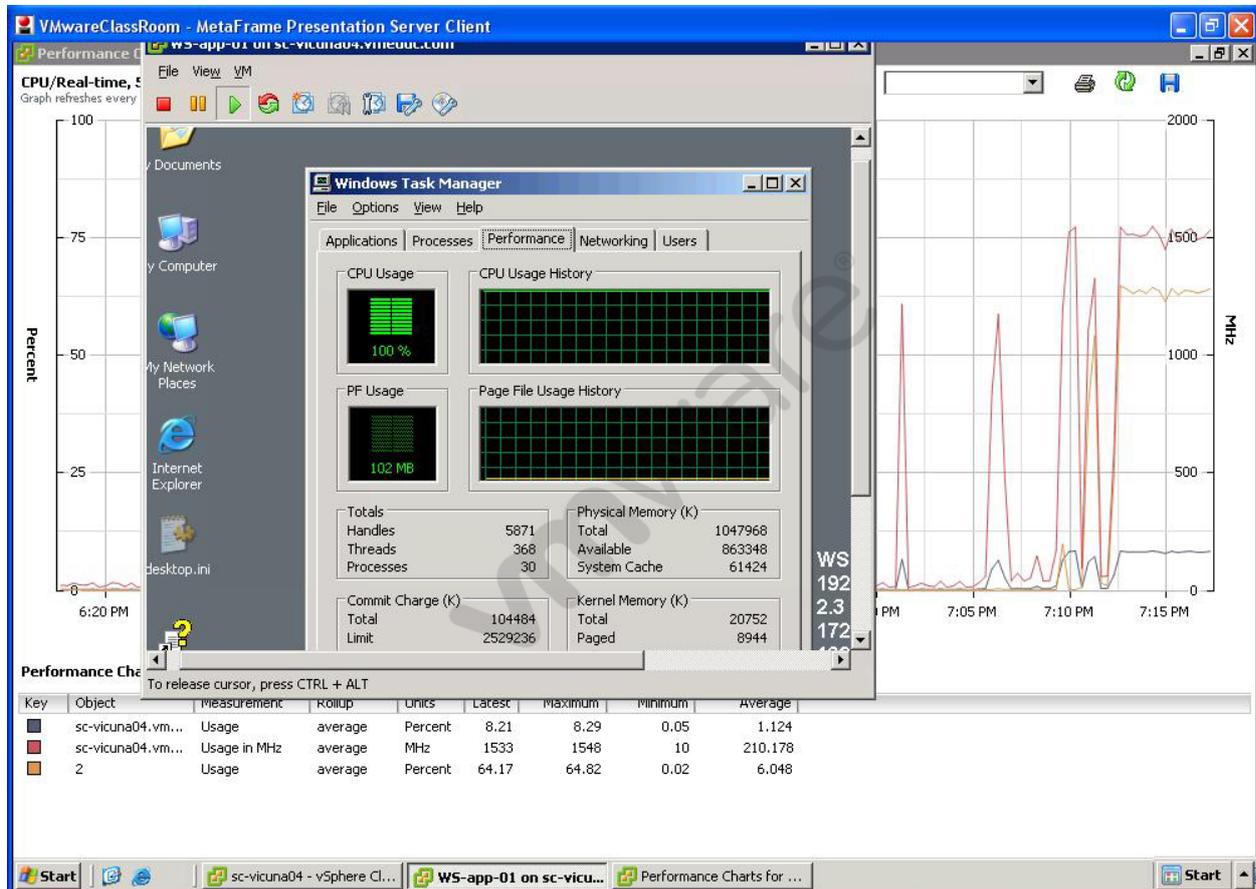

An administrator has deployed a new virtual machine on an ESXi 5.x host. Users are complaining of poor performance on the application running on the virtual machine. Performance tools display the results shown in the exhibit. Which two tasks might improve the user experience? (Choose two.)

- A. Add a vCPU to the virtual machine
- B. Remove CPU affinity on the advanced CPU setting of the virtual machine
- C. Migrate the virtual machine to another ESXi host
- D. Remove the limit on the CPU settings of the virtual machine

Answer: A, D

Question: 2

An administrator notices that when a virtual machine is placed into a resource pool, a warning indicates that the virtual machine will receive a very large percentage of the total shares for memory. Which action can be taken to resolve this problem?

- A. Increase the memory resource allocation to the resource pool.
- B. Increase the share value for the resource pool.
- C. Change the shares setting from custom to high, medium, or low for the virtual machine.
- D. Decrease the memory allocation for the virtual machine.

Answer: C

Explanation:

The Memory Resources panel lets you allocate memory resources for a virtual machine and specify reservations, limits, and shares. Symbolic values Low, Normal, High, and Custom are compared to the sum of all shares of all virtual machines on the server and, on an ESX host, the service console. By decreasing the memory share of a particular system, it receives less memory out of the total available memory.

Question: 3

An administrator views the Fault Tolerance pane of the Summary tab of a virtual machine and finds that the current status is Not Protected. What are two vSphere Fault Tolerance states that would cause the virtual machine to not be protected? (Choose two.)

- A. Stopped - Fault Tolerance has been stopped on the secondary virtual machine.
- B. Need Secondary VM - The primary virtual machine is running without a secondary virtual machine and is not protected
- C. Need Primary VM - The secondary virtual machine is running, and a new primary virtual machine cannot be generated.
- D. Disabled - Fault Tolerance is disabled.

Answer: B, D

Explanation:

| Reason for Not Protected Status | Description |
|---------------------------------|--|
| Starting | Fault Tolerance is in the process of starting the Secondary VM. This message is only visible for a short period of time. |
| Need Secondary VM [C above] | The Primary VM is running without a Secondary VM, so the Primary VM is currently not protected. This generally occurs when there is no compatible host in the cluster available for the Secondary VM. Correct this by bringing a compatible host online. If there is a compatible host online in the cluster, further investigation might be required. Under certain circumstances, disabling Fault Tolerance and then re-enabling it corrects this problem. |
| Disabled [A above] | Fault Tolerance is currently disabled (no Secondary VM is running). This happens when Fault Tolerance is disabled by the user or when vCenter Server disables Fault Tolerance after being unable to power on the Secondary VM. |
| VM not Running | Fault Tolerance is enabled but the virtual machine is powered off. Power on the virtual machine to reach Protected state. |

Table 3-2
Reasons for Primary VM Not Protected Status
Part 3
Create and Configure Resource Pools (14 questions).

Question: 4

Which two conditions prevent the application of a host profile to an ESXi 5.x host? (Choose two.)

- A. The host has multiple profiles attached.
- B. The host has not been placed into maintenance mode.
- C. The host is running virtual machines.
- D. The host is an ESXi host.

Answer: B, C

Question: 5


An administrator is editing the IP allocation policy for a vApp. Which three options are available? (Choose three.)

- A. Automatic
- B. Roaming
- C. Transient

- D. DHCP
- E. Fixed

Answer: C, D, E

Explanation:

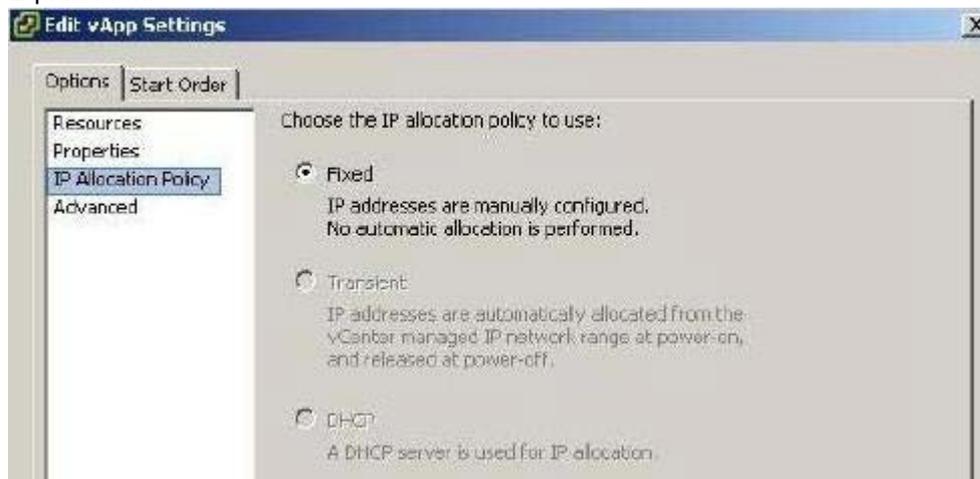

Question: 6

ACME Junkmail Incorporated has been utilizing templates in their environment. They are running a 10-node ESXi 5.x Cluster and DRS has not been configured. Several virtual machines have been deployed from this template and successfully powered on, but a newly deployed virtual machine will not power on. There appear to be adequate CPU and Memory resources available on the host. Which three things can be done to allow more virtual machines to be deployed into the cluster from this template? (Choose three.)

- A. Select a different datastore for the virtual machine
- B. Move the swap file to a different location
- C. Deploy the virtual machine to a different host using the same datastore
- D. Enable DRS on the cluster to balance the virtual machine load out across hosts
- E. Increase the virtual machine memory reservation

Answer: A, B, E

Explanation:

If you make reservations for your virtual machine's that are equal to the amount of RAM assigned to them, swapping and page sharing does not occur. You can over commit pretty heavily if you are comfortable with poorer performance. If you do not set reservations, ESX host creates a .vswp file equal to the difference between the amount of physical memory assigned to the virtual machine and

the reservation it has. By default, memory reservations are set to 0. If you have a virtual machine with 2GB of memory without a reservation, it creates a 2GB .vswp file when it is powered on. The virtual machine starts using the .vswp file if the server is out of physical RAM. If you set a 1GB reservation, it creates a 1GB .vswp file. The .vswp files are what allows for memory overcommitment.

Question: 7

What are three valid objects to place in a vApp? (Choose three.)

- A. Folders
- B. Hosts
- C. Resource pools
- D. vApps
- E. Virtual machines

Answer: C, D, E

Explanation:

Create an Object Inside the vApp in the vSphere Client

Within a vApp, you can create a new virtual machine, resource pool, or another vApp.

Procedure

- 1 In the inventory, select the vApp in which you want to create the object machine.
- 2 Select the menu option to create a specific object.

| Menu Option | Description |
|--|---|
| Inventory > vApp > New Virtual Machine | Creates a new virtual machine inside the vApp. Complete the Create New Virtual Machine wizard. See Creating a Virtual Machine in the vSphere Client for instructions on creating a new virtual machine. |
| Inventory > vApp > New Resource Pool | Adds a resource pool inside the vApp. Complete the Create Resource Pool window. |
| Inventory > vApp > New vApp | Creates a new vApp inside the currently selected vApp. Complete the New vApp wizard. See Create a vApp in the vSphere Client for instructions on creating a new vApp. |

http://pubs.vmware.com/vsphere-50/index.jsp?topic=/com.vmware.vsphere.vcenterhost.doc_50/GUID-3B5AF2B1-C534-4426-B97A-D14019A8010F.html

Question: 8

Which three Storage I/O Control conditions might trigger the Non-VI workload detected on the datastore alarm? (Choose three.)

- A. The datastore is connected to an ESX/ESXi 4.0 host that does not support Storage I/O Control.
- B. The datastore is on an array that is performing system tasks such as replication.
- C. The datastore is utilizing active/passive multipathing or NMP (Native Multi-Pathing).
- D. The datastore is storing virtual machines with one or more snapshots.
- E. The datastore is connected to an ESX/ESXi 4.0 host that is not managed by vCenter.

Answer: A, B, E

Explanation:

http://kb.vmware.com/selfservice/microsites/search.do?language=en_US&cmd=displayKC&externalId=1020651

http://pubs.vmware.com/vsphere-50/topic/com.vmware.vsphere.troubleshooting.doc_50/GUID-38F95285-DB4F-462F-AFD7-0F4D812B085F.html

Question: 9

An administrator has just finished deploying a vApp for a web service. What three options are available to the administrator for IP allocation within the vApp? (Choose three.)

- A. Transient
- B. Fixed
- C. DHCP
- D. Bridged
- E. NAT

Answer: A, B, C

Explanation:

Option Description

| Option | Description |
|-----------|--|
| Fixed | IP addresses are manually configured. No automatic allocation is performed. |
| Transient | IP addresses are automatically allocated using IP pools from a specified range when the vApp is powered on. The IP addresses are released when the appliance is powered off. |
| DHCP | A DHCP server is used to allocate the IP addresses. The addresses assigned by the DHCP server are visible in the OVF environments of virtual machines started in the vApp. |

Question: 10

An administrator is working to implement Storage Profiles in their environment. Which two ways can storage capabilities be generated? (Choose two.)

- A. They are generated by Datastore Clusters as LUNs are added to the cluster.
- B. They are automatically determined by the Storage Profile when it is created.
- C. They can be retrieved from the array through the VMware APIs for Storage Awareness (VASA).
- D. They can be manually generated by the administrator.

Answer: C, D

Explanation:

Understanding Storage Capabilities

A storage capability outlines the quality of service that a storage system can deliver. It is a guarantee that the storage system can provide a specific set of characteristics for capacity, performance, availability, redundancy, and so on.

If a storage system uses Storage APIs – Storage Awareness, it informs vCenter Server that it can guarantee a specific set of storage features by presenting them as a storage capability. vCenter Server recognizes the capability and adds it to the list of storage capabilities in the Manage Storage Capabilities dialog box. Such storage capabilities are system-defined. vCenter Server assigns the system-defined storage capability to each datastore that you create from that storage system.

NOTE:

Because multiple system capabilities for a datastore are not supported, a datastore that spans several extents assumes the system capability of only one of its extents.

You can create user-defined storage capabilities and associate them with datastores. You should associate the same user-defined capability with datastores that guarantee the same level of storage capabilities. You can associate a user-defined capability with a datastore that already has a system-defined capability. A datastore can have only one system-defined and only one user-defined capability at a time.

Question: 11

Which VMware solution uses the security of a vSphere implementation and provides linked-clone technology to virtual desktops?

- A. VMware ACE
- B. VMware View
- C. VMware Workstation
- D. VMware ThinApp

Answer: B

Explanation:

Reference: <http://www.vmware.com/files/pdf/VMware-View-4-Composer-DS-EN.pdf> (page 1, last paragraph)

Question: 12

Which two conditions will prevent a virtual machine from being successfully migrated using Storage vMotion? (Choose two.)

- A. The virtual machine has an RDM.
- B. The virtual machine has Fault Tolerance enabled.
- C. The virtual machine is running on a vSphere 5.x Standard host.
- D. The virtual machine has a disk stored on an NFS datastore.

Answer: B, C

Question: 13

Under which two conditions can vStorage APIs for Array Integration (VAAI) provide a performance benefit? (Choose two.)

- A. When a virtual disk has VMDK files stored on an NFS datastore.
- B. When a virtual disk is created using the New Virtual Machine wizard.
- C. When cloning a virtual machine with snapshots.
- D. When a virtual disk is deleted.

Answer: A, D

Question: 14

An administrator is enabling Enhanced vMotion Compatibility (EVC) in a DRS cluster. The administrator wants only hosts with the newest Intel processors added to the cluster. Which setting satisfies this requirement?

- A. The baseline with the most CPUs listed
- B. The baseline with the fewest CPUs listed
- C. Any baseline that contains Future Intel processors
- D. Create a new baseline and add only the latest processor family

Answer: D

Reference: <http://www.virtualizationadmin.com/articles-tutorials/vmware-esx-and-vsphere-articles/vmotion-drs-high-availability/enhanced-vmotion-compatibility-primer.html> (8th para)

Question: 15

Which two conditions must exist on all hosts in the cluster if Enhanced vMotion Compatibility (EVC) is used? (Choose two.)

- A. The cluster must be enabled for DRS.
- B. All hosts in the cluster must be running ESX/ESXi 3.5 Update 2 or later.
- C. All hosts in the cluster must have hardware virtualization support enabled.
- D. The cluster must be enabled for HA.

Answer: B, C

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual VCP510PSE Exam Questions With Answers.

<http://www.examskey.com/VCP510PSE.html>

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Download Free Product Demo From:

<http://www.examskey.com/VCP510PSE.html>

Money Back Guarantee



Check Out Our Customer Testimonials



<http://vimeo.com/102521210>