

# DURLEGENDARY STATUS DIDN'T HAPPEN OVERNICHT. IT WAS AT LEAST A MONTH OR TWO IN THE MAKING.

Once Ben Gravely received his first patent in 1916, word quickly spread of the craftsmanship and ingenuity he built into his machines. The family name soon became synonymous with reliability as people realized how they could depend on their Gravelys year after year. Sure, a lot has changed over the decades, but our tradition of building rugged machines with superior designs has always remained. We believe that's how you build brand loyalty, how you earn respect, and how you keep a family company on top for over a hundred **years.** GRAVELY. BUILT TO MOW THE DISTANCE.

Every machine that comes off our assembly line prominently displays the Gravely name. For our commercial customers, it's a calling-card to their clients to remind them they hired the best because they use the best equipment. For our crew at the plant, it's a reminder that they're building tough, American-made machines with a 100-year family history of superior designs and unparallel craftsmanship. For

OUR FAMILY TREE HAS MANY BRANCHES, BUT THE ROOTS HAVE ALWAYS BEEN GRAVELY.

everyone else, it's the name they see on the mowers that create the most impeccably manicured lawns. The Gravely name may mean different things to different people, but everyone can agree it's a name you can always rely on to deliver the best cut, the most comfort, and the highest level of ingenuity. It all stems from Ben Gravely's legacy and why the mowers with his name on them are built to mow the distance.



# YOU'RE JUDGED BY THE COMPANY YOU KEEP, WHICH

When you build the best lawnmowers, you want to make sure they're sold and serviced by the best. That's why Gravely machines are only sold through authorized Gravely dealers. They know every bolt, belt, and deck bevel in every Gravely machine. They help their customers find the right mower for their specific needs and provide impeccable service to keep their Gravely running in top

condition for years to come. And most importantly, they know we stand behind them as much as they stand behind our products. Building superior machines is only part of our success story. The other part is finding people as passionate about lawnmowers as we are. That's why we remain a dealer-based brand.

And that's why we remain the best in the business.



Sure, we could just describe the Pro-Turn Series as "high-performance", but these are professional-grade mowers that deliver professional results so "proformance" feels right, even if it is a made-up word.

These are rugged machines designed for maximum comfort and loaded with features to help you get the job done quickly – with im maculate results. For professionals who want the best, turn to the Pro-Series.

# WE'VE CHANGED "PERFORMANCE" TO "PROFORMANCE."

#### Compact-PRO'

- Commercial-grade high-efficienc transmission
- Compact design to easily pass through narrow 36" gates and around obstacles
- Fuel tank design increases stabi improves machine handling and visibility

#### Pro-Turn Z

- Suspension forks absorb bi impacts so your body doesn
- that cause fatigue
- 26.5 HP Gravely Engine a two-stage canister filtrat for longer engine life

#### Pro-Turn ZX

- Kawasaki<sup>®</sup> FX Engine delivers reliable power and performant
- heavy-duty and can hand
- Suspension forks absorb by impacts so your body does

#### Pro-Turn 100

- The 7-gauge X-Factor\* II deck is fabricated from top to bottom
   providing industrial strength
- Our Constant Belt Tension syster ensures the that belt tention is maintained
- Full-suspension sea

#### Pro-Turn 200

- A heavy-duty steel chassis
- ull-suspension seat
- The 7-gauge X-Factor II deck is abricated from top to bottom broviding industrial strength
- Maintenance-free spindles

#### Pro-Turn Mach-One

- Tunnel Deck design puts blades 4-inches back from leading edge to ift grass before being cut
- High-volume output deck
- Our Constant Belt Tension system ensures the that belt tention is maintained

#### Pro-Turn 600

- r\* III deck is completely

   FusionCore QuikSwap B
  - X3 Constant Drive Spindle
    - Commercial grade chassis
    - Failsafe braking



34"

MODEL - 991144

15.5 HP / 603 CC Kawasaki® 481V FX Engine

44"

MODEL - 991145

19 HP / 726 CC Kawasaki® FX 600V Engine



26.5 HP / 764 CC Gravely 764 Pro Engine

26.5 HP / 764 CC Gravely 764 Pro Engine



22 HP / 726 CC Kawasaki® FX691V Engine

**MODEL - 991288** 

22 HP / 726 CC Kawasaki® FX691V Engine

**MODEL - 991290** 

23.5 HP / 726 CC Kawasaki® FX730V Engine



48"

MODEL - 991128

22 HP / 726 CC Kawasaki\* FX691V Engine

**52**"

MODEL - 991129

22 HP / 726 CC Kawasaki® FX691V Engine

MODEL - 991132

23 HP / 747 CC Kohler® ZT730 Engine

60"

MODEL - 991130

23.5 HP / 726 CC Kawasaki® FX730V Engine

MODEL - 991133

25 HP / 747 CC Kohler® EZT740 Engine





27 HP / 852 CC Kawasaki® FX850V Engine

25 HP / 747 CC Kohler® ZT740 Engine

**MODEL - 992269** 

27 HP / 852 CC Kawasaki® FX850V Engine

31 HP / 999 CC Kawasaki® FX921V Engine

31 HP / 999 CC Kawasaki® FX921V Engine





48"

**MODEL - 997005** 

4 Lithium-Ion Swappable Batteries Side Discharge

MODEL - 997008

4 Lithium-Ion Swappable Batteries Rear Discharge

**52**"

**MODEL - 997006** 

4 Lithium-Ion Swappable Batteries Side Discharge

MODEL - 997009

4 Lithium-Ion Swappable Batteries Rear Discharge

**60**"

**MODEL - 997007** 

4 Lithium-Ion Swappable Batteries Side Discharge

MODEL - 997010

4 Lithium-Ion Swappable Batteries Rear Discharge



It's the most forward-thinking battery system available, delivering the juice needed to keep you mowing the distance. These batteries are crammed with power, 4 kWh lithium-ion kind of power. That means combined, you have 16 kWh of total energy. This is battery power you can rely on for all-day performance.

# SINCE WE'RE BUILT INIIITHE III MIDWEST, BRAGGINGIIIISIIINOT IIIIPARTIIIOFIIIOURIIII DNA.IISO,IIWEIILET MOTHERSMOONITM

- --- "Awesome machine, I have 2 of these guys. 1100 hours on the older one and still running strong. Love how easy they are to work on, haven't paid shop labor in years and parts are readily available online."---
- Cory Sheets, Ingram, TX
- --- "We love the Pro-stance mowers! They outwork, outperform and out-cut any mower and with the customer service Gravely has, they can't be beat."---
- Stash Otto, Fort Atkinson, WI
- ---"I purchased one of these and it literally changed my business! The efficiency of this mower is second to none! I would recommend this mower to anyone! They are incredible!"---
- Lance Robeaux, New Orleans, LA
- --- "Pro stance 36" is amazing. Big enough to get the job done in a quick manner and small enough to fit through gates."---
- St. John's Turf LLC, St. John's, FL
- ---"I bought my second 460 in 2018 with a 33HP Kohler EFI. Great machine- perfect cut, great ride, plenty of horsepower and fuel efficiency I'm sold on Gravely!"---
- Dan, River Falls, W



**4**2"

**MODEL - 915255** 

22 HP / 725 CC Kohler® 7000 Series Engine

48"

**MODEL - 915276** 

21.5 HP / 726 CC Kawasaki® FR651V Engine

**52**"

**MODEL - 915256** 

24 HP / 725 CC Kohler® 7000 Series Engine

**MODEL - 915257** 


23 HP / 726 CC Kawasaki® FR691V Engine



A top-of-the-line residential zero-turn mower now available in a limited edition model, the ZT X Stealth™ Edition. With custom styling, tactical design features, and Kawasaki power — it's almost too tough looking to fly under the radar.







PREMIUM SOFT-TOUCH STEERING GRIPS



COCKPIT-INFLUENCED CONTROL CENTER



AGGRESSIVE, MILITARY-INSPIRED TREAD



NEW HIGH BACK SEAT WITH SLIDER



**4**2"

**MODEL - 915262** 

21.5 HP / 726 CC Kawasaki\* FR651V Engine

48"

**MODEL - 915261** 

23 HP / 726 CC Kawasaki® FR691V Engine

**52**"

**MODEL - 915258** 

25 HP / 725 CC Kohler® 7000 Series Engine

**MODEL - 915263** 

23 HP / 726 CC Kawasaki® FR691V Engine

60"

MODEL - 915264

24 HP / 726 CC Kawasaki® FR730V Engine



**MODEL - 991266** 

21.5 HP / 726 CC Kawasaki® FR651V Engine

**MODEL - 991268** 

23 HP / 726 CC Kawasaki® FR691V Engine

**MODEL - 991274** 

25 HP / 725 CC Kohler® 7000 Series Engine

MODEL - 991270

23 HP / 726 CC Kawasaki® FR691V Engine

**MODEL - 991276** 

25 HP / 725 CC Kohler® 7000 Series Engine

**MODEL - 991272** 

24 HP / 726 CC Kawasaki® FR730V Engine

**MODEL - 991278** 

26 HP / 747 CC Kohler® 7000 Series Engine



32

**MODEL - 994157** 

18.5 HP / 603 CC Kawasaki\* FS600 V-TWIN

36"

**MODEL - 994149** 

18.5 HP / 603 CC Kawasaki® FX600 V-TWIN

48"

MODEL - 994161

23.5 HP / 726 CC Kawasaki\* FX730 V-TWIN

**52**"

**MODEL - 994162** 

23.5 HP / 726 CC Kawasaki® FX730 V-TWIN

**MODEL - 994163** 

26 HP / 726 CC Kawasaki\* FT730 EFI

60'

**MODEL - 994164** 

23.5 HP / 726 CC Kawasaki® FX730 V-TWIN

**MODEL - 994165** 

26 HP / 726 CC Kawasaki\* FT730 EFI



14.5 HP / 603 CC Kawasaki\* FS481 Engine

**MODEL - 988185** 


18.5 HP / 603 CC Kawasaki\* FS600 Engine

**MODEL - 988186** 

18.5 HP / 603 CC Kawasaki\* FS600 Engine

23 HP / 726 CC Kawasaki\* FS691 Engine



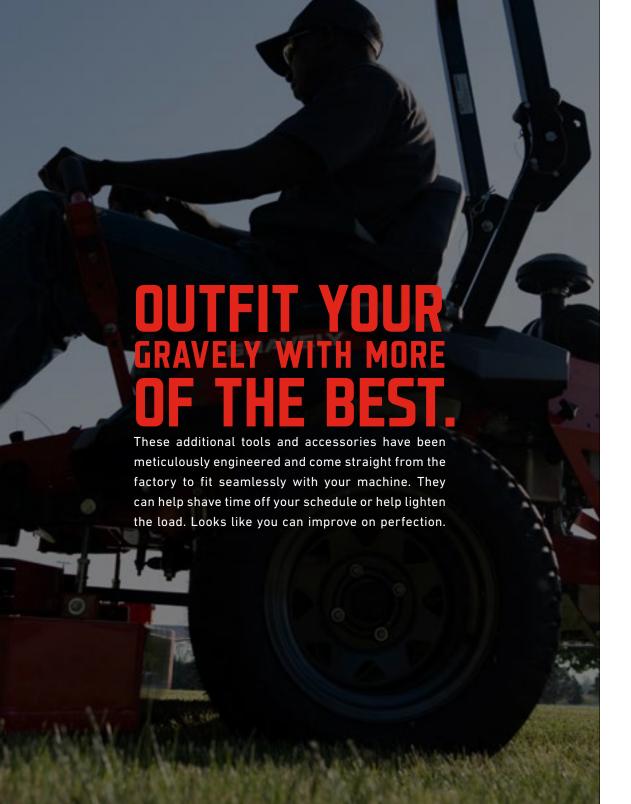



#### MAINTENANCE KITS

Gravely maintenance kits offer a complete service package, designed to protect your engine and promote optimal performance levels.

**OEM BELTS** 

performance and cut quality.

Designed to be a perfect fit for your machine,

Gravely OEM belts provide the strength,

longevity and quality needed to enhance



#### OEM OIL

Gravely Oils are specifically formulated to provide protection for your engine in the toughest of environments.



#### **REAR TWEEL**

These airless, run-flat tires help to minimize your downtime and dampen the effect of uneven terrain.

adjustments smooth and simple.



#### **MULCH KIT**

Separate cutting chambers for each blade produce smaller clippings for a professionally manicured appearance.

LASEREDGE BLADE

These self-sharpening blades last up

to 5 times longer than standard blades, helping to minimize downtime.



#### BAGGER SYSTEMS

Gravely's two- and three-bucket mesh bags provide superior airflow and venting.



#### LIGHT KIT

The LED headlight kit will light your way and keep you cutting long after others call it a day.



#### HITCH KIT

Add a hitch kit to enjoy unmatched versatility with a variety of tow-behind options





3400

MODEL - 996205 - SEATS 3 - POLY BOX 40 HP / 999 CC Polaris® 2-Cylinder, SOHC

3400<sup>SD</sup>

MODEL - 996204 - SEATS 3 - STEEL BOX 40 HP / 999 CC Polaris\* 2-Cylinder, SOHC

6400

MODEL - 996207 - SEATS 6 - POLY BOX 40 HP / 999 CC Polaris® 2-Cylinder, SOHC



	34	44			
MODEL NUMBER	991144	991145			
ENGINE	KAWASAKI® 481V FX, HEAVY DUTY AIR CLEANER	KAWASAKI® FX600V			
HORSEPOWER	15.5 HP	19 HP			
DISPLACEMENT	603 CC	726			
DRIVE SYSTEM	HYDRO-GEAR® ZT-3	100 TRANSAXLE			
FUEL CAPACITY	7.2 G	AL			
GROUND SPEED (APPROX. Mph) (Forward/Reverse)	7 MPH /	3 MPH			
STARTER	ELECTRIC				
DECK					
DECK MATERIAL	10 GA. STEEL WITH 10 GA. S	PINDLE REINFORCEMENT			
DECK CONSTRUCTION	FABRIC	ATED			
NUMBER OF SPINDLES	2	3			
BLADE TIP SPEED (FPM)	17,2	70			
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM				
SPINDLE BEARINGS	BALL BE	ARING			
DECK ENGAGEMENT	OGURA® GT1.5 ELECTRIC CLUTCH				
DECK LIFT SYSTEM	FOOT OPE	RATED			
CUTTING WIDTH	34 IN 44 IN				
CUTTING HEIGHT	1.0 IN - 5.0 IN				
CUTTING POSITIONS	17				
WHEELS					
FRONT AXLE	FIXE	D			
FRONT	13 X 5 - 6 SM00T	TH PNEUMATIC			
REAR	21 X 7-10 TURF	20.5 X 8-10 TURF			
FEATURES					
SEAT	HIGH BACK WITH E	VC SUSPENSION			
FOLDABLE ROPS	OPTIO	NAL			
MACHINE					
WEIGHT	737 LBS	789 LBS			
LENGTH	75	N			
WIDTH (w/o CHUTE)	35.9 IN	46.7 IN			
WIDTH (w/ CHUTE)	48.3 IN	56.9 IN			
HEIGHT	45.3	IN			
WARRANTY					
UNIT	4 YEAR / 750 HOUR COMMERCIAL / NO HO				

PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS

#### ATTACHMENTS & ACCESSORIES

MULCHING KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, FOLDING ROPS KIT, GRASS CATCHER KIT, LEAF COLLECTOR KIT, WHEEL COVER KIT, LASEREDGE BLADES

# COMPACT-PRO FOUR YEAR OF 750 HOUR PRO-TURN Z FOUR YEAR OF 750 HOUR YEAR OF

ATTACHMENTS & ACCESSORIES

COVER KIT. OCDB KIT. LASEREDGE BLADES, TUNE UP KIT



	48	52	60				
MODEL NUMBER	991280	991282	991284				
ENGINE		GRAVELY® 764 PRO					
FILTRATION	Н	IEAVY-DUTY AIR CLEANE	ER				
HORSEPOWER		26.5 HP					
DISPLACEMENT		764 CC					
DRIVE SYSTEM	HYDRO	HYDRO-GEAR® ZT-3100 TRANSAXLES					
FUEL CAPACITY		5.0 GAL					
GROUND SPEED (APPROX. Mph) (Forward/Reverse)		8 MPH / 4 MPH					
DECK							
DECK MATERIAL	10 GA. STEEL	W/ 10 GA. SPINDLE REI	NFORCEMENT				
DECK CONSTRUCTION	l l	FABRICATED X-FACTOR®	3				
NUMBER OF SPINDLES		3					
BLADE TIP SPEED (FPM)		18,000					
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM						
SPINDLE BEARINGS	BALL BEARING						
DECK ENGAGEMENT	OGU	OGURA® GT1.5 ELECTRIC CLUTCH					
CUTTING WIDTH	48 IN 52 IN 60 IN						
CUTTING HEIGHTS	1.5 IN - 5.0 IN						
CUTTING POSITIONS	15						
WHEELS							
FRONT AXLE	SUSPENSIO	SUSPENSION, GREASABLE CASTER FORK TUBES					
FRONT		SM00TH 13 X 6.50-6					
REAR	TURF 22 X 10 -12	TURF 22 X 10.5 -12	TURF 22 X 12 -12				
FEATURES							
SEAT	HIGH BACK COMF	ORT W/ ISOLATION & PA	ADDED ARMRESTS				
FOLDABLE ROPS		STANDARD					
MACHINE							
WEIGHT	925 LBS	931 LBS	952 LBS				
LENGTH		79 IN					
WIDTH (w/o CHUTE)	50.8 IN	56.2 IN	63.7 IN				
WIDTH (w/ CHUTE)	61.9 IN	67.3 IN	74.8 IN				
HEIGHT		72 IN / 52 IN					
(w/ ROPS EXT/DOWN)		72 114 7 52 114					
WARRANTY							
UNIT		UR LIMITED - SEE YOUR ER FOR COMPLETE WA					

MULCHING KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, POWERED BAGGER KIT,

SUSPENSION SEAT KIT, REAR TWEEL KIT, AGGRESSIVE TIRE KIT, SEMI-PNEUMATIC FRONT TIRE KIT, WHEEL



	48	52	60				
MODEL NUMBER	991286	991288	991290				
ENGINE	KAWASAKI° FX691V	KAWASAKI° FX691V	KAWASAKI° FX730V				
HORSEPOWER	22 HP	22 HP	23.5 HP				
DISPLACEMENT	726 CC						
DRIVE SYSTEM	HYDR	HYDRO-GEAR® ZT-3200 TRANSAXLES					
FUEL CAPACITY		5.0 GAL					
GROUND SPEED (APPROX. Mph) - (Forward/Reverse)		8.5 MPH / 4 MPH					
DECK							
DECK MATERIAL	10 GA. STEEL	. W/ 10 GA. SPINDLE RI	EINFORCEMENT				
DECK CONSTRUCTION		FABRICATED X-FACTOR	₹* 3				
NUMBER OF SPINDLES		3					
BLADE TIP SPEED (FPM)	18,000						
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM						
SPINDLE BEARINGS	BALL BEARING						
DECK ENGAGEMENT	OGURA® GT1.5 ELECTRIC CLUTCH						
CUTTING WIDTH	48 IN 52 IN 60 IN						
CUTTING HEIGHTS		1.5 IN - 5.0 IN					
CUTTING POSITIONS		15					
WHEELS							
FRONT AXLE	SUSPENSIO	N, GREASABLE CASTE	R FORK TUBES				
FRONT		SMOOTH 13 X 6.50-6					
REAR	TURF 22 X 10-12	TURF 22 X 10-12 TURF 22 X 10.5-12 TURF 22 X 12					
FEATURES							
SEAT	HIGH BACK COMFO	ORT W/ SUSPENSION 8	PADDED ARMRESTS				
FOLDABLE ROPS		STANDARD					
MACHINE							
WEIGHT	925 LBS	931 LBS	952 LBS				
LENGTH		79 IN					
WIDTH (w/o CHUTE)	50.8 IN 56.2 IN 63.7 IN						
WIDTH (w/ CHUTE)	61.9 IN	67.3 IN	74.8 IN				
HEIGHT (w/ ROPS EXT/DOWN)		72 IN / 52 IN					
WARRANTY							
UNIT		OUR LIMITED - SEE YOU ER FOR COMPLETE W					

#### ATTACHMENTS & ACCESSORIES

MULCHING KIT, OCDB KIT, TRAILER HITCH KIT, LED HEADLIGHT KIT, AGGRESSIVE REAR TIRE KIT, STRIPING KIT, SUNSHADE KIT, POWERED BAGGER KIT, REAR TWEEL KIT, SUSPENSION SEAT KIT, SEMI-PNEUMATIC FRONT TIRE KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT



# ZX FOUR YEAR OR 750 HOUR WARRANTY BTURN MACH 1

(921V
TRANSAXLES
ИРН
LE REINFORCEMENT
IINUM
NG
RIC CLUTCH
IN
TER FORK TUBES
APERED ROLLER BEARINGS
2-12
SION AND PADDED ARMRES
D
;
IN
5 IN
HOUR LIMIT FIRST TWO YEA Y® DEALER FOR COMPLET TAILS
Į

ATTACHMENTS & ACCESSORIES

TRAILER HITCH KIT, HEADLIGHT KIT, SUNSHADE KIT, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, WHEEL COVER KIT, AIR RIDE SEAT KIT, RADIAL DRIVE CONVERSION KIT, TUNE UP KIT

# PRO-TURN' 100



	148	152	152	160	160			
AODEL NUMBER	991128	991129	991132	991130	991133			
NGINE	KAWASAKI* FX691V	KAWASAKI° FX691V	KOHLER® ZT730	KAWASAKI° FX730V	KOHLER® ZT740			
		Д	IR-COOLED, HEAVY-DUTY AIR CLEANE	R				
IORSEPOWER	22 HP	22 HP	23 HP	23.5 HP	25 HP			
ISPLACEMENT (cc)	726 CC	726 CC	747 CC	726 CC	747 CC			
RIVE SYSTEM			HYDRO-GEAR® ZT-3400 TRANSAXLES					
UEL CAPACITY – Gallons (Liters)			10 GAL					
ROUND SPEED APPROX. Mph) (Forward/Reverse)			10 MPH / 5 MPH					
ECK								
DECK MATERIAL		7 GA	. STEEL W/ 1/4 IN. SPINDLE REINFORCE	MENT				
ECK CONSTRUCTION	FABRICATED							
IUMBER OF SPINDLES	3							
LADE TIP SPEED (FPM)	18,000							
PINDLE HOUSING MATERIAL	FORGED ALUMINUM							
PINDLE BEARINGS	BALL BEARING							
DECK ENGAGEMENT	OGURA® GT 2.75 ELECTRIC CLUTCH							
UTTING WIDTH	48 IN	52 IN	52 IN	60 IN	60 IN			
UTTING HEIGHTS	1.0 IN - 5.0 IN							
UTTING POSITIONS	17							
HEELS								
FRONT AXLE		F	IXED, GREASEABLE CASTER FORK TUBE	S				
RONT	SM00TH 13 X 6.50 - 6							
REAR			TURF 23 X 10.50 - 12					
EATURES								
SEAT		HIGH BAC	K W/ FULL SUSPENSION AND MOLDED A	RM RESTS				
OLDABLE ROPS			STANDARD					
MACHINE								
VEIGHT	1062 LBS	1079 LBS	1068 LBS	1121 LBS	1110 LBS			
ENGTH			78.5 IN					
VIDTH (w/o CHUTE)	50 IN	55.5 IN	55.5 IN.	63 IN	63 IN			
WIDTH (w/ CHUTE)	62 IN	67.5 IN	67.5 IN	75 IN	75 IN			
HEIGHT (W/ ROPS EXT/DOWN)			68 IN. / 48 IN					
WARRANTY								
JNIT	5 YEAR / 1000 HOU	R COMMERCIAL / NO HOUR LIMIT FIRST	Γ 2 YEARS - SEE YOUR PROFESSIONAL	GRAVELY® DEALER FOR COMPLETE WA	RRANTY DETAILS			
DECK SHELL & FRAME			LIMITED LIFETIME		-			

MULCHING KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, BAGGER KIT, SEMI-PNEUMATIC FRONT TIRE KIT, WHEEL COVER KIT, RADIAL DRIVE CONVERSION KIT, OCDB KIT, LASEREDGE BLADES, TUNE UP KIT



# PRO-TURN' 200

	252	260	260	260	272		
MODEL NUMBER	992268	992267	992269	992298	992270		
NGINE	KAWASAKI° FX850V	KOHLER® ZT740	KAWASAKI° FX850V	KAWASAKI° FX921V0	KAWASAKI* FX921V		
		A	IR-COOLED, HEAVY-DUTY AIR CLEAN	IER			
HORSEPOWER	27 HP	25 HP	27 HP	31 HP	31 HP		
DISPLACEMENT	852 CC	747 CC	852 CC	999 CC	999 CC		
DRIVE SYSTEM			HYDRO-GEAR® ZT-5400 TRANSAXLES	5			
FUEL CAPACITY			13.4 GAL.				
GROUND SPEED (APPROX. Mph) (Forward/Reverse)			13 MPH / 6 MPH				
DECK							
DECK MATERIAL		7 GA. S	STEEL WITH .25 IN. SPINDLE REINFOR	CEMENT			
DECK CONSTRUCTION	FABRICATED						
NUMBER OF SPINDLES	3						
BLADE TIP SPEED (FPM)	18,000						
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM						
SPINDLE BEARINGS	BALL BEARING						
DECK ENGAGEMENT			OGURA® GT3.5 ELECTRIC CLUTCH				
CUTTING WIDTH	52 IN	60 IN	60 IN	60 IN	72 IN		
CUTTING HEIGHTS			1.5 IN 5.5 IN.				
CUTTING POSITIONS			17				
WHEELS							
FRONT AXLE		FI	XED, GREASEABLE CASTER FORK TUE	BES			
FRONT			SMOOTH PNEUMATIC 15X6.5-6				
REAR	TURF 23 X 10.5-12	TURF 24 X 12-12	TURF 24 X 12-12	TURF 24 X 12-12	TURF 24 X 12-12		
FEATURES							
SEAT		HIGH BAO	CK W/ FULL SUSPENSION & PADDED A	ARMRESTS			
FOLDABLE ROPS			STANDARD				
MACHINE							
WEIGHT (w/o FUEL)	1315 LBS.	1380 LBS.	1380 LBS.	1395 LBS	1410 LBS		
LENGTH	80 IN.	80 IN.	80 IN.	80 IN.	82 IN.		
WIDTH (w/o CHUTE)	55.5 IN.	63 IN.	63 IN.	63 IN.	75 IN.		
WIDTH (w/ CHUTE)	67.5 IN.	75 IN.	75 IN.	75 IN.	87 IN.		
HEIGHT (W/ ROPS EXT/DOWN)			70 IN. / 47.8 IN.				
WARRANTY							
UNIT		5 YEAR / 1250	HOUR COMMERCIAL / NO HOUR LIMIT	FIRST 2 YEARS			
DECK SHELL & FRAME			LIMITED LIFETIME				

ATTACHMENTS & ACCESSORIES

SEAT ISOLATOR KIT, TIRES, STRIPING KIT, OCDB KIT, SEMI-PNEUMATIC FRONT TIRE KIT AND HEADLIGHT KIT, POWERED BAGGER KIT, MULCHING KIT, TRAILER HITCH KIT, SUNSHADE KIT, REAR TWEEL KIT, RADIAL DRIVE CONVERSION KIT, AIR RIDE SEAT KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT

# PRO-TURN'600



	652	660	660	672	672				
MODEL NUMBER	992500	992501	992503	992502	992504				
ENGINE	KAWASAKI° FX850V	KAWASAKI° FX1000	KAWASAKI° FX1000V-EFI	KAWASAKI° FX1000	KAWASAKI° FX1000V-EFI				
HORSEPOWER	27 HP	35 HP	38.5 HP	35 HP	38.5 HP				
DISPLACEMENT	852 CC	999 CC	999 CC	999 CC	999 CC				
DRIVE SYSTEM			PARKER HTG TRANSMISSION						
FUEL CAPACITY		12.7 GAL							
GROUND SPEED (APPROX. Mph) (Forward/Reverse)	15 MPH / 6 MPH								
DECK									
DECK MATERIAL	7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT								
DECK CONSTRUCTION	FABRICATED X-FACTOR III								
NUMBER OF SPINDLES	3								
BLADE TIP SPEED (FPM)	18,000								
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM								
SPINDLE BEARINGS	BALL BEARING								
DECK ENGAGEMENT	OGURA" GT3.5 ELECTRIC CLUTCH								
CUTTING WIDTH	52 IN	60 IN	60 IN	72 IN	72 IN				
CUTTING HEIGHTS			1.0 IN - 5.5 IN						
CUTTING POSITIONS			19						
WHEELS									
FRONT AXLE			FIXED, GREASEABLE CASTER FORK TUBES	5					
FRONT	SMOOTH 15 X 6-6 SEMI PNEUMATIC								
REAR			26 X 12-16 LOW PROFILE RADIAL TURF						
FEATURES									
SEAT		HIGH B	ACK BOLSTERED WITH SUSPENSION POD	SYSTEM					
FOLDABLE ROPS			STANDARD						
MACHINE									
WEIGHT	1535 LBS	1586 LBS	1601 LBS	1646 LBS	1661 LBS				
LENGTH			83 IN						
WIDTH (w/o CHUTE)	55 IN	63 IN	63 IN	75 IN	75 IN				
WIDTH (w/ CHUTE)	63 IN	75 IN	75 IN	87 IN	87 IN				
HEIGHT (w/ ROPS EXT/DOWN)			71.5 IN / 47.8 IN						
WARRANTY									
UNIT	5 YEAR / 1500 HO	UR COMMERCIAL / NO HOUR LIMIT FIRS	ST 2 YEARS - SEE YOUR PROFESSIONAL G	RAVELY® DEALER FOR COMPLETE W	ARRANTY DETAILS				
DECK SHELL & FRAME			LIMITED LIFETIME						
ATTACHMENTS & ACCESSORIES									

MULCHING KIT, TRAILER HITCH KIT, LED HEADLIGHT KIT, STRIPING KIT, POWERED BAGGER KIT, OCDB KIT, SUNSHADE KIT, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, AIR RIDE SEAT KIT, LASEREDGE BLADES, TUNE UP KIT, SUNSHADE KIT, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, AIR RIDE SEAT KIT, LASEREDGE BLADES, TUNE UP KIT



## PRO-TURN' EV

	EV 48 SD	EV 48 RD	EV 52 SD	EV 52 RD	EV 60 SD	EV 60 RD		
IODEL NUMBER	997005	997008	997006	997009	997007	997010		
ATTERIES			4 - 16 KWH FUSION	I CORE LITHIUM ION				
HEEL DRIVE MOTORS		5 KW PER MOTOR						
PINDLE MOTORS			3.5 KW P	ER MOTOR				
RIVE SYSTEM			PROPRIETARY ELE	CTRIC TRANSAXLES				
ROUND SPEED Approx. Mph) (Forward/Reverse)		8 MPH / 4MPH (LOW SPEED) – 11 MPH / 5.5 MPH (HIGH SPEED)						
ECK								
ECK MATERIAL			7	GA.				
ECK CONSTRUCTION			X-FACTO	R 3® DECK				
JMBER OF SPINDLES	3							
LADE TIP SPEED (FPM)	18,000							
PINDLE HOUSING MATERIAL	CAST ALUMINUM							
PINDLE BEARINGS	SERVICEABLE BOTTOM BEARING							
ECK ENGAGEMENT	ELECTRIC DC BRUSHLESS MOTORS							
JTTING WIDTH	48 IN.	48 IN	52IN	52 IN	60 IN	60 IN		
UTTING HEIGHTS	1.5 IN 5.0 IN.							
JTTING POSITIONS			1	5				
HEELS								
RONT AXLE			FIXED, GREASEABLE	CASTER FORK TUBES				
RONT			SM00TH	13 X 6.5-6				
EAR	RADIAL TUR	F 22 X 10-12	RADIAL TURI	= 22 X 10.5-12	RADIAL TUR	F 22 X 12-12		
EATURES								
EAT			HIGH BACK COMFOR	T WITH SUSPENSION				
OLDABLE ROPS			STAN	IDARD				
IACHINE								
/EIGHT	1261 LBS.	1286 LBS.	1284 LBS.	1301 LBS.	1312 LBS.	1326 LBS.		
ENGTH			83	B IN.				
IDTH (w/o CHUTE)	50 IN.	50 IN.	56 IN.	54 IN.	63 IN.	64 IN.		
IIDTH (w/ CHUTE)	62 IN.	50 IN.	67 IN.	54 IN.	75 IN.	62 IN.		
EIGHT (w/ ROPS EXT/DOWN))			72 IN	/ 49 IN.				
/ARRANTY								
NIT	5 YEAR / 150	00 HOUR COMMERCIAL / NO HOUF	R LIMIT FIRST 2 YEARS - SEE YOU	JR PROFESSIONAL GRAVELY® DE	EALER FOR COMPLETE WARRAN	TYDETAILS		
TTACHMENTS & ACCESSORIES								

FUSIONCORE OFF BOARD PORTABLE CHARGER, REPLACEMENT BATTERIES, MULCHING KIT, LED HEADLIGHT KIT, BEACON LIGHT KIT, FAST CHARGE KIT WITH Y HARNESS, HIGH-LIFT BLADE KIT, OCDB KIT, FRONT CASTOR SUSPENSION FORKS, REAR TWEEL KIT, FRONT WEIGHT KIT





	42	48	52	52	52 STEALTH					
MODEL NUMBER	915255	915276	915257	915256	915280					
ENGINE	KOHLER® 7000	KAWASAKI° FR651V	KAWASAKI° FR691V	KOHLER® 7000	KAWASAKI° FR691V					
HORSEPOWER	22 HP	21.5 HP	23 HP	24 HP	23 HP					
DISPLACEMENT	725 CC	726 CC	726 CC	725 CC	726 CC					
DRIVE SYSTEM		HYDRO-GEAR® EZT® TRANSAXLES								
FUEL CAPACITY		2.8 GAL								
GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)		7 MPH / 3 MPH								
DECK										
DECK MATERIAL			11 GA.							
DECK CONSTRUCTION			FABRICATED							
NUMBER OF SPINDLES			3							
BLADE TIP SPEED (FPM)			18,000							
SPINDLE HOUSING MATERIAL			STEEL							
SPINDLE BEARINGS			1 IN. SEALED							
DECK ENGAGEMENT	ELECTRIC WARNER*									
DECK LIFT SYSTEM			FOOT OPERATED, DIAL SELECTION							
CUTTING WIDTH	42 IN	48 IN	52 IN	52 IN	52 IN					
CUTTING HEIGHT			1.5 IN 4.5 IN.							
CUTTING POSITIONS			13							
WHEELS										
FRONT			11 X 6 - 5 SMOOTH PNEUMATIC							
REAR	20 X 8 - 8 TURF	20 X 10 - 8 TURF	20 X 10 - 8 TURF	20 X 10 - 8 TURF	20 X 10-8 AGRESSIVE TREAD TUR					
FEATURES										
SEAT		18 IN. PLUSH HIG	H BACK W/ PADDED ARM RESTS & SEAT SI	LIDER STANDARD						
HOUR METER			STANDARD							
MACHINE										
WEIGHT	595 LBS	603 LBS	642 LBS	640 LBS	647 LBS					
LENGTH			77.5 IN							
WIDTH (w/o CHUTE)	46.1 IN	54.5	54.5 IN	55.6 IN	55.6 IN					
WIDTH (w/ CHUTE)	54.3 IN	60.2	60.2 IN	64.4 IN	64.2 IN					
HEIGHT			40.9 IN							
WARRANTY										
UNIT		3 YEARS OR 300 HOURS - SEE YOUR	R PROFESSIONAL GRAVELY® DEALER FOI	R COMPLETE WARRANTY DETAILS	;					

TRAILER HITCH KIT, POWERED BAGGER KIT, MULCHING KIT, HEADLIGHT KIT, ENGINE HOOP KIT, HAND GRIP KIT, DECK BUMPER KIT, AGGRESSIVE TIRE KIT, WHEEL COVER KIT, TUNE UP KIT





42 915262 WASAKI* FR651V 21.5 HP 726 CC	48 915261 KAWASAKI* FR691V 23 HP 726 CC	915258  KOHLER* 7000 W/ SMART CHOKE™  25 HP  725 CC  HYDRO-GEAR* ZT-2800* TRANSAXLES  2.8 GAL.  7.5 MPH / 3 MPH  11 GA.  FABRICATED  3	915263  KAWASAKI* FR691V  23 HP  726 CC	915264  KAWASAKI* FR730V  24 HP  726 CC				
WASAKI" FR651V 21.5 HP	KAWASAKI* FR691V 23 HP	KOHLER® 7000 W/ SMART CHOKE™  25 HP  725 CC  HYDRO-GEAR® ZT-2800® TRANSAXLES  2.8 GAL.  7.5 MPH / 3 MPH  11 GA.  FABRICATED	KAWASAKI" FR691V 23 HP	KAWASAKI" FR730V 24 HP				
21.5 HP	23 HP	25 HP 725 CC HYDRO-GEAR* ZT-2800* TRANSAXLES 2.8 GAL. 7.5 MPH / 3 MPH  11 GA. FABRICATED	23 HP	24 HP				
		725 CC HYDRO-GEAR* ZT-2800* TRANSAXLES 2.8 GAL. 7.5 MPH / 3 MPH  11 GA. FABRICATED						
726 CC	726 CC	HYDRO-GEAR* ZT-2800* TRANSAXLES 2.8 GAL. 7.5 MPH / 3 MPH 11 GA. FABRICATED	726 CC	726 CC				
		2.8 GAL. 7.5 MPH / 3 MPH 11 GA. FABRICATED						
		7.5 MPH / 3 MPH 11 GA. FABRICATED						
		11 GA. FABRICATED						
		FABRICATED						
		FABRICATED						
		3						
		•						
	18,000							
STEEL								
1 IN. SEALED								
ELECTRIC WARNER®								
FOOT OPERATED, DIAL SELECTION								
42 IN	48 IN	52 IN	52 IN	60 IN				
		1.5 IN - 4.5 IN						
		13						
		11 X 6-5 SMOOTH PNEUMATIC						
20 X 8-10 TURF	20 X 10-10 TURF	20 X 10-10 TURF	20 X 10-10 TURF	20 X 12-10 TURF				
	18 IN. PLUSH HIGH BACI	K W/ PADDED ARM RESTS, SEAT SLIDER & SEAT	I ISOLATION STANDARD					
		STANDARD						
663 LBS	671 LBS	679 LBS	681 LBS	697 LBS				
		77.5 IN						
46.1 IN	54.5 IN	55.6 IN	55.6 IN	64.1 IN				
54.3 IN	60.2 IN	64.2 IN	64.2 IN	73.7 IN				
		42 IN.						
	4 YEARS OR 400 HOURS - SEE YO	DUR PROFESSIONAL GRAVELY® DEALER FOR C	COMPLETE WARRANTY DETAILS					
	20 X 8-10 TURF 663 LBS 46.1 IN	20 X 8-10 TURF  20 X 10-10 TURF  18 IN. PLUSH HIGH BAC  663 LBS  671 LBS  46.1 IN  54.3 IN  60.2 IN	1 IN. SEALED  ELECTRIC WARNER*  FOOT OPERATED, DIAL SELECTION  42 IN 48 IN 52 IN  1.5 IN - 4.5 IN  13  11 X 6-5 SMOOTH PNEUMATIC  20 X 8-10 TURF 20 X 10-10 TURF 20 X 10-10 TURF  18 IN. PLUSH HIGH BACK W/ PADDED ARM RESTS, SEAT SLIDER & SEAT STANDARD  663 LBS 671 LBS 679 LBS  77.5 IN  46.1 IN 54.5 IN 55.6 IN  54.3 IN 60.2 IN 64.2 IN	1 I.N. SEALED				

TRAILER HITCH KIT, POWERED BAGGER KIT, MULCHING KIT, ENGINE HOOP KIT, HAND GRIP KIT, AGGRESSIVE TIRE KIT, DECK BUMPER KIT, WHEEL COVER KIT, TUNE UP KIT





	44	48	48	52	52	60	60
MODEL NUMBER	991266	991268	991274	991270	991276	991272	991278
ENGINE	KAWASAKI° FR651V	KAWASAKI° FR691V	KOHLER® 7000	KAWASAKI° FR691V	KOHLER® 7000	KAWASAKI* FR730V	KOHLER® 7000
HORSEPOWER	21.5 HP	23 HP	25 HP	23 HP	25 HP	24 HP	26 HP
DISPLACEMENT	726 CC	726 CC	725 CC	726 CC	725 CC	726 CC	725 CC
DRIVE SYSTEM			НҮГ	DRO-GEAR® ZT-3100® TRANSA)	(LES		
FUEL CAPACITY				5.0 GAL.			
GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)				8 MPH / 4 MPH			
DECK							
DECK MATERIAL				10 GA.			
DECK CONSTRUCTION				FABRICATED X-FACTOR® 3			
NUMBER OF SPINDLES				3			
BLADE TIP SPEED (FPM)				18,000			
SPINDLE HOUSING MATERIAL				FORGED ALUMINUM			
SPINDLE BEARINGS				BALL BEARING			
DECK ENGAGEMENT	ELECTRIC OGURA						
DECK LIFT SYSTEM	FOOT OPERATED						
CUTTING WIDTH	44 IN	48 IN	48 IN	52 IN	52 IN	60 IN	60 IN
CUTTING HEIGHT				1.5 IN - 5.0 IN			
CUTTING POSITIONS				15			
WHEELS							
FRONT				13 X 6.5-6 SMOOTH PNEUMAT	IC		
REAR	22 X 10-12 TURF	22 X 10-12 TURF	22 X 10-12 TURF	22 X 10.5-12 TURF	22 X 10.5-12 TURF	22 X 12-12 TURF	22 X 12-12 TURF
FEATURES							
SEAT			HIGH BACK COMF	ORT W/ SEAT ISOLATION & PA	DDED ARM RESTS		
HOUR METER				STANDARD			
MACHINE							
WEIGHT	805 LBS	825 LBS	825 LBS	850 LBS	850 LBS	870 LBS	870 LBS
LENGTH				79 IN			
WIDTH (w/o CHUTE)	47.6 IN	50.8 IN	50.8 IN	56.2 IN	56.2 IN	63.7 IN	63.7 IN
WIDTH (w/ CHUTE)	58.8 IN	61.9 IN	61.9 IN	67.3 IN	67.3 IN	74.8 IN	74.8 IN
HEIGHT				47 IN			
WARRANTY							
UNIT		4 YEARS OR 50	0 HOURS - SEE YOUR PRO	FESSIONAL GRAVELY® DEAL	ER FOR COMPLETE WARR	ANTY DETAILS	
ATTACHMENTS & ACCESSORIES							

SEAT SPRING KIT, FOLDING ROPS KIT, TRAILER HITCH KIT, POWERED BAGGER KIT, LOWER ROPS BAGGER MOUNT, OCDB KIT, MULCHING KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, SUSPENSION SEAT KIT, FRONT CASTOR SUSPENSION FORKS, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, AGGRESSIVE TIRE KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT





	32	36	48	52	52	60	60
IODEL NUMBER	994157	994149	994161	994162	994163	994164	994165
NGINE	KAWASAKI° FS 600V	KAWASAKI° FS 600V	KAWASAKI* FX 730V	KAWASAKI° FX 730V	KAWASAKI° FT 730 EFI	KAWASAKI° FX 730V	KAWASAKI° FT730-E
ORSEPOWER	18	3.5	23.5 HP	23.5 HP	26 HP	23.5 HP	26 HP
ISPLACEMENT	603	CC	726 CC	726 CC	726 CC	726 CC	726 CC
PRIVE SYSTEM	HYDRO-GEAR® ZT-	3100 TRANSAXLE		HY	DRO-GEAR® ZT-3400 TRANSAX	(LE	
UEL CAPACITY	6 0	AL			9 GAL		
GROUND SPEED (APPROX. Mph) Forward/Reverse)	8 MPH	/ 3 MPH		9 MPH / 4 MPH			
TARTER				ELECTRIC			
DECK							
ECK MATERIAL				7 GA.			
DECK CONSTRUCTION				FABRICATED			
IUMBER OF SPINDLES	2	2			3		
LADE TIP SPEED (FPM)	18,	220			18,000		
PINDLE HOUSING MATERIAL				FORGED ALUMINUM			
PINDLE BEARINGS				BALL BEARING			
ECK ENGAGEMENT				OGURA 2.75 ELECTRIC CLUTC	Н		
ECK LIFT SYSTEM				MANUAL	-		
UTTING WIDTH	32 IN	36 IN	48 IN	52 IN	52 IN	60 IN	60 IN
UTTING HEIGHTS				1.5 IN - 5.0 IN			
UTTING POSITIONS				15			
VHEELS							
RONT AXLE				RIGID			
RONT	11 X 4.00-5 SE	MI-PNEUMATIC			13 X 6.50-6 SEMI-PNEUMATIC		
EAR	18 X 6.50 - 8 RADIAL	18 X 8.50 - 8 RADIAL			20 X 10.50 - 8 RADIAL		
ACHINE							
VEIGHT	750 LBS	784 LBS	995 LBS	1015 LBS	1015 LBS	1043 LBS	1048 LBS
ENGTH	59.5 IN	59.5 IN	60.63 IN	60.63 IN	60.63 IN	62 IN	62 IN
VIDTH (w/o CHUTE)	33.5 IN	36.5 IN	50 IN	55.5 IN	55.5 IN	63 IN	63 IN
VIDTH (w/ CHUTE)	49 IN	49 IN	62.25 IN	67.75 IN	67.75 IN	75.25 IN	75.25 IN
IEIGHT				48 IN			
VARRANTY							
JNIT	5 YEA	AR / 1000 HOUR COMMERCIAI	L / NO HOUR LIMIT FIRST 2 YE	ARS - SEE YOUR PROFESSIO	NAL GRAVELY® DEALER FOR	COMPLETE WARRANTY DE	TAILS
				LIMITED LIFETIME			

MULCHING KIT, OCDB KIT, HEADLIGHT KIT, TRIMMER MOUNT KIT, PACK BLOWER MOUNT KIT, BUCKET MOUNT KIT, REAR TWEEL KIT, LASEREDGE BLADES, TUNE UP KIT

53





	36HR	48HE	52HE	60HE	
MODEL NUMBER	988184	988185	988186	988187	
ENGINE	KAWASAKI° FS481V	KAWASAKI° FS600V	KAWASAKI° FS600V	KAWASAKI° FS691V	
HORSEPOWER	14.5 HP	18.5 HP	18.5 HP	23 HP	
DISPLACEMENT	603 CC	603 CC	603 CC	726 CC	
DRIVE SYSTEM	HYDRO-GEAR* ZT-2800 TRANSAXLE				
FUEL CAPACITY	5.8 GAL.				
GROUND SPEED (APPROX. Mph) (Forward/Reverse)	8 MPH / 3 MPH				
STARTER	ELECTRIC				
DECK					
DECK MATERIAL	10 GA.				
DECK CONSTRUCTION	FABRICATED				
NUMBER OF SPINDLES	2	3	3	3	
BLADE TIP SPEED (FPM)	18,000				
SPINDLE HOUSING MATERIAL	ALUMINUM	ALUMINUM	FORGED ALUMINUM	FORGED ALUMINUM	
SPINDLE BEARINGS	BALL BEARING				
DECK ENGAGEMENT	OGURA GT1A ELECTRIC CLUTCH				
DECK LIFT SYSTEM	MANUAL				
CUTTING WIDTH	36 IN	48 IN	52 IN.	60 IN.	
CUTTING HEIGHTS	1.5 IN - 4.5 IN	1.5 IN - 5.0 IN	1.5 IN - 5.0 IN	1.5 IN - 5.0 IN	
CUTTING POSITIONS (1/4 IN. Increments)	13	15	15	15	
WHEELS					
FRONT AXLE	N/A				
FRONT WHEELS	11 X 4-5 SEMI-PNEUMATIC				
REAR WHEELS	21 X 7-10		20 X 8-10		
MACHINE					
WEIGHT	701 LBS	740 LBS	770 LBS	795 LBS	
LENGTH	64 IN	69 IN	71 IN	71.8 IN	
WIDTH (w/o CHUTE)	36.8 IN	50.1 IN	55.5 IN	63 IN	
WIDTH (w/ CHUTE)	48.3 IN	62.2 IN	67.6 IN	75.1 IN	
HEIGHT	45 IN				
WARRANTY					
UNIT	4 YEAR / 750 HOUR - NO HOUR LIMIT FIRST 2 YEARS				
DECK SHELL & FRAME	N/A				
ATTACHMENTS & ACCESSORIES					

MULCHING KIT, GRASS COLLECTOR, SINGLE WHEEL SULKY, TWO WHEEL SULKY, HEADLIGHT KIT, OCDB KIT, LASEREDGE BLADE KIT



# PRO-QXT TRACTOR

MODEL NUMBER	985911
ENGINE	KOHLER*
HORSEPOWER	14 HP
DISPLACEMENT	429 CC
DRIVE SYSTEM	HYDRO-GEAR*  ZT - 2800 TRANSAXLES
FUEL CAPACITY	1.8 GAL.
GROUND SPEED (APPROX. Mph) (Forward/Reverse)	5 MPH / 2.5 MPH
STARTER	ELECTRIC & RECOIL
TIRES	
REAR	TURF 20 X 8 - 10
MACHINE	
WEIGHT (w/o FUEL)	520 LBS.
LENGTH	55.5 IN.
WIDTH	30.5 IN.
HEIGHT	39 IN.
PTO COUPLER	
PTO SPEED	900 RPM
ENGAGEMENT	ELECTRIC
PTO DRIVE	DUAL BELT
FEATURES	
HOUR METER	STANDARD
POWER STEERING	STANDARD
POWER STEERING LOCK OUT	STANDARD
WARRANTY	
TRACTOR	4 YEAR / 500 HOUR COMMERCIAL NO HOUR LIMIT FIRST 2 YEARS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS
ENGINE	5 YEAR LIMITED
ACCESSORIES	

WORK LIGHT, TIRE CHAIN, AG TIRES, TWIST GRIP RING

ATTACHMENTS	MODEL	WIDTH
POWER BRUSH	885911	44 IN.
DOZER BLADE	885910	48 IN.
SNOW BLOWER	885912	32 IN.
BRUSH MOWER	885913	32 IN.
FINISH MOWER	885914	36 IN.
FINISH MOWER	885915	48 IN.
AERATOR	885916	32 IN.
DETHATCHER	885917	32 IN.

### **ATLAS JSV**



	3400	3400SD	6400		
MODEL NUMBER	996205	996204	996207		
ENGINE	POLARIS" 2-CYLINDER, SOHC, GAS				
HORSEPOWER	40 HP				
DISPLACEMENT (CC)	999 CC				
FUEL SYSTEM	EFI				
FUEL CAPACITY	11.5 GAL.				
GROUND SPEED (Approx. Mph)	35 MPH				
TOWING CAPACITY	2,500 LBS.				
TOTAL RATED PAYLOAD	1,900 LBS.	1,800 LBS.	2,075 LBS.		
TRANSMISSION	CONTINUOUSLY VARIABLE (CVT)				
TURNING RADIUS	112 IN. 15				
TIRES & WHEELS					
RONT & REAR SUSPENSION	IFS DUAL A-ARM				
RONT & REAR TIRES	HEAVY-DUTY 26X10-12				
RONT & REAR WHEELS	12 X 6 STEEL				
EATURES					
STEERING	RACK & PINION	ELECTRIC POWERED STEERING	ELECTRIC POWERED STEERING		
BED LIFT	STANDARD, ELECTRIC	STANDARD, ELECTRIC	STANDARD, ELECTRIC		
ED MATERIAL	POLY	STEEL	POLY		
ІІТСН	STANDARD, HEAVY DUTY				
ROPS	ACCORDING TO ANSI/OPEI B71.9, OSHA 1928.53				
SEATING CAPACITY	3	3	6		
/EHICLE DIMENSIONS					
WEIGHT	1,620 LBS.	1,790 LBS.	1,925 LBS.		
ENGTH	125 IN.	125 IN.	157 IN.		
WIDTH	62.5 IN.	62.5 IN.	62.5 IN.		
HEIGHT	75 IN.				
GROUND CLEARANCE	11 IN.				
WARRANTY					
UNIT	1 YEAR LIMITED COMMERCIAL				
NSTRUMENTATION					

SPEEDOMETER, TACHOMETER, FUEL GAUGE, HOUR METER, ODOMETER & TRIP METER, GEAR INDICATION, GLOW PLUG INDICATOR LIGHT\* & ENGINE OIL PRESSURE\* (\*DIESEL MODELS ONLY), SEAT BELT REMINDER LIGHT, BATTERY VOLTAGE CHARGE SYSTEM. ENGINE/COOLANT TEMP. 2 IN-DASH 12V POWER OUTLETS

# GRAVELY HELPS MORK HARDER TOO.

Put equipment in the hands of the ones who need it most with financing options through Gravely. Accelerate getting the tools you need to get the job done with affordable plans provided through our network of authorized independent finance companies.

Visit your local dealer to learn more.

Dealer Information

### VISIT US ONLINE AT GRAVELY.COM

for product information, consumer reviews, product videos, dealer locator, product selector, and customer support.

Registered trademark and ™ trademark of AriensCo. Kohler\*, Kawasaki\*, Yamaha\*, Subaru\* and Hydro-Gear\* are registered trademarks of their respective companies. The engine horsepower information is provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower will be less. Visit www.gravely.com for a complete listing of engine manufacturer power rating information. Product features and specifications subject to change without notice. Photos are a representation of the product; actual product may vary.

© Copyright 2022 AriensCo. All rights reserved. 2022





