PowerSteamer® Powerbrush Select







- 3 Safety Instructions
- 4 Product View
- 5 Assembly
- 6 Special Features
- 7-11 Operation
 - 12 Maintenance and Care
 - 13 Troubleshooting
 - 14 Consumer Services
- 14 Replacement Parts
- 15 Additional Accessories
- 16 Warranty



Thank you for buying a BISSELL deep cleaner

We're glad you purchased a BISSELL deep cleaner. Everything we know about floor care went into the design and construction of this complete, high-tech home cleaning system. By purchasing this product you are helping BISSELL with our commitment to reducing our impact on the environment through an expanding range of sustainable design efforts.

Your deep cleaner is well made, and we back it with a limited one-year warranty. We also stand behind it with a knowledgeable, dedicated Consumer Services department, so, should you ever have a problem, you'll receive fast, considerate assistance.

My great-grandfather invented the floor sweeper in 1876. Today, BISSELL is a global leader in the design, manufacture, and service of high quality homecare products like your deep cleaner.

Thanks again, from all of us at BISSELL.

man J. Broke

Mark J. Bissell

President and Chief Executive Officer

MPORTANT SAFETY INSTRUCTIONS

When using an electrical appliance, basic precautions should be observed, including the following:

Read all instructions before using your PowerSteamer®

WARNING: To reduce the risk

of fire, electric shock, or injury:

- Do not immerse.
- Use only on surfaces moistened by cleaning process.
- Always connect to a properly grounded outlet.
- See Grounding Instructions.
- Unplug from outlet when not in use and before conducting maintenance or troubleshooting.
- Do not leave machine when it is plugged in.
- Do not service machine when it is plugged in.
- Do not use with damaged cord or plug.
- If appliance is not working as it should, has been dropped, damaged, left outdoors, or dropped into water, have it repaired at an authorized Service Center.
- Use indoors only.
- Do not pull or carry by cord, use cord as a handle, close door on cord, pull cord around sharp corners or edges, run appliance over cord, or expose cord to heated surfaces.
- Unplug by grasping the plug, not the cord.
- Do not handle plug or appliance with wet hands.
- Do not put any object into appliance openings, use with blocked opening, or restrict air flow.
- Do not expose hair, loose clothing, fingers or body parts to opening or moving parts.
- Do not pick up hot or burning objects.
- Do not pick up flammable or combustible materials (lighter fluid, gasoline, kerosene, etc.) or use in the presence of explosive liquids or vapor.
- Do not use appliance in an enclosed space filled with vapors given off by oil base paint, paint thinner, some moth proofing substances, flammable dust, or other explosive or toxic vapors.
- Do not pick up toxic material (chlorine bleach, ammonia, drain cleaner, gasoline, etc.).
- Do not modify the 3-prong grounded plug.
- Do not allow to be used as a tov.
- Do not use for any purpose other than described in this User's Guide.
- Do not operate the appliance unless the belt door is securely assembled in the location provided.
- Do not unplug by pulling on the cord.
- Use only manufacturer's recommended attachments.
- Use only cleaning products formulated by BISSELL for use in this appliance to prevent internal component damage. See the cleaning fluid section of this guide.
- Keep openings free of dust, lint, hair, etc.
- Do not point attachment nozzle at people or animals
- Keep appliance on a level surface.

- Turn off all controls before unplugging.
- Be extra careful when cleaning stairs.
- Close attention is necessary when used by or near children.

SAVE THESE INSTRUCTIONS.

THIS MODEL IS FOR HOUSEHOLD USE ONLY. Commercial use of this unit voids the manufacturer's warranty.

GROUNDING INSTRUCTIONS

This appliance must be connected to a grounded wiring system. If it should malfunction or break down, grounding provides a safe path of least resistance for electrical current, reducing the risk of electrical shock. The cord for this appliance has an equipment-grounding conductor and a grounding plug. It must only be plugged into an outlet that is properly installed and grounded in accordance with all local codes and ordinances.



⚠ WARNING: Improper connection of the equipment-grounding conductor can result in a risk of electrical shock. Check with a qualified electrician or service person if you aren't sure if the outlet is properly grounded. DO NOT MODIFY THE PLUG. If it will not fit the outlet, have a proper outlet installed by a qualified electrician. This appliance is designed for use on a nominal 120-volt circuit, and has a grounding attachment plug that looks like the plug in the drawing above. Make certain that the appliance is connected to an outlet having the same configuration as the plug. No plug adapter should be used with this appliance.







Cleaning fluid

Keep plenty of genuine BISSELL 2X Fiber Cleansing Formula on hand so you can clean and protect whenever it fits your schedule. Always use genuine BISSELL deep cleaning formulas. Non-BISSELL cleaning solutions may harm the machine and will void the warranty.



BISSELL 2X Fiber Cleansing Formula with Scotchgard[™] Protection



BISSELL Removal Formula Odor Removal with Scotchgard[™] Formula with Protection



BISSELL 2X Multi-Allergen 2X Pet Stain and 2X Natural Scotchgard[™] Protection



BISSELL Orange Extract Formula with Scotchaard[™] Protection



Brushes

BISSELL 2X Lavendar Essence Formula with Scotchgard^T Protection



BISSELL 2X Professional Deep Cleaning Formula with Scotchgard^T Protection



BISSFI I 2X Hard Floor Solutions Formula



BISSELL Tough Stain PreCleaner



Assembly

Your deep cleaner comes in five easy to assemble components:

- Handle assembly
- Upper body assembly
- Upper hose rack
- Lower body assembly
- Lower hose rack

Three Phillips head screws are included and can be found taped to the handle assembly.

The only tool you will need to assemble your cleaner is a Phillips head screwdriver.

- 1. Slide upper body assembly onto lower body and secure with two screws.
- 2. With the "tabs" on upper hose rack pointing toward top of handle, attach upper hose rack to handle assembly by sliding it to top of handle until it can go no further. Turn hose rack until it snaps into place.
- Slide handle assembly down into upper body until it will go no further and secure with screw.
- Attach lower hose rack to back of upper body by pushing into open slots and sliding down until it snaps into place.
- Wrap flex hose around hose rack and secure it into notched out holder as shown.
- **6.** Keep flex hose locked in place with hose secure latch.



Do not plug in your cleaner until you have completely assembled it per the following instructions and are familiar with all instructions and operating procedures.





















Special features of your BISSELL deep cleaner

Your BISSELL deep cleaner is a home cleaning system that uses a combination of hot tap water, BISSELL advanced cleaning formula, brush agitation and suction to safely clean carpets.

DirtLifter® PowerBrush

The DirtLifter PowerBrush is designed to enhance cleaning performance. The bristle pattern safely lifts out the deep down dirt while gently grooming carpet fibers. The floating suspension self-adjusts to all carpet heights. When the power is ON and the machine is in the upright position, your carpet is protected because the brushes are lifted up off the carpet.

Ready Tools™ Dial

The Ready Tools feature allows you to choose between FLOOR CLEANING or cleaning with TOOLS simply by turning the dial. The TOOLS setting allows for above floor cleaning of upholstery, stairs, creases along baseboards, and other hard to reach areas. Simply choose the tool that is appropriate for the job, attach to flex hose and you are ready to go.

Measuring cup

Your deep cleaner is equipped with a measuring cup for adding the proper amount of formula to the 2-in-1 tank. For convenience the measuring cup is built into the lid of the 2-in-1 tank.

2-in-1 water tank

Our 2-in-1 water tank system is designed with a heavy duty bladder inside for clean water. As you clean, the clean water in the bladder will empty and mix with the cleaning formula. Dirty water pulled out of your carpet will collect around the outside of the bladder so clean and dirty water are always kept separate. This allows the user to maximize tank space, yet only carry one tank to and from the sink for emptying and filling.

⚠ WARNING:

To reduce the risk of fire, use only BISSELL advanced deep cleaning formula for full size machines in your deep cleaner. Use of cleaning formulas that contain lemon or pine oil may damage this appliance and void the warranty. Chemical spot cleaners or solvent-based soil removers should not be used. These products may react with the plastic materials used in your deep cleaner causing cracking or pitting.







ATTENTION:

Some Berber carpets have a tendency to fuzz with wear. Repeated strokes in the same area with an ordinary vacuum or deep cleaner may aggravate this condition.



Before you clean

- 1. Plan activities to give your carpet time to dry.
- **2. Move furniture** to another area if cleaning an entire room (optional).
- Vacuum area with a dry vacuum cleaner before deep cleaning.
- Plan your cleaning route to leave an exit path. It is best to begin cleaning in the corner farthest from your exit.




Pretreating is recommended to improve cleaning effectiveness for heavily soiled carpet in high traffic areas such as entry ways and hallways. To pretreat:

- A. Using the BISSELL Tough Stain Pre-cleaner, generously spray evenly over soiled area, do not overwet.
- B. Wait 3-5 minutes before deep cleaning.
- **C.** Clean as normal using your BISSELL deep cleaner, following the instructions below.

Fill the 2-in-1 water tank

- Remove the tank from the base of the machine by lifting the tank carry handle.
- Carry like a bucket to the sink. Rotate the handle forward to unlatch the lid. Remove lid, turn over and locate built in measuring cup.
- Fill with BISSELL 2X concentrated formula to the indicated fill line on the built in measuring cup and pour into mouth of the bladder.
- Fill the bladder with clean hot tap water.
 *Do not boil or microwave water as it can destroy the bladder.







Fill the 2-in-1 water tank (continued)

 Replace the top of the tank by matching the lid and tank edges. Handle must be in the forward position in order to replace lid. Rotate the handle to the carrying position to latch the lid.

Note: Remember to secure the lid and test to make sure it is secure before picking up the tank.

 Place tank into machine base, seating firmly in place. Rotate tank handle back into latched position.

Carpet cleaning strokes

- Plug the deep cleaner into a proper outlet. Turn the power ON by pressing the red power switch on the back of the unit with your foot.
- With your foot, press the gray handle release lever located on the back of unit below water tank.
- While pressing the spray trigger, make one slow forward wet pass and another back. Let the BISSELL 2X advanced deep cleaning formula and DirtLifter PowerBrush do the work for you. Caution: Do not overwet.
- 4. Release the spray trigger and make one slow forward and backward pass over the same area to remove any residual dirty water and aid in drying.
- Repeat cleaning passes until solution being pulled up appears clean. Continue passes without pressing the trigger until you can't see any more water being suctioned up.

8





Tip: Thorough vacuuming before deep cleaning will prevent early clogging of the lint trap.



WARNING:

To reduce the risk of fire and electric shock due to internal component damage, use only BISSELL cleaning fluids intended for use with the deep cleaner. Non-BISSELL cleaning solutions may harm the machine and void the warranty.

Empty the 2-in-1 water tank/ clean removable nozzle

- Tum power switch OFF. Remove the 2-in-1 water tank from the base using the tank carry handle. Carry the tank like a bucket to a utility sink or outside where you will dispose of the collection water. Remove the top of the tank by rotating the handle forward to unlatch lid and lifting lid off tank.
- 2. Empty collection water from bottom of tank.
- **3.** After each use, remove and rinse the lint screen located on the tank lid.
- If nozzle needs to be cleaned: remove by grasping handle at the top and pulling forward. Clean removable nozzle by rinsing under running water.
- When finished, replace nozzle by slightly raising front of machine to line up slots on the base with the hooks on nozzle. Attach at base first and then click nozzle into place.
 NOTE: If nozzle is not attached properly loss of suction will occur.
- 6. To continue carpet cleaning, refer back to pages 7 through 8, beginning with "Fill the 2-in-1 water tank" on page 7.


If cleaning is complete, refer to the "Maintenance and care" section on page 12.

Ready Tools™ cleaning with attachments

Your deep cleaner comes equipped with a hose and at least one attachment for cleaning stairs, upholstery, and more.

Important! If using the machine to clean upholstery, check upholstery tags.

- Check manufacturer's tag before cleaning.
 "W" or "WS" on the tag means you can use your PowerSteamer. If the tag is coded with "X" or "S" (with a diagonal strike through), or says "Dry Clean Only," do not proceed. Do not use on velvet or silk. If manufacturer's tag is missing or not coded, check with your furniture dealer.
- **2.** Check for colorfastness in an inconspicuous place.
- If possible, check upholstery stuffing. Colored stuffing may bleed through fabric when wet.
- 4. Plan activities to give upholstery time to dry.

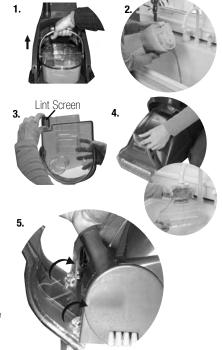



Ready Tools™

- Vacuum thoroughly to pick up loose debris and pet hair. Use a vacuum with a brush attachment and a crevice tool to clean in fabric folds and tufts.
- To begin cleaning with attachments, follow the instructions on pages 7-8 for filling the 2-in-1 water tank.
- Set the ReadyTools dial to the TOOLS setting. This will allow spray and suction from the hose.
- **8.** Attach the cleaning tool to the end of the hose.
- Clean by pressing the trigger to spray solution onto the area to be cleaned. Slowly move the tool back and forth over the soiled surface. Release the trigger to suction dirty water. Continue to clean in the area, working in small sections, until dirt is removed.

Caution: Do Not Overwet.

- **10.** When finished cleaning, remove and rinse tool(s) in clean, running water.
- **11.** It is recommended that you suction clean water from a bowl to rinse out the hose.
- Before wrapping hose onto tool rack, lift end of hose and stretch out to ensure all water is cleared from hose.
- 13. Wrap flex hose around tool rack.
- **14.** Empty 2-in-1 water tank and rinse out, following instructions on page 9.
- 15. If the ReadyTools dial becomes difficult to turn, the diverter assembly that holds the dial may need to be cleaned. To clean, first remove nozzle and locate screw that holds the diverter assembly in place. With a Phillips screwdriver, remove the screw and set aside.
- 16. Remove diverter assembly; hold under running water making sure water flows through and around the dial. Turn the dial about 10 times clockwise and 10 more times counter clockwise. This should free up any debris.
- **17.** Wipe diverter assembly with a soft cloth and replace back on machine. Replace nozzle.
- Return ReadyTools dial to FLOOR CLEANING setting.

Tip: To clean with sliding crevice tool, slide brushes forward to clean stain, slide back to suction







10 www.bissell.com 800.237.7691

Hard Floor Cleaning

Your deep cleaner may have come with a hard floor tool and Hard Floor Solutions Formula. The hard floor tool provides effective cleaning for linoleum, vinyl, and tile floors.

Caution: Do not use on unsealed hardwood floors.

1. Thoroughly vacuum or sweep floor to pick up any debris.

NOTE: Prior to filling with formula and water, be sure all carpet cleaning formula is thoroughly rinsed from tank.

- Fill BISSELL 2X Hard Floor Solutions Formula to the indicated fill line in the built in measuring cup and pour into mouth of bladder.
- Fill the bladder with clean hot tap water and set aside.
- 4. Attach the hard floor tool to the bottom of the machine by hooking it into the nozzle and swinging it down until it clicks into place.
- **5.** Be sure the ReadyTools dial is set to FLOOR CLEANING.
- **6.** Plug into an outlet and turn the power ON.
- Plan your cleaning route to leave an exit path. Be sure to allow adequate time for floors to dry.
- While pressing the spray trigger, make one slow forward wet pass and another back.
 Caution: Do Not Overwet.
- Repeat the motion without pressing the trigger using the hard floor tool to squeegee and suction up the dirty water.
- 10. When finished, remove the hard floor tool, rinse and let dry before storing. Refer to the Maintenance section on page 12 for machine clean up and storage instructions.

To reduce the risk of fire and electric shock- when cleaning a hard floor, the BISSELL hard floor tool 203-5641 must be used and it must only be used with BISSELL Hard Floor Solutions or BISSELL 2X Hard Floor Solutions cleaning fluid intended for use with this appliance.





Maintenance and care

Machine care

For best results, a few simple steps can assure your machine is well maintained after your cleaning is complete.

- Turn power switch OFF. Unplug the machine and wrap the power cord.
- After emptying the 2-in-1 water tank, rinse it with running hot tap water, taking care to clean underneath and around the heavy duty bladder. Clean out red lint screen. Removable nozzle may be rinsed if necessary. Refer to page 9.
- **3.** Replace the 2-in-1 water tank on the machine.
- **4.** Any loose hair or debris can be pulled from the brush roll and thrown away.
- 5. To clean attachments, remove from hose and rinse in clean, running water. Dry before storing. Clean the hose by suctioning clean water from a bowl. Before wrapping back on machine, lift end of hose and stretch out to ensure all water is cleared from hose. Refer to page 10, illustrations 11 and 12.
- **6.** Wipe the machine's exterior with a soft cloth.
- After carpet is dry, vacuum again to remove hair and fuzz.

Machine storage

www.bissell.com


Put the unit away in a closet or basement for the next use. Store cleaner in a protected, dry area. Since this product uses water, it must not be stored where there is a danger of freezing. Freezing will damage internal components and void the warranty.



Troubleshooting

Reduced Spray OR No Spray Possible cause

- Bladder may be empty
- 2-in-1 tank may not be seated properly.
- 3. Pump may have lost prime.
- The pump belt may be broken.



Pump Belt Slots

DirtLifter PowerBrush Does Not Turn

Possible cause

The brush belt or pump belt is off or broken.

Cleaner Not Picking Up Solution Possible cause

- 1. Removable nozzle may not be properly attached.
- 2. 2-in-1 tank lid is not properly installed.
- 2-in-1 tank is not properly seated.
- 2-in-1 tank has picked up maximum dirty water.
- The lint screen may be clogged

WARNING:

To reduce the risk of fire, electric shock or injury, unplug from the outlet before servicing.

Remedies

- 1. Turn power switch OFF; Refill bladder with clean hot tap water.
- 2. Turn power switch OFF: remove tank and reseat tanks.
- 3. Turn power switch OFF: after 1 minute turn ON and depress spray release trigger.
- 4. Turn power switch OFF and unplug from the outlet. To check if a pump belt has broken, vou will need a flat head screwdriver. A. Insert the blade end into the slot of the belt access door to release. Examine the belt for breakage. You should be able to see the pump belt looped around the motor shaft. If it is broken or missing, please refer to Replacement Parts on page 14. A replacement belt may be ordered at www.bissell.com or by calling BISSELL Consumer Services at 800-237-7691. Complete installation instructions will accompany the replacement belt. **B.** When replacing belt access door be sure to
 - line up slots of belt access door with slots in machine, slide door into place and snap shut.

Remedies

1. Refer to Remedy 4 above to check if brush belt or pump belt is broken.

Remedies

- 1. Make sure nozzle is on correctly by slightly raising front of machine to line up slots on the base of the machine with the hooks on nozzle. Attach at base first and then dick nozzle into place.
- 2. Re-install lid; refer to the image on page 8.
- 3. 2-in-1 tank must be firmly seated to function: remove and reseat 2-in-1 tank.
- 4. Empty 2-in-1 tank and refill, refer to the Operation section.
- 5. Clean out lint screen. Refer to page 9.

Other maintenance or service not included in the manual should be performed by an authorized service representative.

Thank you for selecting a BISSELL product.

Please do not return this product to the store

For any questions or concerns, BISSELL is happy to be of service. Contact us directly at 1-800-237-7691.



BISSELL Consumer Services

For information about repairs or replacement parts, or questions about your warranty, call:

BISSELL Consumer Services 1-800-237-7691

Monday - Friday 8 a.m. — 10 p.m. EST Saturday 9 a.m. — 8 p.m. EST

Or write:

BISSELL HOMECARE, INC

PO Box 3606

Grand Rapids MI 49501 ATTN: Consumer Services

Or visit the BISSELL website - www.bissell.com or www.2Xbissell.com

When contacting BISSELL, have model number of unit available.

Please record your Model Number: ______

Please record your Purchase Date:

NOTE: Please keep your original sales receipt. It provides proof of date of purchase in the event of a warranty claim. See Warranty on page 16 for details.

Please register your new BISSELL product at www.bissell.com/productregistration

Replacement parts

Item	Part No.	Part Name
1	203-0104	Tank Assembly Complete
2	203-0102	Tank Base
3	203-0124	Removable Nozzle
4	215-0628	Replacement Pump Belt (with instructions)
5	015-0621	Replacement Brush Belt (with instructions)
6	203-0105	Lint Screen



1

14

2



3



4



6







Additional accessories

These items are available for purchase as accessories for your BISSELL PowerSteamer Select: To purchase call 1-800-237-7691 or visit www.bissell.com.

	1 2	Part No 203-50 203-60	641	3" Tough 3	Tool, wi Stain To	ol	ze bottle	of Hard Fl	oor Solution	s Formula	
	3 4 5 6 7 8 9 10 11 12 13 14 15 16	203-6i 203-6i 203-6i 203-6i 210-3i 62E5 99K5 83P3 34B5 78H6 56L9 4001	654 652 116 655	4" Upholstery Tool 6" Stair Tool Powered TurboBrush Hand Tool Spraying, Sliding Crevice tool w/ Brush Spraying Crevice Tool Mesh Tool Storage Bag 2X Fiber Cleansing Formula with Scotchgard Protection 24 oz. 2X Pet Stain and Odor Removal Formula with Scotchgard Protection 24 oz. 2X Multi-Allergen Removal Formula with Scotchgard Protection 24 oz. 2X Natural Orange Extract Formula with Scotchgard Protection 24 oz. 2X Lavendar Essence Formula with Scotchgard Protection 24 oz. 2X Professional Deep Cleaning Formula with Scotchgard 24 oz. 2X Hard Floor Solutions Formula 16 oz. Tough Stain PreCleaner 22 oz.							
1		2	!	3		4	4		5		
		3		4			4		11)
6		7	7		8	0.000	_ 9		10	11	
											A SUP
12	13	101	14	15	16						

For a complete list of replacement parts, cleaning formulas, and accessories available for your BISSELL deep cleaner please visit www.bissell.com or contact BISSELL Consumer Services at 800.237.7691.

Earn Rewards Points!

To qualify you for discounts, rebates, and other BISSELL perks. Visit www.bissell.com/rewards to learn more.



Warranty - BISSELL PowerSteamer

This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state. If you need additional instruction regarding this warranty or have questions regarding what it may cover, please contact BISSELL Consumer Services by E-mail, telephone, or regular mail as described below.

Limited One Year Warranty

Subject to the ***EXCEPTIONS AND EXCLUSIONS** identified below, upon receipt of the product BISSELL Homecare, Inc. will repair or replace (with new or remanufactured components or products), at BISSELL's option, free of charge from the date of purchase by the original purchaser, for one year any defective or malfunctioning part.

See information below on "If your BISSELL product should require service".

This warranty applies to product used for personal, and not commercial or rental service. This warranty does not apply to fans or routine maintenance components such as filters, belts, or brushes. Damage or malfunction caused by negligence, abuse, neglect, unauthorized repair, or any other use not in accordance with the User's Guide is not covered.

If your BISSELL product should require service:

Contact BISSELL Consumer Services to locate a BISSELL Authorized Service Center in your area.

If you need information about repairs or replacement parts, or if you have questions about your warranty, contact BISSELL Consumer Services.

Website or E-mail:

www.bissell.com

Or visit: www.2Xbissell.com

Or call:

BISSELL Consumer Services 1-800-237-7691 Monday - Friday 8 a.m. - 10 p.m. ET Saturday 9 a.m. - 8 p.m. ET

Or write:

BISSELL Homecare Inc. PO Box 3606 Grand Rapids MI 49501 ATTN: Consumer Services

BISSELL HOMECARE, INC. IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY NATURE ASSOCIATED WITH THE USE OF THIS PRODUCT. BISSELL'S LIABILITY WILL NOT EXCEED THE PURCHASE PRICE OF THE PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

*EXCEPTIONS AND EXCLUSIONS FROM THE TERMS OF THE LIMITED WARRANTY THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ANY OTHER WARRANTIES EITHER ORAL OR WRITTEN. ANY IMPLIED WARRANTIES WHICH MAY ARISE BY OPERATION OF LAW, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO THE ONE YEAR DURATION FROM THE DATE OF PURCHASE AS DESCRIBED ABOVE.

Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.



©2010 BISSELL Homecare, Inc Grand Rapids, Michigan All rights reserved. Printed in China Part Number 120-4202 Rev 02/10 Visit our website at: www.bissell.com Scotchgard is a trademark of 3M

