



**ANGAS**  
FENCING PRODUCTS

# FENCING PRODUCTS CATALOGUE



1st January 2014

Phone: 1300 384 981



Manufactured by  
**Austral Wire Products**  
Sydney, Australia

[www.angasfencing.com.au](http://www.angasfencing.com.au)

**QUALITY • PERFORMANCE • RELIABILITY**

*at the right price!*



## Contents

INTRODUCTION	2
HINGED JOINT - BLACK ANGAS	3
HINGED JOINT - STANDARD	4
MAX-LOC	5
FENCING WIRE	6
WIRE NETTING	7
BARBED WIRE	8
STEEL FENCE POSTS	9
GATES	10
GATE FITTINGS	11
FENCING TOOLS	11

### How to Contact Us

**Factory:** 134 Hassall St, Wetherill Park NSW 2164  
**Mail:** PO Box 6709, Wetherill Park NSW 2164  
**Phone:** 1300 384 981  
**Fax:** 1300 384 985  
**Email:** [sales@angasfencing.com.au](mailto:sales@angasfencing.com.au)  
**Web:** [www.angasfencing.com.au](http://www.angasfencing.com.au)

For a list of resellers please contact us as above.

### Introduction

The owners of Angas Fencing Products have for many years manufactured a diverse range of wire products including:

- Hinged Joint
- Barbed Wire
- Max-Loc
- Wire Netting
- Fencing Wire

### Production Equipment

We use specialised high production machines. These world class machines feature the best technology available for the manufacture of wire fencing products.

### Wire Raw Materials

Angas Fencing source raw materials from wire mills locally and worldwide, ensuring continuity of supply and consistent quality. Our suppliers are the best in the world, only supplying raw materials that comply with Australian Standards AS 2423-2002 stringent quality assured standards.

### Testing


State of the art test equipment is used to ensure accurate tensility of every coil of wire used. This quality operating procedure combined with close attention to the detail of the manufacturing process confidently ensures Angas Fencing supplies a well-made, long lasting fence for the tough Australian conditions.

### Availability

Angas Fencing, to ensure an adequate supply to the requirements of its resellers, warehouse finished manufactured stock at the Wetherill Park factory. Angas Fencing products are only distributed through Australian rural resellers. Angas Fencing does not supply to non bona fide resellers.

**Notes:** This product range is suitable for most rural fencing applications. If the products are exposed to strong chemicals, pollutants & or corrosion sources, the performance may be adversely affected. As these fencing products will be installed in widely varying situations, you must use diligence to ensure that what is selected is adequate for the purpose. We do not accept liability for loss, damage or consequences for claims based on using this fencing catalogue.





# Hinged Joint

## BLACK ANGAS


The Black Angas Hinged Joint range is suited to all fencing requirements. Specially made for those who require a stronger fence.

- 2.8mm top and bottom line wires
- All line wires high tensile
- All Standard Galvanised wires
- 9 rolls/pallet

### SIZE DESCRIPTION EXAMPLE

**7 / 90 / 30** = 7 horizontal (line) wires,  
 90cm fence height  
 30cm vertical (picket) wire spaces

PRODUCT CODE	SIZE	KG/ROLL	LENGTH
100505	<b>6 / 70 / 30</b>	80	200 m
100510	<b>6 / 90 / 30</b>	84	200 m
100515	<b>7 / 90 / 30</b>	94	200 m
100540	<b>8 / 90 / 30</b>	102	200 m
100535	<b>8 / 90 / 15</b>	71	100 m



# Hinged Joint

## STANDARD

The Standard Hinged Joint range is well known for its outstanding performance.

- All wires 2.50 mm
- All line wires high tensile
- All standard galvanised wire

### SIZE DESCRIPTION EXAMPLE

**7 / 90 / 30** = 7 horizontal (line) wires,  
90cm fence height  
30cm vertical (picket) wire spaces

PRODUCT CODE	SIZE	KG/ROLL	LENGTH
100410	<b>6 / 70 / 30</b>	70	200 m
100415	<b>6 / 90 / 30</b>	74	200 m
100420	<b>7 / 90 / 30</b>	84	200 m
100445	<b>8 / 90 / 30</b>	92	200 m
100430	<b>8 / 115 / 30</b>	102	200 m
100435	<b>8 / 80 / 15</b>	60	100 m
100440	<b>8 / 90 / 15</b>	61	100 m
100425	<b>8 / 115 / 15</b>	73	100 m
100401	<b>11 / 142 / 15</b>	94	100 m





We are proud to announce the introduction of MAX-LOC Field Fence into the Angas Fencing range of products.

# Max-Loc

## STANDARD

Angas Max-Loc offers the following features:

- Smooth knot both sides. No sharp edges to cause injury to animals
- Knot design resists slipping along either picket or line wires
- All wires 2.50mm Standard Galvanised High Tensile
- 9 rolls/pallet

### SIZE DESCRIPTION EXAMPLE

**7 / 90 / 30** = 7 horizontal (line) wires,  
90cm fence height  
30cm vertical (picket) wire spaces

PRODUCT CODE	SIZE	KG/ROLL	LENGTH
100703	<b>5 / 70 / 30</b>	60	200 m
100705	<b>6 / 70 / 30</b>	68	200 m
100710	<b>6 / 90 / 30</b>	73	200 m
100715	<b>7 / 90 / 30</b>	81	200 m
100740	<b>8 / 90 / 30</b>	89	200 m
100725	<b>8 / 115 / 30</b>	101	200 m
100730	<b>8 / 80 / 15</b>	61	100 m
100735	<b>8 / 90 / 15</b>	60	100 m
100720	<b>8 / 115 / 15</b>	68	100 m
100701	<b>11 / 142 / 15</b>	90	100 m



## Fencing Wire

Angas Fencing wire is coiled in Australia on world class machinery resulting in a product that will give trouble free pay off.

PRODUCT CODE	WIRE DIA.	LENGTH	KG/ROLL	GALVANISED COATING	TENSILE	RECOMMENDED TENSION
100330	<b>4.00 mm</b>	500 m	49	Standard	Soft	1.8 kn
100325	<b>3.15 mm</b>	750 m	47	Standard	Soft	1.2 kn
100315	<b>2.50 mm</b>	1500 m	58	Standard	Soft	1.0 kn
100310	<b>2.50 mm</b>	1500 m	58	Standard	Medium	1.3 kn
100305	<b>2.50 mm</b>	1500 m	58	Standard	High	1.8 kn
100320	<b>2.80 mm</b>	1000 m	48	Standard	High	2.0 kn
100301	<b>2.00 mm</b>	2000 m	52	Standard	Soft	-
700335	<b>5.20 mm</b>	400 m	43	White PVC	-	-





# Wire Netting

Angas Fencing Netting offers the following features:

- Reverse twist knot
- Double selvedge wires


PRODUCT CODE	SIZE	WIRE DIA.	KG/ROLL	MESH SIZE	GALVANISED COATING	LENGTH	ROLLS/PALLET
100630	<b>30cm</b>	1.40 mm	28	40 mm	Heavy	100 m	18
100635	<b>60cm</b>	1.40 mm	54	40 mm	Heavy	100 m	9
100650	<b>90cm</b>	1.40 mm	81	40 mm	Heavy	100 m	9
100605	<b>105cm</b>	1.40 mm	93	40 mm	Heavy	100 m	9
100640	<b>90cm</b>	1.40 mm	40	40 mm	Heavy	50 m	16
100601	<b>105cm</b>	1.40 mm	47	40 mm	Heavy	50 m	16
100665	<b>120cm</b>	1.40 mm	50	40 mm	Heavy	50 m	16
100620	<b>180cm</b>	1.40 mm	73	40 mm	Heavy	50 m	7
100645	<b>90cm</b>	0.90mm	25	30mm	Standard	50m	16
700655	<b>90cm</b>	1.00 mm	14	50mm	Standard	50 m	25
700610	<b>120cm</b>	0.90mm	33	30mm	Standard	50m	16
700615	<b>120cm</b>	1.00 mm	18	50 mm	Standard	50 m	25
700625	<b>180cm</b>	1.00 mm	28	50 mm	Standard	50 m	20



HIGH TENSILE



IOWA



# Barbed Wire

Angas Fencing Barbed Wire comes with the guaranteed quality of being produced in Australia.

**Pallet Quantities**

1.57mm x 500m - 48 reels/pallet

1.80mm x 500m - 36 reels/pallet

2.50mm x 400m - 27 reels/pallet

Wooden spools with handles.

## HIGH TENSILE

PRODUCT CODE	SIZE	LENGTH	KG PER ROLL	GALVANISED COATING
100101	1.57 mm	500 m	24	Heavy
100105	1.80 mm	500 m	30	Heavy

## IOWA

PRODUCT CODE	SIZE	LENGTH	KG PER ROLL	GALVANISED COATING
100115	2.5 mm	400 m	47	Standard



**QUALITY • PERFORMANCE • RELIABILITY** *at the right price!*



BLACK

GALVANISED  
(HOT DIPPED)

# Steel Fence Posts




## STANDARD HOLE SPACINGS

SIZE	HEAVY GALVANISED		HEAVY BLACK		LIGHT BLACK	
	CODE	POSTS PER BUNDLE	CODE	POSTS PER BUNDLE	CODE	POSTS PER BUNDLE
45 cm	-	-	-	-	850605	400
60 cm	-	-	-	-	850610	400
90 cm	-	-	-	-	850615	400
135 cm	850750	400	850701	400	850620	400
150 cm	850755	400	850705	400	-	-
165 cm	850760	400	850710	400	850630	400
180 cm	850765	400	850715	400	850635	400
210 cm	850770	200	850720	200	-	-
240 cm	850775	200	850725	200	850645	200

**NOTE:** Austral Wire Products Fence Posts are Imported. Quality control procedures have been put into place at the point of manufacture to ensure that the quality meets the Australian requirements.

# Accessories


## GATES

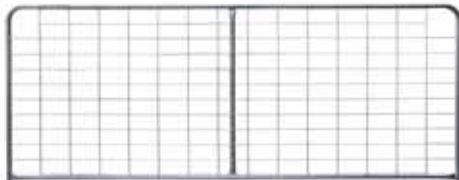

VERTICAL BRACE



"N" BRACE

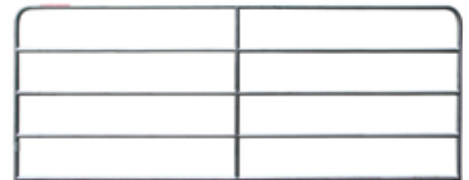

5 BAR

### VERTICAL BRACE

PRODUCT CODE	INFILL MESH (MM)	WIDTH (MM)	BRACE	HEIGHT (MM)	WEIGHT (KG)	PACK QTY.
810085	200 x 100 x 5.0	850 [3']	NB	1170	8	5
810116	200 x 100 x 5.0	1160 [4']	NB	1170	10	5
810146	200 x 100 x 5.0	1460 [5']	NB	1170	13	5
810177	200 x 100 x 5.0	1770 [6']	NB	1170	14	5
810207	200 x 100 x 5.0	2070 [7']	NB	1170	16	5
810238	200 x 100 x 5.0	2380 [8']	1 brace	1170	20	10
810298	200 x 100 x 5.0	2980 [10']	1 brace	1170	22	10
810358	200 x 100 x 5.0	3580 [12']	1 brace	1170	26	10
810418	200 x 100 x 5.0	4180 [14']	2 braces	1170	31	10
810478	200 x 100 x 5.0	4780 [16']	2 braces	1170	36	10

### "N" BRACE

PRODUCT CODE	INFILL MESH (MM)	WIDTH (MM)	BRACE	HEIGHT (MM)	WEIGHT (KG)	PACK QTY.
820298	200 x 100 x 5.0	2980 [10']	NB	1170	26	10
820358	200 x 100 x 5.0	3580 [12']	NB	1170	29	10
820418	200 x 100 x 5.0	4180 [14']	NB	1170	33	10
820478	200 x 100 x 5.0	4780 [16']	NB	1170	37	10

### 5 BAR

PRODUCT CODE	INFILL MESH (MM)	WIDTH (MM)	BRACE	HEIGHT (MM)	WEIGHT (KG)	PACK QTY.
830237	N / A	2370 [8']	1 brace	1170	25	10
830297	N / A	2970 [10']	1 brace	1170	29	10
830357	N / A	3570 [12']	1 brace	1170	34	10
830357	N / A	4170 [14']	2 braces	1170	41	10
830417	N / A	4780 [16']	2 braces	1170	44	10






# Accessories

## GATE LATCHES



AGF2DL



AGF4DL



AGF15DL



AGF4RL



AGF2RL



AGF15RL

## DROP LATCH SETS

PRODUCT CODE	DESCRIPTION	WEIGHT (KG)	PACK QUANTITY
840802	AGF2DL – Econo Pack	1.6	10
840804	AGF4DL – Heavy Duty Pack	3.0	5
840815	AGF15DL – Multi-Fit Pack	1.6	10

## RING LATCH SETS


PRODUCT CODE	DESCRIPTION	WEIGHT (KG)	PACK QUANTITY
840852	AGF2RL – Bolt Thru Top Strap	1.5	5
840854	AGF4RL – Heavy Duty Pack	2.9	5
840856	AGF15RL – Multi-Fit Pack	1.5	10



## FENCING TOOLS



POST DRIVER

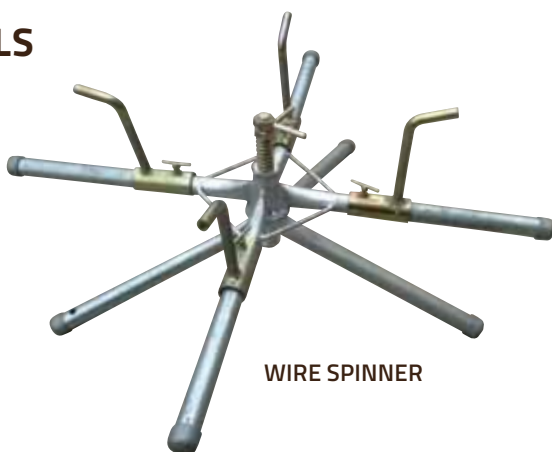

WIRE SPINNER



POST LIFTER

PRODUCT CODE	DESCRIPTION	WEIGHT (KG)	PACK QUANTITY
910060	Wire Spinner	9	1
910040	Post Lifter	10	2
910020	Post Driver	10	2

**QUALITY • PERFORMANCE • RELIABILITY**

*at the right price!*



# ANGAS

FENCING PRODUCTS

**Phone 1300 384 981**

Fax: 1300 384 985    [sales@angasfencing.com.au](mailto:sales@angasfencing.com.au)    [www.angasfencing.com.au](http://www.angasfencing.com.au)

134 Hassall Street, Wetherill Park NSW 2164



Manufactured by  
**Austral Wire Products**  
Sydney, Australia

Disclaimer: This product range is suitable for most fencing applications. If the products are exposed to strong chemicals, pollutants & or corrosive sources, the performance may be adversely affected. As fencing products are installed in widely varying situations, diligence must be used to ensure that what is selected is adequate for the purpose. We do not accept liability for loss, damage or consequences for claims based on using this fencing catalogue. Printed January 2014. E&OE. Supersedes all previous catalogues.