





<p><b>TEST REPORT</b>  <b>IEC 60335-2-30</b>  <b>Safety of household and similar electrical appliances</b>  <b>Part 2: Particular requirements for room heaters</b></p>	
Report Number .....	21144121 006
Date of issue .....	08.06.2015
Total number of pages.....	105
Applicant's name.....	eCO2heat GmbH
Address .....	Zu den Sandbeeten 1; D – 35043 Marburg
<b>Test specification:</b>	
Standard .....	IEC 60335-2-30 (Fifth Edition) :2009 used in conjunction with IEC 60335-1:2010 (Fifth Edition)
Test procedure.....	GS
Non-standard test method.....	N/A
Test Report Form No.....	IEC60335_2_30J
Test Report Form(s) Originator.....	LCIE
Master TRF .....	Dated 2013-09
<p><b>Copyright © 2013 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.</b></p> <p>This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</p> <p>If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.</p> <p><b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b></p>	
Test item description .....	Infrared Room Heater (fixed used)
Trade Mark .....	eCO2heat
Manufacturer.....	As applicant
Model/Type reference .....	1) 70150SHT    2) 70200SHT
Ratings .....	230V 50/60Hz 1) 470W    2) 630W    cl. II IPX1

<b>Testing procedure and testing location:</b>	
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>
<b>Testing location/ address .....</b>	TÜV Rheinland LGA Products GmbH Am Grauen Stein 29 ; 51105 Cologne
<input type="checkbox"/>	<b>Associated CB Laboratory:</b>
<b>Testing location/ address .....</b>	
<b>Tested by (name + signature).....:</b>	M.Klee (SV) 
<b>Approved by (name + signature)....:</b>	V. Ebinghaus (SV)(TC) 
<input type="checkbox"/>	<b>Testing procedure: TMP</b>
<b>Testing location/ address .....</b>	
<b>Tested by (name + signature).....:</b>	
<b>Approved by (name + signature)....:</b>	
<input type="checkbox"/>	<b>Testing procedure: WMT</b>
<b>Testing location/ address .....</b>	
<b>Tested by (name + signature).....:</b>	
<b>Witnessed by (name + signature) ..:</b>	
<b>Approved by (name + signature)....:</b>	
<input type="checkbox"/>	<b>Testing procedure: SMT</b>
<b>Testing location/ address .....</b>	
<b>Tested by (name + signature).....:</b>	
<b>Approved by (name + signature)....:</b>	
<b>Supervised by (name + signature) :</b>	
<input type="checkbox"/>	<b>Testing procedure: RMT</b>
<b>Testing location/ address .....</b>	
<b>Tested by (name + signature).....:</b>	
<b>Approved by (name + signature)....:</b>	
<b>Supervised by (name + signature) :</b>	

**List of Attachments (including a total number of pages in each attachment):**

Photo documentation 21144121 006FD (5 pages)  
 European group differences and national differences (at the end of this report page 92-105)  
 PAH report 21144121 006PAK (1page)

**Summary of testing: pass****Tests performed (name of test and test clause):**

IEC 60335-2-30 (Fifth Edition) :2009 used in conjunction with IEC 60335-1:2010 (Fifth Edition)

EN 60335-2-30:2009 + A11: 2012 used in conjunction with EN 60335-1:2012 +A11:2014  
 EN 62233:2008

AfPS GS 2014:01

This is a re-examination of the deviations off the test report 21144121 005F.

**Testing location:**

TÜV Rheinland LGA Products GmbH  
 Am Grauen Stein 29 ; 51105 Cologne

**Summary of compliance with National Differences**

CENELEC COMMON MODIFICATIONS (EN) passed.

National differences have been tested.

**Copy of marking plate**

Representative for all samples


On backside of sample:



On frontside of sample:



Example text (for durable test) normally 70200SHT:

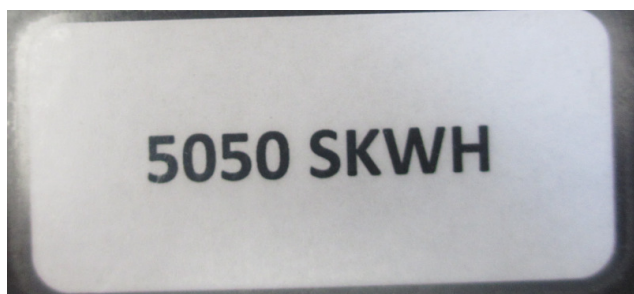

<b>Test item particulars</b> .....:	
<b>Classification of installation and use</b> .....:	Class II – fixed IR heating elements
<b>Supply Connection</b> .....	Power supply is connected with a plug
.....:	
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object .....	: N/A
- test object does meet the requirement .....	: P (Pass)
- test object does not meet the requirement .....	: F (Fail)
<b>Testing</b> .....:	
<b>Date of receipt of test item</b> .....:	11.05.2015 (test item no.: A000097175-001)
<b>Date (s) of performance of tests</b> .....	: 08.06.2015
<b>General remarks:</b>	
<p>The test results presented in this report relate only to the object tested.  This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.  "(see Enclosure #)" refers to additional information appended to the report.  "(see appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>This is a standard update from:  EN 60335-1:2002+A11:2004+A1:2004+A12:2006+A2:2006+A13:2008+A14:2010+A15:2011  EN 60335-2-30:2003 + A1:2004 + A2:2007  EN 62233:2008</p> <p>To the standards which are listened one page 3.</p> <p>This is a re-examination of the deviations off the test report 21144121 005F. Only the deviations (7.12; 7.14; 25.15; 25.17; 22.Z102) were tested in this test report. All other results are taken over from test report 21144121 005F.</p> <p>SAP order no.: 3129964</p> <p>The product is suitable for its intended purpose. Foreseeable use was considered. Currently neither a safeguard clause procedure has been invoked nor is an increase in accidents known for this / these product.</p>	
<b>Manufacturer's Declaration per sub-clause 6.2.5 of IEC 60335-1:</b>	
<b>The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided</b> .....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
.....:	
<b>When differences exist; they shall be identified in the General product information section.</b>	

**Name and address of factory (ies) .....** :

eCO2heat GmbH  
 Zu den Sandbeeten 1  
 D – 35043 Marburg

**General product information:**

- The device is an IR heating device for wall and ceiling mounting.
- The connection is given by a plug.
- Switches and Knobs for the temperature adjustment are not given.
- The device is designed in metal.
- The tests are prepared by the maximum configuration on an IR heating device
- The models 470W (Type: 70150SHT) and 630W (Type: 70200SHT) are only for wall mounting.  
 (noted at the assembly instruction)

**Model references and rated inputs:**

SHT = Slawinski Heiz Tapete

Model	Rating
70150 SHT	470W
70200 SHT	630W

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict

5	GENERAL CONDITIONS FOR THE TESTS		P
	Tests performed according to cl. 5, e.g. nature of supply, sequence of testing, etc.		P
5.2	Heaters intended to be installed adjacent to each other, tests made with sufficient number. (IEC 60335-2-30)		N/A
5.3	Appliance used for tests of Cl. 19 also used for the test of Cl. 22.24 (IEC 60335-2-30)		N/A
	Test of Cl. 22.24 carried out after test of Cl. 29 (IEC 60335-2-30)		N/A
5.6	Thermostats short-circuited if sensible to room air temperature (IEC 60335-2-30)		N/A
	However, if the thermostat can be set so that it does not cycle, it is not short-circuited, unless otherwise specified (IEC 60335-2-30)		N/A
5.10	Heaters intended to be installed adjacent to each other, installed in accordance with instructions (IEC 60335-2-30)		N/A
5.101	Heaters intended to be used as both portable and fixed appliances are subjected to the tests applicable to both types (IEC 60335-2-30)	Only fixed	N/A
5.102	If the heater is a combination of two or more types, tests relevant for each type (IEC 60335-2-30)		N/A
	Heaters for wall-mounting are tested both as heaters for mounting high level and as heaters for mounting other than at high level (IEC 60335-2-30)		P
	Unless the installation instructions state that the heater has to be installed at least 1,8m above the floor. (IEC 60335-2-30)		N/A

6	CLASSIFICATION		P
6.1	Protection against electric shock: Class 0, 0I, I, II, III .....	Class II	P
6.2	Protection against harmful ingress of water	IPX1	P
	Heaters intended for use in greenhouses or building sites shall be at least IPX4 (IEC 60335-2-30)	Not for such use	N/A

7	MARKING AND INSTRUCTIONS		P
7.1	Rated voltage or voltage range (V) .....	230V	P
	Symbol for nature of supply, or .....	Hz	P

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Rated frequency (Hz)..... :	50/60Hz	P
	Rated power input (W): ..... :	630W Typ 70200SHT 470W Typ 70150SHT	P
	Rated current (A) ..... :		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark..... :	eCO2heat GmbH Zu den Sandbeeten 1, 35043 Marburg	
	Model or type reference..... :	70150SHT; 70200SHT	P
	Symbol 5172 of IEC 60417, for Class II appliances		P
	IP number, other than IPX0..... :	IPX1	P
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose- sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains		N/A
	Heaters intended to be filled with liquid by the user shall be marked with max. and min. levels (IEC 60335-2-30)		N/A
	Heaters shall be marked: WARNING "Do not cover" - or with the symbol 5641 of IEC 60417-1 except for colours (IEC 60335-2-30)	Symbol	P
	This Marking is not required for-	(IEC 60335-2-30)	P
	- Heaters for mounting high level; (IEC 60335-2-30)		N/A
	- visible glowing radiant heaters (IEC 60335-2-30)		N/A
	- heaters constructed so that they cannot be covered: (IEC 60335-2-30)		N/A
	- heaters also intended to dry clothes and witch comply with IEC 60335-2-43 (IEC 60335-2-30)		N/A
	-heaters for mounting under benches (IEC 60335-2-30)		N/A



IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Heaters having a fireguard that is intended to be removed for transportation or storage shall be marked to state that the heater must not be operated without this guard in place (IEC 60335-2-30)		N/A
	For ceiling mounting heat lamp appliances, the maximum rated wattage and type of each lamp shall be marked (IEC 60335-2-30)		N/A
7.2	Warning for stationary appliances for multiple supply	Only single supply	N/A
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		N/A
	Different rated values marked with the values separated by an oblique stroke		N/A
7.4	Appliances adjustable for different rated voltages, the voltage setting is clearly discernible	Only one voltage	N/A
	Requirement met if frequent changes are not required and the rated voltage to which the appliance is to be adjusted is determined from a wiring diagram		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless	Only one voltage	N/A
	the power input is related to the arithmetic mean value of the rated voltage range		N/A
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage	No ~ symbol, only Hz informations	N/A
	Symbol for class II appliances placed unlikely to be confused with other marking		P
	Units of physical quantities and their symbols according to international standardized system		P
	Symbol 5641 of IEC 60417-1 (do not cover) is used except for colours (IEC 60335-2-30)	Not able to cover	N/A
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply	Only single supply with an approved plug	N/A
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		N/A
	- marking of terminals exclusively for the neutral conductor (N)	Equipped with a plug, no terminals	N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	- marking of protective earthing terminals (symbol 5019 of IEC 60417)	Class II appliance	N/A
	- marking not placed on removable parts		N/A
7.9	Marking or placing of switches which may cause a hazard	No switch	N/A
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means..... :		N/A
	This applies also to switches which are part of a control		N/A
	If figures are used, the off position indicated by the figure 0		N/A
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
7.11	Indication for direction of adjustment of controls	No adjusting devices	N/A
7.12	Instructions for safe use provided		P
	Details concerning precautions during user maintenance		P
	The instructions state that:		N/A
	- the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction	New requirements in part EN60335-2-30	N/A
	- children being supervised not to play with the appliance		N/A
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
	Instructions for safe use provided: .....	(IEC 60335-2-30)	P
	- If Symbol 5641 of IEC 60417-1 (do not cover) is marked on the appliance, its meaning is explained. (IEC 60335-2-30)		P
	-For heaters marked "Do not cover" (or with symbol) contain the substance of: In order to avoid overheating, do not cover the heater (IEC 60335-2-30)		P

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	-Statement: heater is not located immediately below a socket-outlet (IEC 60335-2-30)	Written down in manual	P
	-Statement for heaters with heating elements in direct contact with accessible panel made of glass, ceramic or similar material , includes the following warning:  The heater must not be used if the glass ( <i>or ceramic or similar material</i> ) panels are damaged (IEC 60335-2-30)		N/A
	-Statements for visibly glowing radiant heaters, other than heaters for mounting at high level, includes the substance of following: Do not use the heater with a programmer, timer or any other device that switches the heater on automatically (IEC 60335-2-30)		N/A
	-have a fireguard that can be partly removed without the aid of a tool includes the substance of following: .....	(IEC 60335-2-30)	N/A
	The fireguard of this heater is intended to prevent direct access to heating elements and must be in place when the heater is used.		N/A
	The fireguard does not give full protection for young people and infirm persons		N/A
	-Statements for portable heaters : Do not use this heater in the immediate surroundings of a bath, a shower or a swimming pool (IEC 60335-2-30)		N/A
	-Statements for visibly glowing radiant heaters: shall be provided for cleaning the reflector, if appropriate (IEC 60335-2-30)		N/A
	-Statement: shall be provided for replacing the lamps of fuel-effect heaters (IEC 60335-2-30)		N/A
	-Statements for oil-filled radiators: .....	(IEC 60335-2-30)	N/A
	- this heater is filled with a precise quantity of special oil. Repairs requiring opening of the oil container are only to be made by the manufacturer or his service agent who should be contacted if there is an oil leakage		N/A
	- regulations concerning the disposal of oil when scrapping the appliance have to be followed		N/A
	Instructions shall be provided for routine cleaning of ceiling mounted heat lamp appliances including removal of covers if applicable (IEC 60335-2-30)		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	<b>The instructions for room heaters without a built-in room thermostat or thermal control limiting the room temperature shall include the substance of the following: WARNING: This heater is not equipped with a device to control the room temperature. Do not use this heater in small rooms when they are occupied by persons not capable of leaving the room on their own, unless constant supervision is provided.</b>	<b>Written down in manual on page 2.</b>	<b>P</b>
7.12.1	Sufficient details for installation supplied		P
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A
	Instructions for heaters intended to be fixed by screws or other give details on the method of fixing (IEC 60335-2-30)	A detailed instruction for installation and screws is given by the heating device.	P
	Instructions for visibly glowing radiant heaters warn about the possible danger of installation close to curtains and other combustible materials (IEC 60335-2-30)		N/A
	Instructions for heaters for mounting at high level state that the heater must be installed at least 1,8 m above the floor (IEC 60335-2-30)		N/A
	Instructions for fixed heaters likely to be used in a bathroom: that the heater is to be installed so that switches and other controls cannot be touched by a person in the bath or shower (IEC 60335-2-30)	Written down in manual	P
	Statement for heaters with rollers or feet delivered separately: how they have to be fixed (IEC 60335-2-30)		N/A
	Statement for heaters intended to be installed in wardrobes or ceiling: for proper installation in a wardrobe or in the ceiling (IEC 60335-2-30)		N/A
	The installation instructions for ceiling mounted heat lamp appliances, recessed into a ceiling place or cavity shall give details for proper installation in the ceiling and shall state the substance of the following:..... (IEC 60335-2-30)		N/A
	-The appliance shall, under no circumstances, be covered with insulating material or similar material.		N/A
	-Regulations concerning the discharge of air have to be fulfilled.		N/A
	-Joists, beams and rafters shall not be cut or notched to install the appliance		N/A
	The installation instructions for heaters for mounting under church benches shall state:..... (IEC 60335-2-30)		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	-The heater is intended for installation under benches that are fixed in position		N/A
	- The minimum distance between the underside of the installed heater and the floor		N/A
	-The minimum distances of the relevant surfaces of the heaters to the front and rear edge of the underside of the bench which shall be not less than 50 mm		N/A
	The installation instructions for heaters intended to be built into the floor and that incorporate a floor level grille shall state the substance of the following: (IEC 60335-2-30) After installation, ensure that any drain holes are free from obstruction.		N/A
	Ensure that any floor level grille has a mechanical strength consistent with the national building codes. (IEC 60335-2-30)		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules	The device is equipped with a cable and a connector	N/A
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions stating that the fixed wiring must be protected	No permanent installed equipment as described in this part	N/A
7.12.4	Instructions for built-in appliances:		N/A
	- dimensions of space		N/A
	- dimensions and position of supporting means		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment	Have to contact the customer service	P

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Replacement cord instructions, type Z attachment		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard	No such parts given	N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed	A detailed instruction is given	P
7.12.8	Instructions for appliances connected to the water mains:		N/A
	- max. inlet water pressure (Pa):	A connection to the water mains is not used	N/A
	- min. inlet water pressure, if necessary (Pa):		N/A
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.13	Instructions and other texts in an official language	German	P
7.14	<b>Marking clearly legible and durable</b>		<b>P</b>
	The height of the "Do not cover " symbol shall be at least 15 mm (IEC 60335-2-30)		P
	The height of the words "Do not cover " shall be at least 3 mm (IEC 60335-2-30)	This symbol is not in use	N/A
	The height of the words relating to the maximum rated wattage and type of heat lamp shall be at least 6mm (IEC 60335-2-30)		N/A
7.15	Marking on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool	Not portable	N/A
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions	Eco2heat 70200SHT	P
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading	No switches	N/A
	Heaters for mounting at high level, indication of the different positions of switches visible from a distance of 1 m (IEC 60335-2-30)	Not for high level	N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Marking concerning covering visible shall be visible after the heater has been installed. It shall not be placed on the bottom of, or on the back of, portable heaters. (IEC 60335-2-30)		P
	Marking not placed on the back of portable heaters (IEC 60335-2-30)		N/A
	Marking concerning removable fireguards visible before fitting the fireguard (IEC 60335-2-30)		N/A
	For ceiling mounted heat lamp appliances, the marking relating to the maximum rated wattage and type of heat lamp shall be visible when replacing a lamp in accordance with the instructions (IEC 60335-2-30)		N/A
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link	No replaceable fuse	N/A

8	PROTECTION AGAINST ACCESS TO LIVE PARTS		P
8.1	Adequate protection against accidental contact with live parts		P
	This requirement does not apply to live parts of screw-type or bayonet-type lampholders incorporated in ceiling mounted heat lamp appliances that are only accessible when the heat lamp is extracted (IEC 60335-2-30)	No such parts given	N/A
8.1.1	Requirement applies for all positions, detachable parts removed		P
	Lamps behind a detachable cover not removed, if conditions met		N/A
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		N/A
	Use of test probe B of IEC 61032: no contact with live parts		P
	Detachable fireguards not removed if their removal requires the use of a tool, provided that (IEC 60335-2-30)		N/A
	- the instructions state that the plug must be removed from the socket-outlet before cleaning the reflector, or		N/A
	- the heater incorporates a switch having contact separation all poles that provides full disconnection under overvoltage category III conditions		N/A
8.1.2	Use of test probe 13 of IEC 61032 through openings in class 0 appliances and class II appliances/ constructions: no contact with live parts		P

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts	No openings	N/A
8.1.4	Accessible part not considered live if:		N/A
	- safety extra-low a.c. voltage: peak value not exceeding 42.4 V	No such parts given	N/A
	- safety extra-low d.c. voltage: not exceeding 42.4 V		N/A
	- or separated from live parts by protective impedance		N/A
	If protective impedance: d.c. current not exceeding 2 mA, and		N/A
	a.c. peak value not exceeding 0.7 mA		N/A
	- for peak values over 42.4 V up to and including 450 V, capacitance not exceeding 0,1 $\mu$ F		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 $\mu$ C		N/A
	-for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		N/A
	- built-in appliances		N/A
	- fixed appliances		P
	- appliances delivered in separate units		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
	During user maintenance and after the removal of detachable parts during replacement of heat lamp, the basic insulation of internal wiring may be touched provided electrically equivalent to the insulation of cords complying with IEC 60227 or IEC 60245 (IEC 60335-2-30)	No parts to removal	N/A

10	POWER INPUT AND CURRENT		P
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1	(see appended table)	P
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		P



IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	the rated power input is related to the arithmetic mean value		P
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2	(see appended table)	N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the range		N/A

11	HEATING		P
11.1	No excessive temperatures in normal use		P
11.2	Placing and mounting of appliance	(IEC 60335-2-30)	P
	-Portable fan heaters		N/A
	-Other heaters normally placed on a floor		N/A
	-Fixed heater for mounting at high level		N/A
	-Other fixed heaters for wall mounting		P
	-Heaters for ceiling mounting)		N/A
	-Heaters for mounting under benches		N/A
	- Built-in heaters		N/A
	- Fixed heater with opening at floor level, felt pad pushed flat into the opening		N/A
	-Heaters having an air-outlet grille intended to be recessed in a floor, a window-sill or similar		N/A
	-Appliance provided with an automatic cord reel		N/A
	-Appliance with cord storage devices, other than automatic cord reel intended to accommodate supply cord partially while the appliance is in operation		N/A
	-Ceiling mounted heat lamp appliances		N/A
	-Recessed ceiling mounted heat lamp appliances are mounted as near as possible to the walls		N/A
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		N/A
	the windings makes it difficult to make the necessary connections		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Temperature rise of the felt pad (IEC 60335-2-30)		N/A
11.4	Heating appliances operated under normal operation at 1.15 times rated power input .....	70150SHT: 540,5W 70200SHT: 945W	P
	If the temperature rise limits are exceeded in appliances incorporating motors, transformers or electronic circuits and the power input is lower than the rated power input, the test is repeated with the appliance supplied at 1.06 times rated voltage .....	The temperature rise limits are not exceeded.	N/A
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage .....		N/A
11.6	Combined appliances are operated as heating appliances .... (IEC 60335-2-30)		N/A
11.7	Operation until steady conditions established (IEC 60335-2-30)		P
11.8	Temperature rises monitored continuously and not exceeding the values in table 3 .....	(see appended tables)	P
	If the temperature rise of a motor winding exceeds the value of table 3, or		N/A
	if there is doubt with regard to classification of insulation,		N/A
	tests of Annex C are carried out		N/A
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4	No electronic	N/A
	Sealing compound does not flow out		P
	Modification of temperature rise in table 3 (IEC 60335-2-30)		P
	Temperature rise limits of motors, transformers or components of electronic circuits and other parts may be exceed by 1.15 times rated power input (IEC 60335-2-30)		N/A
	Outer surface of liquid container of unvested liquid-filled radiators shall be at least 50 K less than the boiling point of liquid (IEC 60335-2-30)	Boiling-point: .. °C	N/A
	Temperature rise of surfaces shall not exceed the values in table 101 (IEC 60335-2-30)	(see appended table)	P
	-Heaters intended to be mounted under church benches, the temperature rise of surfaces accessible to the test rod shall not exceed 70K (IEC 60335-2-30)		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	-For heaters intended to be mounted under other benches, temperature rises not exceeding values in table 3, for parts that are held for short periods only (IEC 60335-2-30)		N/A

13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		P
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1.15 times rated power input .....	70150SHT: 540,5W 70200SHT: 945W	P
	Motor-operated appliances and combined appliances supplied at 1.06 times rated voltage..... :		N/A
	Protective impedance and radio interference filters disconnected before carrying out the tests		N/A
13.2	For class 0, class II and class III appliances, leakage current measured by means of the circuit described in figure 4 of IEC 60990		P
	For other appliances, a low impedance ammeter may be used		N/A
	Leakage current measurements	(see appended table)	P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4	(see appended table)	P
	No breakdown during the tests		P

14	TRANSIENT OVERVOLTAGES		N/A
	Appliances withstand the transient overvoltages to which they may be subjected	All clearances are higher than given in table 16	N/A
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6	(see appended table)	N/A
	No flashover during the test, unless of functional insulation		N/A
	In case of flashover of functional insulation, the appliance complies with clause 19 with the clearance short circuited		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
15	MOISTURE RESISTANCE		P
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance	IPX1	P
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3	14.2.1	P
	No trace of water on insulation which can result in a reduction of clearances and creepage distances below values specified in clause 29		P
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529..... :	IPX1 : 14.2.1	P
	Water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N/A
15.1.2	Hand-held appliance turned continuously through the most unfavourable positions during the test		N/A
	Built-in appliances installed according to the instructions		N/A
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N/A
	Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board		P
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube		N/A
	However, for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N/A
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		P
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support		N/A
	For IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Detachable parts subjected to the relevant treatment with the main part	No detachable parts	N/A
	However, if a part has to be removed for user maintenance and a tool is needed, this part is not removed		N/A
15.2	Spillage of liquid does not affect the electrical insulation	No liquids	N/A
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		N/A
	Detachable parts removed		N/A
	Overfilling test with additional amount of water, over a period of 1 min (l)..... :		N/A
	The appliance withstands the electric strength test of 16.3		N/A
	No trace of water on insulation that can result in a reduction of clearances and creepage distances below values specified in clause 29		N/A
	Heaters intended to be built into the floor and having a grille or opening at or near to the floor level shall be constructed so that such spillage does not affect their electrical insulation. .... (IEC 60335-2-30)		N/A
	The heater is installed as specified in 11.2, however the felt pad is not applied. The content of a container filled with approximately 10 l of water containing 1 % NaCl and 0,6 % rinsing agent as specified in Annex AA of IEC 60335-2-5 is poured steadily over the grille of the appliance at the most unfavourable place over a period of approximately 10 s.		N/A
	The appliance withstands the electric strength test of 16.3		N/A
	No trace of water on insulation that can result in a reduction of clearances and creepage distances below values specified in clause 29		N/A
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part	No detachable parts	N/A
	Humidity test for 48 h in a humidity cabinet		P
	Reassembly of those parts that may have been removed		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The appliance withstands the tests of clause 16		P
16	<b>LEAKAGE CURRENT AND ELECTRIC STRENGTH</b>		P
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		P
	Tests carried out at room temperature and not connected to the supply		P
16.2	Single-phase appliances: test voltage 1.06 times rated voltage..... :	243,8V	P
	Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$ ..... :	Single-phase device	N/A
	Leakage current measurements	(see appended table)	P
	Limit values doubled if:		N/A
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A
	With the radio interference filters disconnected, the leakage current do not exceed limits specified..... :		N/A
16.3	Electric strength tests according to table 7	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified ..... :	(see appended table)	P
	No breakdown during the tests		P
17	<b>OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS</b>		N/A
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use	(see appended table) No transformer equipped	N/A
	Appliance supplied with 1.06 or 0.94 times rated voltage and the most unfavourable short-circuit or overload likely to occur in normal use applied ..... :		N/A
	Basic insulation is not short-circuited		N/A
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Temperature of the winding not exceeding the value specified in table 8,		N/A
	however limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N/A
18	<b>ENDURANCE</b>		N/A
	Requirements and tests are specified in part 2 when necessary		N/A
19	<b>ABNORMAL OPERATION</b>		P
19.1	The risk of fire or mechanical damage under abnormal or careless operation obviated	No electronic	N/A
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe		N/A
	Heaters compliance is checked by the tests of Cl. 19.5, 19.6, 19.11, 19.12, 19.101 to 19.115, as applicable (IEC 60335-2-30)		P
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11	No relays	N/A
19.2	Test of appliance with heating elements with restricted heat dissipation; test voltage (V): power input of 0.85 times rated power input .....	561W	P
19.3	Test of 19.2 repeated; test voltage (V): power input of 1.24 times rated power input .....	818W	P
19.4	Test conditions as in cl. 11, any control limiting the temperature during tests of cl. 11 short-circuited	No limiting devices	N/A
19.5	Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the elements sheath	Class II appliance	N/A
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N/A
	The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4		N/A
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions	No PTC heating elements	N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The working voltage of the PTC heating element is increased by 5% and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1.5 times working voltage or until the PTC heating element ruptures		N/A
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque or locking moving parts of other appliances	No fan	N/A
	Locked rotor, motor capacitors open-circuited or short-circuited, if required		N/A
	Locked rotor, capacitors open-circuited one at a time		N/A
	Test repeated with capacitors short-circuited one at a time, unless		N/A
	capacitor is of class P2 of IEC 60252-1		N/A
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed		N/A
	Other appliances supplied with rated voltage for a period as specified		N/A
	Winding temperatures not exceeding values specified in table 8	(see appended table)	N/A
19.8	Multi-phase motors operated at rated voltage with one phase disconnected	Single-phase	N/A
19.9	Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously	No motor	N/A
	Motor-operated and combined appliances for which 30.2.3 is applicable and that use overload protective devices relying on electronic circuits to protect the motor windings, are also subjected to the test		N/A
	Winding temperatures not exceeding values as specified	(see appended table)	N/A
19.10	Series motor operated at 1.3 times rated voltage for 1 min .....		N/A
	During the test, parts not being ejected from the appliance		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 19.11.1	No electronic circuits	N/A
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless		N/A



IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	restarting does not result in a hazard		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out		N/A
	During and after each test the following is checked:		N/A
	- the temperature of the windings do not exceed the values specified in table 8		N/A
	- the appliance complies with the conditions specified in 19.13		N/A
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/A
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		N/A
	- the base material of the printed circuit board withstands the test of Annex E		N/A
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N/A
19.11.1	Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:		N/A
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		N/A
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction in other parts of the appliance does not rely on the correct functioning of the electronic circuit		N/A
19.11.2	Fault conditions applied one at a time, the appliance operated under conditions specified in cl. 11, but supplied at rated voltage, the duration of the tests as specified:		N/A
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in 29		N/A
	b) open circuit at the terminals of any component		N/A
	c) short circuit of capacitors, unless they comply with IEC 60384-14		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	d) short circuit of any two terminals of an electronic component, other than integrated circuits. This fault condition is not applied between the two circuits of an optocoupler		N/A
	e) failure of triacs in the diode mode		N/A
	f) failure of an integrated circuit		N/A
	g) failure of an electronic power switching device		N/A
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		N/A
19.11.3	If the appliance incorporates a protective electronic circuit which operates to ensure compliance with clause 19, the relevant test is repeated with a single fault simulated, as indicated in a) to f) of 19.11.2		N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		N/A
	a device that can be placed in the stand-by mode,		N/A
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode		N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated, except that		N/A
	appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.		N/A
	Surge protective devices disconnected, unless		N/A
	They incorporate spark gaps		N/A
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		N/A
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, test level 3		N/A
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		N/A
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified		N/A
	Earthed heating elements in class I appliances disconnected		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		N/A
19.11.4.6	The appliance is subjected to voltage dips and interruptions in accordance with IEC 61000-4-11		N/A
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2		N/A
19.11.4.8	The appliance ins supplied at rated voltage and operated under normal operation. After 60s the power supply ins reduces to a level such that the appliance ceases to respond or a programmable component cease to operate		N/A
	The appliance continues to operate normally, or		N/A
	requires a manual operation to restart		N/A
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); rated current of the fuse-link (A)..... :		N/A
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9	(see appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated it complies with 20.2		P
	During Cl. 19.106, the temperature of motor windings shall not exceed the values in table 8 (IEC 60335-2-30)		N/A
	Insulation, other than of class III appliance, withstand the electric strength test of 16.3, the test voltage specified in table 4:		P
	- basic insulation ..... :	1000	P
	- supplementary insulation..... :	--	N/A
	- reinforced insulation ..... :	3000	P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstanding the electric strength test of 16.3. the test voltage being twice the working voltage	No such controls	N/A
	The appliance does not undergo a dangerous malfunction, and		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	no failure of protective electronic circuits, if the appliance is still operable		N/A
	Appliances tested with an electronic switch in the off position or in the stand-by mode, do not become operational		N/A
	- do not become operational, or		N/A
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N/A
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that:		N/A
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A
19.14	Appliances operated under the conditions of Clause 11. Contactors or relays contacts operating under the conditions of clause 11 short-circuited	No relays	N/A
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		N/A
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N/A
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N/A
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied	No selector switch	N/A
19.101	Heaters operated at 1.24 times rated power input, all thermal controls operated during the test of Cl. 11 short-circuited simultaneously (IEC 60335-2-30)		P
19.102	Circular and similar portable heaters which emit heat in several directions are placed as close as possible to one of the walls of the test corner at 1.24 times rated power input (IEC 60335-2-30)		N/A
19.103	Tests specified for heaters, other than (IEC 60335-2-30)		N/A
	- heaters for mounting at high level except those intended to be installed in wardrobes (IEC 60335-2-30)		N/A
	- visibly glowing radiant heaters (IEC 60335-2-30)		N/A
	- portable fan heaters (IEC 60335-2-30)		N/A
	Heaters operated as specified in Cl. 11 but covered with felt strips (IEC 60335-2-30)		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The temperature rise of the strips not exceeds 150 K . An over-shoot of 25K is allowed during the first hour ..... (IEC 60335-2-30)		N/A
	Heaters intended to be installed in wardrobes, including heaters for mounting at high level, comply with the test with any self-resetting thermal cut-out short-circuited ..... (IEC 60335-2-30)		N/A
19.104	Built-in heaters, having air outlet in the floor, window- sill or similar locations, special conditions as specified, thermal controls operated during the test of Cl. 11 short-circuited ..... (IEC 60335-2-30)		N/A
	The temperature rise of the strips not exceeds 150 K . An over-shoot of 25K is allowed during the first hour ..... (IEC 60335-2-30)		N/A
19.105	Heaters having a liquid container to be filled by the user, tests specified in Cl. 11 but container empty (IEC 60335-2-30)		N/A
19.106	Fan heaters and other heaters, incorporating motors, tests specified in Cl. 11 but locked rotor and heaters supplied at rated voltage (IEC 60335-2-30)		N/A
19.107	Fan heaters with an enclosure substantially of non- metallic material, tests specified in Cl. 11 but the voltage at the terminal of the motor is supplied separately at its working voltage, thermal controls operated during the test of Cl. 11 short-circuited..... (IEC 60335-2-30)		N/A
19.108	Portable fan heaters, tests specified in Cl. 11. but a sheet of paper covered the air inlets for 4 h (IEC 60335-2-30)		N/A
19.109	Portable fan heaters, tests specified in Cl. 11 but air flow directed against a wall, thermal controls operated during the test of Cl. 11 short-circuited (IEC 60335-2-30)		N/A
	Maximum temperature rise (K) on the wall does not exceed 150 K (IEC 60335-2-30)		N/A
19.110	Portable visibly glowing radiant heaters, tests specified in Cl. 11 but radiation directed against a wall (IEC 60335-2-30)		N/A
	Maximum temperature rise (K) on the wall does not exceed 70 K (IEC 60335-2-30)		N/A
19.111	Visibly glowing radiant heaters, other than heaters for mounting at high level, tests specified in Cl. 11 but rated power input and a piece flannelette in contact with the fireguard. The flannelette shall not smoulder or ignite within 10 s (IEC 60335-2-30)		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
19.112	Portable heaters, tests specified in Cl. 11 but overturned position on a soft wood surface covered with a double layer cotton gauze. The cotton gauze or the wood surface shall not smoulder or ignite (IEC 60335-2-30)		N/A
	Surface of oil-filled radiators shall be at least 40 K lower than the boiling point (°C) of the oil, no deformation of container, leakage of oil or emission of flames (IEC 60335-2-30)	(see appended table) Boiling-point: .. °C	N/A
	Pressure in liquid-filled radiators (IEC 60335-2-30)	(see appended table)	N/A
	Fuel effect heaters intended to be placed in a fireplace not subjected to this test (IEC 60335-2-30)		N/A
19.113	Fan heaters having an enclosure substantially of non-metallic material, tests specified in Cl.11 but all self-resetting thermal cut-outs and controls which operated during the test of Cl. 11 short-circuited and the fan motor is stalled (IEC 60335-2-30)		N/A
19.114	Oil filled radiators, tests specified in Cl. 11 but at rated power input, the oil level is approximately 10 mm above the heating element and the container resealed (IEC 60335-2-30)		N/A
	Surface of container shall be at least 40 K lower than the boiling point of the oil (IEC 60335-2-30)	(see appended table)	N/A
19.115	Ceiling mounted heat lamp appliances tests specified in Cl. 11 but at the highest rated wattage heat lamps fitted as allowed by the construction. (IEC 60335-2-30)		N/A

20	STABILITY AND MECHANICAL HAZARDS		N/A
20.1	Portable heaters shall have adequate stability (IEC 60335-2-30)	Wall mounted heater	N/A
	Portable heaters placed:	(IEC 60335-2-30)	N/A
	- most unfavourable normal position of use on a inclined plane of 15 °. The heater shall not overturn (IEC 60335-2-30)		N/A
	- on a horizontal plane with 5 N applied to the top. The heater shall not overturn (IEC 60335-2-30)		N/A
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury	No moving parts	N/A
	Protective enclosures, guards and similar parts are non-detachable, and		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	have adequate mechanical strength		N/A
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		N/A
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard, by unexpected reclosure		N/A
	Not possible to touch dangerous moving parts with test probe		N/A

21	MECHANICAL STRENGTH		P
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J		P
	The appliance shows no damage impairing compliance with this standard, and		P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		P
	Compliance also checked by the tests of 21.101 and 21.102 (IEC 60335-2-30)		N/A
	For appliances with heating elements that are in direct contact with accessible glass panels, the impact energy of the blows applied to the panel is 2 J (IEC 60335-2-30)	No glass	N/A
	If necessary, repetition of groups of three blows on a new sample		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	The insulation is tested as specified, unless		P
	the thickness of supplementary insulation is at least 1 mm and reinforced insulation is at least 2 mm		N/A
21.101	Visibly glowing radiant heaters, other than heaters for mounting at high level, placed that the central part of the fireguard is horizontal - a mass of 5 kg having a flat base 100 mm placed for 1 min on the central part of the fireguard. The fireguard show no significant permanent deformation (IEC 60335-2-30)		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
21.102	Heaters having a part fixed to the wall or ceiling and another part hinged to it, fixed in accordance with the instructions - the hinged part fall away under its own weight five times - after test the heater compliance with Cl. 8.1 and Cl. 29.1 and show no damage (IEC 60335-2-30)		N/A
21.103	Panel heaters for ceiling mounting, suspension means shall have adequate strength - a load equal four times the mass of appliance suspended from the centre for 1 h - if suspension means rigid, torque of 2.5 Nm applied for 1 min in each direction - after tests suspension means shall show no significant deformation (IEC 60335-2-30)		N/A

22	CONSTRUCTION		P
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled		N/A
22.2	Stationary appliance: means to provide all-pole disconnection from the supply provided, the following means being available:		P
	- a supply cord fitted with a plug		P
	- a switch complying with 24.3		N/A
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided		N/A
	- an appliance inlet		N/A
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor	No switch	N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets	No socket-outlet	N/A
	Applied torque not exceeding 0.25 Nm		N/A
	Pull force of 50 N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm		N/A
	Each pin subjected to a tork of 0.4Nm; the pins are not rotating unless rotating does not impair compliance with the standard		N/A



<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets	No liquids	N/A
22.5	No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance exceeding 0,1 $\mu$ F, the appliance being disconnected from the supply at the instant of voltage peak	No capacitor equipped	N/A
	Voltage not exceeding 34 V (V) :		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid		N/A
	Electrical insulation of Class II appliances not affected in case of a hose rupture or seal leak		N/A
	In case of doubt, test as described		N/A
22.7	Heaters containing liquid or gas shall be constructed that they withstand the pressure to occur during use -appliance subjected to twice the highest pressure during the tests of Cl. 19.101, 19.103 or 19.112 -after test there shall be no leakage of liquid or gas (IEC 60335-2-30)	Test pressure: ...Pa	N/A
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		N/A
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		N/A
	the substance has adequate insulating properties		N/A
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance ,if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		N/A
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N/A
	Tests as described		P
22.12	Handles, knobs etc. fixed in a reliable manner		N/A
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		N/A
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		N/A
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		N/A
22.13	Unlikely that handles, when gripped as in normal use, make the operators hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		N/A
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self-tapping screws etc., liable to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands, no undue wear of contacts		N/A
	Cord reel tested with 6000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
	Requirement does not apply to rollers or feet, meets requirements of Cl. 19 without rollers or feet (IEC 60335-2-30)		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion under normal conditions of use		P
22.19	Driving belts not used as electrical insulation		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless material used is non-corrosive, non-hygroscopic and non-combustible		N/A
	Compliance is checked by inspection and, if necessary, by appropriate test		N/A
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless impregnated		P
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		N/A
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		N/A
22.24	Bare heating elements shall be supported to prevent excessive displacement occurring during normal use. The rupture of the heating element shall not give rise to a hazard. Compliance is checked by inspection, after the bare heating conductor has been cut in the most unfavourable place. The string shall not break (IEC 60335-2-30)		N/A
22.25	Sagging heating conductors cannot come into contact with accessible metal parts		N/A
22.26	The insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water: separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation	Equipped with plug	N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete	Preparing only service personal; if insulation would be missing, the product will be manifestly incomplete	P

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in clause 29 as a result of wear		N/A
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose		N/A
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29 and reinforced insulation designed or protected against deposition of dirt or dust		N/A
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar material or beads alone not used as supplementary or reinforced insulation		N/A
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
	Insulating material in which heating conductors are embedded is considered to be basic insulation and not reinforced insulation		N/A
22.33	Conductive liquids that are or may become accessible in normal use are not in direct contact with live parts		N/A
	Electrodes not used for heating liquids		N/A
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless the shaft is not accessible when the part is removed		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		N/A
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of an insulation fault, they are either adequately covered by insulation material, or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances other than those of electrical components, provided they are either reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N/A
22.36	Handles continuously held in the hand in normal use are so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless they are separated from live parts by double or reinforced insulation	Mounted device	N/A
22.37	Capacitors in Class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless	No capacitors	N/A
	the capacitors comply with 22.42		N/A
22.38	Capacitors not connected between the contacts of a thermal cut-out		N/A
22.39	Lamp holders used only for the connection of lamps	No lamp holder	N/A
	For ceiling mounted lam appliances, the insulating parts of lampholders used for the connection of replaceable heat lamp shall be ceramic (IEC 60335-2-30)		N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible	Not motor-operated	N/A
	Unless the appliance can operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch. The actuating member of the switch being easily visible and accessible		N/A
22.41	No components, other than lamps, containing mercury		P

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
22.42	Protective impedance consisting of at least two separate components		N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.1 a) in IEC 60065		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur	Only one voltage	N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.4 due to deformation as a result of an external force applied to the enclosure		N/A
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in table R.1	No electronic	N/A
	Software that contains measures to control the fault/error conditions specified in table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N/A
	No leakage from any part, including any inlet water hose		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water		N/A
22.49	For remote operation, the duration of operation shall be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard	The device is for continuous operation	N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation	No remote control given	N/A
22.51	A control on the appliance being manually adjusted to the setting for remote operation before the appliance can be operated in this mode	No remote control given	N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	Manual setting and visual indication not necessary on appliances that can operate as follows, without giving rise to a hazard:		N/A
	- operate continuously,		N/A
	- operate automatically, or		N/A
	- be operated remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold	No sockets given	N/A
22.101	Heaters other than heaters for mounting at high level, shall be guarded in order to prevent contact with heating elements	(IEC 60335-2-30)	P
	Test probe 41 IEC 61032 applied with a force not exceeding 5N not touch the heating elements		P
	Fireguards shall have no openings which exceed		N/A
	- a major dimension of 126 mm and a corresponding minor dimension of 12 mm, or	No fire guards	N/A
	- a major dimension of 53 mm and a corresponding minor dimension of 20 mm		N/A
	These dimensions also apply to any gap between the fireguard and its immediate surround. However, any apertures having a minor dimension of less than 5 mm are ignored.		N/A
22-102	Fireguards shall have a total open area not less than 50% of the surface area of the fireguard (IEC 60335-2-30)		N/A
22.103	Fireguards not completely removable without use of a tool (IEC 60335-2-30)		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
22.104	Appliance for wall mounting so constructed That they can be securely fixed to a wall (IEC 60335-2-30)		P
22.105	Accessible panels made of glass, ceramic or similar material in direct contact with heating elements shall withstand thermal shock (1 l water (15 ± 5) °C is directed onto the central part of the panel at a rate of 10 ml/s through a 5 mm diameter tube) The panel shall not be damaged (IEC 60335-2-30)	No such components given	N/A
22.106	Portable appliances not have openings on the underside that would allow small items to penetrate and touch live parts (IEC 60335-2-30)	Not portable	N/A
22.107	Visibly glowing radiant heaters, after fixing to a wall or ceiling direction of radiation cannot be changed without the aid of a tool (IEC 60335-2-30)		N/A
22.108	Visibly glowing radiant heaters other than heaters for mounting at high level, incorporates not thermostats, timers or similar means which switch on heating elements automatically, unless at least one heating element is already visibly glowing.(IEC 60335-2-30)		N/A
22.109	Disconnection of supply by a switch in the OFF position shall not rely on electronic components (IEC 60335-2-30)	No switch	N/A
22.110	Heaters intended to be mounted under church benches: metal surfaces accessible to the 75mm diameter test rod shall have a non-metallic coating with a thickness of at least 50 microns (IEC 60335-2-30)	Not for this mounting position	N/A

23	INTERNAL WIRING		P
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well rounded or provided with bushings		P
	Wiring effectively prevented from coming into contact with moving parts	No moving parts	N/A
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges or corners	No such parts	N/A
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A



IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		N/A
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		N/A
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use or 100 flexings for conductors flexed during user maintenance		N/A
	Electric strength test, 1000 V between live parts and accessible metal parts		N/A
	Not more than 10% of the strands of any conductor broken, and		N/A
	not more than 30% for wiring supplying circuits that consume no more than 15W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed	No bare internal wiring in use	N/A
23.5	The insulation of internal wiring withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		N/A
	No breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		N/A
	be such that it can only be removed by breaking or cutting		P
23.7	The colour combination green/yellow used only for earthing conductors	Class II appliance	N/A
23.8	Aluminium wires not used for internal wiring		P
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		P

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		N/A

24	COMPONENTS		P
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components	(see appended table)	P
	Components not tested and found to comply with relevant IEC standard for the number of cycles specified are tested in accordance with 24.1.1 to 24.1.6	Approved components used, see list of components	P
	Components not tested and found to comply with relevant IEC standard, components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		N/A
	Lampholders and starterholders not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N/A
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309	The plug is approved	P
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14, or	No capacitors given	N/A
	tested according to annex F		N/A
24.1.2	Safety isolating transformers complying with IEC 61558-2-6, or	No transformers given	N/A
	tested according to annex G		N/A
24.1.3	Switches complying with IEC 61058-1, the number of cycles of operation being at least 10 000, or	No switch used	N/A
	tested according to annex H		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Switches operating during the test of Cl. 19.112: 300 (IEC 60335-2-30)		N/A
24.1.4	Automatic controls complying with IEC 60730-1 with relevant part 2. The number of cycles of operation being:		N/A
	- thermostats	10 000	N/A
	- temperature limiters	1 000	N/A
	- self-resetting thermal cut-outs (IEC 60335-2-30)	10 000	N/A
	-non-self-resetting thermal cut-outs operating during 19.112 (IEC 60335-2-30)	300	N/A
	-for other non-self-resetting thermal cut- outs (IEC 60335-2-30)	1 000	N/A
	- voltage maintained non-self-resetting thermal cut-outs:	1 000	N/A
	- timers:	3 000	N/A
	- energy regulators:	10 000	N/A
	thermostats of liquid-filled radiators which operate during Cl. 11 to limit the surface temperature rise to 85 K: (IEC 60335-2-30)	100.000	N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		N/A
24.1.5	Appliance couplers complying with IEC 60320-1		N/A
	However, appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3		N/A
	Interconnection couplers complying with IEC 60320-2- 2		N/A
24.1.6	Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable	No lamp holder	N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.7	If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151	No remote control applied	N/A
24.1.8	The relevant standard for thermal links is IEC 60691. Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		N/A
	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance..... :		N/A
24.2	Appliances not fitted with:		N/A
	- switches or automatic controls in flexible cords	Not equipped with such parts	N/A
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		N/A
	- thermal cut-outs that can be reset by soldering, unless		N/A
	the solder has a melting point of at least 230 °C		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and having a contact separation in all poles, providing full disconnection under overvoltage category III conditions	The plug is used for full disconnection	N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N/A
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance and used accordingly		N/A
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load		N/A
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42V.	No motor	N/A
	In addition, the motors are complying with the requirements of Annex I		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770	No detachable hose-sets	N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		N/A
	One or more of the following conditions are to be met:		N/A
	- the capacitors are of class P2 according to IEC 60252-1		N/A
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of Annex E		N/A
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
24.101	Oil-filled radiators, devices incorporated to comply with Cl. 19.114 shall be non-self-resetting (IEC 60335-2-30)		N/A

25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		P
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		—
	- supply cord fitted with a plug		P
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance		N/A
	- pins for insertion into socket-outlets		N/A
25.2	Appliance not provided with more than one means of connection to the supply mains	No multi connection possible	P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	- a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimensions according to table 10		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in 29		N/A
25.5	Method for assemble supply cord with the appliance:		—
	- type X attachment		N/A
	- type Y attachment		P
	- type Z attachment, if allowed in part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
25.6	Plugs fitted with only one flexible cord		P

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
25.7	Supply cords, other than for class III appliances, being one of the following types:		P
	- rubber sheathed (at least 60245 IEC 53)		N/A
	- polychloroprene sheathed (at least 60245 IEC 57)		N/A
	- cross-linked polyvinyl chloride sheathed (at least 60245 IEC 87)		N/A
	-polyvinyl chloride sheathed: Not used if they are likely to touch metal parts having a temperature rise exceeding 75K during the test of Clause 11.		P
	<ul style="list-style-type: none"> <li>light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg</li> </ul>	H05VVH2-F	P
	<ul style="list-style-type: none"> <li>ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances</li> </ul>		N/A
	-heat resistant polyvinyl chloride sheathed: Not used for type X attachment other than specially prepared cords.		N/A
	<ul style="list-style-type: none"> <li>heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances</li> </ul>		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		
	Supply cords of portable heaters intended to be used in greenhouses shall not be lighter than ordinary polychloroprene sheathed flexible cord (IEC 60335-2-30)	Not portable	N/A
	Supply cords of heaters intended to be used on building sites shall not be lighter than heavy ordinary polychloroprene sheathed flexible cord (60245 IEC 66) (IEC 60335-2-30)		N/A
	For portable oil-filled radiators fitted with polyvinyl chloride sheathed cords (code designation 60227 IEC 52 or code designation 60227 IEC 53), metal parts likely to touch the supply cord in normal use include those parts that are inaccessible to the 75 mm diameter test rod specified in Table 101 but that may come into contact with the cord when it is wrapped around the heater. This does not apply if storage means for the cord are provided. (IEC 60335-2-30)		N/A
25.8	Nominal cross-sectional area of supply cords according to table 11; rated current (A); cross-sectional area (mm <sup>2</sup> )..... :	Min 2x 0,75mm <sup>2</sup>	P

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
25.9	Supply cord not in contact with sharp points or edges		P
25.10	Green/yellow core for earthing purposes in Class I appliance	Class II product	N/A
25.11	Conductors of supply cords not consolidated by lead-tin soldering where they are subject to contact pressure, unless		N/A
	the contact pressure is provided by spring terminals		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		P
25.13	Inlet openings so constructed as to prevent damage to the supply cord		P
	If the enclosure at the inlet opening is not of insulating material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided	The inlet opening is designed in insulation material.	P
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is	Only sheathed cords given.	P
	class 0, or		N/A
	a class III appliance not containing live parts		N/A
25.14	Supply cords adequately protected against excessive flexing		N/A
	Flexing test:		—
	- applied force (N) .....		N/A
	- number of flexings .....		N/A
	The test does not result in:		—
	- short circuit between the conductors		N/A
	- breakage of more than 10% of the strands of any conductor		N/A
	- separation of the conductor from its terminal		N/A
	- loosening of any cord guard		N/A
	- damage, within the meaning of the standard, to the cord or the cord guard		N/A
	- broken strands piercing the insulation and becoming accessible		N/A
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage	Connected by plug	P



<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		P
	<b>Pull and torque test of supply cord, values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm)..... :</b>	<b>Mass ~1,98 kg Pull = 60N torque= 0,25Nm</b>	<b>P</b>
	<b>Cord not damaged and max. 2 mm displacement of the cord</b>	<b>Displacement of the cord 0,00mm</b>	<b>P</b>
25.16	Cord anchorages for type X attachments constructed and located so that:		N/A
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless separated from accessible metal parts by supplementary insulation		N/A
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A
	it is part of a specially prepared cord		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances they are of insulating material, or		N/A
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
25.17	<b>Adequate cord anchorages for type Y and Z attachment</b>	See photodocumentation	P
25.18	<b>Cord anchorages only accessible with the aid of a tool, or</b>	See photodocumentation	P
	<b>so constructed that the cord can only be fitted with the aid of a tool</b>		P
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A
25.20	Conductors of the supply cord for type Y and Z attachment adequately additionally insulated		P
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		N/A
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		N/A
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlet:		N/A
	- live parts not accessible during insertion or removal. Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the supply cord is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except as that		N/A
	- the cross-sectional area of the conductors is determined on the basis of the maximum current during clause 11		N/A
	- the thickness of the insulation may be reduced		N/A
	If necessary, electric strength test of 16.3		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
25.24	Interconnection cords not detachable without the aid of a tool if compliance with the standard is impaired when they are disconnected		N/A
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.	No pins	N/A
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083		N/A

26	TERMINALS FOR EXTERNAL CONDUCTORS		P
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors	No terminals given. The connection is crimped	N/A
	Terminals only accessible after removal of a non-detachable cover		N/A
	for class III appliances that do not contain live parts		N/A
	Earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for connection to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless the connections are soldered		N/A
	Screws and nuts serve only to clamp supply conductors, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection to fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure and without damaging the conductor		N/A
	Terminals for type X attachment and those for connection to fixed wiring so fixed that when tightening or loosening the clamping means:		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	- the terminal does not become loose		N/A
	- internal wiring is not subjected to stress		N/A
	- neither clearances nor creepage distances are reduced below the values in clause 29		N/A
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified (Nm) : ..... :		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and		N/A
	so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and, for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection to fixed wiring suitable for connection of conductors with required cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm <sup>2</sup> ):		N/A
	Terminals only suitable for a specially prepared cord		N/A
26.7	Terminals for type X attachment accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection to fixed wiring, including the earthing terminal, located close to each other		N/A
26.9	Terminals of the pillar type constructed and located as specified		N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless conductors ends fitted with a device suitable for screw terminals		N/A
	Pull test of 5 N to the connection		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
26.11	For type Y and Z attachment: soldered, welded, crimped and similar connections may be used	Crimped	P
	For Class II appliances: the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		P
	For Class II appliances: soldering, welding or crimping alone used, barriers provided, clearances and creepage distances satisfactory if the conductor becomes free		P

27	PROVISION FOR EARTHING		P
27.1	Accessible metal parts of Class 0I and I appliances, permanently and reliably connected to an earthing terminal or contact of the appliance inlet		N/A
	Earthing terminals not connected to neutral terminal		N/A
	Class 0, II and III appliance have no provision for earthing	Class II appliance	P
	Safety extra-low voltage circuits not earthed, unless protective extra-low voltage circuits		N/A
27.2	Clamping means adequately secured against accidental loosening		N/A
	Terminals used for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm <sup>2</sup> , and		N/A
	do not provide earthing continuity between different parts of the appliance		N/A
	Conductors cannot be loosened without the aid of a tool		N/A
27.3	For detachable parts that are plugged into another part of the appliance, and having an earth connection, the earth connection made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cord, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		N/A
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		N/A
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		N/A
	If of steel, these parts provided with an electroplated coating with a thickness at least 5 µm		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		N/A
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		N/A
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided that clearances of basic insulation are based on the rated voltage of the appliance		N/A
	Resistance not exceeding 0,1 $\Omega$ at the specified low-resistance test		N/A
27.6	The printed conductors of printed circuit boards shall not be used to provide earthing continuity in hand-held appliances.		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A

28	SCREWS AND CONNECTIONS		N/A
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses	No screws used	N/A
	Screws not of soft metal liable to creep, such as zinc or aluminium		N/A
	Diameter of screws of insulating material min. 3 mm		N/A
	Screws of insulating material not used for any electrical connection or connections providing earthing continuity		N/A
	Screws used for electrical connections or connections providing earthing continuity screw into metal		N/A
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		N/A
	Type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw can impair basic insulation		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	For screws and nuts; torque-test as specified in table 14..... :	(see appended table)	N/A
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless	Class II appliance, no earthing	N/A
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		N/A
	This requirement does not apply to electrical connections in circuits of appliances for which:		N/A
	<ul style="list-style-type: none"> <li>30.2.2 is applicable and that carry a current not exceeding 0,5 A</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>30.2.3 is applicable and that carry a current not exceeding 0,2 A</li> </ul>		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws only used for electrical connections if they generate a full form standard machine screw thread		N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		N/A
	- in normal use,		N/A
	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or		N/A
	- during installation		N/A
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		N/A
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		N/A
	if an alternative earthing circuit is provided		N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		P
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), annex J applies .....		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3		N/A
	These values apply to functional, basic, supplementary and reinforced insulation.....		N/A
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless	(see appended table)	P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		N/A
	However, if the construction is affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500V and above are increased by 0,5 mm and the impulse voltage test is not applicable		N/A
	Impulse voltage test not applicable:		N/A
	- when the microenvironment is pollution degree 3		N/A
	- for basic insulation of class 0 and class 01 appliances		N/A
	Appliances are in overvoltage category II		P
	A force of 2 N is applied to bare conductors, other than heating elements		N/A
	A force of 30 N is applied to accessible surfaces		P
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		N/A
	The values of table 16 or the impulse voltage test of clause 14 are applicable .....	(see appended table)	N/A
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		N/A



<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16	(see appended table)	N/A
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, but using the next higher step for rated impulse voltage	(see appended table)	P
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		P
29.1.4	Clearances for functional insulation are the largest values determined from:		N/A
	- table 16 based on the rated impulse voltage..... :		N/A
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If values of table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		N/A
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
	Lacquered conductors of windings considered to be bare conductors	No such windings given	N/A
	However, clearances at crossover points are not measured	Considered	N/A
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		N/A
	- table 16 based on the rated impulse voltage..... :	No higher working voltages given than rated voltage	N/A
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or Clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160% of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation		N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in table 15		N/A
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree	(see appended table)	P
	Pollution degree 2 applies, unless		N/A
	-precautions taken to protect the insulation; pollution degree 1	Live parts completely covered and closed	P
	-insulation subjected to conductive pollution; pollution degree 3		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		N/A
	A force of 30 N is applied to accessible surfaces		N/A
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		P
	For fan heaters, the microenvironment is pollution degree 3 unless the insulation is enclosed or located so that it is unlikely to be exposed to pollution during normal use of the appliance. (IEC 60335-2-30)	No fan heater	N/A
29.2.1	Creepage distances of basic insulation not less than specified in table 17	(see appended table)	N/A
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 17 .....		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14 .....		N/A
29.2.2	Creepage distances of supplementary insulation at least as specified for basic insulation in table 17 or	(see appended table)	N/A
	Table 2 of IEC 60664-4, as applicable .....		N/A
29.2.3	Creepage distances of reinforced insulation at least double as specified for basic insulation in table 17 or	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable .....		N/A
29.2.4	Creepage distances of functional insulation not less than specified in table 18	(see appended table)	N/A
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 18.....		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
29.3	Supplementary and reinforced insulation having adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked by:		P
	- measurement, in accordance with 29.3.1, or		N/A
	- an electric strength test in accordance with 29.3.2, or		N/A
	- an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3 and		P
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
29.3.1	Supplementary insulation having a thickness of at least 1 mm		N/A
	Reinforced insulation having a thickness of at least 2 mm		N/A
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		N/A
	Supplementary insulation consisting of at least 2 layers		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Reinforced insulation consisting of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		P
	the electric strength test of 16.3		P
	If the temperature rise during the tests of Clause 19 does not exceed the value specified in Table 3, the test of IEC 60068-2-2 is not carried out		N/A
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in table 19..... :	3 layers	N/A

30	RESISTANCE TO HEAT AND FIRE		P
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and	3m foil	P
	thermoplastic material providing supplementary or reinforced insulation,		N/A
	sufficiently resistant to heat		P
	For portable fan heaters, the temperature rises determined during the tests of clause 19 are not taken into account (IEC 60335-2-30)		N/A
	Ball-pressure test according to IEC 60695-10-2	Not possible to do it on the foil	N/A
	External parts: at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C)..... :	(see appended table)	N/A
	Parts supporting live parts: at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125°C, whichever is the higher; temperature (°C)..... :	(see appended table)	N/A
	Parts of thermoplastic material providing supplementary or reinforced insulation, 25°C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C)..... :	(see appended table)	N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
30.2	Parts of non-metallic material adequately resistant to ignition and spread of fire		P
	This requirement does not apply to:		N/A
	parts having a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		N/A
	decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		N/A
	Compliance checked by the test of 30.2.1, and in addition:		P
	- for attended appliances, 30.2.2 applies		N/A
	- for unattended appliances, 30.2.3 applies		P
	For appliances for remote operation, 30.2.3 applies		N/A
	For base material of printed circuit boards, 30.2.4 applies		N/A
30.2.1	The Glow-wire test is carried out on enclosures at a temperature of 650°C (IEC 60335-2-30)		N/A
	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550 °C		N/A
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		P
	Tests not applicable to conditions as specified		N/A
30.2.3.1	Parts of non-metallic material supporting connections carrying a current exceeding 0.2A during normal operation, and		P
	parts of non-metallic material within a distance of 3mm,		P
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850°C		P
	Glow-wire applied to an interposed shielding material, if relevant		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		N/A
30.2.3.2	Parts of non-metallic material supporting current-carrying connections, and		P
	parts of non-metallic material within a distance of 3mm,		P
	subjected to glow-wire test of IEC 60695-2-11		P
	The test severity is:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications		P
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	<ul style="list-style-type: none"> <li>• 775 °C, for connections carrying a current exceeding 0,2 A during normal operation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>• 675 °C, for other connections</li> </ul>		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		P
	- 650 °C, for other connections		N/A
	the material is classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		N/A
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		N/A
	- parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		N/A
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of Annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		N/A
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to needle-flame test of annex E		N/A
	Test not applicable to conditions as specified		N/A
30.101	Fan heaters having an enclosure of substantially non-metallic material shall be resistant to fire. The needle test flame of Annex E is carried out on the enclosure of the appliance.  This test is not carried out on fan heaters that are also intended to be operated at maximum heat output with the fan switched off. (IEC 60335-2-30)		N/A
31	<b>RESISTANCE TO RUSTING</b>		N/A
	Relevant ferrous parts adequately protected against rusting		N/A
	Tests specified in part 2 when necessary		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict

32	RADIATION, TOXICITY AND SIMILAR HAZARDS		P
	Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use		P
	Compliance is checked by the limits or tests specified in part 2, if relevant		N/A

A	ANNEX A (INFORMATIVE) ROUTINE TESTS		P
	Description of routine tests to be carried out by the manufacturer		P

B	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES		N/A
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance		N/A
	This annex does not apply to battery chargers		N/A
3.1.9	Appliance operated under the following conditions:		N/A
	-the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N/A
	-the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N/A
	-if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N/A
	If the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N/A
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N/A
5.B.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N/A
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals		N/A



<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The positive terminal indicated by symbol IEC 60417-5005 and the negative terminal by symbol IEC 60417-5006		N/A
7.6	Symbols 60417-5005 and IEC 60417-5006		N/A
7.12	The instructions give information regarding charging		N/A
	The instructions for appliances incorporating batteries intended to be replaced by the user includes required information		N/A
	Details about how to remove batteries containing materials hazardous to the environment given		N/A
7.15	Markings placed on the part of the appliance connected to the supply mains		N/A
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N/A
	If the appliance can be operated without batteries, double or reinforced insulation required		N/A
11.7	The battery is charged for the period described		N/A
19.1	Appliances subjected to tests of 19.101, 19.102 and 19.103		N/A
19.B.101	Appliances supplied at rated voltage for 168 h, the battery being continually charged		N/A
19.B.102	Short-circuiting of the terminals of the battery, being fully charged, for appliances having batteries that can be removed without the aid of a tool		N/A
19.B.103	Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction		N/A
21.B.101	Appliances having pins for insertion into socket-outlets have adequate mechanical strength, checked according to procedure 2 of IEC 68-2-32		N/A
	Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-32, the number of falls being:		N/A
	- 100, the mass of part does not exceed 250 g		N/A
	- 50, the mass of part exceeds 250 g		N/A
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met		N/A
22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
25.13	An additional lining or bushing not required for interconnection cords operating at safety extra-low voltage		N/A
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N/A
	For other parts, 30.2.2 applies		N/A
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		N/A
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A
D	ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS (IEC 60335-1/A1 : 2004)		N/A
	Applicable to appliances having motors that incorporate thermal motor protectors		N/A
	Test conditions as specified		N/A
E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST (IEC 60335-1/A2: 2006)		N/A
	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:		N/A
7	Severities		N/A
	The duration of application of the test flame is 30 s ± 1 s		N/A
9	Test procedure		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1		N/A
9.2	The first paragraph does not apply		N/A
9.3	The test is carried out on one specimen		N/A
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		N/A
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s		N/A

F	ANNEX F (NORMATIVE) CAPACITORS		N/A
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		N/A
1.5	Terminology		N/A
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	This subclause is applicable		N/A
1.6	Marking		N/A
	Items a) and b) are applicable		N/A
3.4	Approval testing		N/A
3.4.3.2	Table II is applicable as described		N/A
4.1	Visual examination and check of dimensions		N/A
	This subclause is applicable		N/A
4.2	Electrical tests		N/A
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only table IX is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		N/A
	This subclause is applicable		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		N/A
	This subclause is applicable		N/A
4.14	Endurance		N/A
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	Visual examination, no visible damage		N/A
4.17	Passive flammability test		N/A
	This subclause is applicable		N/A
4.18	Active flammability test		N/A
	This subclause is applicable		N/A

G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		N/A
	The following modifications to this standard are applicable for safety isolating transformers:		N/A
7	Marking and instructions		N/A
7.1	Transformers for specific use marked with:		N/A
	-name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	-model or type reference		N/A
17	Overload protection of transformers and associated circuits		N/A
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N/A
22	Construction		N/A
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N/A
29	Clearances, creepage distances and solid insulation		N/A
29.1, 29.2, 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N/A
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed		N/A
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in table 13 of IEC 61558-1		N/A

H	ANNEX H (NORMATIVE) SWITCHES		N/A
	Switches comply with the following clauses of IEC 61058-1, as modified:		N/A
	-The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N/A
	-Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		N/A
	Switches are not required to be marked		N/A
	However, switches that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N/A
13	Mechanism		N/A
	The tests may be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		N/A
15.1	Not applicable		N/A
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection		N/A
17	Endurance		N/A
	Compliance is checked on three separate appliances or switches		N/A
	For 17.2.4.4, the number of cycles is 10 000, unless otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335		N/A
	Switches for operation under no load and which can be operated only by a tool and switches operated by hand that are interlocked so that they cannot be operated under load, are not subjected to the tests		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation		N/A
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		N/A
	Temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		N/A
	This clause is applicable to clearances and creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in table 24		N/A

I	ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE		N/A
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		N/A
8	Protection against access to live parts		N/A
8.1	Metal parts of the motor are considered to be bare live parts		N/A
11	Heating		N/A
11.3	Temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N/A
11.8	Temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N/A
16	Leakage current and electric strength		N/A
16.3	Insulation between live parts of the motor and its other metal parts not subjected to the test		N/A
19	Abnormal operation		N/A
19.1	The tests of 19.7 to 19.9 not carried out		N/A
19.101	Appliance operated at rated voltage with each of the following fault conditions:		N/A
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	- short circuit of each diode of the rectifier		N/A
	- open circuit of the supply to the motor		N/A
	- open circuit of any parallel resistor, the motor being in operation		N/A
	Only one fault simulated at a time, the tests carried out consecutively		N/A
22	Construction		N/A
22.1.101	For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A
	Compliance checked by the tests specified for double and reinforced insulation		N/A

J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		N/A
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		N/A
5.7	Conditioning of the test specimens		N/A
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.1	Cold		N/A
	The test is carried out at -25°C		N/A
5.7.3	Rapid change of temperature		N/A
	Severity 1 is specified		N/A
5.9	Additional tests		N/A
	This subclause is not applicable		N/A

K	ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES		P
	The information on overvoltage categories is extracted from IEC 60664-1		P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N/A
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		P
	Sequences for the determination of clearances and creepage distances		P
M	ANNEX M (NORMATIVE) POLLUTION DEGREE		P
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		P
	The microenvironment determines the effect of pollution on the insulation, taking into account the microenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar	Completely closed enclosure	P
	Minimum clearances specified where pollution may be present in the microenvironment		N/A
	Degrees of pollution in the microenvironment		P
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		P
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		P
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		N/A



IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		N/A
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A

N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		N/A
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		N/A
7	Test apparatus		N/A
7.3	Test solutions		N/A
	Test solution A is used		N/A
10	Determination of proof tracking index (PTI)		N/A
10.1	Procedure		N/A
	The proof voltage is 100V, 175V, 400V or 600V :		N/A
	The last paragraph of Clause 3 applies		N/A
	The test is carried out on five specimens		N/A
	In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100		N/A
10.2	Report		N/A
	The report stating if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A

O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		P
	Description of tests for determination of resistance to heat and fire		P

P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN WARM DAMP EQUABLE CLIMATES (IEC 60335-1/A1 : 2004)		N/A
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WDaE		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WdaE, if liable to be connected to a supply mains that excludes the protective earthing conductor		N/A
5.7	The ambient temperature for the tests of Clauses 11 and 13 is $40^{+3}_0$ °C.		N/A
7.1	The appliance marked with the letters WDaE		N/A
7.12	The instructions state that the appliance is to be supplied through a RCD having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries		N/A
11	Heating		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A

Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS		N/A
	Description of tests for appliances incorporating electronic circuits		N/A

R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		N/A
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		N/A
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		N/A
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		N/A

<b>IEC 60335-2-30</b>			
Clause	Requirement + Test	Result - Remark	Verdict
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired		N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N/A
R.3	Measures to avoid errors		N/A
R.3.1	General		N/A
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		N/A
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1		N/A
R.3.2	Specification		N/A
R.3.2.1	Software safety requirements:	Software Id:	N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		N/A
R.3.2.2.1	The specification of the software architecture includes the aspects listed <ul style="list-style-type: none"> <li>- techniques and measures to control software faults/errors (refer to R.2.2);</li> <li>- interactions between hardware and software;</li> <li>- partitioning into modules and their allocation to the specified safety functions;</li> <li>- hierarchy and call structure of the modules (control flow);</li> <li>- interrupt handling;</li> <li>- data flow and restrictions on data access;</li> <li>- architecture and storage of data;</li> <li>- time-based dependencies of sequences and data</li> </ul>	Document ref. No:	N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		N/A
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3.3	Software validation		N/A
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		N/A
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A
	- undesired conditions requiring system action		N/A

IEC 60335-2-30			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE R.1 <sup>e</sup> – GENERAL FAULT/ERROR CONDITIONS				
Component <sup>a</sup>	Fault/error	Acceptable measures <sup>b,c</sup>	Definitions See IEC 60730-1	Verdict
1 Central processing unit (CPU)				N/A
1.1 Registers	Stuck at	Functional test, or periodic self-test using either: - static memory test, or - word protection with single bit redundancy	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2	N/A
1.2 VOID				N/A
1.3 Programme counter	Stuck at	Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2	N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4	N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4	N/A
4 Memory				N/A
4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2	N/A
4.2 Variable memory	DC fault	Periodic static memory test, or word protection with single bit redundancy	H.2.19.6 H.2.19.8.2	N/A

IEC 60335-2-30				
Clause	Requirement + Test		Result - Remark	Verdict
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2	N/A
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2	N/A
5.1 VOID				N/A
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2	N/A
6 External communication	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single work, or Transfer redundancy, or Protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14	N/A
6.1 VOID				N/A
6.2 VOID				N/A
6.3 Timing	Wrong point in time  Wrong sequence	Time-slot monitoring, or scheduled transmission  Time-slot and logical monitoring, or Comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator  Logical monitoring, or time-slot monitoring, or Scheduled transmission	H.2.18.10.4 H.2.18.18 H.2.18.10.3  H.2.18.15 H.2.18.3 H.2.18.10.2 H.2.18.10.4 H.2.18.18	N/A
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13	N/A
7.1 VOID				N/A
7.2 Analog I/O				N/A
7.2.1 A/D and D/A- converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13	N/A

IEC 60335-2-30				
Clause	Requirement + Test		Result - Remark	Verdict
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13	N/A
8 VOID				N/A
9 Custom chips <sup>d</sup> e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6	N/A
NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.				
<sup>a</sup> For fault/error assessment, some components are divided into their sub-functions. <sup>b</sup> For each sub-function in the table, the Table R.2 measure will cover the software fault/error. <sup>c</sup> Where more than one measure is given for a sub-function, these are alternatives. <sup>d</sup> To be divided as necessary by the manufacturer into sub-functions. <sup>e</sup> Table R.1 is applied according to the requirements of R.1 to R.2.2.9 inclusive.				



10.1	TABLE: Power input deviation					P
Input deviation of/at:	P rated (W)	P measured (W)	dP	Required dP	Remark	
70200 SHT	630 W	660 W	+4,8 %	+5/-10%	P	
--	--	--	--	--	--	

10.2	TABLE: Current deviation					N/A
Current deviation of/at:	I rated (A)	I measured (A)	dI	Required dI	Remark	

11.8	TABLE: Heating test, thermocouples			P
	Test voltage (V)..... :	264,5V		—
	Ambient (°C) ..... :	22		—
	Thermocouple locations	dT (K)	Max. dT (K)	
	Heating surface	72	100	
	Rear side (wooden test corner)	53	60	
	Power cord closed to crimp connection	17	50	
	--	--	--	

11.8	TABLE: Heating test, resistance method					N/A
	Test voltage (V)..... :					—
	Ambient, t <sub>1</sub> (°C) ..... :					—
	Ambient, t <sub>2</sub> (°C) ..... :					—
	Temperature rise of winding	R <sub>1</sub> (Ω)	R <sub>2</sub> (Ω)	dT (K)	Max. dT (K)	Insulation class

13.2	TABLE: Leakage current		P
	Heating appliances: 1.15 x rated input..... :	724,5W	—
	Motor-operated and combined appliances: 1.06 x rated voltage .....	--	—
Leakage current between		I (mA)	Max. allowed I (mA)
L/N – metal foil in contact with out surface of heating element		0,01	0,25
--		--	--

13.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
L/N – metal foil in contact with out surface of heating element		3000	NO
--		--	--

14	TABLE: Transient overvoltages					N/A
Clearance between:		CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)

16.2	TABLE: Leakage current		P
	Single phase appliances: 1.06 x rated voltage .....	243,8V	—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$ :..... :	--	—
Leakage current between		I (mA)	Max. allowed I (mA)
L/N – metal foil in contact with out surface of heating element		0,01	0,25
--		--	--

16.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
L/N – metal foil in contact with out surface of heating element		3000	NO
--		--	--

17	TABLE: Overload protection, temperature rise		N/A
Temperature rise of part/at:		dT (K)	Max. dT (K)

<b>19</b>	<b>Abnormal operation conditions</b>						<b>P</b>
Operational characteristics		YES/NO	Operational conditions				
Are there electronic circuits to control the appliance operation?		NO					
Are there “off” or “stand-by” position?		NO					
The unintended operation of the appliance results in dangerous malfunction?		NO					
Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2	Testing by a wattage of 561W	No hazard	--	N.A	--	--	P
19.3	Tested by a wattage of 818W	No hazard	--	--	--	--	P
19.4	--	--	--	--	--	--	N/A
19.5	--	--	--	--	--	--	N/A
19.6	--	--	--	N.A	--	--	N/A
19.7	--	--	--	--	--	--	N/A
19.8	--	--	--	--	--	--	N/A
19.9	--	--	--	--	--	--	N/A
19.10	--	--	--	--	--	--	N/A
19.11.2	--	--	--	--	--	--	N/A
19.11.4.8	--	--	--	--	--	--	N/A
19.10X	Heaters	No hazard	--	--	--	--	P

	operated at 818,4, thermal control which operated during the test of Cl. 11 is short-circuited						
Supplementary information:							

19.7	TABLE: Abnormal operation, locked rotor/moving parts					N/A
	Test voltage (V)..... :					—
	Ambient, t <sub>1</sub> (°C) .....					—
	Ambient, t <sub>2</sub> (°C) .....					—
	Temperature of winding	R <sub>1</sub> (Ω)	R <sub>2</sub> (Ω)	dT (K)	T (°C)	Max. T (°C)

19.9	TABLE: Abnormal operation, running overload					N/A
	Test voltage (V)..... :					—
	Ambient, t <sub>1</sub> (°C) .....					—
	Ambient, t <sub>2</sub> (°C) .....					—
	Temperature of winding	R <sub>1</sub> (Ω)	R <sub>2</sub> (Ω)	dT (K)	T (°C)	Max. T (°C)

19.13	TABLE: Abnormal operation, temperature rises		P
	Thermocouple locations	dT (K)	Max. dT (K)
	heating mat	96	150
	Power cord	90	150
	--	--	--

24.1	TABLE: Components					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity	
power cord	PLASTRO MEYER	H05VVH2-F	2x0,75mm <sup>2</sup>	HD21	VDE	
plug	PLASTRO MEYER	Type 110	16A 250V	DIN VDE 0620	VDE	
Heating element	IHS	NN	470W or 630W 230V	EN/IEC 60335-1 EN/IEC 60335-2- 30	Tested in appliance	
<sup>1)</sup> An asterisk indicates a mark which assures the agreed level of surveillance						

28.1	TABLE: Threaded part torque test			N/A
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque ( Nm )	

29.1	TABLE: Clearances					P
	Overvoltage category ... :	II				—
		Type of insulation:				
Rated impulse voltage (V):	Min. cl (mm)	Basic	Functional	Supplementary	Reinforced	Verdict / Remark
330	0,5*	--	--	--	--	N/A
500	0,5*	--	--	--	--	N/A
800	0,5*	--	--	--	--	N/A
1 500	0,5/**	--	--	--	--	N/A
2 500	1,5**	--	--	--	--	N/A
4 000	3,0**	--	--	--	X	P
6 000	5,5**	--	--	--	--	N/A
8 000	8,0**	--	--	--	--	N/A
10 000	11,0**	--	--	--	--	N/A
<p>*) The value is increased to 0,8mm for pollution degree 3</p> <p>*) If the construction is affected by wear, distortion, movement of the parts or during assembly, the value is increased by 0,5 mm</p>						

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm) Pollution degree										
	1	2			3			Type of insulation			
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb	B <sup>*)</sup>	S <sup>*)</sup>	R <sup>*)</sup>	Verdict
≤50	0,2	0,6	0,9	1,2	1,5	1,7	1,9		—	—	N/A
≤50	0,2	0,6	0,9	1,2	1,5	1,7	1,9	—		—	N/A
≤50	0,4	1,2	1,8	2,4	3,0	3,4	3,8	—	—		N/A
>50 and ≤125	0,3	0,8	1,1	1,5	1,9	2,1	2,4		—	—	N/A
>50 and ≤125	0,3	0,8	1,1	1,5	1,9	2,1	2,4	—		—	N/A
>50 and ≤125	0,6	1,6	2,2	3,0	3,8	4,2	4,8	—	—		N/A
>125 and ≤250	0,6	1,3	1,8	2,5	3,2	3,6	4,0		—	—	N/A
>125 and ≤250	0,6	1,3	1,8	2,5	3,2	3,6	4,0	—			N/A
>125 and ≤250	<b>1,2</b>	2,6	3,6	5,0	6,4	7,2	8,0	—	—	X	P
>250 and ≤400	1,0	2,0	2,8	4,0	5,0	5,6	6,3		—	—	N/A
>250 and ≤400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—		—	N/A
>250 and ≤400	2,0	4,0	5,6	8,0	10,0	11,2	12,6	—	—		N/A
>400 and ≤500	1,3	2,5	3,6	5,0	6,3	7,1	8,0		—	—	N/A
>400 and ≤500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—		—	N/A
>400 and ≤500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—		N/A
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		—	—	N/A
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—		—	N/A
>500 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—		N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5		—	—	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—		—	N/A
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—		N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0		—	—	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—		—	N/A
>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—		N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		—	—	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—		—	N/A
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—		N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0		—	—	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—		—	N/A

>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—		N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0		—	—	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—		—	N/A
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—		N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		—	—	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—		—	N/A
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—		N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0		—	—	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—		—	N/A
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—		N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		—	—	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—		—	N/A
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	112,0	126,0	—	—		N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		—	—	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—		—	N/A
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—		N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		—	—	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—		—	N/A
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—		N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0		—	—	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—			N/A
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—		N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0		—	—	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—		—	N/A
>10000 and ≤12500	80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—		N/A

\*) , B=Basic, S=Supplementary and R=Reinforced



29.2	TABLE: Creepage distances, functional insulation							P
Working voltage (V)	Creepage distance (mm) Pollution degree							
	1	2			3			
		Material group			Material group			
		I	II	IIIa/IIIb	I	II	IIIa/IIIb	Verdict / Remark
≤50	0,2	0,6	0,8	1,1	1,4	1,6	1,8	N/A
>50 and ≤125	0,3	0,7	1,0	1,4	1,8	2,0	2,2	N/A
>125 and ≤250	<b>0,4</b>	1,0	1,4	2,0	2,5	2,8	3,2	P
>250 and ≤400	0,8	1,6	2,2	3,2	4,0	4,5	5,0	N/A
>400 and ≤500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N/A
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	N/A

30		TABLE: Resistance to heat and fire																		
Object/ part No.	Manuf acterer / tradem ark	Type/ model	Ball pressure test °C				Glow wire test (GWT) °C				Glow-wire flammability index (GWFI) °C				Glow- wire ignition temp. (GWIT) °C		Needle - flame test (NFT)	Verdict		
			75	125	cl. 11 +40	cl. 19 +25	550	650		750		850	550	650	750	850			675	775
								te	ti	te	ti									
Heating element	3M	Triple layer polyester film tape with acrylic pressure sensitive adhesive for use as reinforced insulation													P	P				P
Supplementary information:																				
<ol style="list-style-type: none"> <li>1) Parts of material classified at least HB40 or if relevant HBF</li> <li>2) Parts of material classified as V-0 or V-1</li> <li>3) Flame persisting longer than 2 s (= te – ti) need only be reported for unattended appliances</li> <li>4) Surrounding parts subjected to the needle-flame test of annex E</li> <li>5) Base material classified as V-0 or if relevant VTM-0</li> <li>6) The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not applicable for attended appliances</li> </ol>																				

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict

**List of test equipment used:**

**(Note: This is an example of the required attachment. Other forms with a different layout but containing similar information are also acceptable.)**

Clause	Measurement / testing	Testing / measuring equipment / material used	Range used	Calibration date
--	Impact-/tensile force measurement	02686	--	01/2016
--	Tape measure	02611	--	06/2016
--	Caliper	00714	--	09/2015
--	Test Pin B	08029	--	04/2016
--	HV Tester	02694	--	01/2016
--	Test pin	01956	--	05/2017
--	--	--	--	--

All measurement equipment calibrated at measuring time.

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict

<p align="center"><b>ATTACHMENT TO TEST REPORT IEC 60335-2-30</b>  <b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b>            (Household and similar electrical appliances – Safety –  <b>Part 2: Particular requirements for room heaters)</b></p>	
<b>Differences according to :</b>	EN 60335-2-30:2009 + A11: 2012 used in conjunction with EN 60335-1:2012 EN 62233:2008
<b>Attachment Form No. :</b>	EU_GD_IEC60335_2_30J
<b>Attachment Originator :</b>	LCIE
<b>Master Attachment :</b>	2014-07
<b>Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</b>	

<b>CENELEC COMMON MODIFICATIONS</b>			
6.1	Delete “class 0” and “class 01”		P
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered		P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N/A
7.10	Devices used to start/stop operational functions of the appliance distinguished from other manual devices by means of shape, size, surface texture, position, etc.	No switch	N/A
	An indication that the device has been operated is given by:		N/A
	• a tactile feedback, or		N/A
	• an audible and visual feedback		N/A
7.12	The instructions include the substance of the following:		P
	- this appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved		N/A
	- children shall not play with the appliance		N/A
	- cleaning and user maintenance shall not be made by children without supervision		P
	The instructions shall include the substance of the following: (EN 60335-2-30)		P
	Children of less than 3 years should be kept away unless continuously supervised.		P

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	Children aged from 3 years and less than 8 years shall only switch on/off the appliance provided that it has been placed or installed in its intended normal operating position and they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children aged from 3 years and less than 8 years shall not plug in, regulate and clean the appliance or perform user maintenance.		P
	<b>CAUTION — Some parts of this product can become very hot and cause burns. Particular attention has to be given where children and vulnerable people are present.</b>		P
7.12.Z1	The specific instructions related to the safe operation of this appliance is collated together in the front section of the user instructions		P
	The height of the characters, measured on the capital letters, is at least 3 mm		P
	These instructions are also available in an alternative format, e.g. on a website		P
8.1.1	Also test probe 18 of EN 61032 is applied		P
	The appliance being in every possible position during the test		P
	The force on the probe in the straight position is increased to 10 N when probe 18 is used		P
	When using test probe 18 the appliance is fully assembled as in normal use without any parts removed, and		P
	parts intended to be removed for user maintenance are also not removed		P
8.2	Compliance is checked by applying the test probes of EN 61032		P
	For built-in appliances and fixed appliances, the test probe B and probe 18 of EN 61032 are applied only after installation		P
11.8	Footnotes to “External enclosure of motor-operated appliances” to be taken into account	No motor	N/A
	The temperature rise of surfaces of heaters shall not exceed the values shown in Table 101. (EN 60335-2-30)		N/A
11.Z101	For the measurement of temperature rises the instructions from the manufacturer on where the appliance has to be situated during normal operations have to be followed. (EN 60335-2-30)		P

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling	No cord reel	N/A
20.2	Parts that are intended to be removed only for user maintenance are not removed. (EN 60335-2-30)		N/A
	When using the test probe similar to test probe B with a circular stop face, the accessories and detachable covers are removed		N/A
	Test probe 18 applied with a force of 2,5N on the appliance fully assembled		N/A
22.Z101	Stationary appliances part or all of the body of which are positioned at a height below 850 mm from the floor and portable appliances that can be used on the floor shall not have accessible openings with a minor dimension exceeding 5,5mm. (EN 60335-2-30)	The backside of the product is directly fixed at wall	P
22.Z102	<b>For appliances fitted with a supply cord with a plug, the free length of the supply cord measured from the inlet point in the appliance to the inlet point in the plug including the cord guard, shall be not less than 1 m and no more than 1,9 m. (EN 60335-2-30)</b>	<b>Confirmatory letter;</b>	<b>P</b>
24.1	Components comply with the safety requirements specified in the relevant standards as far as they reasonably apply		P
	The requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance.		P
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		N/A
	Components that have not been previously tested or do not comply with the standard for the relevant component are tested according to the requirements of 30.2		N/A
	Components that have been previously tested and shown to comply with the resistance to fire requirements in the standard for the relevant component need not be retested provided that:		P
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		N/A
	- the test report for the component states whether it complied with the standard for the relevant component with or without flame, flames not exceeding 2 s during the test are ignored		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	Unless components have been previously tested and found to comply with the relevant standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components that have not been separately tested and found to comply with the relevant standard, and		N/A
	components that are not marked or not used in accordance with their marking,		N/A
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		N/A
	Lamp holders and starter holders that have not been previously tested and found to comply with the relevant standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant standard under the conditions occurring in the appliance	No lamp holder	N/A
	Where the relevant standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of Clause 11 are used		P
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		P
	with connectors and appliance inlets complying with the standard sheets of IEC 60320-1,		N/A
	if direct supply to these parts from the supply mains gives rise to a hazard		P
24.1.7	If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is EN 41003		N/A
	Compliance with Clause 8 of this standard is not impaired by connecting the appliance to a device covered by EN 41003		N/A
24.Z1	For motor running capacitors (IEC 60252-1 type P2) with a metallic enclosure having an overpressure fuse the flame testing of internal plastic parts supporting current carrying connections as required in 30.2.2 and 30.2.3.1 is not necessary		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
25.6	Supply cords of single-phase portable appliances having a rated current not exceeding 16 A, fitted with a plug complying with the following standard sheets of IEC/TR 60083:		P
	- for Class I appliances: standard sheet C2b, C3b or C4..... ..... ..... ..... ..... :		N/A
	- for Class II appliances: standard sheet C5 or C6 ..... ..... ..... ..... ..... :	C5	P
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors or when they are liable to be exposed to significant amount of ultraviolet radiation	Not for outdoor use	P
	Halogen-free thermoplastic compound sheathed supply cords have properties at least those of:		N/A
	<ul style="list-style-type: none"> <li>halogen-free thermoplastic compound sheathed cords (H03Z1Z1H2-F or H03Z1Z1-F), for appliances having a mass not exceeding 3 kg</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>halogen-free thermoplastic compound sheathed cords (H05Z1Z1H2-F or H05Z1Z1-F), for other appliances</li> </ul>		N/A
	Cross-linked halogen-free compound sheathed supply cords have properties at least those of cross-linked halogen-free compound sheathed cords (H07ZZ-F)		N/A
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position unless they are held in place near the terminals independently of the solder		N/A
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2		P
32	Compliance regarding electromagnetic fields is checked according to EN 50366 or EN 62233	See annex EN 62233:2008	P
Annex I, 19.I.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified		N/A



IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	The duration of the test is as specified in 19.7		N/A
<b>ZA</b>	<b>ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS</b>		P
	<b>Norway</b>		N/A
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N/A
	<b>Norway</b>		N/A
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N/A
	<b>All CENELEC countries</b>		P
25.6 and 25.25	Information concerning National plug and socket-outlets is available from the CENELEC website. Normative national requirements concerning plug and socket-outlets are shown in the relevant National standard		P
	<b>Ireland and United Kingdom</b>		N/A
25.8	In the table, the lines for 10 A and 16 A are replaced by:		N/A
	> 10 and ≤ 13 1,25		N/A
	> 13 and ≤ 16 1,5		N/A
<b>ZB</b>	<b>ANNEX ZB (INFORMATIVE) A-DEVIATIONS</b>		N/A
	<b>Ireland</b>		N/A
25.6	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances		N/A
	<b>United Kingdom</b>		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
25.6	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances. It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes		N/A
<b>ZC</b>	<b>ANNEX ZC (NORMATIVE) NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>		P
	A list of referenced documents in this standard		P
<b>ZD</b>	<b>ANNEX ZD (INFORMATIVE) IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS</b>		P
	A table with IEC and CENELEC code designations for flexible cords	60227 IEC 52	P
<b>ZE</b>	<b>ANNEX ZE (INFORMATIVE) SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE</b>		N/A
7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative..... :		N/A
	Model or type reference..... :		N/A
	Serial number, if any..... :		N/A
	Production year		N/A
	Designation of the appliance ..... :		N/A
7.12	Instructions provided with the appliance so that the appliance can be used safely		N/A
	The instructions contain at least the following information:		N/A
	- the business name and full address of the manufacturer and, where applicable, his authorized representative		N/A
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number		N/A
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers		N/A
	- the general description of the appliance, when needed due to the complexity of the appliance		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	- specific precautions if required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving		N/A
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance		N/A
	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		N/A
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		N/A
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		N/A
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		N/A
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		N/A
7.12.ZE1	If needed for specific appliances, the following information to be given:		N/A
	<ul style="list-style-type: none"> <li>on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided</li> </ul>		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	<ul style="list-style-type: none"> <li>on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>on the specifications on the spare parts to be used, when these affect the health and safety of the operator</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:</li> </ul>		N/A
	- the A-weighted emission sound pressure level at workstations, where this exceeds 70 dB(A) .....		N/A
	- where this level does not exceed 70 dB(A), this fact is indicated		N/A
	- the peak C-weighted instantaneous sound pressure value at workstations, where this exceeds 63 Pa (130 dB in relation to 20 µPa) .....		N/A
	- the A-weighted sound power level emitted by the machinery, where the A-weighted emission sound pressure level at workstations exceeds 80 dB(A) .....		N/A
7.12.ZE2	The instructions includes a warning to disconnect the appliance from its power source during service and when replacing parts		N/A
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug has to be such that an operator can check from any of the points to which he has access that the plug remains removed		N/A
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided		N/A
19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or		N/A
	a manual operation is required to restart it		N/A
20.1	Appliances and their components and fittings have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance		N/A
20.2	Dangerous moving transmission parts safeguarded either by design or guards		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	When guards are used, they are fixed guards, interlocking movable guards or protective devices		N/A
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:		N/A
	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N/A
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N/A
	Interlocking movable guards used where frequent access is required		N/A
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N/A
	The distance between the seat and the control devices capable of being adapted to the operator		N/A
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N/A
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		N/A
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N/A
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N/A
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N/A
	so designed that they can be fitted with such attachments, or		N/A
	be shaped in such a way that standard lifting gear can easily be used		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		N/A
22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts only removable with the use of tools		N/A
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N/A
	Where possible, guards are incapable of remaining in place without their fixings		N/A
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N/A
	Movable guards are interlocked		N/A
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N/A
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		N/A
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N/A
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N/A
	Interlocking movable guards remain attached to the appliance when open, and		N/A
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N/A
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N/A
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations being defined in the specific Part 2 ..... :		N/A
	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	After these tests the interlock system is fit for further use		N/A
22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for the work are:		N/A
	- adjustable manually or automatically, depending on the type of work involved, and		N/A
	- readily adjustable without the use of tools		N/A
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart		N/A
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred		N/A
22.ZE.9	Appliances fitted with means to isolate them from all energy sources		N/A
	Such isolators are clearly identified, and		N/A
	they are capable of being locked if reconnection endanger persons		N/A
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons		N/A
<b>ZF</b>	<b>ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD</b>		P
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive) ..... :	LVD	P
<b>ZG</b>	<b>ANNEX ZG (NORMATIVE) UV APPLIANCES</b>		N/A
	The following modifications to this standard apply to appliances having UV emitters		N/A
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109		N/A
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following: WARNING — This appliance contains a UV emitter. Do not stare at the light source		N/A

IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N/A
<b>ZZ</b>	<b>ANNEX ZZ (INFORMATIVE) COVERAGE OF ESSENTIAL REQUIREMENTS OF EC DIRECTIVES</b>		P
	Description of the relation between this European standard and the LVD (Low Voltage Directive, 2006/95/EC) and the MD (Machinery Directive, 2006/42/EC)		P

<b>Annex EN 62233:2008</b>			
Clause	Requirement + Test	Result - Remark	Verdict
<b>EMF- ELECTROMAGNETICS FIELDS</b>			
	The tested product also complies with the requirements of EN 62233:2008		P
	Limit .....100%	Measured max. :.....0,3%	p

	<b>EN 62233: 2008</b> Measurement methods for electromagnetic fields of household appliances and similar apparatus with regard to human exposure		P
5.2	Magnetic fields , method of measurement		P
5.2	Frequency range 10 Hz – 400 kHz	50/60Hz	P
5.3	Distance, position, mode of use Accord annex A ( see below)	30cm	P
5.4	Magnetic sensor : isotropic sensor used		P
5.5	Methods for measurement of magnetic fields		P
5.5.1	General		P
5.6	Uncertainty of measurement Shall not > 25 %	Estimated 4%	P
6	Evaluation of measurement results		P
	Measured value ( in % of reference value)	0,3 %	P
A.1	General		P
	Table A 1 used :	(See below)	P



IEC60335_2_30J- ATTACHMENT			
Clause	Requirement - Test	Result - Remark	Verdict
	Kind of appliance :		P
	If table A is not used :		P
A.1.1	condition of normal use		P
	Time of measurement	15min	P
	Nominal voltage and frequency	230V 50/60Hz	P
	Controls set to maximum, unless table A1 defines different conditions	No such devices given.	N/A
A.1.2	Distance of measurement	Other devices 30cm	P
A 1.3	Position of sensor	b)	P
A 2	Conditions of measurement for special appliances	No multi-function given	N/A
Table A1	Conditions of use		P
	Type of appliance:	Heating device. Same distance as an oil radiator.	P
	Surfaces:	Front-, Left-, Right- side	P
	Distance of measurement	30 cm	P