



gas fireplace inserts



why choose Regency?

Beautiful Home Heating Solutions

Regency Fireplace Products was founded over 30 years ago with a mission to produce the finest fireplace products available anywhere. Regency has heating solutions for any room in any home.

Regency Quality

The Regency name means quality in every way. The product is created and built in a world class manufacturing facility focused on getting every detail just right. Represented across North America by a carefully selected professional retail network; you can rely on knowledgeable dealers and installers who understand how to make our products run safely and to the optimum performance.

Exceptional Fire

The essence of each and every Regency fireplace is the unique flame. With its dancing flames and glowing embers, realistic logs or Horizon burners your Regency fire is spectacular.

Custom Styling

By researching current trends and styles we have created tasteful options and accessories that allow you to tailor the look of our fireplace to your home. Sleek and simple or grand and glamorous... the choice is yours.

Cut Home Heating Bills in Half!

Turn down your furnace and zone heat with high efficiency heat just in the rooms you spend time in. This will lower your home heating bills. The entire Regency Gas Fireplace Insert line produces consistent, controllable warmth even during power outages.

One Regency = One Tree

At Regency, we are committed to protecting our environment. For every Regency sold, we will plant a tree. Working with *American Forests*, the trees planted across North America will offset carbon emissions and take one more step to restore nature's balance.

Lifetime Warranty

I am so confident in the quality workmanship, the finest materials and durable heavy-duty construction invested in each and every product, that I offer a Limited Lifetime Warranty. The Regency warranty is the best in the industry. We are absolutely sure that you will be as proud of your Regency Gas Fireplace Insert as we are – I guarantee it.

Robert Little Founder & CFO

Robert Little





index	
Liberty Gas Fireplace Inserts	4
L540E, L390E	
Regency Horizon™Gas Fireplace Inserts	6
HZI540E, HZI390E	
Energy Gas Fireplace Inserts	
E33	8
U32, U32E, U31	10
E21	14
Regency Horizon & Liberty Gas Fireplace In	nserts
HZI234E	12
L234	13
Design Choices	16
Technical Specs	18







Liberty[™] Gas Inserts L540E & L390E



 $High \, Definition \, Log \, Set \, Designed \, to \, Radiate \, More \, Heat \,$

Regency Liberty™ High Efficiency Inserts offer timeless charm that combines modern style with rustic appeal. The High Definition Fire (HDF) package highlights the authentic flames that are set on a bed of glowing embers.

Not only does the HDF package create an intense glow and realistic flame, it is also designed to hold and radiate more heat and ultimately increase the efficiency of your insert.

L540E shown with full screen doors and brick panels.







 ${\it L540E}\ shown\ with\ low\ profile\ face plate,\ brick\ panels\ and\ safety\ screen.$

 ${\tt L390E}\ shown\ with\ 4-sided\ low\ profile\ faceplate\ in\ black\ and\ enamel\ panels.$



L390E shown with low profile faceplate in sunset bronze and reflective panels.

Specifications (NG)	L540E	L390E
Input (BTU)	38,000	31,000
Turn down to (BTU)	25,000	22,000
EnerGuide Rating*	73.72%	71.9%
Efficiency (steady state)	84%	84%

Efficiency (steady state)	0170	0170
Min. Fireplace Opening	L540E	L390E
Width (front)	34"	30"
Width (rear)	25"	22"
Height	24"	20"
Depth	16-3/4"	15-1/2"
View area	540 sq.in.	390 sq. in.
Width (rear) Height Depth	25" 24" 16-3/4"	22" 20" 15-1/2"


^{*} for Canada only
For detailed specifications please see pages 18-19.

Standard Features

- Natural gas
- Flush front with ceramic safety glass
- Ceramic log set molded from real wood
- Ceramic burner with built-in glowing ember bed
- Electronic ignition with SureFire™ switch
- Proflame GTM Remote Control (L390E)
- Proflame GTMF Remote Controls (L390EB & L540EB)
- Variable speed blower (L390EB & L540EB only)
- Heat exchanger for maximized efficiencies
- 30° angled flue (for versatile installations)
- · Easy access controls
- Direct vent

- · Low profile faceplates in two sizes
- Customizable backing plate (3 or 4 sided)
- · Full screen doors
- · Removable mesh glass guard
- Brick panels
- · Enamel reflective panels
- Variable speed blower (L390E only)
- Programmable wall thermostat
- Regency flex venting
- Propane conversion kit
- Hearth trims in 2"or 4" (black, low profile faceplate only)

Regency Horizon™ Gas Inserts HZI540E & HZI390E

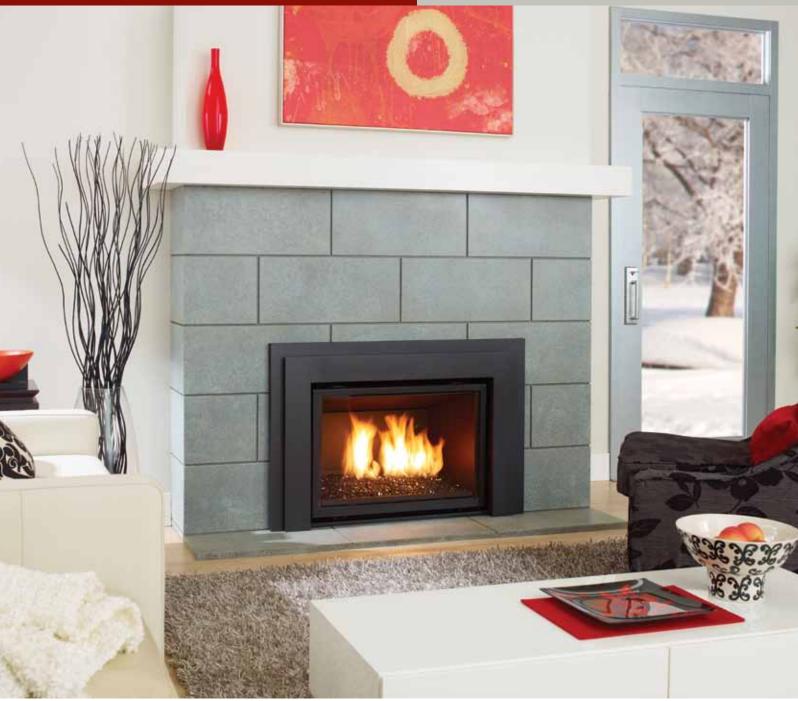

Regency Horizon HZI540E shown with low profile faceplate in black and copper crystals.

$High-Efficiency\,Heating\,in\,a\,Modern\,Insert$

These contemporary inserts feature a vibrant and dramatic flame that dances on a full continuous bed of glass crystals, which amplify the visual appeal of the linear burner. The generous ceramic glass maximizes the radiant heat output and provides an impressive view framed with a sleek low profile faceplate.

With several design choices to choose from in 3 modern colours, both the HZI390E and HZI540E can be customized to complement the décor of any modern living space.











HZI540E shown with low profile faceplate and copper crystals.

Specifications (NG)	HZI540E	HZI390E
Input (BTU)	38,000	31,000
Turn down to (BTU)	25,000	22,000
EnerGuide Rating*	73.72%	66.10%
Efficiency (steady state)	84%	84%

Min. Fireplace Opening	HZI540E	HZI390E
Width (front)	34"	30"
Width (rear)	25"	22"
Height	24"	20"
Depth	16-3/4"	15-1/2"
View area	540 sq.in.	390 sq. in.

* for Canada only

For detailed specifications please see pages 18-19.



 $\label{eq:HZI390E} HZI390E shown with 4-sided low profile faceplate in black, reflective panels and blue crystals.$

Standard Features

- Natural gas
- Flush front with ceramic safety glass
- · Linear burner (glass crystals required)
- Electronic ignition with SureFire™ switch
- Proflame GTM Remote Control (HZI390E)
- Proflame GTMF Remote Controls (HZI390EB & HZI540E)
- Variable speed blower (HZI390EB & HZI540E only)
- · Heat exchanger for maximized efficiencies
- 30° angled flue (for versatile installations)
- Easy access controls
- · Direct vent



 $\ensuremath{\mathsf{HZI390E}}$ shown with low profile face plate in sunset bronze and copper crystals.

- Crystals in various colours
- Ceramic spa stones & volcanic stones
- Low profile faceplates in two sizes
- Customizable backing plate (3 or 4 sided)
- Full screen doors
- · Removable mesh glass guard
- Enamel reflective panels
- Variable speed blower (HZI390E only)
- Programmable wall thermostat
- Regency flex venting
- · Propane conversion kit
- Hearth trims in 2"or 4" (black, low profile faceplate only)



Regency E33 gas insert featuring gold louvers, brick panels and contour face plate $\,$

Turns Your Drafty Fireplace Into an Attractive Heat Source

With 38,000 BTU of comforting, controllable heat and a full, yellow fire, this insert is guaranteed to warm your room quickly and consistently. This Direct Vent Gas Insert is perfect for airtight homes or basements because the sealed firebox doesn't use internal air. All Regency gas inserts can be enjoyed from the comfort of your sofa with the Regency remote control or wall thermostat.













Shown with Excalibur surround and brick panels.



E33 fire package with platinum bright embers.

Specifications	Natural Gas	Propane
Input (BTU)	38,000	35,500
Turn down to (BTU)	20,000	19,000
EnerGuide Rating*	60.79%	61.52%
Efficiency (steady state)	83%	84%

Min. Fireplace Opening / Faceplate	Low profile/ Contour/ Full screen doors	Excalibur
Width (front)	32-1/4"	34-1/2"
Width (rear)	25"	25"
Height	24-3/16"	26"
Depth	16-3/4"	17-3/4"

^{*}for Canada only
For detailed specifications please see pages 18-19.

Standard Features

- Natural gas
- Beautiful fire with glowing logs, platinum bright embers & Embaglow embers
- Flame height adjustment control with 50% turn down
- Flush front with ceramic safety glass
- Easy access controls
- · Variable speed blower
- 30° angled flue for versatile installations
- Direct vent

- Low profile faceplates
- Excalibur surround, double doors & accent kits
- Contour faceplate
- Louvers
- Full screen doors
- Brick panels
- Hearth trims various sizes
- · FireGenie® remote control
- Wall thermostat
- Regency flex venting
- · Propane conversion kit

Energy Medium Gas Inserts U31/U32/U32E



Regency U31 gas insert shown with brick panels and low profile faceplate.


Customize to Suit Your Style

This Regency insert is a complete fireplace system that can turn your existing wood fireplace into a high efficiency, clean burning gas heater. Choose from several faceplates, designer fronts (including Excalibur arched surrounds), many finishes, brick panels and so much more! Enjoy peace of mind even during power outages, all Regency gas inserts operate without electricity.









76%

76%

76%

Min. Fireplace Opening	U32/U32E	U31
Width (front)	26-1/2"	26-1/2"
Width (rear)	22-1/2"	22-1/2"
Height	22"	21"
Depth	14"	15"
* (()		

Efficiency (steady state)

For detailed specifications please see pages 18-19.



U31 shown with full screen door in black and brick panels.

Standard Features

- · Natural gas • Beautiful fire with glowing logs, platinum bright embers, fire grate & Embaglow embers
- · Flame height adjustment control
- Flush front with ceramic safety glass
- · Easy access controls
- · Variable speed blower
- Direct Vent (U32/U32E)
- B Vent (U31)
- Standing pilot system (U31/U32)
- Electronic ignition with Surefire switch (U32E)



U31 shown with Excalibur surround.

- · Low profile faceplates
- Excalibur surround, double doors & accent kits (U31)
- Contour faceplate
- Louvers
- Full screen doors
- Brick panels
- Hearth trims various sizes
- FireGenie® remote control (U31/U32)
- Proflame GT, GTM remote control (U32E)
- · Wall thermostat
- New fireplace kit (U31 only)
- Regency flex venting
- Propane conversion kit





Regency Horizon HZI234E gas insert featuring a contour faceplate, and black glass crystals.

Compact Size for Tighter Openings

A clean front fireplace insert that will slide easily into your dated, drafty steel fireplace and transform it to a high efficiency heater in minutes. Available in two distinct styles: traditional realistic logs (L234) and contemporary linear burner (HZI234E). Customizable accessories and a limited lifetime warranty are just a few more reasons you will choose a high quality Regency fireplace insert!







L234 shown with contemporary faceplate, hearth riser, backing plate and brick panels.

Specifications (NG)	L234	HZI234E
Input (BTU)	23,500	16,500
Turn down to (BTU)	12,500	12,000
EnerGuide Rating*	63.3%	68.24%
Efficiency (steady state)	74%	74%

Min. Fireplace Opening	L234	HZI234E
Width (front)	25"	25"
Width (rear)	16"	16"
Height	17"	17"
Depth	14"	14"
* for Canada only		

For detailed specifications please see pages 18-19.



L234 shown with contour faceplate, hearth riser, backing plate and brick panels.

HZI234E shown with low profile faceplate and copper crystals.

Standard Features

- · Natural gas
- Standing pilot with direct spark ignition (L234)
- Electronic ignition with Surefire™ switch (HZI234E)
- Flush front with ceramic safety glass
- Realistic logs with beautiful flames, platinum bright embers & Embaglow embers (L234)
- Linear burner (glass crystals required) (HZI234E)
- 30° angled flue (for versatile installation)
- Clean front 234 sq. in. viewing area
- Variable speed blower
- Easy access controls
- Flame height adjustment
- · Direct vent

- · Contemporary or contour faceplate
- Low profile faceplates
- Customizable backing plate
- Adjustable hearth riser
- Brick panels (L234)
- Reflective inner panels (HZI234E)
- Crystals in various colours (HZI234E)
- Ceramic spa stones (HZI234E)
- Natural river pebbles (HZI234E)
- FireGenie® remote (L234)
- Proflame GT/GTM remote control (HZI234)
- Regency flex venting
- 3" to 2" air intake reducer
- · Propane conversion kit

Energy Small Gas Insert



Energy E21 Gas Insert featuring flush front, contour faceplate, brushed steel louvers and standard brick panels.

Designed to Fit Almost Anywhere

If you have a smaller fireplace opening or want to heat a smaller living space, you don't have to sacrifice a beautiful fire and high efficiency. The E21 Energy Gas Insert has been designed to fit almost anywhere – including bedrooms and alcoves. Enjoy consistent, controllable, convenient heat at the flick of a switch.

Standard Features

- Natural Gas
- Beautiful fire with glowing logs, platinum bright embers & Embaglow embers
- Flame height adjustment control with 50% turn down
- · Flush front with ceramic safety glass
- Easy access controls
- · Variable speed blower
- B Vent

Optional Features

- · Low profile faceplate
- Contour faceplate
- Louvers
- · Full screen doors
- Brick panels
- Hearth trims various sizes
- FireGenie® remote control
- Wall thermostat
- New fireplace kit
- Regency flex ventingPropane conversion kit

 Specifications
 Natural Gas
 Propane

 Input (BTU)
 23,500
 22,500

 Turn down to (BTU)
 11,750
 11,250

 EnerGuide Rating*
 60.60%
 53.48%

 Efficiency (steady state)
 77%
 78%

Minimum Fireplace Opening		
Width (front)	26-1/2"	
Width (rear)	18"	
Height	17-3/4"	
Depth	14"	

^{*} for Canada only

For detailed specifications please see pages 21-22.



Maximizing Comfort and Efficiency

Regency Fireplace Inserts deliver controllable heat solutions combining the latest in radiant/convection heat technology and innovative features.

- ☑ Adjustable flame/heat control
- ☑ Heat radiating ceramic glass for maximum radiant heat performance
- ☑ SureFire[™] Electronic Ignition switch with battery backup features a fuel saving intermittent pilot ignition conserving energy when not in use.
- ☑ Power's Out, Heat's On. Never worry about being cold in a power outage again! All Regency gas fireplaces operate without electricity. Enjoy peace of mind all winter long.


Direct Vent Technology

A Regency® Gas Insert is a specially engineered, sealed fireplace that slips into your existing masonry or pre-fab fireplace to create a high efficiency heating system with a beautiful fire. The airtight firebox means that you will keep all of the comforting heat generated from your Regency inside your home. Even when your fireplace is turned off, you will not lose heat up the chimney.

All the air used by the fireplace for combustion comes from outside the home and is vented to outside the home maintaining indoor air quality.


SureFire™ Electronic Ignition

The SureFire system offers an electronic ignition system which saves you money by ensuring the pilot light is only turned on when the fireplace needs to be ignited. This Electronic Ignition System converts to Standing Pilot at the flick of a switch; making it ideal during the winter season if you live in a colder climate.





Blower



Spread the warmth

Extreme Efficiency

The precision engineered heat exchanger systems, dramatically increase the overall heating efficiency of these Regency gas inserts. The cold air from your room passes through the pre-heated heat exchanger system which is then re-distributed back into your room as comforting warm air (also known as convection heat).

Intense Radiant Heat


Not only do these gas inserts include the latest innovations in fireplace technology and efficiencies, they also generate a large amount of radiant heat from the flames and glow of the Fire Package. The heat from the fire radiates through the ceramic glass and transfers that warmth to you. Providing the perfect combination of radiant and convective heat distribution.

Variable Speed Blower to Maximize Efficiency

Adding a Regency blower will let you enjoy the warmth of your fireplace from any corner of your living space. Our quiet blowers increase the efficiency of your fireplace by pushing the heat produced by your fireplace forward and distributing it further and evenly into the room.



design choices

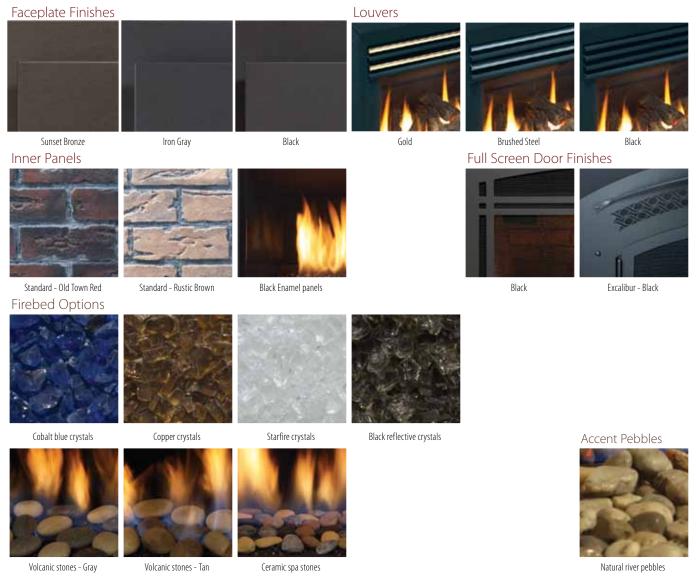

comfort controls



Create optimal comfort with the ease and convenience at the touch of a button with a Regency Comfort Control System. Our user friendly programmable controls can be set, adjusted and programmed for your fireplace to come on at the temperature you want when you want it.

Feature	Description	FireGenie	Prof	lame Rem	notes	Programmable
		Remote	GT	GTM	GTMF	Thermostat
On/Off		✓	✓	✓	✓	✓
Child lock		-	✓	✓	✓	-
LCD Backlit Screen		✓	✓	✓	✓	✓
Clock		✓	-	-	-	✓
Temperature display	°F / °C	✓	✓	✓	✓	✓
Themostat	one setting (all days)	✓	✓	✓	✓	✓
	5-day day weekday & 2-day weekend	✓	-	-	-	✓
Smart thermostat*	'	-	-	✓	✓	-
Flame adjustment	(6 levels)	-	-	✓	✓	-
Fan control**	(6 levels)	-	-	-	✓	-

^{*} Smart Thermostat - Rather than a thermostat that simply turns your fireplace on and off, the Smart Control function allows you to set your desired room temperature and as the room reaches your personal setting the flame intensity and heat will gradually decrease — keeping the ambiance of your Regency fire on with less heat output with the option to turn off at any time.

^{**} For models that have a blower.



Accessories - at a	glance		HZI540E	L540E	E33	HZI390E	HZI390EB	L390E	L390EB	U32	U32E	U31	E21	L234	HZI234E
Horizon firebed	Crystals- various colo	rs	*	-	-	*	*	-	-	-	-	-	-	-	*
	Ceramic spa stones		*	-	-	*	*	-	-	-	-	-	-	-	*
	Volcanic stones		*	-	-	*	*	-	-	-	-	-	-	-	-
Horizon look	Faceplates	Low profile (3 or 4 sided) ¹	*	-	-	*	*	-	-	-	-	-	-	-	*
		Contemporary	-	-	-	-	-	-	-	-	-	-	-	-	*
		Contour	-	-	-	-	-	-	-	-	-	-	-	-	*
Classic look	Faceplates	Low profile (3 or 4 sided)	-	*	*	-	-	*	*	*	*	*	*	*	-
		Contemporary	-	-	*	-	-	-	-	*	*	-	-	*	-
		Contour	-	-	*	-	-	-	-	*	*	*	*	*	-
		Custom	-	-	*	-	-	-	-	*	*	*	*	-	-
	Louvers	Black	-	-	*	-	-	-	-	*	*	*	*	-	-
		Black/Brushed Steel	-	-	*	-	-	-	-	*	*	*	*	-	-
		Black/Gold	-	-	*	-	-	-	-	*	*	*	*	-	-
Excalibur Arch Surrounds	Surround	Black	-	-	*	-	-	-	-	-	-	*	-	-	-
	Double screen doors	Black	-	-	*	-	-	-	-	-	-	*	-	-	-
	Accent kit	Nickel	-	-	*	-	-	-	-	-	-	*	-	-	-
		Gold	-	-	*	-	-	-	-	-	-	*	-	-	-
Full Screen Doors		Black	*	*	*	*	*	*	*	*	*	*	*	-	-
Inner Panels	Bricks	Standard - Rustic Brown	-	*	*	-	-	*	*	*	*	*	*	*	-
		Standard - Old Town Red	-	*	*	-	-	*	*	*	*	*	*	*	-
	Reflective	Black enamel	*	*	-	*	*	*	*	-	-	-	-	-	*
Removable mesh glass gua	rd		*	*	-	*	*	*	*	-	-	-	-	-	*
Hearth Trim (for sizes see p	age 19)		*	*	*	*	*	*	*	*	*	*	*	*	*
New Fireplace Kit (zero clea	rance kit)		-	-	-	-	-	-	-	-	-	*	*	-	-
Blower (with fan speed cor	troller)		1	✓	1	*	✓	*	1	1	1	1	1	1	1
Wall Thermostat			*	*	*	*	*	*	*	*	*	*	*	*	*
Remote Controls	FireGenie™		-	-	*	-	-	-	-	*	-	*	*	*	-
	Proflame GT		-	-	-	-	-	-	-	-	*	-	-	-	*
	Proflame GTM		-	-	-	1	-	1	-	-	*	-	-	-	*
	Proflame GTMF		1	✓	-	-	✓	-	1	-	-	-	-	-	-
Turn down flame modulato	r (for use with Proflame	GTM/GTMF remotes)	1	1	-	1	1	1	1	-	*	-	-	-	*
Faceplate Mounted on/off S	Switch		1	1	1	1	1	1	1	1	1	1	1	1	1
Direct Vent			1	1	1	1	1	1	1	1	1	-	-	1	1
B-Vent			-	-	-	-	-	-	-	-	-	1	1	-	-
Surefire Electronic Ignition			1	1	-	1	1	1	1	-	1	-	-	-	1
Propane conversion kit			*	*	*	*	*	*	*	*	*	*	*	*	*

- Not available Standard Optional

1. 4-sided low profile faceplates are custom order



Proflame Remote Control



FireGenie Remote Control



Thermostat




specifications


Specifications		HZI540E	L540E	E33	HZI390E	L390E	U32	U32E	U31	E21	L234	HZI234E
Input (BTU)	Natural Gas	38,000	38,000	38,000	31,000	31,000	30,000	30,000	30,000	23,500	23,500	16,500
	Propane	38,000	38,000	35,500	31,000	31,000	30,000	27,000	28,000	22,500	21,500	15,000
Turn Down to (BTU)	Natural Gas	25,000	25,000	20,000	22,000	22,000	15,300	19,500	20,600	11,750	12,500	12,000
	Propane	30,000	30,000	19,000	26,000	26,000	15,000	22,000	22,000	11,250	11,000	12,000
EnerGuide Rating	Natural Gas	73.72%	73.72%	60.79%	66.10%	71.9%	57.17%	58.04%	52.9%	50.60%	63.3%	68.24%
(Canada only)	Propane	75.69%	75.69%	61.52%	70.1%	75.3%	57.17%	58.24%	48.07%	53.48%	64.5%	69.07%
Efficiency (steady state)	Natural Gas	84%	84%	83%	84%	84%	76%	76%	76%	77%	74%	74%
	Propane	84%	84%	84%	84%	84%	77%	77%	77%	78%	74%	74%





Dimensions	HZI540E	L540E	E33	HZI390E	L390E	U32	U32E	U31	E21	L234	HZI234E
Α	33-11/16"	33-11/16"	32-1/4"	29-5/8"	29-5/8"	28"	28"	27-7/8"	26"	24-3/4"	24-3/4"
В	23-5/8"	23-5/8"	23-13/16"	20"	20"	20"	20"	20-1/4"	17-1/2"	16-7/8"	16-7/8"
A1	28-13/16"	28-13/16"	30-3/8"	24-1/8"	24-1/8"	24-1/4"	24-1/4"	24-1/2"	24-1/2"	17-3/4"	17-3/4"
B1	18-15/16"	18-15/16"	14-7/8"	14-3/4"	14-3/4"	11-3/8"	11-3/8"	12-5/8"	10-7/8"	12-1/2"	12-1/2"
C	16-3/4"	16-3/4"	16-1/2"	15-1/2"	15-1/2"	13-3/4"	13-3/4"	13-1/2"	13-1/4"	13"	12-1/4"
D	12"	12"	11-3/8"	12-1/8"	12-1/8"	10-3/4"	10-3/4"	11-3/4"	10-3/4"	11-3/4"	10-7/8"
F	-	-	-	-	-	1-1/16"	1-1/16"	5/8"	1"	-	-
G	24-5/8"	24-5/8"	24-1/2"	21-5/8"	21-5/8"	22-1/2"	22-1/2"	22-1/2"	17-1/2"	14-3/4"	14-3/4"



Minimum F	ireplace Openings	Width (front)	Width (rear)	Height	Depth
HZI540E	low profile faceplate	34"	25"	24"	16-3/4"
	full screen doors	34"	25"	24"	16-3/4"
L540E	low profile faceplate	34"	25"	24"	16-3/4"
	full screen doors	34"	25"	24"	16-3/4"
E33	low profile faceplate	32-1/4"	25"	24-3/16"	16-3/4
	contour faceplate	32-1/4"	25"	24-3/16"	16-3/4
	full screen doors	32-1/4"	25"	24-3/16"	16-3/4"
	Excalibur surround	34-1/2"	25"	26"	17-3/4"
HZI390E	low profile faceplate	30"	22"	20"	15-1/2"
	full screen doors	30"	22"	20"	15-1/2"
L390E	low profile faceplate	30"	22"	20"	15-1/2"
	full screen doors	30"	22"	20"	15-1/2"
U32/U32E	low profile faceplate	26-1/2"	22-1/2"	22"	14"
	contour faceplate	26-1/2"	22-1/2"	22"	14"
	full screen doors	26-1/2"	22-1/2"	22"	14"
U31	low profile faceplate	26-1/2"	22-1/2"	22"	14"
	contour faceplate	26-1/2"	22-1/2"	21"	15"
	molded faceplate	29"	22-1/2"	21"	16"
	full screen doors	26-1/2"	22-1/2"	21"	15"
	Excalibur surround	29"	22-1/2"	21"	16"
E21	contour faceplate	26-1/2"	18"	17-3/4"	14"
	low profile faceplate				
L234	contemporary faceplate	25"	16"	17"	14"
	contour faceplate	25"	16"	17"	14"
	low profile faceplate	25"	16"	17"	14"
HZI234E	contemporary faceplate	25"	16"	17"	14"
	contour faceplate	25"	16"	17"	14"
	low profile faceplate	25"	16"	17"	14"









The Regency Gas Inserts are listed as: Vented Gas Fireplace Heater and Certified for: CANADA and USA The Regency Gas Inserts are tested & approved by Intertek Warnock Hersey to the following standards:

MODEL	ANSI	CSA	CAN/CGA	Approval #:	Approved for:
L540E	Z21.88-2009	2.33-2009	2.17-M91(R2009)	4001172	Bedroom, Alcove & Mobile Homes
HZI540E	Z21.88-2009	2.33-2009	2.17-M91(R2009)	4001172	Bedroom, Alcove & Mobile Homes
L390E	Z21.88-2009	2.33-2009	2.17-M91(R2009)	4001172	Bedroom, Alcove & Mobile Homes
HZI390E	Z21.88-2009	2.33-2009	2.17-M91(R2009)	4001172	Bedroom, Alcove & Mobile Homes
HZI234E	Z21.88-2009	2.33-2009	2.17-M91(R2009)	4001172	Bedroom, Alcove & Mobile Homes
E33-1	Z21.88a-2007	2.33a-2007	2.17-M91	16352	Bedroom, Alcove & Mobile Homes
U32-5	Z21.88a-2009	2.33a-2009	2.17-M91	16117	Bedroom, Alcove & Mobile Homes
U32E	Z21.88-2009	2.33.2009	2.17-M91	16513	Bedroom, Alcove & Mobile Homes
U31-2	Z21.88a-2007	2.33s-2007	2.17-M91	15948	Bedroom & Alcove
E21-3	Z21.88a-2007	2.33a-2007	2-17-M91	16353	Bedroom & Alcove
L234	Z21.88-2005	2.33-2005	2.17-M91	3118729C0Q-002	Bedroom, Alcove & Mobile Homes










(L390E/HZI390E/L540E/HZI540E)

Excalibur Surround




Low profile faceplate (4-sided)


Faconlatos		HZI540	E/L540E	E	33	HZI3901	E/L390E	U32/	'U32E	U	31	E	21	L234/H	łZI234E
Faceplates		Width	Height	Width	Height	Width	Height	Width	Height	Width	Height	Width	Height	Width	Height
Low profile (3-sided)	without backing plate	39-7/8"	27-3/8"	42-1/2"	26-3/4"	35-13/16"	23-13/16"	36"	21-1/2"	36"	22"	35-3/8"	20"	29-1/8"	21"
	with backing plate	45-1/2"	30-1/4"	46-1/2"	28-3/4"	39-15/16"	25-13/16"	40-3/4"	23-7/8"	40-3/4"	23-7/8"	40-1/8"	22-11/16"	32-7/8"	22-7/8"
Low profile (3-sided	without backing plate	39-7/8"	27-3/8"			35-7/8"	23-3/4"								
oversize)	with backing plate	46"	33"			44"	30"								
Low profile (4-sided)	without backing plate	40-3/8"	30-7/8"	42-1/2"	32-1/2"	35-13/16"	27-5/16"	36"	26"	36"	26"	36-1/4"	24-1/4"	29-1/8"	26-1/2"
	backing plate							custom o	rder only						
Contemporary														27-3/4"	21"
Contour Standard				45-9/16"	31-1/8"			40-1/8"	26-1/8"	40-1/8"	26-1/8"	40-1/8"	23-3/4"	27-1/2"	20-3/4"
Contour Oversize				49-9/16"	33-1/8"			44-1/8"	28-1/8"	44-1/8"	28-1/8"	44-1/8"	25-3/4"		
Custom Flat				custom	order only			48"	34"	48"	34"	48"	32"		
Hearth Trim – sizes		2", 4" for 2", 4" for	contempora low profile	ir faceplate ary faceplati faceplate (L temporary	e 390E/HZI39	0E/L540EB/	/HZI540EB)	– use custo	om backing	plate on all	other mod	els.			
Excalibur surround				45-9/16"	33-1/4"					40-1/8"	27-7/8"				
Full screen doors*		45-1/2"	30-1/4"	47-3/8"	33-3/16"	38-1/8"	25-3/4"	41-5/8"	29-1/4"	41-5/8"	29-1/4"	41-9/16"	29-1/4"		

^{*} depth = 2"

Minir	mum Clearance to Combustibles	HZI540E	L540E	E33	HZI390E	L390E	U31/32/32E	E21	L234	HZI234E
Α	Side Wall	12"	12"	8"	6"	6"	10"	9"	8"	8"
В	Ceiling	46"	46"	47"	45"	45"	47-1/2"	36"	56"	56"
C	Mantel Height (min.)	16"	16"	15"	15"	15"	13"	14"	21"	15-1/2"
	(with optional deflector)	12"	12"	N/A	12"	12"	N/A	N/A	N/A	N/A
D	Mantel Depth (min.)	2"	2"	3-1/2"	1"	1"	3-1/2"	3-1/2"	1"	1"
	(with optional deflector)	1"	1"	N/A	1"	1"	N/A	N/A	N/A	N/A
Е	Alcove Width	56"	56"	76"	54"	54"	48"	48"	60"	60"
F	Max. Alcove Depth	36"	36"	36"	36"	36"	36"	36"	36"	36"

Non-	Combustible Hearth Require	ment								
G	Hearth Height	1-3/8"	1-3/8"	1-1/4"	0"	0"	0"	0"	1-1/2"	0"
Н	Hearth Width	44"	44"	45-1/2"	40"	40"	0"	0"	28"	0"
I	Hearth Depth	14"	14"	13"	14"	14"	0"	0"	12"	0"





You deserve a fireplace makeover



Problem:

- I have a drafty wood or gas fireplace.
- I have inefficient gas logs.
- I need an updated fireplace style.



Solution:

- Choose the gas fireplace insert that fits your opening and install.
- Voila! Updated fire, updated fireplace style, and much lower heating bill.

fireplace selection worksheet

We want you to enjoy your beautiful Regency fireplace for years to come. To help you figure out which product is just right for your home, fill in the following worksheet. Once complete, visit your nearest Regency dealer. Your professional Regency dealer will assess your needs - including local building codes - and install your Regency.

local building codes - and install your Re		rear proressionaria	egene) dealer will assess your needs lines
1. BASIC PRODUCT FUNCTION QUESTION	NS		
a. I would like my insert to provide me with:	☐ Supplemental heating ☐	Priority heating	
b. The room/rooms I would like to heat are:	Sq	are feet	
c. My fuel source will be:	□ Natural gas □	Propane	
Has gas been piped to the proposed fireplace area?	□ Yes □	No	Mantel depth
2. FIREPLACE PRODUCT TYPE AND MEAS	UREMENTS		- ====================================
a. I am:	☐ Installing a new fireplace		Facing
	☐ Installing into an existing fireplace		thickness
b. Fill in the following measurements:	Ceiling Height:		
	Location in the room:		- He arth to mantel height height
c. What is the:	Flooring material:		Drop in fireplace
	Wall material:		, — — — — — — — — — — — — — — — — — — —
	Ceiling material:		1
d. Fireplace opening dimensions	Width (front)		Depth in fireplace
	Width (back)		
	Height		MIX Paper from responsible sources
	P Depth		Paper from responsible sources FSC www.fsc.org FSC* C011267
		WWW	regency-fire.com
		your re	gency dealer

© 2012 FPI Fireplace Products International Ltd. Regency, Liberty, Excalibur, Regency Horizon, Surefire and FireGenie are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved. Printed in Canada (07/12) Part no. 944-072