



**ARI QUOTE : 103 EXT - 2017 CHEVY EXPRESS 2500
MAINTENANCE**

MODEL: CG23705


MAINTENANCE

SPEC: 103 EXT

PREVIOUS SPEC: 0A7531

CAP COST: \$ 34,340.60

Picture for general illustration only

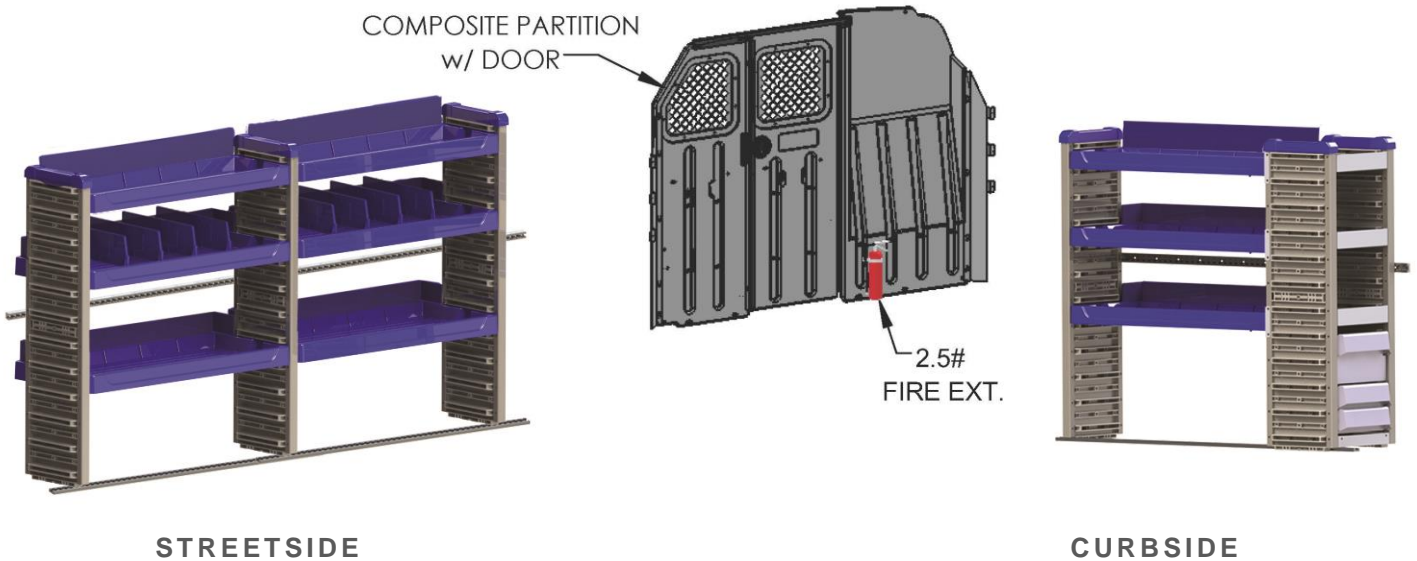

Selected Equipment

| Type | Code | Description |
|------|------|--|
| | 1WT | <p>Preferred Equipment Group 1WT</p> <ul style="list-style-type: none"> • L20:Engine: Vortec 4.8L V8 SFI --(Includes external engine oil cooler.) • MYD:Transmission: Electronic 6-Speed HD Auto w/OD --(Includes tow/haul mode and internal transmission oil cooler.) • C6P:GVWR: 8,600 lbs (3,901 kg) • GU6:3.42 Rear Axle Ratio • AR7:Front Reclining High-Back Bucket Seats --(Includes outboard head restraints and inboard armrests.) <ul style="list-style-type: none"> ○ DAA:Driver & Front Passenger Vinyl Visors --(In lieu of standard cloth.) • --W:Vinyl Seat Trim • XLP:Tires: Front LT245/75R16E AS BW • YLP:Tires: Rear LT245/75R16E AS BW • QB5:Wheels: 16" x 6.5" Steel (4) |

| | | |
|---|----------|--|
| | | --((40.6 cm x 16.5 cm). Includes gray center caps and steel spare.) <ul style="list-style-type: none"> • U0F:Radio: AM/FM Stereo w/MP3 Player --(Includes seek-and-scan, digital clock, TheftLock, random select, auxiliary jack and 2 front door speakers.) |
| | DRJ | Inside Rearview Mirror w/Rr Vision Camera Display |
| | NC7 | Federal Emissions Override For vehicles ordered by dealers in Federal emission states with (YF5) or (NE1) emissions - Not required for vehicles being shipped to California, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont or Washington. |
| | UVC | Rear Vision Camera Display integrated into rearview mirror. |
| | WARANT | Fleet Customer Powertrain Limited Warranty Fleet designated delivery types come with 5 years/100,000 miles of coverage for the Powertrain Limited Warranty. Coverage includes the engine, transmission/transaxle, transfer case, drive systems and emission control systems. In addition courtesy transportation and roadside assistance is also covered for 5 years/100,000 miles. |
| | YA2 | Sliding Passenger-Side Door Includes sliding door trim panel. |
| | YF5 | California State Emissions Requirements |
| | ZLP | Tire: Spare LT245/75R16E AS BW Located at rear underbody of vehicle. |
| | ZQ3 | Convenience Package <ul style="list-style-type: none"> • TILT:Tilt-Wheel • K34:Cruise Control |
| | ZX2 | Driver & Front Passenger High-Back Bucket Seats Includes head restraint. |
| | ZY1 | Solid Paint |
| | UPFITA01 | KNAPHEIDE QTE: L5250-16 MAINT. - SPEC 103EXT DATED 09/23/2016 EXPIRES 03/22/2017 |
| | UPFITA02 | COMPASS GROUP COMPOSITE STD MAINTENANCE PACKAGE CONSISTING OF: PROTEXX THERMOFORMED CAB PARTITION WITH WINDOW |
| | UPFITA03 | 2 4460-1 STAXX (1) EACH SIDE 1 4460-2 STAXX |
| | UPFITA04 | BACK UP ALARM 97DB ECCO 10 |
| | UPFITA06 | 2.5# FIRE EXTINGUISHER BEHIND DRIVERS SEAT IN CAB REAR CROSSOVER MIRROR |
| | UPFITA07 | SHIP THRU |
| A | GM | GM E-FLEET |

D - Driver Paid A - Adjustments

| Available Options | |
|-------------------|-------------|
| Code | Description |

| | |
|----------|---|
| UPFITA10 | OPTION - CVL-AG-1330 EF71 1330 LB LIFTGATE CANTILEVERED LIFTGATE |
| UPFITA21 | NO DECALS |
| UPFITA22 | KNAPHEIDE SUPPLY & INSTALL DECALS MUST CHOOSE AT LEAST ONE DECAL PACKAGE BELOW |
| UPFITA23 | BAT-001 BATEMAN DECALS |
| UPFITA24 | BON-008 BON APPETIT DECALS |
| UPFITA25 | CHAR-ELL-003 CHARTWELL DECALS- K12, EAT,LIVE,LEARN |
| UPFITA26 | CHAR-HED-005 CHARTWELL DECALS HIGHER ED |
| UPFITA27 | COMP-001 COMPASS GROUP DECALS |
| UPFITA28 | CROTH-005 CROTHALL HEALTHCARE DECALS |
| UPFITA29 | EUR-BG-ST-005 EUREST-BLACK/GREY STRIPES |
| UPFITA30 | EUR-CAT-002 EUREST CATERING DECALS ONLY |
| UPFITA31 | EUR-CAT-FRFK-002 EUREST CATERING FRESH FORK DECALS |
| UPFITA32 | FLIK-HOSP-006 FLIK HOSPITALITY DINING DECSALAS |
| UPFITA33 | KIM-ES-005 KIMCO-EUREST SERVICES DECALS - PRICES TBD |
| UPFITA34 | MOM-CAGR-008 MOMENTUM CANTEEN DECALS |
| UPFITA35 | MOM-CAGR-OPT-001 MOMENTUM CANTEEN PHONE NUMBER |
| UPFITA36 | MOR-006 MORRISON HEALTH CARE |

Standard Equipment

Powertrain

- Engine--Vortec 4.8L (293.3 cu.in.) V-8 OHV SMPI 16 valve engine
- Ignition Type--Electronic ignition
- Engine Location & Orientation--Longitudinal engine
- Engine Head & Block--Iron engine block, aluminum engine head
- Engine Cylinders--V-8
- Variable Valve Timing--Variable valve control
- recommended fuel--Regular unleaded
- Alternator--105 amp alternator
- Battery--600 CCA battery with run down protection

- Engine Oil Cooler--Engine oil cooler
- Transmission--6-speed electronic automatic transmission with overdrive
- Transmission Lock-up--Transmission lock-up
- Driver Selectable Program--Driver selection
- Tip-Auto--Sequential shift control
- Transmission Oil Cooler--HD transmission oil cooler
- Drive--Rear-wheel drive
- Traction Control--ABS and driveline traction control
- Axle Ratio--3.42 axle ratio
- Exhaust--Partial stainless steel exhaust
- Emission Type--Federal emissions
- Powertrain Type--None

Steering and Suspension

- Wheel Covers--Argent hub wheel covers
- Tires--LT245/75SR16.0E BSW AS front and rear tires
- Spare Tire--Underbody w/crankdown mounted full-size spare tire
- Spare Wheel--Steel spare wheel
- Wheels--Front and rear 16.0" x 6.50" gray steel wheels
- Steering--Hydraulic power-assist re-circulating ball steering
- Brakes--4-wheel disc brakes with front and rear vented discs
- Electronic Stability--StabiliTrak electronic stability
- Front Suspension Independence--Front independent suspension
- Front Suspension Type--Front short and long arm suspension
- Front Anti-Roll Bars--Front anti-roll bar
- Front Springs--Front coil springs
- Front Shocks--Gas-pressurized front shocks
- Rear Suspension Independence--Rigid rear axle
- Rear Suspension Type--Rear leaf suspension
- Rear Springs--Rear leaf springs
- Rear Shocks--Gas-pressurized rear shocks

Safety

- ABS--4-wheel anti-lock braking system with 4 ABS channels
- Safety Lights--Daytime running lights, center high mounted stop light
- Front Airbags--Dual airbags with passenger front-impact side cancellable airbag
- Side Impact Airbags--Dual seat mounted side airbags
- Overhead Airbag--Curtain 1st row overhead airbag
- Airbag Occupancy Sensor--Airbag occupancy sensor
- Seatbelts--Front height adjustable seatbelts
- Ignition Disable--PASS-Key III immobilizer security

Comfort and Convenience Features

- A/C & Heat--Air conditioning
- Radio--AM/FM stereo, clock, seek-scan, with MP3 decoder

- Speakers--2 speakers
- Radio Theft Deterrent--TheftLock radio theft deterrent
- Antenna--Fixed antenna
- Auxiliary Releases & Door Locks--Power door locks
- Rear Child Safety Locks--Child safety rear door locks
- Trunk/Hatch/Door Release--Tailgate/rear door lock included with power door locks
- Retained Accessory Power--Retained accessory power
- 12V DC Power Accessory Outlet--2 12V DC power outlets
- AC Power Outlet--AC power outlet
- Instrumentation--Analog instrumentation display
- Tachometer--Tachometer
- Oil Pressure Gauge--Oil pressure gauge
- Water Temp Gauge--Water temperature gauge
- Volt Gauge--Voltmeter gauge
- Systems Monitor--Systems monitor
- Trip Computer--Trip computer
- Trip Odometer--Trip odometer
- Engine Hour Meter--Engine hour meter
- Battery Warning--Battery warning
- Lights On Warning--Lights on warning
- Key in Ignition Warning--Key warning
- Low Fuel Warning--Low fuel warning
- Service Interval Warning--Service interval warning
- Low Tire Pressure Warning--Low tire pressure warning
- PRND in IP--PRND in IP
- Windows--Power front windows
- Tinted Windows--UV Protection
- 1-Touch Open--Driver 1-touch down window
- Windshield--Variable intermittent front windshield wipers
- Sunvisor Strip--Front windshield sun visor strip
- Dome Light--Dome light
- Variable IP Lighting--Variable IP lighting
- Other Console--Engine cover console with storage
- Instrument Panel Storage--Instrument panel bin
- Dashboard Storage--Dashboard storage
- Door Bins--Driver and passenger door bins
- Cargo Space Trim--Vinyl/rubber cargo floor, plastic trunk lid/rear cargo door
- Cargo Tie Downs--Cargo tie downs
- Cargo Light--Cargo light
- Cupholders--Front cupholder

Seating and Interior

- Seating Capacity--Capacity of 2

- Front Seats--Bucket front seats
- Front Head restraints--Fixed front head restraints
- Front Armrest--Driver and passenger front armrests
- Driver's Seat--4-way adjustable driver seat with manual reclining, manual fore/aft
- Passenger's Seat--4-way adjustable passenger seat with manual reclining, manual fore/aft
- Front Seat Trim--Vinyl faced front seats with vinyl side and back
- Headliner--Front cloth headliner
- Front Floor Trim--Full vinyl/rubber floor covering

Exterior Features

- Side Impact Bars--Side impact beams
- Front License Plate Bracket--Front license plate bracket
- Body Material--Fully galvanized steel body material
- Window Moldings--Black side window moldings
- Front Windshield Moldings--Black front windshield molding
- Door Handles--Black door handles
- Grille--Black grille
- Door Count--3 doors
- Right Rear Passenger Door--Split swing-out rear passenger's side door
- Rear Cargo Door--Split swing-out
- Exterior Mirrors--Dual manual black convex spotter folding outside mirrors
- Mirror Style--Regular style mirrors
- Bumpers--Front and rear black bumpers
- Rub Strips--Rear black bumper rub strip/fascia accent
- Rear Step Bumper--Rear step bumper
- Exterior Lights--Sealed beam halogen fully automatic headlamps with delay-off
- Paint--Clearcoat monotone paint

Warranty

- Basic--36 month/36,000 miles
- Powertrain--60 month/60,000 miles
- Corrosion Perforation--72 month/100,000 miles
- Roadside Assistance--60 month/60,000 miles
- Maintenance--24 month/24,000 miles

Dimensions and Capacities

- output--285 hp@5,400 rpm
- torque--295 lb.-ft. @4,600 rpm
- bore x stroke & compression ratio--3.8" bore x 3.3" stroke with a 9.08:1 compression ratio
- 1st gear ratio--4.030
- 2nd gear ratio--2.360
- 3rd gear ratio--1.530
- 4th gear ratio--1.150
- 5th gear ratio--.850
- 6th gear ratio--.670

- reverse gear ratio--3.060
- Traction Battery Type--None
- curb weight--5,578 lbs.
- GVWR--8,600lbs.
- Front GAWR--4,100 lbs.
- Rear GAWR--5,360 lbs.
- Front Axle Capacity--4,100 lbs.
- Rear Axle Capacity--5,360 lbs.
- Front Spring Rating--4,100 lbs.
- Rear Spring Rating--5,360 lbs.
- payload--3,000lbs.
- towing capacity--8,200 lbs.
- GCWR--14,600 lbs.
- front legroom--41.3"
- front headroom--39.8"
- front hiproom--65.5"
- front shoulder room--68.8"
- length--244.1"
- body width--79.2"
- body height--84.3"
- wheelbase--155"
- Frame Yield Strength--35,000.00 frame yield strength (psi)
- front track--68.1"
- rear track--67.7"
- turning radius--27.3'
- fuel tank--31.0 gal.
- interior cargo volume--284.4cu.ft.
- interior maximum cargo volume--284.4cu.ft.
- interior cargo height--53.4"
- interior cargo length--146.2"
- interior cargo minimum width--52.7"
- interior cargo maximum width--62.9"
- min ground clearance--7.1"
- max ground clearance--11.0"
- load floor height--27.8"

Vehicle Specifications are subject to change without notice. The actual Manufacturers Invoice for factory orders will be used as the basis for final vehicle pricing.