

Salina Supply Company

May 1, 2022

P-1

Myers

4" NEMA SUBMERSIBLE PUMPS

1/3, 1/2, 3/4, 1, 1 1/2, 2, 3 & 5 H.P. 5, 8, 12, 30 & 25 GPM 2 Or 3 Wire Versions

Recommended Operating Ranges For 4" Submersible Pumps All Pumps Have 1 1/4" Discharge

| Tank Pressure | 2 Wire Cat.# | 3 Wire Cat.# | Motor H.P. | Volts | GPM | Depth To Water | | | | | | | | | | | |
|---------------|--------------|--------------|------------|-------|-----|----------------|------|------|------|------|------|------|------|------|------|------|------|
| | | | | | | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 250 | 300 |
| 20/40 | 2ST52-12 | 3ST52-12 | 1/2 | 230 | 12 | | | 15.0 | 13.5 | 12.0 | 10.3 | 8.0 | | | | | |
| 20/40 | 2ST72-12 | 3ST72-12 | 3/4 | 230 | 12 | | | | 15.7 | 14.7 | 13.7 | 12.6 | 11.2 | 9.8 | 8.0 | | |
| 20/40 | 2ST102-12 | 3ST102-12 | 1 | 230 | 12 | | | | | | 15.5 | 14.7 | 13.7 | 12.7 | 11.9 | 8.7 | |
| 20/40 | 2ST152-12 | 3ST152-12 | 1 1/2 | 230 | 12 | | | | | | | | | | 15.6 | 14.2 | 12.6 |
| 20/40 | 2ST72-20 | 3ST72-20 | 3/4 | 230 | 20 | 23.5 | 22.0 | 20.0 | 17.0 | | | | | | | | |
| 20/40 | 2ST102-20 | 3ST102-20 | 1 | 230 | 20 | | 24.5 | 23.0 | 22.0 | 20.5 | 18.0 | 15.5 | | | | | |
| 20/40 | 2ST152-20 | 3ST152-20 | 1 1/2 | 230 | 20 | | | | 24.5 | 23.5 | 22.5 | 21.5 | 20.5 | 19.0 | 17.0 | | |
| 20/40 | 2ST102-25 | 3ST102-25 | 1 | 230 | 25 | | 27.7 | 23.5 | 17.5 | | | | | | | | |
| 20/40 | 2ST152-25 | 3ST152-25 | 1 1/2 | 230 | 25 | | | 30.5 | 27.1 | 24.0 | 19.6 | 15.3 | | | | | |
| 30/50 | 2ST52-8 | 3ST52-8 | 1/2 | 230 | 8 | 12.0 | 11.4 | 10.8 | 10.1 | 9.3 | 8.3 | 7.2 | 5.8 | | | | |
| 30/50 | 2ST72-8 | 3ST72-8 | 3/4 | 230 | 8 | | | | 11.5 | 11.1 | 10.6 | 10.0 | 9.5 | 8.8 | 8.0 | 5.5 | |
| 30/50 | 2ST52-12 | 3ST52-12 | 1/2 | 230 | 12 | | 14.5 | 13.0 | 11.5 | 9.8 | 7.2 | | | | | | |
| 30/50 | 2ST72-12 | 3ST72-12 | 3/4 | 230 | 12 | | | 15.5 | 14.5 | 13.4 | 12.2 | 10.9 | 9.4 | 7.5 | | | |
| 30/50 | 2ST102-12 | 3ST102-12 | 1 | 230 | 12 | | | | | 15.3 | 14.5 | 13.5 | 12.6 | 11.6 | 10.5 | | |
| 30/50 | 2ST152-12 | 3ST152-12 | 1 1/2 | 230 | 12 | | | | | | | | | 15.4 | 14.9 | 13.4 | 11.7 |
| 30/50 | 2ST72-20 | 3ST72-20 | 3/4 | 230 | 20 | 21.5 | 19.5 | 16.0 | | | | | | | | | |
| 30/50 | 2ST102-20 | 3ST102-20 | 1 | 230 | 20 | 24.0 | 23.0 | 21.5 | 20.0 | 17.5 | 14.5 | | | | | | |
| 30/50 | 2ST152-20 | 3ST152-20 | 1 1/2 | 230 | 20 | | | 24.5 | 23.5 | 22.5 | 21.5 | 20.0 | 18.5 | 16.5 | 14.5 | | |
| 30/50 | 2ST102-25 | 3ST102-25 | 1 | 230 | 25 | 26.7 | 21.8 | 16.1 | | | | | | | | | |
| 30/50 | 2ST152-25 | 3ST152-25 | 1 1/2 | 230 | 25 | | 30.0 | 26.6 | 23.1 | 19.1 | 15.0 | | | | | | |
| 40/60 | 2ST52-8 | 3ST52-8 | 1/2 | 230 | 8 | 11.4 | 10.8 | 10.1 | 9.3 | 8.3 | 7.1 | 5.7 | | | | | |
| 40/60 | 2ST72-8 | 3ST72-8 | 3/4 | 230 | 8 | | | 11.5 | 11.1 | 10.6 | 10.0 | 9.5 | 8.8 | 8.0 | 7.1 | | |
| 40/60 | 2ST52-12 | 3ST52-12 | 1/2 | 230 | 12 | 14.5 | 13.0 | 11.5 | 9.8 | | | | | | | | |
| 40/60 | 2ST72-12 | 3ST72-12 | 3/4 | 230 | 12 | | 15.5 | 14.5 | 13.4 | 12.2 | 10.9 | 9.4 | 7.5 | | | | |
| 40/60 | 2ST102-12 | 3ST102-12 | 1 | 230 | 12 | | | | 15.3 | 14.5 | 13.5 | 12.6 | 11.6 | 10.5 | 9.2 | | |
| 40/60 | 2ST152-12 | 3ST152-12 | 1 1/2 | 230 | 12 | | | | | | | | 15.4 | 14.9 | 14.3 | 12.8 | 11.0 |
| 40/60 | 2ST72-20 | 3ST72-20 | 3/4 | 230 | 20 | 19.5 | 16.0 | | | | | | | | | | |
| 40/60 | 2ST102-20 | 3ST102-20 | 1 | 230 | 20 | 23.0 | 21.5 | 20.0 | 17.5 | 14.5 | | | | | | | |
| 40/60 | 2ST152-20 | 3ST152-20 | 1 1/2 | 230 | 20 | | 24.5 | 23.5 | 22.5 | 21.5 | 20.0 | 18.5 | 16.5 | 14.5 | 12.5 | | |
| 40/60 | 2ST102-25 | 3ST102-25 | 1 | 230 | 25 | 21.4 | 15.5 | | | | | | | | | | |
| 40/60 | 2ST152-25 | 3ST152-25 | 1 1/2 | 230 | 25 | 30.0 | 26.2 | 22.8 | 19.0 | | | | | | | | |

1/2 H.P. Units Available In 115 Volt Also

| WIRE SIZING CHART 2 or 3 Wire Cable 60 Hz Service Entrance to Motor -Maximum Length in Feet) | MOTOR RATING | | AWG COPPER WIRE SIZE | | | | | | | | |
|---|--------------|-----|----------------------|------|------|------|------|------|------|------|------|
| | VOLTS | HP | 14 | 12 | 10 | 8 | 6 | 4 | 3 | 2 | 1 |
| | 115 | 1/2 | 100 | 160 | 250 | 390 | 620 | 960 | 1190 | 1460 | 1780 |
| 230 | 1/3 | 550 | 880 | 1390 | 2190 | 3400 | 5250 | 6520 | 7960 | 9690 | |
| | 1/2 | 400 | 650 | 1020 | 1610 | 2510 | 3880 | 4810 | 5880 | 7170 | |
| | 3/4 | 300 | 480 | 760 | 1200 | 1870 | 2890 | 3580 | 4370 | 5330 | |
| | 1 | 250 | 400 | 630 | 990 | 1540 | 2380 | 2960 | 3610 | 4410 | |
| | 1 1/2 | 190 | 310 | 480 | 770 | 1200 | 1870 | 2320 | 2850 | 3500 | |

PUMPS TANKS SOFTENERS



Myers SUBMERSIBLE PUMPS

PREDATOR SERIES ST 4" SUBMERSIBLE PUMPS

- STAINLESS STEEL PUMP SHELL, SHAFT, & COUPLING • 1¹/₄" NPT CAST STAINLESS STEEL DISCHARGE
- TEFLON® REINFORCED POLYESTER STAGING FOR BETTER HEAT DEFLECTION & LUBRICATION FOR LONGER LIFE IN SANDY & LOW YIELDING WELLS
- THERMAL OVERLOADS HELP EXTEND MOTOR LIFE BY SHUTTING DOWN AN OVERHEATING MOTOR
- PENTEK MOTORS WITH BUILT-IN LIGHTNING PROTECTION
- PENTEK MOTORS ARE APPROXIMATELY 20% MORE EFFICIENT WHEN USED WITH PENTEK CONTROL BOX

| SSC No. | Manuf No. | H.P. | GPM | Most Effective GPM Range | Factory Recommended Wires | Factory Recommended Voltage | Wgt. | Price Each |
|----------|---------------------|------|-----|--------------------------|---------------------------|-----------------------------|--------|-------------|
| 50A 5092 | 2ST51-12+P4 | .5 | 12 | 9 To 15 | 2 | 115 V | 33 Lbs | \$ 682.35 |
| 50A 5100 | 2ST52-8+P4 | .5 | 8 | 5 To 11 | 2 | 230 V | 34 Lbs | 745.93 |
| 50A 5107 | 2ST52-12+P4 | .5 | 12 | 9 To 15 | 2 | 230 V | 33 Lbs | 660.16 |
| 50A 5115 | 2ST72-8+P4 | .75 | 8 | 5 To 11 | 2 | 230 V | 38 Lbs | \$ 928.41 |
| 50A 5120 | 2ST72-12+P4 | .75 | 12 | 9 To 15 | 2 | 230 V | 37 Lbs | 873.08 |
| 50A 5122 | 2ST72-20+P4 | .75 | 20 | 14 To 24 | 2 | 230 V | 36 Lbs | 834.26 |
| 50A 5138 | 2ST102-12+P4 | 1 | 12 | 9 To 15 | 2 | 230 V | 40 Lbs | \$ 1,090.99 |
| 50A 5139 | 2ST102-20+P4 | 1 | 20 | 14 To 24 | 2 | 230 V | 40 Lbs | 965.78 |
| 50A 5147 | 3ST51-12+P4 | .5 | 12 | 9 To 15 | 3 | 115 V | 32 Lbs | \$ 645.96 |
| 50A 5157 | 3ST52-12+P4 | .5 | 12 | 9 To 15 | 3 | 230 V | 32 Lbs | 603.71 |
| 50A 5168 | 3ST72-12+P4 | .75 | 12 | 9 To 15 | 3 | 230 V | 35 Lbs | \$ 750.30 |
| 50A 5182 | 3ST102-12+P4 | 1 | 12 | 9 To 15 | 3 | 230 V | 40 Lbs | \$ 910.08 |
| 50A 5184 | 3ST102-20+P4 | 1 | 20 | 14 To 24 | 3 | 230 V | 38 Lbs | 881.82 |



Motors On Predator & Rustler Series Pumps Are Identical.

RUSTLER SERIES 4" SUBMERSIBLE PUMPS

- FILED REPLACEABLE MOTOR & PUMP END • WATER-COOLED NEMA MOTOR • PENTEK MOTOR
- STAINLESS STEEL PUMP/MOTOR SHELL • COMPOSITE PUMP INLET • COMPOSITE 1-1/4" DISCHARGE
- INSULATED GROUND • BUILT-IN CHECK VALVE

| SSC No. | Manuf No. | H.P. | GPM | Most Effective GPM Range | Factory Recommended Wires | Factory Recommended Voltage | Wgt. | Price Each |
|----------|------------------------|------|-----|--------------------------|---------------------------|-----------------------------|--------|------------|
| 50A 7151 | 2NFL51-12-P4 | .5 | 12 | 9 To 15 | 2 | 115 V | 31 Lbs | \$ 565.88 |
| 50A 7156 | 2NFL52-12-P4 | .5 | 12 | 9 To 15 | 2 | 230 V | 31 Lbs | 565.88 |
| 50A 7161 | 2NFL72-12-P4 | .75 | 12 | 9 To 15 | 2 | 230 V | 35 Lbs | \$ 691.09 |
| 50A 7162 | 2NFL72-20-P4-02 | .75 | 20 | 10 To 12 | 2 | 230 V | 35 Lbs | \$ 739.62 |
| 50A 7165 | 2NFL102-12-P4 | 1 | 12 | | 2 | 230 V | 36 Lbs | \$ 845.42 |
| 50A 7171 | 2NFL102-20-P4 | 1 | 20 | 14 To 24 | 2 | 230 V | 36 Lbs | 831.35 |



PENTEK CONTROL BOXES FOR MYERS PUMPS

| SSC No. | Manuf No. | H.P. | Voltage | Price Each |
|----------|-------------------|------|---------|------------|
| 50B 3536 | SMC-IR0511 | .5 | 115 V | \$ 112.78 |
| 50B 3611 | SMC-IR0521 | .5 | 230 V | 102.91 |
| 50B 3616 | SMC-IR0721 | .75 | 230 V | \$ 118.45 |
| 50B 3621 | SMC-IR0121 | 1 | 230 V | \$ 120.17 |
| 50B 3631 | SMC-CR1521 | 1.5 | 230 V | 175.91 |



PENTEK INTELLIDRIVE WATER PRESSURE CONTROL CENTER - 2 Wire, 3 Wire & 3 Phase In 1 Unit

| SSC No. | Manuf No. | H.P. Capability | Voltage | Price Each |
|----------|--------------|-----------------|---------------|-------------|
| 50B 5000 | PID10 | .5 to 1 | 190 V - 265 V | \$ 1,485.72 |



Myers SUBMERSIBLE PUMPS

S SERIES 4" SUBMERSIBLE PUMPS

ALL HEAVY DUTY 304 STAINLESS STEEL CONSTRUCTION • EASY INSTALLATION • TOUGH CORROSION RESISTANT DESIGN
 ABRASIVE HANDLING DESIGN FOR LONG LIFE • POWERFUL PERFORMANCE • SLIM 3³/₄" DIAMETER EASILY FITS INTO 4" WELLS
 NEMA MOUNTING DIMENSIONS • BUNA-N SHAFT BEARING • BUILT-IN CHECK VALVE




| SSC No. | Manuf No. | | H.P. | GPM | Discharge | Wires | Volts/Ph | Wgt. Lbs. | Price Each |
|----------|-------------------|-----------------------|------|-----|---------------------------------|-------|----------|-----------|------------|
| 50A 7174 | 2S51-10-P4 | ASSEMBLED PUMP | .5 | 10 | 1 ¹ / ₄ " | 2 | 115V/1 | 25 | \$ 646.18 |
| 50A 7175 | 2S52-10-P4 | ASSEMBLED PUMP | .5 | 10 | 1 ¹ / ₄ " | 2 | 230V/1 | 25 | 646.18 |

For More Information On These Products Or On Products Not Listed,
 Call *Salina Supply Company* At (785) 823-2221

Myers JET PUMPS

HJ SERIES DEEP WELL JET PUMP

115/230 VOLT • PUMP WITH HEAVY DUTY CAST IRON CASE & MOTOR BRACKET
 DUAL COMPARTMENT, DOUBLE-BALL BEARING MOTOR WITH VOLTAGE SELECTOR SWITCH
 DUAL ADJUSTMENT PRESSURE SWITCH INCLUDES PRESSURE REGULATOR • PRIMING SCREEN
 STAINLESS STEEL IMPELLER WEAR RING • BUILT-IN OVERLOAD PROTECTION

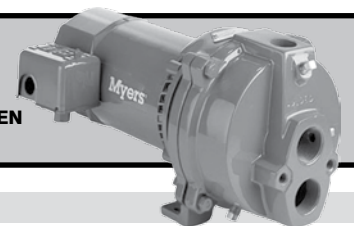

| SSC No. | Manuf No. | H.P. | Discharge | Drop Pipe | Foot Valve | Voltage | Lbs | Price Each |
|----------|--------------|------|-----------|--------------------------------------|------------|-----------|-----|------------|
| 50A 1110 | HJ50D | .5 | 1" | 1 ¹ / ₄ " x 1" | 1" | 115V/230V | 44 | \$ 781.87 |

| | | | | | | | | |
|----------|---------------|-----|----|--------------------------------------|---------------------------------|-----------|----|-----------|
| 50A 1160 | HJ75D | .75 | 1" | 1 ¹ / ₄ " x 1" | 1 ¹ / ₄ " | 115V/230V | 58 | \$ 867.50 |
| 50A 1175 | HJ100D | 1 | 1" | 1 ¹ / ₄ " x 1" | 1 ¹ / ₄ " | 115V/230V | 75 | 1,055.88 |

| Pump | HJ50D | HJ75D | HJ100D |
|-------------|-------|-------|--------|
| Jet Package | DW50 | DW75 | DW100 |
| Max Depth | 80 | 100 | 110 |

HJ SERIES SHALLOW WELL JET PUMP

115/230 VOLT • PUMP WITH HEAVY DUTY CAST IRON CASE & MOTOR BRACKET
 DUAL COMPARTMENT, DOUBLE-BALL BEARING MOTOR WITH VOLTAGE SELECTOR SWITCH
 DUAL ADJUSTMENT PRESSURE SWITCH INCLUDES PRIMING TEE • PRIMING SCREEN
 STAINLESS STEEL IMPELLER WEAR RING • BUILT-IN OVERLOAD PROTECTION



| SSC No. | Manuf No. | H.P. | Discharge | Pump Inlet | Foot Valve | Voltage | Lbs | Price Each |
|----------|--------------|------|-----------|---------------------------------|---------------------------------|-----------|-----|------------|
| 50A 1150 | HJ50S | .5 | 1" | 1 ¹ / ₄ " | 1 ¹ / ₄ " | 115V/230V | 44 | \$ 848.40 |

| | | | | | | | | |
|----------|---------------|-----|----|---------------------------------|---------------------------------|-----------|----|-----------|
| 50A 1170 | HJ75S | .75 | 1" | 1 ¹ / ₄ " | 1 ¹ / ₄ " | 115V/230V | 58 | \$ 867.50 |
| 50A 1180 | HJ100S | 1 | 1" | 1 ¹ / ₄ " | 1 ¹ / ₄ " | 115V/230V | 75 | 1,055.88 |

| Pump | HJ50S | HJ75S | HJ100S | |
|--------------|------------------------|---------|---------|---------|
| Press. Set | 20/40 | 20/40 | 20/40 | |
| Disch. PSI | GPM@Discharge Pressure | | | |
| Suction Lift | 5' | 14.5@30 | 23.5@30 | 27.5@30 |
| | 15' | 11.5@30 | 17.5@30 | 21.0@30 |
| | 25' | 7.0@30 | 10.5@40 | 13.0@40 |

TWIN TYPE EJECTOR PACKAGES

| | | | | | |
|----------|--------------|-----|--------|-----------------|-----------|
| 50B 1180 | DW50 | 1/2 | Bronze | 4" Well Minimum | \$ 315.18 |
| 50B 0580 | DW75 | 3/4 | Bronze | 4" Well Minimum | 315.18 |
| 50B 1360 | DW100 | 1 | Bronze | 4" Well Minimum | 293.58 |





Myers CENTRIFUGAL PUMP • WATER PRESSURE BOOSTER PUMP

CTJ SERIES HIGH PRESSURE CENTRIFUGAL PUMP

- 1" NPT DISC • 1 1/4" SUCTION • HEADS UP TO 140' • CAPACITIES TO 95 GPM
- RATED TO 212° F • 25 PSI MAX WORKING PRESSURE • BRASS IMPELLER
- HEAVY DUTY CAST IRON CONSTRUCTION • BACK PULL-OUT DESIGN
- DEPENDABLE, CONTINUOUS DUTY RATED DOUBLE BALL BEARING MOTOR

Myers

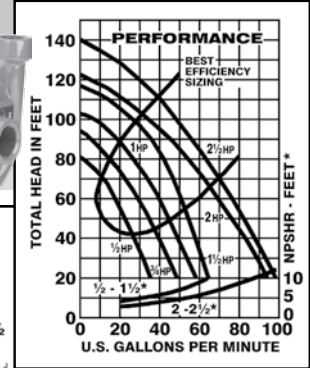

| SSC No. | Manuf No. | H.P. | Voltage | Phase | A | Lbs | Price Each |
|----------|----------------|-------|-----------|-------|---------|-----|-------------|
| 50A 3260 | CTJ05B | 1/2 | 115V/230V | 1 | 13 7/8" | 45 | \$ 933.87 |
| 50A 3310 | CTJ07B | 3/4 | 115V/230V | 1 | 14 5/8" | 52 | 1,022.44 |
| 50A 3360 | CTJ10B | 1 | 115V/230V | 1 | 15 1/8" | 55 | \$ 1,138.86 |
| 50A 3410 | CTJ10B3 | 1 | 220V/440V | 3 | 15 1/8" | 55 | 1,198.76 |
| 50A 3460 | CTJ15B | 1 1/2 | 115V/230V | 1 | 15 1/8" | 77 | \$ 1,277.21 |
| 50A 3510 | CTJ15B3 | 1 1/2 | 220V/440V | 3 | 15 1/8" | 77 | 1,333.73 |

MIB0715S MYERS SERIES INTELLIBOOST® PUMP

VARIABLE SPEED WATER PRESSURE BOOSTER ALL-IN-ONE UNIT


- .75 HP • 230 V • 1 PH • 1" SUCTION • 1" DISCHARGE • BOOSTS PRESSURE UP TO 60 PSI
- PROVIDES CONSTANT PRESSURE • EASY TO USE LCD DISPLAY • BUILT-IN CHECK VALVE
- STAINLESS STEEL PUMP BODY • PRE-ASSEMBLED 2 LITER TANK • 1 YEAR WARRANTY

Myers



| SSC No. | Manuf No. | H.P. | Voltage | Phase | Length | Lbs | Price Each |
|----------|-----------------|------|---------|-------|---------|-----|-------------|
| 50B 5010 | MIB0715S | .75 | 230V | 1 | 20 7/8" | 30 | \$ 1,400.17 |

| BOOSTER SET AT | | | | | |
|-----------------------------|--------------|--------------|--------------|--------------|--------------|
| 50 | 60 | 50 | 60 | 50 | 60 |
| INCOMING HOUSEHOLD PRESSURE | | | | | |
| 20 | | 30 | | 40 | |
| BOOSTED HOUSEHOLD PRESSURE | | | | | |
| 50 PSI | 60 PSI | 50 PSI | 60 PSI | 50 PSI | 60 PSI |
| HOUSEHOLD WATER USAGE | | | | | |
| Up To 13 GPM | Up To 10 GPM | Up To 19 GPM | Up To 15 GPM | Up To 21 GPM | Up To 19 GPM |



ResiBoost COMPLETE PACKAGE

COMPLETE PACKAGED RESIDENTIAL CONSTANT PRESSURE BOOSTING SYSTEM


- 13 GPM AT 60 PSI • 22 GPM MAXIMUM • 5 STAGE • FOR CONTINUOUS OPERATION
- STAINLESS STEEL PUMP • BUILT-IN CHECK VALVE • PRE-PROGRAMMED • LCD DISPLAY
- CONTROL WITH PUSH BUTTON SETTINGS • RED LED SIGNAL LIGHTS • BUILT-IN MEMORY
- PUMP SHIPS WITH A 2-LITER PRESSURE TANK THAT MUST BE FIELD INSTALLED



| SSC No. | Manuf No. | H.P. | Voltage | Phase | TEMP RATING | Lbs | Price Each |
|----------|-------------------|------|---------|-------|--------------|-----|-------------|
| 50B 5030 | 13159RB115 | 1 | 115V | 1 | 32°F - 122°F | 30 | \$ 1,254.01 |

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.

For More Information On
These Pumps Or On Products Not Listed,
Call **Salina Supply Company** At
(785) 823-2221

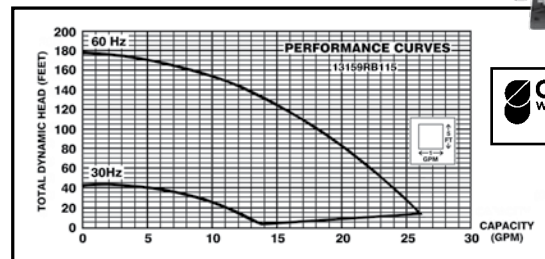

GOULDS
WATER TECHNOLOGY
a xylem brand

American Granby Inc. PUMP & TANK ACCESSORIES **MERRILL**

CAST IRON WELL SEALS
1 OR 2 HOLE DROP PIPE • SPLIT TOP

| SSC No. | Manuf No. | Size | Price Each |
|--|------------------|-------------|------------|
| SINGLE DROP FOR SUBMERSIBLE PUMPS | | | |
| 50F 0681 | SWS4X1 | 4" x 1" | \$ 27.93 |
| 50F 0811 | SWS5X1 | 5" x 1" | \$ 39.75 |
| 50F 0831 | SWS5X11/4 | 5" x 1 1/4" | 39.75 |
| 50F 0861 | SWS6X1 | 6" x 1" | \$ 52.88 |
| 50F 0881 | SWS6X11/4 | 6" x 1 1/4" | 52.88 |



DOUBLE DROP FOR JET PUMPS

| | | | |
|----------|-------------------|------------------|----------|
| 50F 0981 | JWS5X114X1 | 5" x 1 1/4" x 1" | \$ 39.75 |
|----------|-------------------|------------------|----------|



WATERTIGHT WELL CAP
CAST ALUMINUM & ABS • SOLVENT WELD

| SSC No. | Manuf No. | Size | Price Each |
|----------|------------|------|------------|
| 50F 2067 | SC4 | 4" | \$ 36.10 |
| 50F 2069 | SC5 | 5" | 46.86 |
| 50F 2071 | SC6 | 6" | 49.70 |



ABS PLASTIC WELL SEAL
EXTRA THICK PVC GLAND • ZINC PLATED STEEL BOLTS

| SSC No. | Manuf No. | Size | Price Each |
|----------|-------------------|-------------|------------|
| 50F 1741 | PSWS4X1 | 4" x 1" | \$ 20.56 |
| 50F 1761 | PSWS4X11/4 | 4" x 1 1/4" | 20.56 |
| 50F 1811 | PSWS5X1 | 5" x 1" | \$ 31.42 |
| 50F 1841 | PSWS5X11/4 | 5" x 1 1/4" | 31.42 |
| 50F 1861 | PSWS6X1 | 6" x 1" | \$ 30.60 |
| 50F 1881 | PSWS6X2 | 6" x 2" | 30.60 |



VENTED WELL CAPS
PVC/STEEL CASING • WATERTIGHT

| SSC No. | Manuf No. | Size | Price Each |
|----------|----------------|------|------------|
| 50F 2066 | WCOS400 | 4" | \$ 73.50 |
| 50F 2068 | WCOS500 | 5" | 80.46 |
| 50F 2070 | WCOS600 | 6" | 90.88 |




4" CLEARWAY PITLESS ADAPTER
EASY INSTALLATION BY CUTTING 2 3/4" HOLE & CLAMPING ON

| SSC No. | Manuf No. | Size | Price Each |
|----------|----------------|------|----------------------------------|
| 50F 2075 | CW-4-10 | 4" | Simple Slip Fit Insert \$ 190.34 |



NO LEAD CAST BRONZE PITLESS ADAPTERS
TOP BAR SLIDE STOP • CAST FROM 81% COPPER CONTENT ALLOY NO LEAD BRONZE • FOR 5" TO 12" CASINGS

| SSC No. | Manuf No. | Size | Price Each |
|----------|-----------------|-------------------|-----------------------------|
| 50F 2081 | PT300NL | 5" to 8" x 1" | For Wells To 400' \$ 75.15 |
| 50F 2084 | PT825NL | 5" to 8" x 1 1/4" | For Wells To 400' 134.53 |
| 50F 2089 | PT3000NL | 6" to 12" x 2" | For Wells To 600' \$ 444.15 |



NO LEAD CAST BRONZE 2 PIPE JET PITLESS ADAPTER
U-CUP SLIDE STOP • CAST FROM 81% COPPER CONTENT ALLOY NO LEAD BRONZE • FOR 4" TO 12" CASING

| SSC No. | Manuf No. | Size | Price Each |
|----------|----------------|-------------|--------------------------------------|
| 50F 2088 | PT900NL | 1" x 1 1/4" | 2 Pipe Jet Pitless Adapter \$ 383.72 |




PVC TORQUE ARRESTOR
2 PIECE • WITH 2 STAINLESS STEEL CLAMPS

| SSC No. | Manuf No. | Length | Price Each |
|----------|-------------|---------|------------|
| 50F 2161 | TA48 | 11 3/4" | \$ 9.90 |



FVNL BRASS FOOT VALVE
LEAD FREE • ROUGH BODY FINISH

| SSC No. | Manuf No. | Size | Price Each |
|----------|------------------|--------|------------|
| 60G 0601 | FVNL100BS | 1" | \$ 15.58 |
| 60G 0651 | FVNL125BS | 1 1/4" | 21.76 |
| 60G 0701 | FVNL150BS | 1 1/2" | 31.20 |
| 60G 0751 | FVNL200BS | 2" | 45.90 |



SNAP-IN CABLE GUARD
TWO CABLE HOLES • FITS 4"-6" CASING

| SSC No. | Manuf No. | Casing I.D. | Price Each |
|----------|------------|-------------|------------|
| 50F 2171 | MG6 | 4" - 6" | \$.74 |



continued on next page

 American Granby Inc. **PUMP & TANK ACCESSORIES**

NO LEAD CHECK VALVES FOR WATER WELL SYSTEMS

BUNA-N O-RING • STAINLESS STEEL SPRINGS, WASHERS, LOCKNUTS • DELRIN POPPET STEM GUIDE • 200 PSI WOG W.P.



| SSC No. | Manuf No. | Size | Tap | Finish | Price Each |
|---|------------------|--------|-----|-------------------|------------|
| CVNL-BS SERIES NO LEAD BRASS CHECK VALVES COLD WATER APPLICATIONS ONLY | | | | | |
| 60G 0091 | CVNL50BS | 1/2" | | Rough Body Finish | \$ 9.64 |
| 60G 0101 | CVNL75BS | 3/4" | | Rough Body Finish | 12.90 |
| 60G 0151 | CVNL100BS | 1" | | Rough Body Finish | 17.94 |
| 60G 0201 | CVNL125BS | 1 1/4" | | Rough Body Finish | 23.10 |
| 60G 0251 | CVNL150BS | 1 1/2" | | Rough Body Finish | 34.42 |
| 60G 0301 | CVNL200BS | 2" | | Rough Body Finish | 59.11 |



CVNL-BS

SSCV SERIES STAINLESS STEEL CHECK VALVE COLD WATER APPLICATIONS ONLY • VITON O-RING

SSCV

| | | | | | |
|----------|------------------|-----------------|--|-----------------------------|----------|
| 60G 0231 | SSCVS1025 | 1 1/4" M x 1" F | | 304 Stainless Steel Casting | \$ 40.08 |
|----------|------------------|-----------------|--|-----------------------------|----------|



CVMNL-BS

CVMNL-BS SERIES BRASS SUBMERSIBLE CHECK VALVE COLD WATER APPLICATIONS ONLY

| | | | | | |
|----------|--------------------|---------------------|--|-------------------|----------|
| 60G 0271 | CVMNL1252BS | 1 1/4" M x 1 1/4" F | | Rough Body Finish | \$ 36.70 |
|----------|--------------------|---------------------|--|-------------------|----------|

NO LEAD TAPPED CHECK VALVES FOR WATER WELL SYSTEMS

BUNA-N O-RING • STAINLESS STEEL SPRINGS, WASHERS, LOCKNUTS • DELRIN POPPET STEM GUIDE • 200 PSI WOG W.P.



| SSC No. | Manuf No. | Size | Tap | Finish | Price Each |
|--|--------------------|--------|----------------------------------|-------------------|------------|
| CVT-1B SERIES BRASS SINGLE TAP CHECK VALVE COLD WATER APPLICATIONS ONLY | | | | | |
| 60G 0351 | CVTNL1001BS | 1" | 1/8" Inlet Tap | Rough Body Finish | \$ 25.75 |
| CVRT-2BS SERIES BRASS DOUBLE TAP CHECK VALVE COLD WATER APPLICATIONS ONLY | | | | | |
| 60G 0551 | CVTNL1252BS | 1 1/4" | 1/8" Inlet Tap & 1/4" Outlet Tap | Rough Body Finish | \$ 31.99 |



CVRT-2BS

WIRE SPLICE KITS
HEATSHRINK OR COMPRESSION TYPE



| SSC No. | Manuf No. | Wire | Wire Size | Price Each |
|------------------------------------|----------------------|------|-----------|------------|
| HEATSHRINK WIRE SPLICE KITS | | | | |
| 50F 2176 | HSCL3 | 3 | 10-12-14 | \$ 2.20 |
| 50F 2181 | HSCL4 | 4 | 10-12-14 | 2.94 |
| 50F 2178 | LHS4 HVY DUTY | 4 | 8-6-4-2 | \$ 9.58 |



COMPRESSION TYPE WIRE SPLICE KITS

| | | | | |
|----------|------------|---|----------|---------|
| 50F 2191 | SK2 | 2 | 10-12-14 | \$ 3.94 |
| 50F 2186 | SK3 | 3 | 10-12-14 | 5.92 |



BRAIDED SAFETY ROPE
BLUE & WHITE • POLYPROPYLENE

| SSC No. | Manuf No. | Size | PRICE PER FOOT |
|----------|-----------------|------|----------------|
| 50F 2196 | MR25-500 | 1/4" | \$.06 |

| SSC No. | Manuf No. | Size | PRICE PER SPOOL |
|----------|-----------------|-------------|-----------------|
| 50F 2197 | MR25-500 | 1/4" x 500' | \$ 27.92 |



For More Information On These Products Or
On Products Not Listed, Call
Salina Supply Co. At (785) 823-2221

SUBMERSIBLE PUMP CABLE

| SSC No. | Manuf No. | Wire | Gauge | Length | PRICE PER FOOT |
|----------|---------------|-----------|-------|--------|-----------------------|
| 50G 0400 | 10-2+G | 77210 PVC | 2 | 10 | 500' 56370702 \$.87 |
| 50G 0600 | 12-2+G | 77206 PVC | 2 | 12 | 500' 56370502 .56 |
| 50G 2100 | 10-3+G | 77211 PVC | 3 | 10 | 500' 56370802 \$ 1.09 |
| 50G 2400 | 12-3+G | 77207 PVC | 3 | 12 | 500' 56370602 .76 |

| SSC No. | Manuf No. | Wire | Gauge | Length | PRICE PER SPOOL |
|----------|---------------|-----------|-------|--------|-------------------------|
| 50G 0615 | 12-2+G | 77206 PVC | 2 | 12 | 500' 56370502 \$ 281.93 |
| 50G 2415 | 12-3+G | 77207 PVC | 3 | 12 | 500' 56370602 623.84 |




continued on next page

American Granby Inc. PUMP & TANK ACCESSORIES **MERRILL**




NO LEAD PRESSURE SWITCHES
 FOR ALL TYPES OF PUMPS • DIAPHRAGM ACTUATED • 1/4" FPT CONNECTION • STANDARD SWITCH • CAPTIVE COVER THUMB SCREW
 TERMINAL & GROUND SCREWS COMBINATION SLOTTED, PHILLIPS HEAD • BLACK PLASTIC NEMA 1 GENERAL PURPOSE ENCLOSURE

| SSC No. | Manuf No. | Factory Press. Setting ON/OFF | Cut-Out Range | Max HP-1 Phase AC | | Max HP-3 Phase AC | | Price Each |
|----------|---------------|-------------------------------|---------------|-------------------|-------|-------------------|-------|------------|
| | | | | 110 V | 220 V | 220 V | 440 V | |
| 50F 3667 | PS2040 | 20/40 PSI | 20-65 PSI | 1 | 1 1/2 | 2 | --- | \$ 11.70 |
| 50F 3821 | PS3050 | 30/50 PSI | 20-65 PSI | 1 | 1 1/2 | 2 | --- | 11.70 |
| 50F 3826 | PS4060 | 40/60 PSI | 20-65 PSI | 1 | 1 1/2 | 2 | --- | 11.70 |




MERRILL NO LEAD PRESSURE SWITCHES
 CAPTIVE NUT ON COVER • PRESSURE SWITCH PIPE CONNECTION 1/4" FEMALE NPT • EACH TURN OF THE ADJ SCREW = 2 PSI
 CONTACT POINTS OPEN ON CUT-OUT PRESSURE - SWITCH OFF • POINTS CLOSE ON CUT-IN OR PRESSURE DROP - SWITCH ON

| SSC No. | Manuf No. | Factory Press. Setting ON/OFF | Cut-Out Range | Max HP-1 Phase AC | | Max HP-3 Phase AC | | Price Each |
|---|-------------------|-------------------------------|---------------|-------------------|-------|-------------------|-------|------------|
| | | | | 110 V | 220 V | 220 V | 440 V | |
| PRESSURE SWITCH WITH MANUAL LEVER & LOW WATER CUT OFF FOR DOMESTIC WATER PUMPS | | | | | | | | |
| 50F 4115 | MPSM43050 | 30/50 PSI | 34-65 PSI | 1 | 1 1/2 | 2 | --- | \$ 19.36 |
| HEAVY DUTY PRESSURE SWITCHES FOR LARGE OR HIGH PRESSURE PUMPS | | | | | | | | |
| 50F 4135 | MPSHD3050 | 30/50 PSI | | 2 | 3 | 5 | 5 | \$ 23.38 |
| 50F 4145 | MPSHD4060 | 40/60 PSI | | 2 | 3 | 5 | --- | 23.38 |
| EXTRA HEAVY DUTY NO LEAD PRESSURE SWITCH | | | | | | | | |
| 50F 4150 | MPSXHD6080 | 60/80 PSI | | 2 | 3 | 5 | --- | \$ 78.43 |


2" PRESSURE GAUGE
 TO BE USED WITH AIR OR WATER ONLY • MAXIMUM ACCURACY (+/- 3-2-3%)

| SSC No. | Manuf No. | Connection | Pressure Range | Dial Size | Price Each |
|----------|---------------------|------------|----------------|-----------|------------|
| 50F 4211 | EIPG100-4LNL | 1/4" NPT | 100 PSI Max | 2" Dial | \$ 3.52 |




LIQUID LEVEL CONTROL RELAY
 1 HP CONTACT CAPACITY • 110/220 V

| SSC No. | Manuf No. | Price Each |
|----------|---------------------|------------|
| 50F 7920 | 1500GL1S7N1X | \$ 359.00 |






ELECTRODE
 STAINLESS STEEL WITH SHIELD

| SSC No. | Manuf No. | Price Each |
|----------|----------------|------------|
| 50F 7960 | 6013-W6 | \$ 41.62 |




LEAD FREE DOLE FLOW CONTROL VALVES
 MAX SYSTEM PRESSURE 200 PSI • LEAD FREE • FLOW RATED MAINTAINED WITHIN +/- 15% UP TO A PRESSURE DROP OF 125 PSI

| SSC No. | Manuf No. | GPM | Threshold Press | Inlet/Outlet | Overall Length | Housing | Price Each |
|----------|---------------|------|-----------------|--------------|----------------|---------------------|------------|
| 50F 9871 | GC3.0 | 3 | 15-25 PSI | 3/4" FNPT | 2.28" | Nickel Plated Brass | \$ 33.28 |
| 50F 9881 | GC5.0 | 5 | 15-25 PSI | 3/4" FNPT | 2.28" | Nickel Plated Brass | 33.28 |
| 50F 9883 | GC7.0 | 7 | 15-25 PSI | 3/4" FNPT | 2.28" | Nickel Plated Brass | 33.28 |
| 50F 9899 | GC10 | 10 | 15-25 PSI | 3/4" FNPT | 2.28" | Nickel Plated Brass | 33.28 |
| 50F 9893 | GC11.5 | 11.5 | 15-25 PSI | 3/4" FNPT | 2.28" | Nickel Plated Brass | 33.28 |
| 50F 7966 | GX3.0 | 3 | 15-25 PSI | 1" FNPT | 2.75" | Nickel Plated Brass | \$ 50.14 |
| 50F 7965 | GX5.0 | 5 | 15-25 PSI | 1" FNPT | 2.75" | Nickel Plated Brass | 50.14 |
| 50F 7964 | GX7.0 | 7 | 15-25 PSI | 1" FNPT | 2.75" | Nickel Plated Brass | 50.14 |
| 50F 9884 | GX6.0 | 6 | 15-25 PSI | 1" FNPT | 2.75" | Nickel Plated Brass | 50.14 |
| 50F 9898 | GX15 | 15 | 15-25 PSI | 1" FNPT | 2.75" | Nickel Plated Brass | 50.14 |
| 50F 9897 | GP20 | 20 | 15-25 PSI | 1 1/4" MNPT | 3" | Zinc Plated Steel | \$ 119.51 |

WATTS PUMP & TANK ACCESSORIES

STANDARD DUTY MECHANICAL FLOAT VALVES WITH LOCKNUT & GASKET



| SSC No. | Manuf No. | Pipe Size | Stem Fitting Thread | Size | Wgt. | Price Each |
|----------|---------------|-----------|---------------------|-------------|---------|------------|
| 50F 4600 | ST500 | 1/2" | 1/4-20 | 3 1/2" x 2" | 0.7 lbs | \$ 90.47 |
| 50F 4610 | ST750 | 3/4" | 1/4-20 | 4" x 2" | 1.0 lbs | 111.95 |
| 50F 4620 | ST1000 | 1" | 1/4-20 | 3" x 4" | 1.9 lbs | \$ 176.59 |
| 50F 4630 | ST1250 | 1 1/4" | 3/8-16 | 5 1/2" x 4" | 2.3 lbs | 315.17 |

BRONZE STEMS




| SSC No. | Manuf No. | Pipe Size | Stem Fitting Thread Valve End | Stem Fitting Thread Float End | Price Each |
|----------|--------------------|-----------|-------------------------------|-------------------------------|------------|
| 50F 4632 | K-STEM-11 | 10" | 1/4-20 | 1/4-20 | \$ 26.38 |
| 50F 4634 | K-STEM-12.5 | 12" | 5/16-18 | 3/8-16 | \$ 38.31 |
| 50F 4636 | K-STEM-13 | 12" | 3/8-16 | 3/8-16 | 38.04 |

COPPER FLOAT BALLS



| SSC No. | Manuf No. | Diameter | Thread Conn. | Buoyancy (oz) | Wgt. | Price Each |
|----------|------------|----------|--------------|---------------|---------|------------|
| 50F 4640 | C5 | 5" | 1/4-20 | 30 | 0.4 lbs | \$ 123.34 |
| 50F 4650 | C6 | 6" | 1/4-20 | | 0.5 lbs | 143.46 |
| 50F 4660 | C8 | 8" | 3/8-16 | 126 | 1.3 lbs | \$ 385.28 |
| 50F 4670 | C10 | 10" | 3/8-16 | 250 | 1.5 lbs | 741.19 |

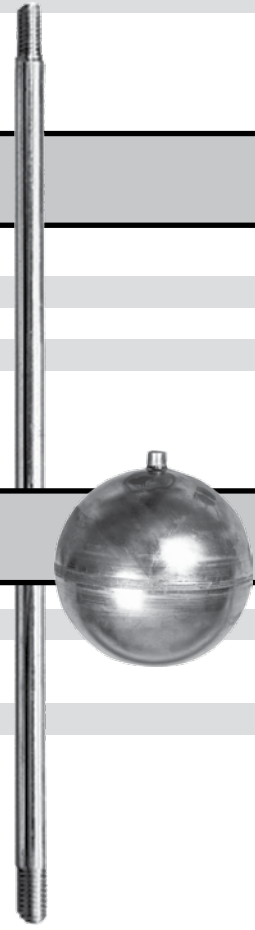

For More Information On These Products Or On Products Not Listed,
Call *Salina Supply Company* At (785) 823-2221

PRESSURE TANKS • TANK TEES

PENTAIR PRO-SOURCE FIBERWOUND PRESSURE TANKS

- DURABLE COMPOSITE CONSTRUCTION • SEAMLESS, DURABLE AIR CELL • MOLDED POLYPROPYLENE BASE • REPLACEABLE AIR CELL
- STAINLESS STEEL SERVICE CONN • 125 PSI MAX OPERATING PRESS • 38 PSI FACTORY PRE-CHARGE • 120°F MAX WATER TEMP

| SSC No. | Manuf No. | Vol Gals | Drawdown Gals | | | Precharge PSI | Tank Diameter | Tank Height | Base To Floor | Conn. | Wgt Lbs | Price Each |
|----------|-------------------|----------|---------------|-------|-------|---------------|---------------|-------------|---------------|----------|---------|-------------|
| | | | 20-40 | 30-50 | 40-60 | | | | | | | |
| 50H 0101 | PSC-20-6 | 19.8 | 6.7 | 5.9 | 5.1 | 38 | 16.0 | 34.1 | 1.75 | 1" F | 27 | \$ 411.40 |
| 50H 0112 | PSC-30-9 | 29.5 | 10.0 | 8.9 | 7.7 | 38 | 16.0 | 46.3 | 1.75 | 1" F | 25 | 600.08 |
| 50H 0113 | PSC-40-12 | 40.3 | 13.7 | 12.1 | 10.5 | 38 | 16.0 | 59.0 | 1.75 | 1" F | 42 | 597.24 |
| 50H 0136 | PSC-60-20 | 60.0 | 20.4 | 18.0 | 15.6 | 38 | 24.0 | 44.0 | 2.25 | 1 1/4" F | 63 | 1,001.54 |
| 50H 0139 | PSC-85-25 | 86.7 | 29.5 | 26.0 | 22.5 | 38 | 24.0 | 57.2 | 2.25 | 1 1/4" F | 76 | \$ 1,041.97 |
| 50H 0141 | PSC-119-35 | 119.7 | 40.7 | 35.9 | 31.1 | 38 | 24.0 | 75.4 | 2.25 | 1 1/4" F | 128 | 1,330.66 |

Dimensions In Inches



PUMP MATE PRE-PRESSURIZED DIAPHRAGM TANKS

- FREE STANDING OR INLINE MODELS • DRAWN STEEL CONSTRUCTION • POWDER COATED WATER CHAMBER • DIAPHRAGM OPERATION
- ROTATING CORROSION RESISTANT BASE LIGHTWEIGHT • MAX WORKING PRESSURE 100 PSI • 5-YEAR WARRANTY

| SSC No. | Manuf No. | Vol Gals | Drawdown Gals | | | Precharge PSI | Tank Diameter | Tank Height | Base To Floor | Conn. | Wgt Lbs | Price Each |
|----------------------|----------------|----------|---------------|-------|-------|---------------|---------------|--------------------|---------------|--------|---------|------------|
| | | | 20-40 | 30-50 | 40-60 | | | | | | | |
| IN-LINE TANKS | | | | | | | | | | | | |
| 50H 0200 | SPMDI-2 | 2 | 0.7 | 0.6 | 0.5 | 38 | 8 1/4 | 10 ³ 16 | | 3/4" M | 5 | \$ 143.68 |
| 50H 0205 | SPMDI-7 | 7.3 | 2.7 | 2.3 | 2.0 | 38 | 11 | 21 1/8 | | 3/4" M | 14 | 278.03 |

FREE STANDING TANKS • PLASTIC BASE

| | | | | | | | | | | | | |
|----------|-----------------|-----|------|------|------|----|--------------------------------|--------------------------------|-------|----------|-----|-----------|
| 50H 0210 | SPMD-20 | 20 | 7.4 | 6.2 | 5.4 | 38 | 15 ³ / ₈ | 32 ³ / ₄ | 2 1/4 | 1" F | 30 | \$ 406.79 |
| 50H 0215 | SPMD-31 | 31 | 11.4 | 9.6 | 9.6 | 38 | 15 ³ / ₈ | 45 1/2 | 2 1/4 | 1" F | 40 | 546.74 |
| 50H 0220 | SPMD-36 | 36 | 13.3 | 11.2 | 9.7 | 38 | 20 | 32 ³ / ₈ | 2 1/4 | 1 1/4" F | 45 | 725.87 |
| 50H 0225 | SPMD-52 | 52 | 19.2 | 16.1 | 14.0 | 38 | 23 ³ / ₈ | 38 ⁵ / ₈ | 2 1/4 | 1 1/4" F | 77 | 970.32 |
| 50H 0230 | SPMD-86 | 86 | 31.8 | 26.7 | 23.2 | 38 | 23 ³ / ₈ | 59 | 2 1/4 | 1 1/4" F | 105 | 1,410.70 |
| 50H 0235 | SPMD-119 | 119 | 44.2 | 37.0 | 32.3 | 38 | 26 | 61 1/4 | 2 1/2 | 1 1/4" F | 111 | 1,505.19 |

Dimensions In Inches




SOURCELINE IN-LINE PUMP TANKS

- 200°F MAXIMUM WORKING TEMPERATURE • 100 PSIG MAXIMUM WORKING PRESSURE
- APPLIANCE GRAY FINISH • THIRD PARTY CERTIFIED TO NSF/ANSI 372.

| SSC No. | Manuf No. | Vol Gals | Drawdown Gals | | | Precharge PSI | A | B | Conn. | Wgt Lbs | Price Each |
|----------|-------------|----------|---------------|-------|-------|---------------|------|------|-------|---------|------------|
| | | | 20-40 | 30-50 | 40-60 | | | | | | |
| 50H 0021 | SL2I | 2 | .8 | .79 | .6 | 18 | 8.0 | 34.1 | 3/4" | 5 | \$ 141.69 |
| 50H 0041 | SL8I | 7.4 | 3.1 | 2.6 | 2.2 | 28 | 11.0 | 46.3 | 3/4" | 15 | 276.82 |

Dimensions In Inches



16007-V3M DuraMAC 7 GALLON DIAPHRAGM PUMP TANK

- 100 PSIG MAXI WP • LIGHTWEIGHT DRAWN-STEEL CONSTRUCTION • 2-PART ELECTROSTATIC FINISH • IDEAL FOR OUTSIDE USE
- 2-LAYER EPOXY COATED INSIDE • PLASTIC LINING • DURABLE BUTYL DIAPHRAGM • CONVENIENTLY LOCATED AIR CHARGE VALVE

| SSC No. | Manuf No. | Vol Gals | Drawdown Gals | | | Precharge PSI | Height | Diameter | MNPT Conn. | Wgt Lbs | Price Each |
|----------|------------------|----------|---------------|-------|-------|---------------|----------------------------------|----------|------------|-----------|------------|
| | | | 20-40 | 30-50 | 40-60 | | | | | | |
| 50H 0050 | 16007-V3M | 7.3 | 2.7 | 2.3 | 38 | 21 1/8" | 11 ³ / ₈ " | 3/4" | 10.5 | \$ 437.98 | |



13" BRONZE TANK TEE

- (1) 1/2" DRAIN PORT • (2) 1/4" CONTROL TAPS
- 1" X 3/4" LEG CONNECTION • NO LEAD


| SSC No. | Manuf No. | Tank Conn. | Lgth | Price Each |
|----------|---------------------|------------|------|------------|
| 50H 0151 | CHC100BF13NL | 1" MPT | 13" | \$ 79.32 |



16" BRONZE TANK TEE

- (1) 3/4" DRAIN PORT • (2) 1/4" CONTROL TAPS
- 1 1/4" X 3/4" LEG CONNECTION • NO LEAD

| SSC No. | Manuf No. | Tank Conn. | Lgth | Price Each |
|----------|---------------------|------------|------|------------|
| 50H 0156 | CHC125BF16NL | 1 1/4" MPT | 16" | \$ 99.37 |





SEWAGE PUMPS & ACCESSORIES

.4 HP OR .5 HP SEWAGE PUMPS

Myers




PIGGY BACK SWITCH ON SRM4 PUMPS • NON PIGGY BACK SWITCH ON CMV5A-11
 FRESH & DRAINAGE EFFLUENT WASTE • 6" TO 6¹/₂" PUMP DOWN RANGE
 2" DIAMETER SOLIDS HANDLING • .4 HP & .5 HP PUMPS HAVE SAME CAPACITY
 85° F CONTINUOUS, 140° INTERMITTENT LIQUID TEMPERATURE • 20' CORD

| SSC No. | Manuf No. | Type | H.P. | Voltage/Amps | Discharge | Price Each |
|----------|--------------------|-----------|------|--------------|-----------|------------|
| 50E 0025 | SRM4T-20-20 | Automatic | .4 | 115V/12A | 2" | \$ 552.51 |

| | | | | | | |
|----------|-----------------|-----------|----|----------|----|-----------|
| 50E 0017 | CMV5A-11 | Automatic | .5 | 115V/12A | 2" | \$ 485.32 |
|----------|-----------------|-----------|----|----------|----|-----------|

| | | | | | | |
|----------|--------------------|------------------------------------|--|-------------|--|----------|
| 50E 0065 | A2-9I/A2D11 | Level Control 10' With Plug | | 1/2 HP 115V | | \$ 98.39 |
|----------|--------------------|------------------------------------|--|-------------|--|----------|


CMV5A-11 IS NON PIGGY BACK & HAS SLIGHTLY DIFFERENT DIMENSION
 OEM SWITCH 21813B131K

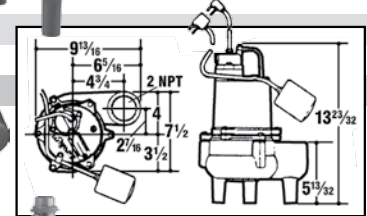


SR PACKAGED SIMPLEX SEWAGE SYSTEM

SEWER SYSTEM PACKAGE WITH SRM4P-1 .4 HP PUMP
 AUTOMATIC • 115 V & 12 AMPS • 20' POWER CORD • GAS TIGHT SPLIT COVER
 18" X 30" (30 GAL) POLYETHYLENE BASIN WITH 4" PLASTIC SLIP TYPE INLET HUB
 FULL SWING 2" COMPRESSION TYPE CHECK VALVE • PUMP DOWN 7" TO 14"

| SSC No. | Manuf No. | Type | H.P. | Voltage/Amps | Discharge | Price Each |
|----------|--------------------|-----------|------|--------------|-----------|------------|
| 50E 0030 | SR1830-23-2 | Automatic | .4 | 115V/12A | 2" | \$ 888.50 |

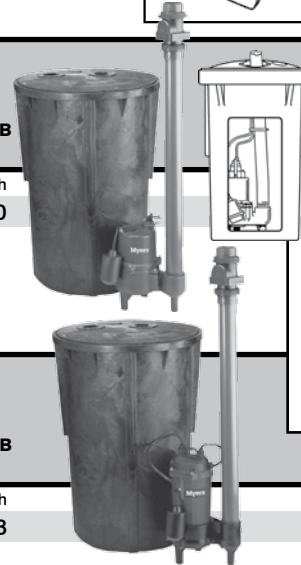

Myers



CMV PACKAGED SIMPLEX SEWAGE SYSTEM

SEWER SYSTEM PACKAGE WITH CMV5A-11 .5 HP PUMP
 AUTOMATIC • 115 V & 12 AMPS • 20' POWER CORD • GAS TIGHT SPLIT COVER
 18" X 30" (30 GAL) POLYETHYLENE BASIN WITH 4" PLASTIC SLIP TYPE INLET HUB
 FULL SWING 2" COMPRESSION TYPE CHECK VALVE • PUMP DOWN 7" TO 14"

| SSC No. | Manuf No. | Type | H.P. | Voltage/Amps | Discharge | Price Each |
|----------|-------------------|-----------|------|--------------|-----------|------------|
| 50E 0031 | CMV1830-01 | Automatic | .5 | 115V/12A | 2" | \$ 763.68 |

Myers

For More Information On These Products Or On Products Not Listed, Call *Salina Supply Company* At (785) 823-2221

.5 HP SEWAGE PUMP

• CAST IRON CASING • CAN RUN DRY WITHOUT COMPONENT DAMAGE
 • 13.0 MAX AMPS • 1750 RPM • HANDLES 2" DIAMETER SOLIDS
 104° F CONTINUOUS, 140° INTERMITTENT LIQUID TEMPERATURE
 • NO SWITCH INCLUDED




| SSC No. | Manuf No. | Type | H.P. | Voltage/Amps | Discharge | Price Each |
|----------|-----------------|--------|------|--------------|-------------|-------------|
| 50E 0008 | WS0511B | Manual | .5 | 115V/14.5A | 2" FPT Only | \$ 1,388.00 |
| 50E 0010 | WS0511BF | Manual | .5 | 115V/14.5A | 2" NPT* | 1,622.00 |

| | | | | | | |
|----------|-----------------|--------|----|-----------|--------|-------------|
| 50E 0009 | WS0512BF | Manual | .5 | 230V/7.3A | 2" NPT | \$ 1,773.92 |
|----------|-----------------|--------|----|-----------|--------|-------------|

| | | | | | | |
|----------|-------------|---|--|--|--|----------|
| 50E 0011 | A1-3 | 3" Flange For WS0511BF Sewage Pump | | | | \$ 80.00 |
|----------|-------------|---|--|--|--|----------|

| | | | | | | |
|----------|--------------|------------------------------------|--|----------------|--|--------|
| 50E 0080 | A2E21 | Level Control 15' With Plug | | 3/4HP 115V/15A | | 139.80 |
|----------|--------------|------------------------------------|--|----------------|--|--------|

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.

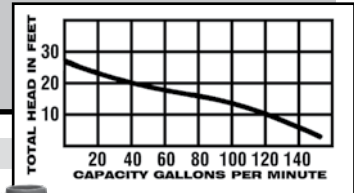

WS0511BF

continued on next page






SEWAGE PUMPS

OMNIVORE™ 2 HP SUBMERSIBLE GRINDER PUMP


AUTOMATIC • CAST IRON CONSTRUCTION • 208-230 VOLTS • 1 PHASE • 3450 RPM
V-SLICE™ CUTTING SYSTEM • 25' POWER CORD WITH QUICK-DISCONNECT
PIGGY BACK PLUG WITH WIDE ANGLE FLOAT • 86 LBS

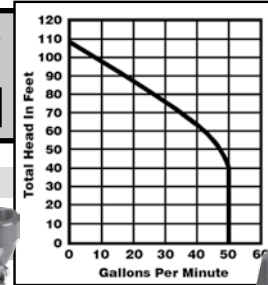

| SSC No. | Manuf No. | H.P. | Voltage | Discharge | Price Each |
|----------|----------------|-------------------|-----------|-------------|--------------------|
| 50E 0033 | LSG202A | Automatic | 2 | 208-230 V | 1 1/4" \$ 2,335.00 |
| 50E 0034 | G90 | 90° Discharge Ell | Cast Iron | 1 1/4" FNPT | \$ 47.58 |

.4 HP SUBMERSIBLE SEWAGE PUMP



AUTOMATIC • PUMP HANDLES LIQUIDS & SOLID WASTE UP TO 2" DIAMETER
10' QUICK-DISCONNECT POWER CORD • CAST IRON BODY
VORTEX IMPELLER • MERCURY FREE WIDE ANGLE FLOAT SWITCH



| SSC No. | Manuf No. | H.P. | Voltage | Discharge | Price Each |
|----------|--------------|-----------|---------|-----------|-------------------|
| 50E 0050 | LE41A | Automatic | .4 | 115 V | 2" FNPT \$ 501.00 |

AUTOMATIC .4 HP SUBMERSIBLE SEWAGE PUMP

THIS PUMP HANDLES LIQUIDS & SOLID WASTE UP TO 2" DIAMETER
20' POWER CORD • CAST IRON WITH GLASS FILLED NYLON COVER
PIGGY BACK FLOAT SWITCH



| SSC No. | Manuf No. | H.P. | Voltage | Discharge | Price Each |
|----------|---------------------------|------|---------|-----------|------------|
| 50E 0035 | 9SCN-CIA-RF/509412 | .4 | 110 V | 2" FNPT | \$ 554.80 |



SEWAGE PUMP ACCESSORIES

A2-3M LEVEL CONTROL

NON MERCURY • NORMALLY OPEN/PUMP DOWN • 15' FS BARE LEAD & WEIGHT



| SSC No. | Manuf No. | Lead | Voltage | Amps | Capacity | Price Each |
|----------|---------------------|-----------|---------|-------|----------|------------------|
| 50E 0070 | A2-3M/A2D23W | Pump Down | 15' | 115 V | 13 A | 1/2 HP \$ 114.64 |

Goolds is a registered trademark of Goolds Pumps, Inc. and is used under license.



LEVEL CONTROLS WITH PLUG

NON MERCURY • NORMALLY OPEN/PUMP DOWN



| SSC No. | Manuf No. | Lead | Voltage | Amps | Capacity | Price Each |
|----------|--------------------|-----------|---------|-------|----------|-----------------|
| 50E 0065 | A2-9I/A2D11 | Pump Down | 10' | 115 V | 13 A | 1/2 HP \$ 97.31 |

| | | | | | | |
|----------|--------------|-----------|-----|-------|------|----------------------|
| 50E 0080 | A2E21 | Pump Down | 15' | 115 V | 15 A | 3/4 HP/15A \$ 138.83 |
| 50E 0081 | A2E22 | Pump Down | 15' | 230 V | 15 A | 2 HP 138.83 |

| | | | | | | |
|----------|-------------|-------------------------------|--|--|--|----------|
| 50E 0086 | A2WT | SUSPENDED CABLE WEIGHT | | | | \$ 29.85 |
|----------|-------------|-------------------------------|--|--|--|----------|



LEVEL CONTROL LESS PLUG

NON MERCURY • NORMALLY OPEN/PUMP DOWN OR NORMALLY CLOSED/PUMP UP • SPDT SWITCH



| SSC No. | Manuf No. | Lead | Voltage | Amps | Capacity | Price Each |
|----------|-------------------|----------------------|---------|-------------|----------|-----------------|
| 50E 0085 | 20PMSPTWOP | Pump Down or Pump Up | 20' | 115/120/230 | 13 A | 1/2 HP \$ 92.44 |

Goolds is a registered trademark of Goolds Pumps, Inc. and is used under license.



continued on next page

SEWAGE PUMP ACCESSORIES

VerticalMaster® PUMP SWITCH

140° LIQUID TEMP CONTROLS PUMPS TO 1/2 HP@120 VAC & 1HP@230 VAC • MECHANICALLY ACTIVATED • 10' CORD



| SSC No. | Manuf No. | Pumping Range | Voltage | Amps | Price Each |
|----------|---------------|------------------------|---------|-------------------|------------|
| 50E 0060 | 10VM1WP/A2H11 | Pump Down .75" To 6.5" | 115 V | 13 Max - 60 Start | \$ 135.97 |



LOW VOLTAGE OPERATED HI WATER ALARM

LOUD HORN • WARNING LIGHT • 10' FLOAT CABLE



| SSC No. | Manuf No. | Wgt. | Price Each |
|----------|----------------------|---------|------------|
| 50E 0075 | 101-01HW/513288/A4-2 | 5.0 Lbs | \$ 240.77 |



2 BULB LEVEL CONTROL

PUMP DOWN • 15' CORD • 120 VOLT

| SSC No. | Manuf No. | Price Each |
|----------|----------------|------------|
| 50E 0100 | 15DFD1WP/A2T31 | \$ 309.26 |



VERTICAL CHECK VALVE

COMPRESSION X COMPRESSION

| SSC No. | Manuf No. | Size | Price Each |
|----------|-----------|-----------------|------------|
| 50E 0115 | CVSUMPR | 1 1/4" x 1 1/2" | \$ 23.89 |
| 50E 0120 | CV200R | 2" | 35.84 |



PVC SWING COMPRESSION CHECK VALVES

FULL FLOW DESIGN • DESIGNED FOR BOTH HORIZONTAL & VERTICAL USE • COMPRESSION ENDS



| SSC No. | Manuf No. | IPS Size | Body Length | Wgt. | Price Each |
|----------|-----------|----------|-------------|----------|------------|
| 50E 0123 | S1500-15 | 1 1/2" | 7 1/2" | | \$ 44.67 |
| 50E 0125 | S1500-20 | 2" | 9 3/4" | 1.14 Lbs | 62.85 |
| 50E 0130 | S1500-30 | 3" | 14" | 5.60 Lbs | 150.22 |



CHECKMATE PUMP VALVE

COMBINATION PVC BALL VALVE, CHECK VALVE & UNION FOR WASTE WATER PUMPS



| SSC No. | Manuf No. | IPS Size | Body Length | Wgt. | Price Each |
|----------|-----------|----------|---------------------|----------|------------|
| 50E 0135 | 2200-15 | 1 1/2" | UNION X SLIP 8" | 1.5 Lbs | \$ 41.03 |
| 50E 0136 | 2200-20 | 2" | UNION X SLIP 9 3/8" | 2.25 Lbs | 65.47 |



CORRUGATED TAPERED WALL SUMP PUMP BASIN WITH TOPP-LOCK SLOTTED COVER



| SSC No. | Manuf No. | Capacity | Size | Price Each |
|----------|----------------|-----------|-----------|------------|
| 50E 0180 | B2300TL/C23STL | 26 Gallon | 18" x 24" | \$ 73.02 |



STRUCTURAL FOAM SEWAGE BASIN OR COVER WITH 4" INLET GROMMET • STRUCTURAL FOAM COVER SOLD SEPARATELY



| SSC No. | Manuf No. | Desc. | Size | Price Each |
|----------|-----------------------|-----------------------------|-----------|------------|
| 50E 0145 | E3-24001/C18TSF-0155S | 30 Gallon Basin | 18" x 30" | \$ 79.20 |
| 50E 0147 | E-C18TSF-0155S | Cover - Split With Grommets | 18" | 73.86 |



POLYETHYLENE ECONOMY SEWAGE BASIN & COVER WITH 4" INLET GROMMET • 1 PIECE STEEL COVER



| SSC No. | Manuf No. | Capacity | Size | Price Each |
|----------|---------------------|-----------|-----------|------------|
| 50E 0185 | B33001/C24SSL-0155P | 54 Gallon | 24" x 30" | \$ 254.04 |






SUMP PUMPS

HIGH HEAD SUBMERSIBLE EFFLUENT PUMP

- CAST IRON • MECHANICAL FLOAT SWITCH • HANDLES 3/4" SOLIDS
- RECESSED IMPELLER • WITH 20' CORD

Myers



| SSC No. | Manuf No. | Voltage | H.P. | Motor RPM | Discharge | Price Each |
|----------|--------------------|---------|------|-----------|------------|------------|
| 50E 0015 | ME3H-11P-01 | 115 V | 1/3 | 1550 | 1 1/2" NPT | \$ 519.48 |

MS33T10 SUBMERSIBLE SUMP PUMP

- HEAVY CAST IRON HOUSING • TETHERED FLOAT SWITCH • RECESSED IMPELLER
- DURABLE PSC MOTOR • 1 PHASE • 52 GPM MAX • 24 FT MAXIMUM HEAD
- 1/4" SOLID HANDLING • FOR BASEMENT SUMPS & DEWATERING

Myers




| TOTAL HEAD | GALS PER HOUR |
|------------|---------------|
| 10' | 1530 |
| 16' | 1140 |
| 20' | 650 |

| SSC No. | Manuf No. | Voltage | H.P. | Motor RPM | Discharge | Wgt. | Price Each |
|----------|----------------|---------|------|-----------|------------|--------|------------|
| 50E 0201 | MS33T10 | 110 V | 1/3 | 3000 | 1 1/2" NPT | 21 Lbs | \$ 231.46 |

S33V1 SUBMERSIBLE SUMP PUMP

- HEAVY CAST IRON HOUSING • VERTICAL FLOAT SWITCH • RECESSED IMPELLER
- DURABLE PSC MOTOR • 1 PHASE • 52 GPM MAX • 24 FT MAXIMUM HEAD
- 1/4" SOLID HANDLING • FOR BASEMENT SUMPS & DEWATERING

Myers





| TOTAL HEAD | GALS PER HOUR |
|------------|---------------|
| 10' | 1530 |
| 16' | 1140 |
| 20' | 650 |

| SSC No. | Manuf No. | Voltage | H.P. | Motor RPM | Discharge | Wgt. | Price Each |
|----------|----------------|---------|------|-----------|------------|--------|------------|
| 50E 0206 | MS33V10 | 110 V | 1/3 | 3000 | 1 1/2" NPT | 21 Lbs | \$ 246.39 |

MCSP3I CAST IRON PEDESTAL SUMP PUMP

- CAST IRON • VERTICAL AUTOMATIC SWITCH • WITH 6' POWER CORD
- 35 AMPS • 1 PHASE • 60 Hz • PERMANENT SPLIT CAPACITOR TYPE

Myers

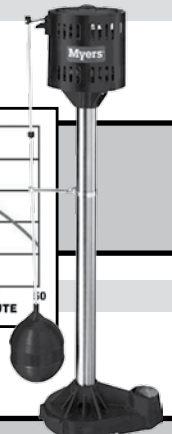

| SSC No. | Manuf No. | Voltage | H.P. | Motor RPM | Discharge NPT | Price Each |
|----------|---------------|---------|------|-----------|-----------------------|------------|
| 50E 0203 | MCSP3I | 115 V | 1/3 | 1625 | 1 1/4" (F) 1 1/2" (M) | \$ 242.66 |

SSF33S STAINLESS STEEL SUBMERSIBLE SUMP PUMP

- STAINLESS STEEL MOTOR HOUSING & FASTENERS • INTEGRATED VERTICAL FLOAT
- FOR 11" DIA. OR LARGER SUMP BASINS • 8' POWER CORD • 2 YEAR WARRANTY

BLUE ANGEL
PUMPS





| DISCHARGE HEAD | 0' | 5' | 10' | 15' | 20' |
|----------------|----|----|-----|-----|-----|
| GALS/MINUTE | 63 | 52 | 63 | 37 | 20 |

| SSC No. | Manuf No. | Voltage | H.P. | Discharge | Wgt. | Price Each |
|----------|---------------|---------|------|------------|--------|------------|
| 50E 0242 | SSF33S | 115 V | 1/3 | 1 1/2" NPT | 13 Lbs | \$ 241.18 |

SUBMERSIBLE SUMP PUMP

- UPPER & LOWER HEAVY DUTY BALL BEARING CONSTRUCTION
- STAINLESS STEEL SHELL • WITH 10' CORD

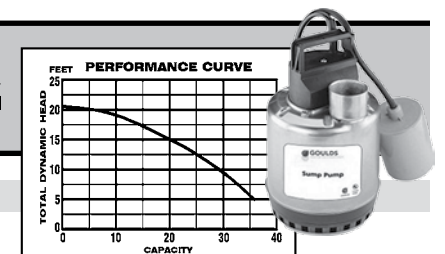

| SSC No. | Manuf No. | Voltage | H.P. | Motor RPM | Discharge | Wgt. | Price Each |
|----------|------------------|---------|------|-----------|-----------|--------|------------|
| 50E 0012 | LSP0311AT | 115 V | 1/3 | 3500 | 1 1/2" | 11 Lbs | \$ 465.00 |


Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.

continued on next page

Liberty Pumps Little GIANT Pump Company **SUMP PUMPS**

EFFLUENT SUBMERSIBLE SUMP PUMP


- PUMP WITH VMF SWITCH (MAGNETICALLY OPERATED VERTICAL FLOAT)
- 1/2" SOLIDS HANDLING • 140°F MAXIMUM TEMPERATURE
- WITH QUICK-DISCONNECT 10' STANDARD POWER CORD
- THERMALLY PROTECTED & PERMANENTLY LUBRICATED • 2 YEAR LIMITED WARRANTY



| SSC No. | Manuf No. | Voltage | H.P. | Discharge | Wgt. | Price Each |
|----------|----------------|---------|------|-----------|--------|------------|
| 50E 0040 | 257 VMF | 115 V | 1/3 | 1 1/2" | 23 Lbs | \$ 233.35 |

SUMP JET WATER POWERED BACK-UP SUMP PUMP

- REQUIRES NO ELECTRICITY • WORKS OFF MUNICIPAL WATER SUPPLY
- 20 PSI TO 100 PSI INLET PRESSURE • HIGH-OUTPUT FLOW RATES
- FULLY AUTOMATIC • FULLY ASSEMBLED • 3/4" NPT INLET CONNECTION

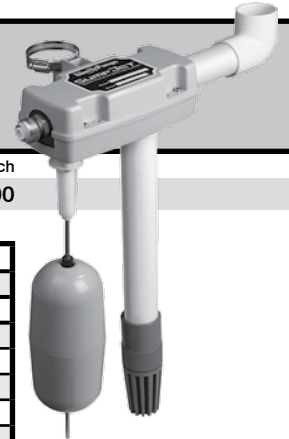

| SSC No. | Manuf No. | Discharge | Inlet PSI | Inlet Connection | Price Each | |
|----------|-------------|-----------|-----------|------------------|------------|-----------|
| 50E 0038 | SJ10 | AUTOMATIC | 1 1/2" | 20 To 100 | 3/4" | \$ 288.00 |


| SJ10 PUMP SUMP WATER REMOVAL AT VARIOUS HEADS (STATIC HEAD IN 1 1/2" PIPE OR LARGER) | | | | | | | | |
|--|------|------|------|------|------|-----|------|-----|
| Lift | 4' | | 8' | | 12' | | 15' | |
| PSI | GPM | GPH | GPM | GPH | GPM | GPH | GPM | GPH |
| 20 | 11.0 | 660 | 5.8 | 348 | - | - | - | - |
| 30 | 12.8 | 765 | 9.0 | 540 | 5.5 | 330 | - | - |
| 40 | 15.4 | 924 | 12.5 | 750 | 9.3 | 558 | 7.2 | 432 |
| 50 | 17.2 | 1032 | 14.5 | 870 | 12.0 | 720 | 10.0 | 600 |
| 60 | 19.8 | 1185 | 17.0 | 1020 | 15.2 | 912 | 13.5 | 810 |

(WATER PRESSURE VALVE AT INLET - VALVE OPEN & WATER FLOWING)

For More Information On These Products Or On Products Not Listed,
Call *Salina Supply Company* At (785) 823-2221

BIG JOHN AUTOMATIC SUMP PUMP


- SUBMERSIBLE PUMP • 10' CORD • 1 1/2" FNPT DISCHARGE
- FEET ABOVE PUMP 5' 10' 15'
- GALLONS PER HOUR 2750 1750 750



| SSC No. | Manuf No. | H.P. | Voltage | PSI | Wgt. | Price Each |
|----------|---------------------|------|---------|-----|--------|------------|
| 50E 0190 | 6-CIA/506158 | 1/3 | 115 V | 7.8 | 18 Lbs | \$ 221.99 |

HI TEMPERATURE SUMP PUMP

- SUBMERSIBLE • AUTOMATIC • 20' LIFT • 15' CORD • 1 1/2" FNPT DISCHARGE
- 1/2" DIAMETER WASTE SOLIDS • CAPABLE OF PUMPING UP TO 200° F. LIQUID
- USES INCLUDE BOILER BLOW-DOWN SUMP PITS

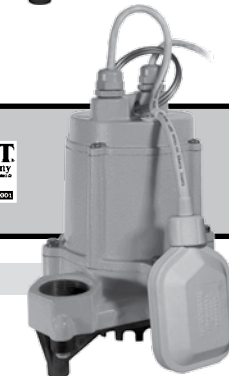

| SSC No. | Manuf No. | H.P. | Voltage | PSI | Wgt. | Price Each |
|----------|----------------------------|------|---------|-----|--------|------------|
| 50E 0192 | HT-6E-CIA-FS/506600 | 1/3 | 115 V | 8.7 | 32 Lbs | \$ 812.22 |

continued on next page



DRAIN PUMP • UTILITY PUMP • CONDENSATE PUMP

1/3 HP AUTOMATIC DRAIN PUMP



SHORT PROFILE DESIGN • PREASSEMBLED • 4.3 GALLON BASIN CAPACITY • 140° F MAX TEMP
 1 1/2" CONNECTIONS • 11 1/8" H x 13 3/4" DIAMETER • 10 FOOT, 3 WIRE POWER CORD WITH GROUNDED PLUG
 QUICKTREE® TECHNOLOGY FOR INSPECTION & REMOVAL OF FLOAT SWITCH WITHOUT DISCONNECTING PLUMBING



| SSC No. | Manuf No. | Voltage | H.P. | Solids Handling | Wgt | Price Each |
|----------|------------|-----------|-------|-----------------|------|------------------|
| 50E 0195 | 404 | AUTOMATIC | 115 V | 1/3 | 3/8" | 13 Lbs \$ 377.74 |

WATER WIZARD UTILITY PUMP


•SUBMERSIBLE •PUMPS DRY TO 1/8" •25' CORD
 FEET ABOVE PUMP 5' 10' 20'
 GALLONS PER MINUTE 19 15 5



| SSC No. | Manuf No. | Voltage | H.P. | PSI | Wgt | Price Each |
|----------|-----------------------|---------|------|------|-------|------------|
| 50E 0197 | 5-MSP25/505025 | 120 V | 1/6 | 11.4 | 8 Lbs | \$ 211.05 |

LCU-SERIES CONDENSATE PUMP

REMOVABLE CHECK VALVE • SAFETY SWITCH • 2 QUART TANK CAPACITY
 3/8" OD DISCHARGE • 20 SHUTOFF • 20' OF 3/8" TUBING



| SSC No. | Manuf No. | Voltage | H.P. | Amps/Watts | Wgt | Price Each |
|----------|------------------|---------|------|------------|-------|------------|
| 50E 0317 | LCU-20-ST | 115 V | 1/30 | 1.6/173 | 6 Lbs | \$ 81.48 |

For More Information On These Products Or On Products Not Listed,
 Call *Salina Supply Company* At (785) 823-2221



WOOD BROS. IND. II
A DIVISION OF MITICHRI INC.

WATER SOFTENERS

GE/OSMONICS LOGIX 2 TANK METERED WATER SOFTENERS

MINERAL TANK WITH BRASS BACK PLATE • TOP BASKET LESS BYPASS
FOR WATER WITH 2 TO 5 PPM OF IRON, USE 200D TURBULATOR IN SOFTENER ADD APPROXIMATELY \$50.00

| SSC No. | Manuf No. | Brine Tank | Mineral Tank | Regeneration | Wgt | Price Each |
|----------|--------------------|------------|--------------|--------------|---------|-------------|
| 50I 0754 | 255-760/48K | 18" x 30" | 10" x 54" | Metered | 135 Lbs | \$ 1,052.60 |
| 50I 0760 | 255-760/24K | 18" x 30" | 8" x 44" | Metered | 86 Lbs | 1,045.01 |
| 50I 0764 | 255-760/32K | 18" x 30" | 9" x 48" | Metered | 103 Lbs | 1,116.55 |

GE/OSMONICS LOGIX 1 TANK CABINET METERED WATER SOFTENERS

MINERAL TANK WITH BRASS BACK PLATE • TOP BASKET LESS BYPASS
FOR WATER WITH 2 TO 5 PPM OF IRON, USE 200D TURBULATOR IN SOFTENER ADD APPROXIMATELY \$50.00

| SSC No. | Manuf No. | Brine Tank | Mineral Tank | Regeneration | Wgt | Price Each |
|----------|--------------------|------------|--------------|--------------|---------|-------------|
| 50I 0756 | 255-760/C24 | Cabinet | 9" x 35" | Metered | 90 Lbs | \$ 1,137.13 |
| 50I 0762 | 255-760/C32 | Cabinet | 10" x 35" | Metered | 107 Lbs | 1,183.72 |


REPLACEMENT 10% CROSS LINK CHLORINE RESISTANT WATER SOFTENER RESIN

| | | | | | |
|----------|---------------|-------------|-----------------------|--------|-----------|
| 50I 0736 | 283507 | 3/4 Cu. Ft. | 24,000 Grain Capacity | 30 Lbs | \$ 154.42 |
| 50I 0737 | 283507 | 1 Cu. Ft. | 32,000 Grain Capacity | 40 Lbs | 216.66 |

AUT-256 NORYL BYPASS & COPPER TUBE ADAPTER TAILPIECES

| | | | | | |
|----------|----------------|---------------------------------|--|----------|-----------|
| 50I 0740 | 1030540 | 3/4" Plastic Bypass & Tailpiece | | 1.11 Lbs | \$ 116.40 |
| 50I 0743 | 1030545 | 1" Plastic Bypass & Tailpiece | | 1.11 Lbs | 120.05 |

Non Stock **TURBULATOR** *Approximately \$ 50.00*

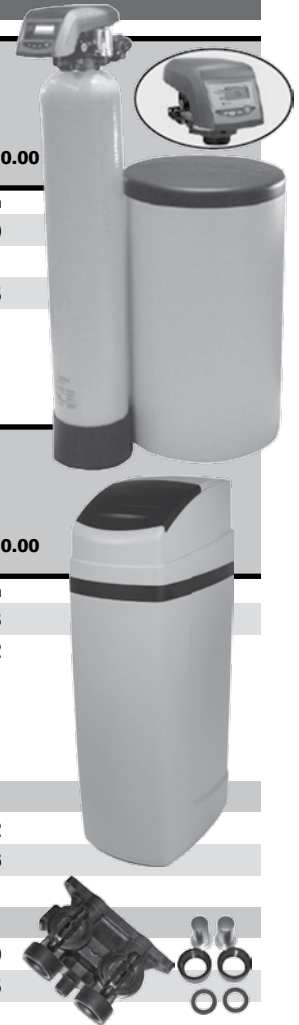

WARRANTY INFO FOR CURRENT SOFTENERS

• **AUTOTROL 255:**
5 YEARS FROM MFGR DATE

• **POLY BRINE TANKS:**
5 YEARS FROM MFGR DATE

• **MINERAL TANKS:**
• 6" TO 13" DIAMETER
10 YEARS FROM MFGR DATE

• OTHER SIZES
5 YEARS FROM MFGR DATE

OLDER UNITS MAY HAVE
ONLY A 5 YEAR WARRANTY

| Softener No. | 255-760 | 255-760 | 255-760 |
|---|----------------|----------------|----------------|
| GRAIN CAPACITY PER REGENERATION | 24000 | 32000 | 48000 |
| POUNDS SALT PER REGENERATION | Adj | Adj | Adj |
| GRAINS HARDNESS MAXIMUM | 30 | 40 | 60 |
| IRON MAXIMUM PPM | 2 | 2 | 2 |
| CONTINUOUS SERVICE FLOW GPM @ 15 PSI | 10 gpm | 10 gpm | 10 gpm |
| PEAK SERVICE FLOW @ 25# PSI DROP | 15 gpm | 16 gpm | 16 gpm |
| WORKING PRESSURE PSI | 20 To 80 | 20 To 80 | 20 To 80 |
| PIPE SIZE IN INCHES | 3/4" | 3/4" | 3/4" |
| POWER IN VOLTS AC | 115 V | 115 V | 115 V |
| MAXIMUM TEMPERATURE °F | 100° | 100° | 100° |
| SHIPPING WEIGHT IN POUNDS | 90 lbs | 107 lbs | 135 lbs |
| MINERAL CONTENT IN CUBIC FEET | 3/4 | 1 | 1 1/2 |
| DRAIN CONNECTION IN INCHES FPT | 1/2" | 1/2" | 1/2" |
| LENGTH OF ELECTRICAL CORD | 60" | 60" | 60" |

SALT CAPACITY OF CABINET SOFTENER: 200#
SALT CAPACITY OF 2 TANK SOFTENER: (18 X 30 BRINE TANK) 300#

continued on next page

Salina Supply Company

May 1, 2022

P-10A




REVERSE OSMOSIS



AQUARIUS 5 STAGE REVERSE OSMOSIS SYSTEM

INCLUDES NON AIR GAP CHROME FAUCET & SADDLE VALVE

| SSC No. | Manuf No. | | Tubing | | Price Per Carton |
|----------|----------------------|--|--------|--------|----------------------|
| 50I 0770 | PR5 314312 | Nom. 35 Gal/Day | 3/8" | 50 GPD | \$ 328.77 |
| 50I 0771 | ROT4 316231 | 4 Gallon RO Tank | | | \$ 103.79 |
| 50I 0773 | PR5/RO 312898 | Replacement Filter Kit For PR5/RO | | | 5.0 Lbs 57.58 |
| 50I 0775 | 150233 285731 | TFC Membrane | | | 50 GPD 1.0 Lbs 51.63 |
| | AG- 130795 | Faucet With Air Gap | | Chrome | \$ 41.31 |
| | NAG- 130997 | Faucet Less Air Gap | | Chrome | 29.34 |

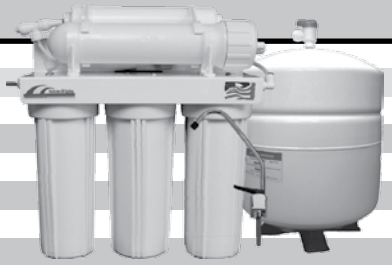

| Source Water Supply - TFC | |
|---------------------------|------------------------------|
| Community/Private | Non Chlorinated |
| System Pressure | 40-80 PSI |
| Temperature | 40° - 90° F |
| pH Range | 3.0 - 11.0 |
| Maximum Supply TDS Level | 2000 ppm <350 mg/L (<20 gpg) |


| Chemical Parameters - TFC | |
|-------------------------------|------------|
| Hardness (CaCO ₃) | 10 |
| Iron (Fe) | <0.1 mg/L |
| Maganese (Mn) | <0.05 mg/L |

Note:
Filters should be changed every 6 Months to 1 Year.
Membranes should be changed every 3 to 4 years.

HM DIGITAL POCKET WATER QUALITY TESTER

RANGE: 0-9990 PPM • RESOLUTION: 1 PPM (0-999 PPM); 10 PPM (1000-9990 PPM) • ACCURACY: +/- 3%

| SSC No. | Manuf No. | | Price Each |
|----------|---------------|---|------------|
| 50I 0780 | TDS-EZ | With Convenient TDS Value Chart On Back | \$ 32.03 |



PLASTIC BALL VALVES



| SSC No. | Manuf No. | Size | Price Each |
|----------|----------------|---------|------------|
| 50I 3232 | PPSV14 | 1/4" OD | \$ 17.39 |
| 50I 3231 | C76-849 | 3/8" OD | 11.23 |



COUPLING




| SSC No. | Manuf No. | Size | Price Each |
|----------|----------------|---------|------------|
| 50I 3240 | C76-856 | 1/4" OD | \$ 2.60 |
| 50I 3245 | C76-858 | 3/8" OD | 3.54 |



RO PAL + VALVE



| SSC No. | Manuf No. | Size | Price Each |
|----------|------------------|-------------|------------|
| 50I 3235 | A-0630425 | 3/8" x 1/4" | \$ 30.49 |



BUSHING



| SSC No. | Manuf No. | Size | Price Each |
|----------|------------------|-------------|------------|
| 50I 3250 | S-0420666 | 3/8" x 1/4" | \$ 2.93 |



For More Information On These Products Or
On Products Not Listed, Call
Salina Supply Co. At (785) 823-2221

TEE



| SSC No. | Manuf No. | Size | Price Each |
|----------|----------------|---------|------------|
| 50I 3254 | C76-863 | 1/4" OD | \$ 3.77 |
| 50I 3255 | C76-865 | 3/8" OD | 4.60 |



RO BOOSTER PUMP

1/4" JOHN GUEST INLET & OUTLET CONNECTION • MAINTAIN 80 PSI INLET • INCREASES WATER PRODUCTION OF RO TANK SHUT-OFF SWITCH SET AT 40 PSI WITH 3/8" JOHN GUEST CONNECTIONS • WITH TRANSFORMER

| SSC No. | Manuf No. | | Price Each |
|----------|-----------------|-----------------|------------|
| 50I 0772 | 6840-1/4 | RO Booster Pump | \$ 214.91 |
| | | T50 Transformer | |



REVERSE OSMOSIS REPLACEMENT FILTERS

2.5" X 10" FILTERS



| SSC No. | Manuf No. | | Microns | | Price Each |
|----------|---------------------------|---------------------------|---------|---------------------|------------|
| 50I 3012 | CB-25-1005 924158 | Carbon Block | 5 | Taste/Odor/Chlorine | \$ 9.90 |
| 50I 2862 | SDC-25-1005 332997 | 100% Polypropylene | 5 | Sediment Depth | 2.62 |



CB-25-1005 SDC-25-1005

PUMPS TANKS SOFTENERS



WATER FILTER HOUSINGS & CARTRIDGES

AP200 UNDER SINK COLD WATER FILTER HOUSING 3M Aqua-Pure AP217 DIRT/RUST/TASTE/ODOR INCLUDED WITH HOUSING



| SSC No. | Manuf No. | Housing | GPM | Connection | Maximum Pressure | Cartridge Info (No. Used)Included | Price Each |
|----------|--------------|----------------|------|------------|------------------|-----------------------------------|------------|
| 50I 3115 | AP200 | Molded Plastic | 1.75 | 3/8" | 125 PSI | (1) AP217 | \$ 207.02 |

150437 #10 WHOLE HOUSE WATER FILTER HOUSING PENTEK BLUE VALVE-IN-HEAD • PRESSURE-RELIEF/BLEED BUTTON ON INLET SIDE OF CAP • 40° TO 125° F MAX



| SSC No. | Manuf No. | Housing | GPM | Connection | Maximum Pressure | Size Filter Used | Price Each |
|----------|---------------|---------------|---------------|------------|------------------|------------------|------------|
| 50I 2775 | 150437 | Clear Plastic | 4 psi @ 8 gpm | 3/4" | 125 PSI | 2.5" X 10" | \$ 123.26 |

CB-25-1005 HYDRONIX WATER TECHNOLOGY CARBON BLOCK CARTRIDGE



| SSC No. | Manuf No. | Microns | Price Each |
|----------|-------------------|----------|------------|
| 50I 3012 | CB-25-1005 | 924158 5 | \$ 9.90 |

AP217 CARTRIDGES 3M Aqua-Pure DIRT/RUST/TASTE/ODOR 2 PAK



| SSC No. | Manuf No. | GPM | Microns | Price Per Pair |
|----------|--------------|------|---------|----------------|
| 50I 3120 | AP217 | 1.75 | 5 | \$ 126.71 |

SPUNPOLY 2 HYDRONIX WATER TECHNOLOGY POLYPROPYLENE CARTRIDGE



| SSC No. | Manuf No. | Microns | Price Each |
|----------|---------------|---------|------------|
| 50I 3112 | 333704 | 50 | \$ 2.54 |

SDC-25-1005 HYDRONIX WATER TECHNOLOGY POLYPROPYLENE CARTRIDGE



| SSC No. | Manuf No. | Microns | Price Each |
|----------|--------------------|----------|------------|
| 50I 2862 | SDC-25-1005 | 332997 5 | \$ 2.62 |

AP420 CARTRIDGE 3M Aqua-Pure DIRT/RUST/SCALE 2 PAK



| SSC No. | Manuf No. | GPM | Microns | Price Per Pair |
|----------|--------------|------|---------|----------------|
| 50I 3134 | AP420 | 10.0 | 5 | \$ 171.54 |

IL-IM-01 CARTRIDGE 3M Aqua-Pure DIRT/RUST/TASTE/ODOR/SCALE



| SSC No. | Manuf No. | GPM | Price Each |
|----------|-----------------|-----|------------|
| 50I 3130 | IL-IM-01 | 0.5 | \$ 32.96 |

HOT WATER PROTECTION SYSTEM 3M Aqua-Pure •FOR COLD WATER FEED LINE •MAINTAINS EFFICIENCY OF SYSTEM •PREVENTS SCALE BUILD-UP & CORROSION



| SSC No. | Manuf No. | Housing | GPM | Conn. | Max. Temp. | Max. Pressure | Price Each |
|----------|----------------|-----------------|-----|-------|------------|---------------|------------|
| 50I 3131 | AP430SS | Stainless Steel | 6.0 | 3/4" | 100° F | 125 PSI | \$ 130.57 |

AP431 CARTRIDGE FOR AP430SS HOT WATER PROTECTION SYSTEM

| | | | | | |
|----------|--------------|-----|------|--------|----------|
| 50I 3132 | AP431 | 6.0 | 3/4" | 100° F | \$ 53.64 |
|----------|--------------|-----|------|--------|----------|

continued on next page

WATER FILTER HOUSINGS & CARTRIDGES

10" FULL FLOW HOUSING KIT WITH PRESSURE RELIEF

• BLUE HOUSING WITH BLACK LID • COMPLETE WITH HOUSING, MOUNTING BRACKET & SCREWS, HOUSING WRENCH

| SSC No. | Manuf No. | | | | | Price Each |
|----------|------------------|---------|--------------|---------------|--|------------|
| 50I 2501 | PWHIB10FF | 7100268 | Blue Plastic | 1" Connection | | \$ 172.31 |



POLYSPUN SEDIMENT DEPTH FILTER CARTRIDGE - POLYPROPYLENE

| | | | | | | |
|----------|--------------------|--------|-----------|------------|--|----------|
| 50I 2518 | SPC-45-1005 | 295324 | 5 Microns | 4.5" X 10" | | \$ 23.62 |
|----------|--------------------|--------|-----------|------------|--|----------|



CARBON BLOCK FILTER CARTRIDGE - TASTE/ODOR/CHLORINE

| | | | | | | |
|----------|-------------------|--------|-----------|------------|--|----------|
| 50I 2517 | CB-45-1005 | 937281 | 5 Microns | 4.5" X 10" | | \$ 40.91 |
|----------|-------------------|--------|-----------|------------|--|----------|



FLO-MAX STAINLESS STEEL SINGLE WATER FILTER HOUSING

• NICKEL PLATED BRASS HEADS • FOR CARTRIDGES WITH O-RING STYLE END CAPS • T-HANDLE CAP NUT INCLUDED FOR SUMP REMOVAL

| SSC No. | Manuf No. | Size | Rated For Temp | Rated For PSI | | Price Each |
|----------|------------------------------|------|----------------|---------------|------------------|------------|
| 50I 2005 | PWHSG-ASY-SS-20-304-1 | 20" | 250° F | 250 PSI | 304 Sump 1" Pipe | \$ 655.64 |



HIGH TEMP WOUND FILTER CARTRIDGE • SEDIMENT/DIRT/RUST/PARTICLES • FOOD GRADE

| | | | | | | |
|----------|---------------------------|--------------|------------|----------|------------|----------|
| 50I 2010 | PWSWT20M20 7100382 | 2 1/2" x 20" | 200° F Max | 12.0 GPM | 20 Microns | \$ 46.80 |
|----------|---------------------------|--------------|------------|----------|------------|----------|



HIGH TEMPERATURE WATER FILTER HOUSING

• MAXIMUM TEMPERATURE 200° • PLASTIC HOUSING • LEAD FREE

| SSC No. | Manuf No. | Size | Rated For Temp | Rated For PSI | | Price Each |
|----------|---------------------------|------|----------------|---------------|--------------------|------------|
| 50I 2050 | HD4500HT34 7100296 | 10" | 250° F | 250 PSI | 304 Sump 3/4" Pipe | \$ 82.09 |



HI TEMP WOUND FILTER CARTRIDGE FOR HD4500HT34 • SEDIMENT/DIRT/RUST/PARTICLES • FOOD GRADE

| | | | | | | |
|----------|----------------------------|-----------------|------------|----------|------------|----------|
| 50I 2070 | PWSMHT10M50 7100380 | 2 1/2" X 9 7/8" | 200° F Max | 12.0 GPM | 50 Microns | \$ 32.04 |
|----------|----------------------------|-----------------|------------|----------|------------|----------|

For More Information On These Products Or On Products Not Listed,
Call *Salina Supply Company* At (785) 823-2221

ELKAY BOTTLE FILLER WATER FILTER CARTRIDGE

WATER SENTRY PLUS ezH2O BOTTLE FILLER FILTER CARTRIDGE

• LEAD/CHLORINE/TASTE/ODOR • CLASS 1 PARTICULATE • 3,000 GALLON • REPLACEMENT FOR BOTTLE FILLING STATIONS • 1.5 GPM

| SSC No. | Manuf No. | Dimensions | Temperature | Max PSI | Min PSI | Water Inlet | Water Outlet | Price Each |
|----------|---------------|-----------------------|--------------|---------|---------|-------------|--------------|------------|
| 18A 3010 | 51300C | 3 1/2" x 3 1/2" x 12" | 40° - 100° F | 105 PSI | 20 PSI | 3/8" | 1/4" | \$ 113.83 |



continued on next page



CHEMICAL PUMPS • WATERGUN • ACCESSORIES

PD SERIES CHEMICAL INJECTION PUMP

- MAXIMUM FLOW: 1.1 G.P.H. @ 150 PSI • 160 SPM • 150 MAX PSI • MANUAL CONTROL
- 3/8" OD TUBING • PTFE/POLYPREL® VALVE, SEATS & O-RING • WITH CERAMIC VALVE BALLS
- ENHANCED CONTROL WITH PULSE INPUT • REMOTE STOP/START & TANK LEVEL INPUT
- 160 STROKES PER MINUTE



LMI
Series A
Metering
Pump

| SSC No. | Manuf No. | Voltage | | Wgt | Price Each |
|----------|--------------------|---------------------|----------|--------|------------|
| 50I 3820 | PD751-A30HI | 110-120V US PLUG UL | 50/60 Hz | 11 lbs | \$ 941.00 |

PD SERIES CHEMICAL METERING PUMP

- MAXIMUM FLOW: • 0.68 G.P.H. • 16.32 G.P.D. • 250 MAXIMUM PSI • MANUAL CONTROL
- FASTPRIME HEAD WITH 4 FUNCTION VALVE - MOLDED HEAD WITH DOUBLE BALL CHECK VALVES
- 1/4" OD TUBING • PTFE/POLYPREL® VALVE, SEATS & O-RING • CERAMIC VALVE BALLS
- 160 MAXIMUM STROKES PER MINUTE



LMI
Series PD
Metering
Pump


| SSC No. | Manuf No. | Voltage | | Wgt | Price Each |
|----------|--------------------|---------------------|----------|--------|------------|
| 50I 3835 | PD041-822SI | 110-120V US PLUG UL | 50/60 Hz | 15 lbs | \$ 908.45 |

HIGH PRESSURE WATERGUN

- 3/4 HP • 3500 RPM • 180° F MAX TEMPERATURE
- 1" SUCTION & DISCHARGE
- 75 PSI MAXIMUM INLET PRESSURE



GOULDS
WATER TECHNOLOGY
a xylem brand



| SSC No. | Manuf No. | Voltage | Size | Price Each |
|----------|---------------------|--------------|-----------------------|--------------------|
| 50D 2300 | 7GBC07/HB707 | 115/230/60/1 | 22 1/8" L x 10 3/8" H | 45 lbs \$ 1,641.89 |

| | | | | | |
|----------|--------------------|-------------------------------|-------------|----------|-----------|
| 50I 3510 | 400KL | Platform Scale (Grey) | 350 Lb Cap. | 37.6 lbs | \$ 345.12 |
| 50I 3840 | 10445 | 5 ml Free Cl2 Test Dispenser | | | \$ 155.90 |
| 50I 3845 | 10447 | 10 ml Free Cl2 Test Dispenser | | | 184.04 |
| 50I 3850 | 10446 | 5 ml Total Cl2 Test Dispenser | | | 155.90 |
| 50I 3880 | CN-66F | Free Chlorine Test Kit | 2231-02 | 1.0 lbs | \$ 152.30 |
| 50I 3881 | 1730-06 | Pack of 6 Tubes | | | 81.68 |
| 50I 3885 | 14076-99 | Total Chlorine Regent | 100 Pak | | 74.64 |
| 50I 3890 | 14077-99 | Free Chlorine Regent | 100 Pak | 0.4 lbs | 73.01 |
| 50I 3891 | 1453-00 | 5B Hardness Test | | | \$ 56.34 |
| 50I 3893 | 426.32 | #3 Hardness Sol. | | 4.0 Lbs | 38.51 |
| 50I 3894 | 962-99 | Univers3 | Pak of 100 | | 71.07 |
| 50I 3892 | HA77/203300 | HD & Iron Tester | | | 302.40 |
| 50I 4210 | | Ortho Tolidine | | 16.0 Oz | \$ 22.27 |
| 50I 4310 | | Potassium Permanganate | | 5.0 Lbs | 32.84 |