


Series  
**09**  
*Universal Switch.*

[www.eao.com/09](http://www.eao.com/09)

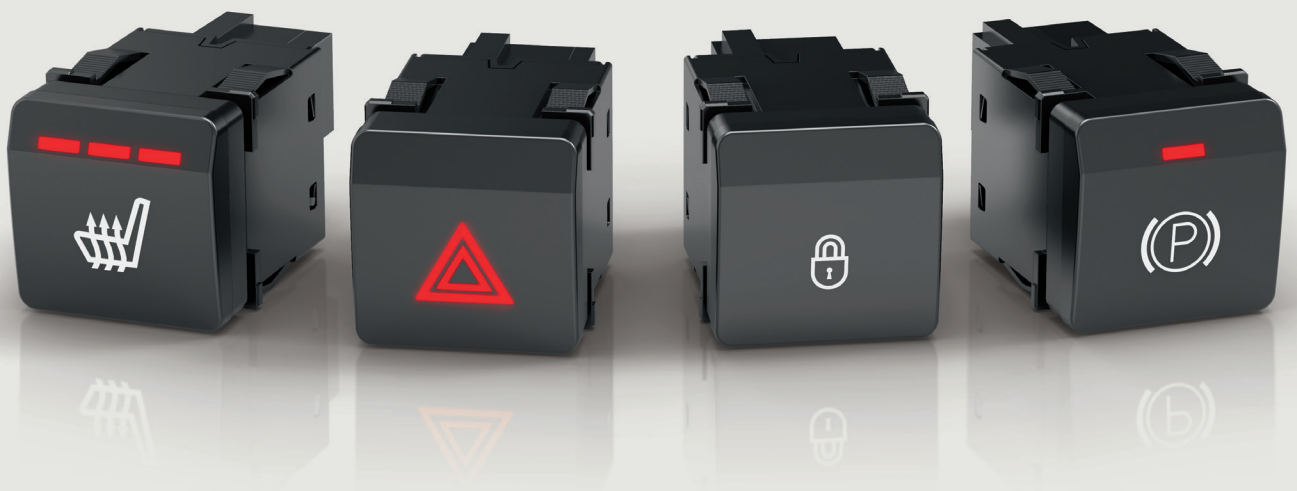

# Series 09

## Universal Switch.

The Series 09 universal switch is ideally suited for use in vehicle interiors. *Combining different switches enables a wide range of applications and layouts to be implemented.*

The Series 09 universal switch has been specially designed for use in vehicle interiors, particularly for cars, electric vehicles, buses, trucks and special vehicles. It is suitable for various applications as well as safety-relevant functions.

The high-quality Series 09 switches facilitate an almost unlimited combination of switching functions for wide-ranging applications in vehicles. They have a modular, ergonomic design and an appealing, durable surface coating with fantastic haptics and tactile feedback. In addition, illuminated symbols are available in accordance with ISO 7000 or as per the customer's preferences. The Series 09 universal switch is the best choice for numerous applications and is unique on the market with its variety of possibilities.

#### **Versatile product options and configuration possibilities**

The Series 09 universal switch is available in a range of designs and with many configuration options, making it suitable for a wide range of applications. The basic versions include switches with white symbol illumination, and the option of no, one or three red LED status indicators. Red symbol illumination for use as a warning light switch is also available as a standard configuration. Versions without a mechanical function, which are available as insertable indicators or blind plug, complete the range.

#### **Typical applications**

- Menu/reset button
- Lock/unlock
- Headlight on/off
- Heated seats/air-conditioning/fan
- Transmission control
- SOS and hazard light switch
- Various driving functions

#### **Suitable for safety-relevant applications**

This universal switch is suitable for safety-relevant applications. Diagnostic capability resulting from resistance coding (Namur) enables, for example, cable breakages and switching states to be detected. There is also the option of two redundant switching signals.

#### **Manufacturer expertise and IATF 16949**

Series 09 products are produced in our Centre of Automotive Excellence in Germany. This means we can apply our many years of comprehensive experience as an original equipment manufacturer (OEM) in the automotive sector to applications in the heavy-duty and special vehicles markets. At the same time, EAO customers benefit from high-quality, durable products and services. The development and production process is geared toward automotive standards (IATF 16949, 100 % product traceability, 100 % EOL testing, etc.).

#### **Not just an expert, also a partner to the automotive industry**

As a global partner to major vehicle manufacturers and sub-contractors, we impress our customers with the excellent quality of our products and services. Thanks to our long-standing commitment and our comprehensive consulting services, we have served the automotive industry for many decades now as an established global subcontractor in the area of switches, subassemblies, control units and indicator units.

#### **Please note**

Information on the availability of the fully validated and certified products is available at:  
[www.eao.com/09-universal-status](http://www.eao.com/09-universal-status)

## Advantages.

- Ideal for safety-relevant applications
- Wide range of designs and application-specific configuration options
- Ergonomic, modular design with IP5K4 protection rating
- ISO 7000 or custom symbols
- Developed and manufactured in accordance with IATF 16949

### Illumination

LED symbol illumination

- Colour: white with luminance:  $\sim 20 \text{ cd/m}^2$
- Colour: red (for hazard warning light) with luminance:  $\sim 90 \text{ cd/m}^2$

LED status indicator

- Colour: red
- Luminance:  $\sim 200 \text{ cd/m}^2$

### Symbols

- Symbols in accordance with ISO 7000
- Customer-specific symbols on request

### Ambient conditions

- Operating temperature  
–40°C ... +85°C
- Storage temperature  
–40°C ... +85°C

### Protection degree

- up to IP5K4 front side  
(built into a panel)
- IP20 rear side

### Approvals and conformities

- E1 (ECE R10, ECE R118)
- CE
- Developed and manufactured in accordance with IATF 16949

Further information is available at  
[www.eao.com/09](http://www.eao.com/09)



### Notes

Customers must ensure that the products are correctly installed to comply with product and functional safety requirements.

















## Ideal for your vehicle interior applications.

### Versatile product variants

The Series 09 universal switch is available in two variants – STANDARD and DUAL CONTACT – and offers universal configuration options. The product variants and their configurations mean the Series 09 universal switch can be used for a wide range of applications – including safety-relevant functions such as hazard light button or transmission control.

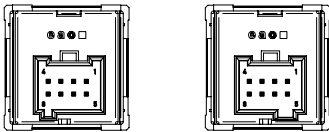This configurability offers many possibilities for the type and number of switching contacts, vehicle voltage, and the option of diagnostic capability. Definitions of haptic feedback, two different connector codings, and a complete selection of ISO 7000 symbols – or custom symbols – complete the comprehensive options to choose from.

Product options, Series 09 universal switch					
Features		Product options	Variants		
			STANDARD	DUAL CONTACT	
				NO-NO	NO/NC-NO
Electrical properties		12 V	✓	✓	✓
		24 V	✓	✓	✓
		12 V Namur $R_s=120\Omega/R_p = 1\text{K}\Omega$	✓	✓	✓
		24 V Namur $R_s=120\Omega/R_p = 1\text{K}\Omega$	✓	✓	✓
Haptics		Firm haptics (short travel)	✓	✗	✓
		Soft haptics (long travel)	✓	✓	✗
		Without haptics	✓	✗	✗
Symbol illumination	   White      Red      Without	White	✓	✓	✓
		Red	✓	✓	✓
		Without symbol illumination	✓	✗	✗
Status indicator	   Without      One LED      Three LEDs	Without status indicator	✓	✓	✓
		One red status indicator	✓	✓	✓
		Three red status indicators	✓	✗	✗

Features	Product options		Variants		
			STANDARD	DUAL CONTACT	
				NO-NO	NO/ NC-NO
TYCO Connector 	Tyco 8P-1745000-3 (black)		✓	✓	✓
	Tyco 8P-1745000-4 (grey)		✓	✓	✓
	Without connector		✓	✗	✗
Symbol	<b>ISO</b> 7000  Customized	ISO 7000- XXXX			
		Customized symbol*			
Symbol direction	 0°	 90°	0°		
			90°		
	 180°	 270°	180°		
			270°		

**Notes**



For this variant the option is not available

\* For customized symbols, please send us the corresponding file

# Universal switch STANDARD.



## Product options

- 12V or 24V (optionally available as diagnosis-capable version with Namur contact)

## Mechanical characteristics

- Actuation force:  
approx. 4.5N (soft (long travel) haptics)  
approx. 6.5N (firm (short travel) haptics)
- Overload: 250 N
- Mechanical lifetime: up to 250 000 cycles of operation

## Electrical characteristics

- Operating voltage range:  
8–18VDC (12V product option)  
18–32VDC (24V product option)
- Max. current: 50mA
- Min. current: 1mA
- Max. power: 1VA (without Namur)  
0.25VA (with Namur)
- Max. switching voltage: 32VDC
- Contact resistance:  
< 10Ω (without Namur)  
106Ω–118Ω (with Namur)

## Illumination

- LED symbol illumination
  - Colour white, luminance: approx. 20cd/m<sup>2</sup> (conditions: 28VDC or 14VDC, 23°C ±2K)
  - Colour red (for hazard warning light), luminance: approx. 90cd/m<sup>2</sup> (conditions: 28VDC or 14VDC, 23°C ±2K)
- LED status indicator
  - Colour red, luminance: approx. 200cd/m<sup>2</sup> (28VDC or 14VDC and 23°C ±2K)

## Symbols

- Symbols in accordance with ISO 7000
- Customer-specific symbols on request

## Connections/interfaces

- Integrated plug recess, suitable for TE 8P-1745000-3 or 8P-1745000-4, 8-pin

## Ambient conditions


- Operating temperature –40°C ... +85°C
- Storage temperature –40°C ... +85°C

## Protection degree


- up to IP5K4 front side (built into a panel)
- IP20 rear side




**Dimensions**  
(All dimensions in mm)

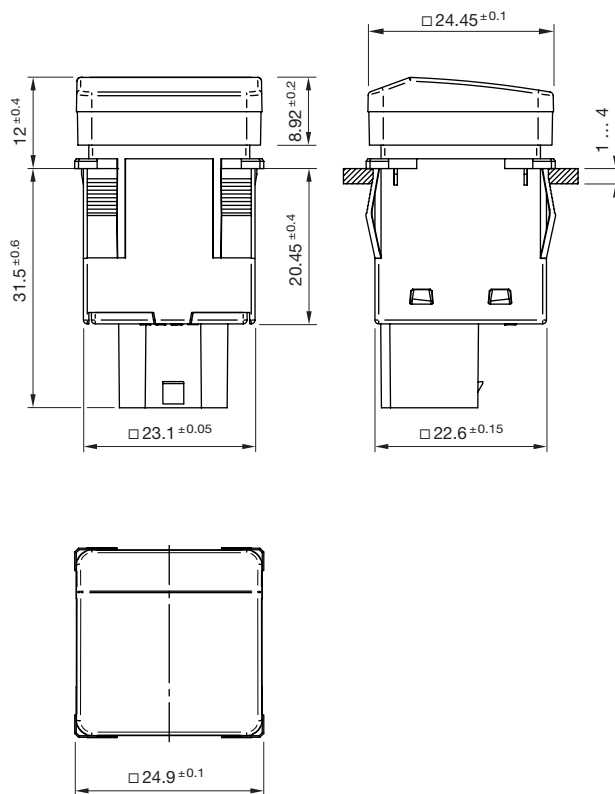

**Mounting cut-outs**  
(All dimensions in mm)

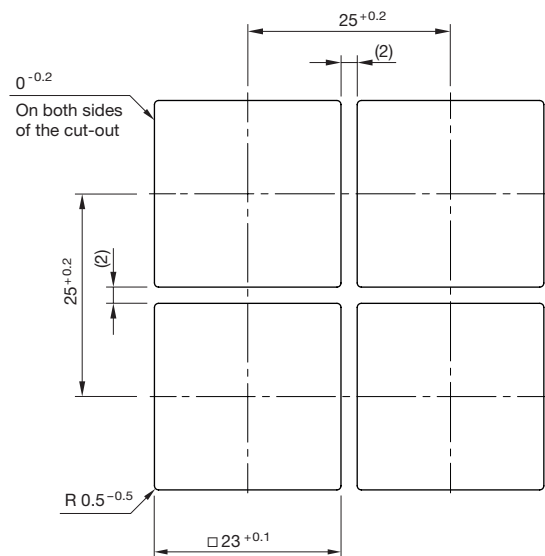

**Wiring diagram**  
Standard (NO)



The switch can be mounted in front panel thicknesses between 2 and 4 mm. To guarantee stability and density, a plastic front panel with a material thickness of 3 mm is recommended.

Further information is provided in the corresponding operating instructions at [www.eao.com/09-universal-switch](http://www.eao.com/09-universal-switch).



# Universal switch DUAL CONTACT.



## Product options

- NO/NO or NO/NC-NO (optionally available as diagnosis-capable version with Namur contact)
- 12V or 24V (optionally available as diagnosis-capable version with Namur contact)

## Mechanical characteristics

- Actuation force:  
approx. 4.5N (soft (long travel) haptics) NO/NO  
approx. 6.5N (firm (short travel) haptics) NO/NC-NO
- Overload: 250N
- Mechanical lifetime: up to 250000 cycles of operation

## Electrical characteristics

- Operating voltage range:  
8–18VDC (12V product option)  
18–32VDC (24V product option)
- Max. current: 50mA
- Min. current: 1mA
- Max. power: 1VA (without Namur)  
0.25VA (with Namur)
- Max. switching voltage: 32VDC
- Contact resistance:  
< 10Ω (without Namur)  
106Ω–118Ω (with Namur)

## Illumination

- LED symbol illumination
  - Colour white, luminance: approx. 20cd/m<sup>2</sup> (conditions: 28VDC or 14VDC, 23°C ±2K)
  - Colour red (for hazard warning light), luminance: approx. 90cd/m<sup>2</sup> (conditions: 28VDC or 14VDC, 23°C ±2K)
- LED status indicator
  - Colour red, luminance: approx. 200cd/m<sup>2</sup> (28VDC or 14VDC and 23°C ±2K)

## Symbols

- Symbols in accordance with ISO 7000
- Customer-specific symbols on request

## Connections/interfaces

- Integrated plug recess, suitable for TE 8P-1745000-3 or 8P-1745000-4, 8-pin

## Ambient conditions

- Operating temperature –40°C ... +85°C
- Storage temperature –40°C ... +85°C


## Protection degree

- up to IP5K4 front side (built into a panel)
- IP20 rear side







**Dimensions**  
(All dimensions in mm)

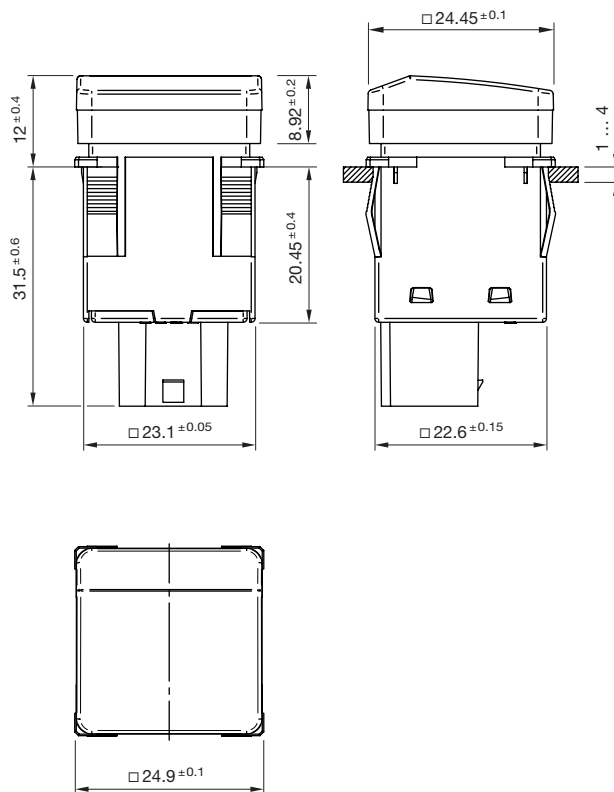


**Mounting cut-outs**  
(All dimensions in mm)

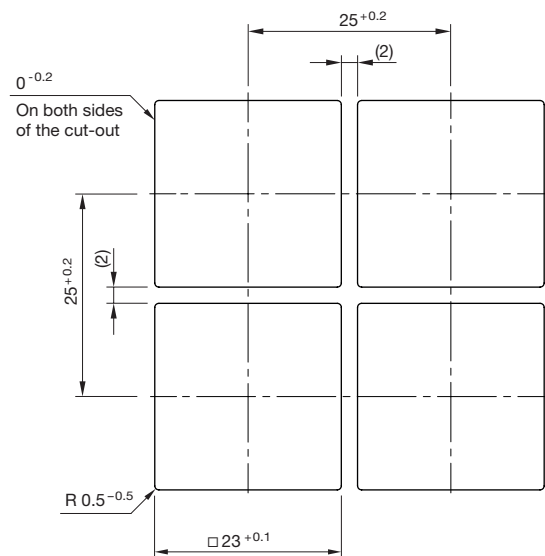

**Wiring diagram**  
Dual Contact (NO/NO)



Dual Contact (NO/NC-NO)



The switch can be mounted in front panel thicknesses between 2 and 4 mm. To guarantee stability and density, a plastic front panel with a material thickness of 3 mm is recommended.

Further information is provided in the corresponding operating instructions at [www.eao.com/09-universal-switch](http://www.eao.com/09-universal-switch).



Expert manufacturers.

*EAO creates possibilities. Since 1947.*



**Founding year:** 1947

**Number of employees:** 600

**Headquarters:** Olten, Switzerland

**Manufacturing Companies:** Switzerland,

Germany, North America, China

**Sales Companies:** 10

**Distribution countries:** 50

**Core markets:** Heavy Duty & Special Vehicles,

Machinery, Transportation, Automotive

EAO AG, a Swiss, family-owned company founded in 1947, has developed into one of the world's leading manufacturers of high-quality switches, keyboards, sophisticated control elements, and complete HMI control units and HMI Systems.

Efficient and modern development processes, effective global supply chains, and skilled project and consultation management represent additional services that we offer our customers and business partners around the world.

#### **Your solution-focused expert and partner**

We do much more than just manufacture individual control elements. As a solution-focused partner, we provide the option of technically and mechanically customising existing HMI Components in line with our customers' individual requirements. From simple control elements through to sophisticated HMI Systems, from serial production through to installation – we offer the entire range of HMI services and inspire the confidence of our customers.

# Visit our website.

## EAO.COM

EAO, the expert partner for Human Machine Interfaces (HMIs), offers a variety of innovative, intuitive and reliable HMI Products and Services.

### Online product configurator

Build your tailored product in the online product configuration system and obtain technical specifications and 3D data at the same time. The right HMI for you, step by step: [eao.com/products](http://eao.com/products)

### EAO downloads


Find more extensive documents such as catalogues, data sheets, certificates and brochures to read and use for research: [eao.com/downloads](http://eao.com/downloads)

### Related documents


Find out more about our innovative, intuitive and reliable HMI Products and Solutions.



HD & SV  
Brochure



Series 09  
Brochure



Series 09  
Brochure

# EAO Contact.

## *Your centre of excellence.*

### Headquarters

EAO Holding AG  
Tannwaldstrasse 88  
CH-4600 Olten  
Telephone +41 62 286 92 00  
info@eao.com

### Manufacturing Companies

**Switzerland**  
EAO AG  
Tannwaldstrasse 88  
CH-4600 Olten  
Telephone +41 62 286 91 11  
info@eao.com

EAO Systems AG  
Tannwaldstrasse 88  
CH-4600 Olten  
Telephone +41 62 286 91 11  
sales.esy@eao.com

**China**  
EAO (Guangzhou) Ltd.  
3/F, Block G4, South China  
New Materials Innovation Park  
31 Kefeng Road  
Guangzhou Science City  
CN-Guangzhou, PRC  
Telephone +86 20 3229 0390  
sales.ecn@eao.com

**Germany**  
EAO Automotive GmbH & Co. KG  
Richard-Wagner-Straße 3  
DE-08209 Auerbach/Vogtland  
Telephone +49 3744 8264 0  
sales.esa@eao.com

**North America**  
EAO Corporation  
One Parrott Drive  
Shelton  
US-CT 06484  
Telephone +1 203 951 4600  
sales.eus@eao.com

### Sales Companies

**France**  
EAO France SAS  
27 rue Maurice Flandin  
FR-69003 Lyon  
Telefon +33 426 298 588  
sales.efr@eao.com

**Germany, Austria, Czech Republic,  
Poland, Slovakia**  
EAO GmbH  
Langenberger Straße 570  
DE-45277 Essen  
Telephone +49 201 8587 0  
sales.ede@eao.com

**Hong Kong (Asia Pacific)**  
EAO (Far East) Ltd.  
Unit A1, 1/F, Block A  
Tin On Industrial Building  
777 Cheung Sha Wan Road  
Lai Chi Kok, Kln  
HK-Hong Kong  
Telephone +852 27 86 91 41  
sales.ehk@eao.com

**Italy**  
EAO Italia S.r.l.  
Centro Direzionale Summit –  
Palazzo C1  
Via Brescia 26  
IT-20063 Cernusco sul Naviglio (MI)  
Telephone +39 029 247 0722  
sales.eit@eao.com

**Japan**  
EAO Japan Co. Ltd.  
Net 1 Mita Bldg. 3F  
3-1-4 Mita Minato-ku  
JP-Tokyo 108-0073  
Telephone +81 3 5444 5411  
sales.ejp@eao.com

**Netherlands, Belgium**  
EAO Benelux B.V.  
Kamerlingh Onnesweg 46  
NL-3316 GL Dordrecht  
Telephone +31 78 653 17 00  
sales.enl@eao.com

**North America**  
EAO Corporation  
One Parrott Drive  
Shelton  
US-CT 06484  
Telephone +1 203 951 4600  
sales.eus@eao.com

**Switzerland**  
EAO Schweiz AG  
Tannwaldstrasse 86  
CH-4600 Olten  
Telephone +41 62 286 95 00  
sales.ech@eao.com

**United Kingdom, Denmark,  
Finland, Ireland, Norway, Sweden**  
EAO Ltd.  
Highland House  
Albert Drive  
Burgess Hill  
GB-West Sussex RH15 9TN  
Telephone +44 1444 236 000  
sales.euk@eao.com