

Dedicated to People Flow™



THE ELEVATOR WITH A COMPACT MACHINE ROOM

KONE S MiniSpace™

KONE S MiniSpace™

– compact and reliable

Kone is the industry leader in elevator and escalator innovation, we have continued our long history of innovative solutions for People Flow™ with the creation of the KONE S MiniSpace™ – a versatile elevator with compact machine room that is ideal for offices, hotels and residential buildings. Powered by the revolutionary KONE EcoDisc®, it guarantees reliable operation, reduced noise levels, and provides outstanding performance for generations to come.

Less space, faster construction

With KONE S MiniSpace, the machine room is simply an extension of the elevator shaft, making it easier and more cost-efficient to install.

Impressive energy savings

KONE S MiniSpace elevators consume less energy and result in lower thermal losses than traditional machines.

Attractive interior design

Our elevator design concepts are the work of renowned professionals and designers, who unite attractive interiors with practical durability.

Excellent service from planning to maintenance

KONE offers full service throughout your building's lifecycle. From our expert traffic analysis to our flexible KONE Care™ maintenance plans and modernization services, we keep things running smoothly, safely and efficiently.

A smooth and quiet ride

The V3F variable-frequency drive ensures a smooth, comfortable ride with superior acceleration/ deceleration profile, better floor-to-floor travel times, and precision leveling.

Industry standards and requirements

All KONE manufacturing units are ISO 14001 certified and meet all elevator industry standards and requirements, including:

- GB7588-2003 (EN81-1:1998)
- Singapore CP2 Code
- EN81-70 and EN81-72/GB26465

KONE S MiniSpace elevator range

Max travel:	Up to 63 floors and 150 meters of travel
Max load:	Up to 1600 kg
Max speed:	Up to 3.0 m/s
Group size:	Up to 8 cars in 1 elevator group
Car height:	Up to 2800 mm, TTC* available

* TTC = Through Type Car (front and rear opening)

Elevator specification in three simple steps

Specifying the optimal elevator solution for your needs takes just three simple steps:

- 1 Specify your elevator based on the expected People Flow™ and size of your building.
- 2 Choose a car design to suit your building interior from our professionally designed interiors or create a custom look and feel by choosing from the wide selection of materials in the KONE Design Collection.
- 3 Select additional options together with your sales representative to further enhance your elevator solution.



Taking eco-efficiency to new heights

Save energy, save costs. It is a simple calculation with impressive results. KONE MiniSpace™ elevators, powered by the KONE EcoDisc® hoisting motor, consume less energy than other gearless elevators. KONE EcoDisc® also results in lower thermal losses than traditional machines, bringing direct savings in terms of cooling and ventilation costs.


A more efficient hoisting motor is not the only way to reduce the total energy consumption of an elevator. KONE has analyzed every function and option in order to squeeze the total energy consumption.




The eco-efficient KONE EcoDisc hoisting system

KONE S MiniSpace energy consumption

- Lighting
- Electrification
- Hoisting

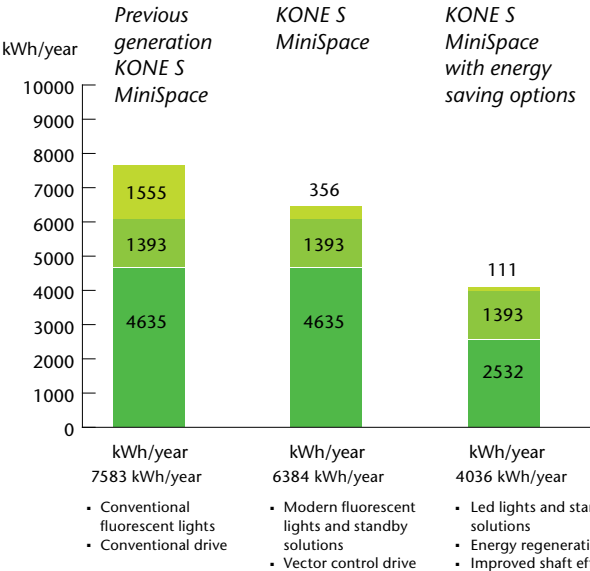

Energy consumption compared to previous technology

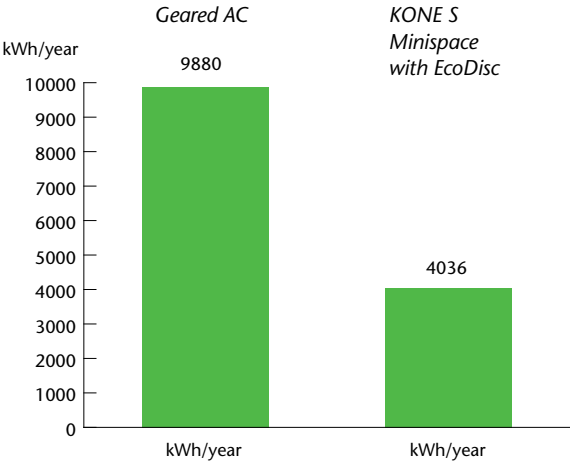

The basis for the calculation is KONE S MiniSpace, Load: 1000 Kg, Number of floors: 26, Travel height: 78 m, Speed: 2,0 m/s, Number of starts: 300,000

A green hoisting system

The KONE EcoDisc® hoisting machine made DC gearless and energy-hungry geared hoisting machines obsolete. The KONE EcoDisc permanent magnet synchronous machine, together with a vector-controlled drive system and energy regeneration options, provides the highest total efficiency and minimizes both mechanical and electrical losses.

Regenerative drive

When the car is descending with a heavy load (or ascending with a light load), it contains potential energy. The regenerative drive recovers this energy, saving up to 30% of the total energy consumed by a typical 13-person KONE elevator.


Further energy savings with standby mode

Lights, signalization, and ventilation can consume a considerable amount of energy even when the elevator is not moving. In a residential elevator with a low usage rate, this can represent a considerable portion of yearly energy costs. KONE offers the following options to minimize energy consumption:

1. Automatic car light operation turns off the lights automatically when the car is not in use and on again when the car is called.
2. Corridor illumination control automatically controls the light on the destination floor.
3. The power stage of the drive is set to sleep mode when not in use.
4. Signalization displays are dimmed when not in use.
5. The car fan is turned off when the elevator is not in use.

Eco-efficient car lighting

Surprisingly, the car lighting can account for up to 40% (1100 kWh) of an elevator's energy consumption. Halogen spots have been replaced with eco-efficient, long-lasting LED and modern fluorescent lighting technology. The lights are optimized for maximum efficiency and natural color saturation. LED lights last up to 10 times longer than traditional halogen bulbs and use up to 80% less energy.

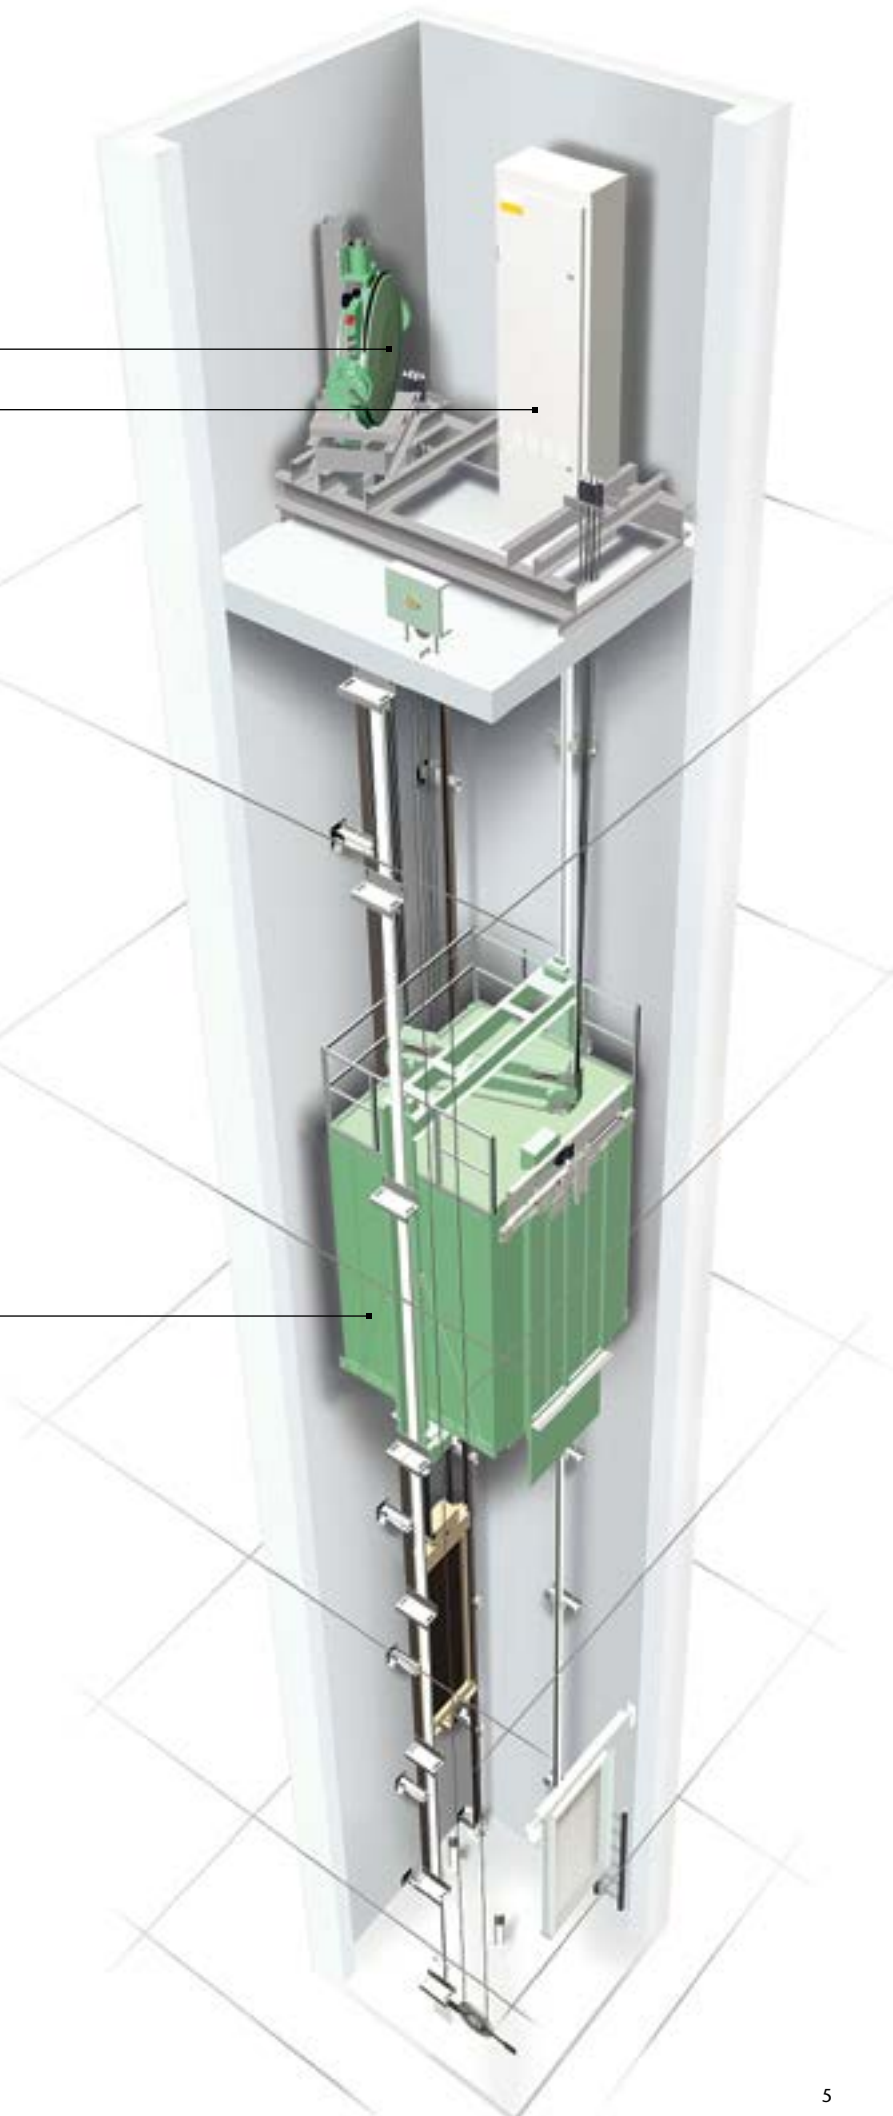

Award-winning design

THAT HELPS YOUR BUILDING STAND OUT

WHAT SETS KONE DESIGN APART

1 Easy selection of car interiors

A collection of 52 functional and visually appealing designs created by KONE's award winning design professionals.

2 The most flexible and versatile offering

100 different materials and accessories that can be combined freely and used in all elevator products, for both new buildings and modernization projects.

3 The most innovative materials

The combination of unique textured, patterned, and 3D-effect wall materials with novel lighting solutions creates a stunning visual effect.

4 Award-winning design

KONE's elevator and signalization design concepts have received both Red Dot and Good Design awards.



reddot design award
winner 2012

2 Good Design awards
4 Red Dot design awards

Intelligent features that improve your building's People Flow™

KONE helps you to deliver smarter People Flow in your building. Our solutions optimize your elevator traffic while our systems monitor equipment in real time.

Intelligent group controls that learn

KONE's group control solutions are the best in the industry. PC-based group controls increase handling capacity during peak times and save energy when traffic is light. Artificial intelligence detects call and passenger information over a period of time, anticipates traffic, and adapts elevator operations accordingly.

KONE Polaris™ DCS – taking elevator group performance to a new level

The KONE Polaris Destination Control System (DCS) can improve the handling capacity of the elevator group during peak times without extending the waiting times during quieter periods. The KONE Polaris series contains new solutions that enable easier access and simpler usage, with access control solutions such as PIN codes and access cards.

The KONE E-Link™ monitoring solution

KONE E-Link provides an accurate view of the transportation status, demand, performance, and availability of elevators and escalators in the building. This helps you ensure that the equipment delivers the best possible performance at all times. KONE E-Link has an open interface to allow integration with other facility management systems.



Easy installation and flexible maintenance solutions

KONE's modern installation methods ensure that elevator installation is safe, fast and cost-efficient. After installation our network of service technicians ensure that the elevator will continue performing optimally for years to come.

Innovation through installation

The KONE MiniSpace™ solution not only saves space and energy throughout its lifetime, but it also saves money during construction. KONE has devised scaffold-less installation methods and special tools to erect the KONE S MiniSpace elevator. When the Site Absolutes are met, the installation process is uninterrupted and requires minimal or no assistance from the builder.

Save time with Construction Time Use elevators

KONE's Construction Time Use elevators (CTUs) enable safer, more weatherproof, and faster transportation of people and goods on building sites during the construction phase compared with an exterior hoist. After completion of your project, KONE CTU elevators are quickly converted into the building's permanent elevators.

Excellence in service around the clock

An elevator needs regular maintenance to ensure optimal performance. Our KONE Care™ maintenance solutions take into account the type, age, and usage of your equipment to maximize reliability and safety and minimize downtime and maintenance costs. KONE provides you with service excellence 365 days a year, 24 hours a day and flexible maintenance options to meet your specific needs.

KONE Care solutions

- **KONE Care Standard** is a cost-effective solution for reliable and top-quality maintenance that ensures compliance with safety laws and standards.
- **KONE Care Plus** simplifies maintenance management by making maintenance expenditure more predictable and providing real-time information on maintenance work.
- **KONE Care Premium** is the recommended solution if disruptions to People Flow would have a major impact on your business. The solution provides a first-class level of service and rapid response times. Maintenance costs are also fully predictable.



KONE references



Coastal View, Residential Compound, Qingdao



Intelligent commercial building, Shanghai



Landlord Butterfly compound, Kunshan




Huasheng Century New Town, Residential compound, Changsha



Hospital of Chinese medicine, Suzhou

Shaft dimensions

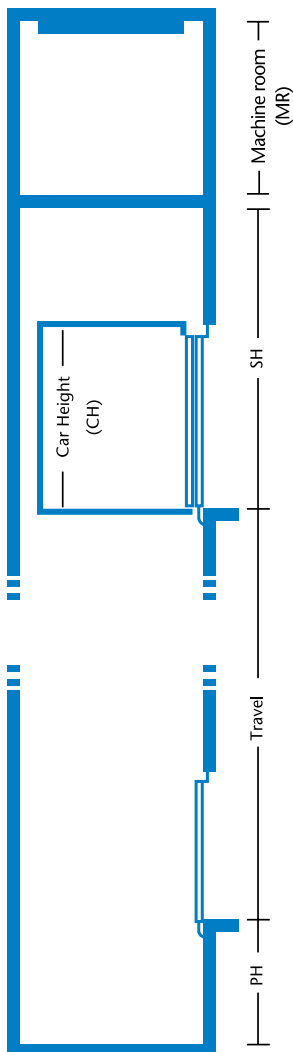

Item	Specification						Remark
Speed (m/s)	1.0	1.6	1.75	2.0	2.5	3.0	
Load (kg)	630	630	630	630	630	-	Rear counterweight/ Side counterweight
	800	800	800	800	800	-	
	1000	1000	1000	1000	1000	1000	
	1150	1150	1150	1150	1150	1150	
	1350	1350	1350	1350	1350	1350	
	1600	1600	1600	1600	1600	1600	
Max. travel (m)	55	75	100	110	120/135 ¹⁾	-	MX14 platform
	-	-	-	110	135	150	MX18 platform
Max. stops	38				48	63	
Max. units of group control	6					8	
Type code	PT08						Passenger: 8 persons, Load: 630 kg
	PT10						Passenger: 10 persons, Load: 1000 kg
	PT13						Passenger: 13 persons, Load: 1000 kg
	PT15						Passenger: 15 persons, Load: 1150 kg
	PT18						Passenger: 18 persons, Load: 1350 kg
	PT21						Passenger: 18 persons, Load: 1600 kg
Car type	Single entrance car Through type car						
Door opening	Optional						
Door height	2100/2200/2300/2400 ²⁾						
Door width	800, 900, 1000, 1100, 1300 (door center open only)						
Counterweight safety gear	Yes, when speed less 3 m/s						
Main power	380 V, 50 HZ, 3 phases						
Lighting power	220 V 50 Hz						
Min. interfloor distance	HH + 450 mm (high duty), HH + 480 mm (mid duty), HH + 500 mm (base duty),						


¹⁾ 135 m up to 1000 kg; 120 m for bigger loads

²⁾ Car height CH must be greater than Door Height HH

Note:

For further information regarding to the same size of machine room and shaft, reaction in pit and machine room, and etc, please contact our sales representatives.

Shaft plan

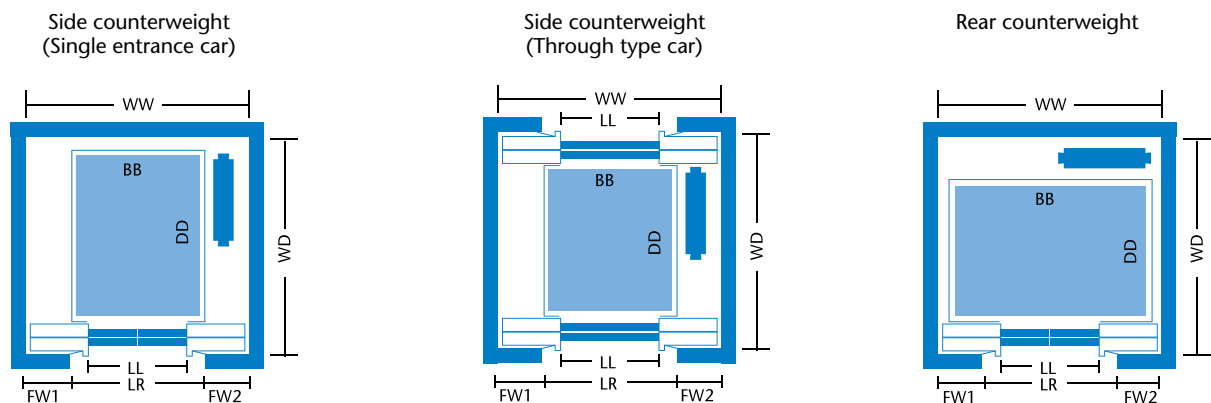

KONE S MiniSpace™ planning data

KONE S MiniSpace™ small machine room (side counterweight)																		
Type code	PT08		PT10				PT13				PT15				PT18		PT21	
Load (kg)	630		800				1000				1150				1350		1600	
Car size (mm)	1100x1400		1350x1400		1400x1200		1600x1400		1600x1500		1500x1800		1800x1450		2000 x 1500		1400x2400	
Door height (mm)	2100, 2200, 2300, 2400																	
Door width (mm)	800		800, 900		800		900		900		900		1000, 1100		1000, 1100		1000, 1100	
Shaft size (mm)	≤ 1.75 m/s	1750x1900		1925x1900		1975x1800		2225x1900		2175x1950		1)		1)		1)		
	2.0 m/s	1750x1850		1950x1900		1975x1850		2250x1950		2175x2050		2150x2150		2500x1950		1)		
	3.0 m/s	NA		NA		NA		1975x2470		1)		1)		2185x2470		1)		
Car height (mm)	2280 2400		2280 2400		2280 2400		2280 2400		2280 2400		2280 2400		2280 2400		2400		2400	
Over-head height (mm)	1.0 m/s	3750 3900		3750 3900		3750 3900		3750 3900		3750 3900		3750 3900		3750 3900		3830		3830
	1.6 m/s	3850 4000		3850 4000		3850 4000		3850 4000		3850 4000		3850 4000		3850 4000		4010		4010
	1.75 m/s	3900 4050		3900 4050		3900 4050		3900 4050		3900 4050		3950 4050		3950 4050		4100		4100
	2.0 m/s	4050 4150		4050 4150		4050 4150		4050 4150		4050 4150		4050 4150		4050 4150		4170		4200
	2.5 m/s	4500 4500		4500 4500		4500 4500		4500 4500		4500 4500		4500 4500		4500 4500		4500		4500
	3.0 m/s	NA NA		NA NA		NA NA		4950 4950		4950 4950		4900 4900		4900 4900		4900		4950
Pit depth (mm)	1.0 m/s	1360										1420		1270		1270		
	1.6 m/s	1460										1490		1360		1360		
	1.75 m/s	1490										1510		1460		1460		
	2.0 m/s	1650										1700		1600		1620		
	2.5 m/s	1970 (TL ≤ 120 m) 2530 (TL = 120 – 130 m) 2850 (TL > 130 m)										2040 (TL ≤ 120 m) 2530 (TL = 120 – 130 m) 2850 (TL > 130 m)		2040 (TL ≤ 120 m) 2530 (TL = 120 – 130 m) 2850 (TL > 130 m)		2070 (TL ≤ 120 m) 2530 (TL = 120 – 130 m) 2850 (TL > 130 m)		
	3.0 m/s	NA										2800 (TL ≤ 100 m), 3100 (TL > 100 m)						

1) Shaft dimensions are available from FLCAD

KONE S MiniSpace™ small machine room (rear counterweight)																
Type code	PT10		PT13				PT15				PT18		PT21			
Load (kg)	800		1000				1150				1350		1600			
Car size (mm)	1350x1400		1600x1400		1600x1500		1800x1450		1700x1500		2000x1500		2100x1600			
Door height (mm)	2100, 2200, 2300, 2400															
Door width (mm)	800		900		900		1000		1000		1000, 1100		1000, 1100			
Shaft size (mm)	≤ 2.0 m/s	1)		1)		1)		2260x2050		2160x2100		2500x2150		2600x2250		
	2.5 m/s	1750x2000		2000x2000		2000x2100		1)		1)		2500x2150		2600x2250		
	3.0 m/s	NA		2120x2050		1)		2185x2470		1)		2580x2250		2680x2250		
Car height (mm)	2280 2400		2280 2400		2280 2400		2280 2400		2280 2400		2400		2400			
Over-head height (mm)	1.0 m/s	4080 4200		3780 3900		3780 3900		3780 3900		3780 3900		3830		3830		
	1.6 m/s	4170 4290		3840 3960		3840 3960		3840 3960		3840 3960		4010		4010		
	1.75 m/s	4240 4360		3910 4030		3910 4030		3910 4030		3910 4030		4100		4100		
	2.0 m/s	4330 4450		4000 4120		4000 4120		4000 4120		4000 4120		4170		4600		
	2.5 m/s	4700 4820		4300 4420		4300 4420		4300 4420		4300 4420		4500		4900		
	3.0 m/s	NA		5150												
Pit depth (mm)	1.0 m/s	1250						1290				1270		1270		
	1.6 m/s	1300						1340				1380		1380		
	1.75 m/s	1400						1400				1490		1460		
	2.0 m/s	1550						1550				1620		1620		
	2.5 m/s	2040 (TL ≤ 120 m) 2530 (TL = 120 – 130 m) 2850 (TL > 130 m)						2040 (TL ≤ 120 m) 2530 (TL = 120 – 130 m) 2850 (TL > 130 m)				2070 (TL ≤ 120 m) 2530 (TL = 120 – 130 m) 2850 (TL > 130 m)		2070 (TL ≤ 120 m) 2530 (TL = 120 – 130 m) 2850 (TL > 130 m)		
	3.0 m/s	NA						2800 (TL ≤ 100 m), 3100 (TL > 100 m)								

1) Shaft dimensions are available from FLCAD



KONE provides innovative and eco-efficient solutions for elevators, escalators, automatic building doors and the systems that integrate them with today's intelligent buildings.

We support our customers every step of the way; from design, manufacturing and installation to maintenance and modernization. KONE is a global leader in helping our customers manage the smooth flow of people and goods throughout their buildings.

Our commitment to customers is present in all KONE solutions. This makes us a reliable partner throughout the life cycle of the building. We challenge the conventional wisdom of the industry. We are fast, flexible, and we have a well-deserved reputation as a technology leader, with such innovations as KONE MonoSpace®, KONE EcoMod™ and KONE UltraRope™.

KONE employs on average 40,000 dedicated experts to serve you globally and locally.

KONE Corporation
www.kone.com