



NÖRDOST

UK RETAIL PRICING (inc. VAT)

REFERENCE AND SUPREME REFERENCE
VALHALLA 2, ODIN 2 AND MORE

1st FEBRUARY 2021

Supplied in the UK and Ireland
by Renaissance



INDEX

Power cords **page 5**
 Analog Interconnects **page 6**
 Ethernet/4K/USB **page 8**
 Digital interconnects **page 10**
 Tonearm cables **page 12**
 Speaker cables and Bi-Wire Jumpers **page 13**
 Misc. **page 17**

ORDERING CONTACT INFO

Email: info@renaissanceaudio.co.uk

Phone: +44(0)131 555 3922

www.renaissanceaudio.co.uk

Renaissance
 94 Commercial Street
 Edinburgh EH6 6LX
 United Kingdom



NORDOST

WARRANTY INFORMATION

Nordost Reference and Supreme Reference products have a limited lifetime warranty to the original purchaser. These limited warranties cover any defects in material or workmanship under normal use of the product. However, due to the intricate yet durable makeup of our products, all merchandise sent in will undergo an evaluation process at the factory and will be handled at the discretion of the Nordost staff. Damage or abuse is not covered under the warranty.

To return any defective items, you must obtain an RA number. To do so, please go to:

<https://www.renaissanceaudio.co.uk/retailer-area/log-in/repairs/>

Made in the USA 



HOW TO MAKE A MODEL NUMBER

A. CABLE MODEL CODES

1. Cable Range Codes

- 2VH = Valhalla 2
- OD = Odin
- 2OD = Odin 2

2. Cable Type Codes

- PWR = Power Cord
- NET = Ethernet Cable
- UHD = 4K UHD Cable
- USB = USB Cable
- D = Digital Interconnect
- TA+ = Tonearm Cable +

B. CABLE LENGTH

- 0.6M = 2 ft.
- 1M = 3.3 ft.
- 1.5M = 5 ft.
- 2M = 6.6 ft.
- 2.5M = 8 ft.
- 3M = 10 ft.
- 3.5M = 11.5 ft.
- 4M = 13.3 ft.
- 5M = 15 ft.
- 5.5M = 18 ft.
- 6M = 20 ft.

C. CONNECTORS

- B = Banana Z-plugs (BFA)
- S = Spade
- R = RCA
- XLR = XLR (Balanced)
- DIN = 5 pin DIN connector

- BNC = BNC
- AA = A to A (USB)
- AB = A to B (USB)
- /90 = Right Angle (90 Degree)

D. POWER CORD CONFIGURATION

1. Wall Plug Selection

- US = United States (add /90 for 90°)
- UK = United Kingdom
- EUR = Europe
- AUS = Australia

2. IEC Amp Selection

- 15 = 15 Amp US (or 13) 13 Amp UK (or 10) 10 Amp EU, AUS (add /90 for 90°)



- 20 = 20 Amp US (or 16) 16 Amp EU, UK, AUS



E. SPEAKER CABLE CONFIGURATION

- SG = Shotgun: 2 connections at Amp & 2 connections at Speaker
- BW = Biwire: 2 connections at Amp & 4 connections at Speaker
- BA = BiAmp: 4 connections at Amp & 4 connections at speaker

EXAMPLES

Power Cord:

2VHPWR2M/US-15

2 meter Valhalla 2 power cord, 15 Amp, configured for the United States.

Interconnects:

2OD1MR

1 meter pair of Odin 2 Analog Interconnects with RCA connections at both ends.

Speaker Cables:

2VH4MSB/SG

4 meter pair of Valhalla 2 Speaker Cables with 2 spades on the amp end and 2 bananas on the speaker end of each cable.

NOTES

All speaker cables and analog interconnects are sold in pairs. To order a single cable, please use .5 for the quantity.

If you would like the same connectors on both ends, only one connector code is necessary. If you require one type of connector at the Amp/Source end and a different connector at the Speaker/Receiving end, list BOTH connector codes in the order of AMP/SOURCE to SPEAKER/RECEIVING.

For 90 Degree connectors, specify the orientation using the charts on the next page.

90 DEGREE PIN ORIENTATION

Pin Orientation of 90° (Right Angle) US Wall Plug

<p>90A</p> <p>Ground Pin at 6 O'Clock</p> <p>FACE Cable at 6 O'Clock</p> <p>BACK Cable at 6 O'Clock</p>	<p>90B</p> <p>Ground Pin at 6 O'Clock</p> <p>FACE Cable at 9 O'Clock</p> <p>BACK Cable at 3 O'Clock</p>	<p>90C</p> <p>Ground Pin at 12 O'Clock</p> <p>FACE Cable at 6 O'Clock</p> <p>BACK Cable at 6 O'Clock</p>	<p>90D</p> <p>Ground Pin at 6 O'Clock</p> <p>FACE Cable at 3 O'Clock</p> <p>BACK Cable at 9 O'Clock</p>
--	--	---	--

Pin Orientation of 90° (Right Angle) IEC C15 Connector

<p>90A</p> <p>Ground Pin at 6 O'Clock</p> <p>FACE Cable at -6 O'Clock</p> <p>BACK Cable at -6 O'Clock</p>	<p>90B</p> <p>Ground Pin at 6 O'Clock</p> <p>FACE Cable at -9 O'Clock</p> <p>BACK Cable at -3 O'Clock</p>	<p>90C</p> <p>Ground Pin at 12 O'Clock</p> <p>FACE Cable at -6 O'Clock</p> <p>BACK Cable at -6 O'Clock</p>	<p>90D</p> <p>Ground Pin at 6 O'Clock</p> <p>FACE Cable at -3 O'Clock</p> <p>BACK Cable at -9 O'Clock</p>
--	--	---	--

Pin Orientation of 90° (Right Angle) DIN Connector

<p>90A</p> <p>Horizontal Configuration</p>	<p>90B</p> <p>Vertical Configuration</p>	<p>90C</p> <p>Horizontal Configuration</p>	<p>90D</p> <p>Vertical Configuration</p>
---	---	---	---

REFERENCE

VALHALLA 2 POWER CORD



Model	Length	Retail
*2VHPWR1M	1M	£4,890
*2VHPWR2M	2M	£5,880
*2VHPWR3M	3M	£6,870
*2VHPWR4M	4M	£7,860
*2VHPWR5M	5M	£8,850
*2VHPWR6M	6M	£9,840



Also available in 20 amp (US) / 16 amp (EU, UK, AUS)

- Fully manufactured and terminated in the USA
- Dual Mono-Filament construction
- 15 amp (US) / 13 amp (UK) / 10 amp (EU, AUS) IEC-C15 standard
- 7 x 16 AWG silver plated 99.99999% OFC solid core conductors
- FEP insulation
- 8pF/ft Capacitance
- 1.3 Ohms per 1,000ft/304m
- HOLO:PLUG® US, EU, AUS and Furutech UK connectors available

- ▶ Add £90 retail for 16 amp (EU, UK, AUS)
- ▶ Add £55 retail for 90 degree wall plug
- ▶ Add £320 retail for Low Profile HOLO:PLUG® IEC-C15
- ▶ Add £50 retail for 90 degree IEC
- ▶ Add £60 retail for Furutech Figure 8
- ▶ Add £60 retail for Powercon Connector
- ▶ Add £990 retail per additional 1 meter

SUPREME REFERENCE

ODIN 2 POWER CORD



Model	Length	Retail
*2ODPWR1.25M	1.25M	£16,670
*2ODPWR2.5M	2.5M	£21,560
*2ODPWR5M	5M	£31,340



Also available in 20 amp (US) / 16 amp (EU, UK, AUS)

- Fully manufactured and terminated in the USA
- High purity class 1.003 extruded Fluorinated Ethylene Propylene (FEP) insulation
- 15 amp (US) / 13 amp (UK) / 10 amp (EU, AUS) IEC C-15 standard
- Mechanically tuned spacing, length and Dual Mono-Filament construction, TSC design
- 7 x 14 AWG silver-plated 99.99999% OFC solid core conductors
- 0.014 µH/ft Inductance
- 1.33 Ohms per 1000ft DC Resistance
- 20 Amp Cable Power Rating
- 100% Individually shielded total coverage
- Velocity of Propagation: 88% Speed of Light
- Odin 2 HOLO:PLUG® gold-plated US (Nema), EU (Schuko), AUS or UK to Odin 2 HOLO:PLUG® IEC-C15 or IEC-C19 termination

UK	AUS	LOW PROFILE
		

- ▶ Add £400 retail for UK or AUS HOLO:PLUG®
- ▶ Add £400 retail for Low Profile HOLO:PLUG® IEC-C15
- ▶ Add £400 retail for HOLO:PLUG® IEC-C19 (20 amp US, 16 amp EU, UK, AU)
- ▶ Add £4,890 retail per additional 1.25 meter

REFERENCE

VALHALLA 2 INTERCONNECT



Model	Length	Retail
*2VH0.6M	0.6M	£6,400
*2VH1M	1M	£7,440
*2VH1.5M	1.5M	£8,510
*2VH2M	2M	£9,580
*2VH2.5M	2.5M	£10,650
*2VH3M	3M	£11,720
*2VH3.5M	3.5M	£12,790
*2VH4M	4M	£13,860
*2VH4.5M	4.5M	£14,930
*2VH5M	5M	£16,000
*2VH5.5M	5.5M	£17,070
*2VH6M	6M	£18,140
*2VH6.5M	6.5M	£19,210
*2VH7M	7M	£20,280

- Comes as a PAIR of cables
- Fully manufactured and terminated in the USA
- Dual shielded silver braid analog interconnect
- 10 x24 AWG silver plated 99.999999% OFC solid core conductors
- Dual Mono-Filament design
- 17OpF/ft capacitance
- HOLO:PLUG® RCA or HOLO:PLUG® XLR termination (note: retermination unavailable)

- ▶ Add £35 retail per 5-pin or 4-pin Din connector
- ▶ Add £1,070 retail per additional 1/2 meter pair

SUPREME REFERENCE

ODIN 2 INTERCONNECT



Model	Length	Retail
*2OD0.6M	0.6M	£19,820
*2OD1M	1M	£22,040
*2OD1.5M	1.5M	£24,490
*2OD2M	2M	£26,940
*2OD2.5M	2.5M	£29,390
*2OD3M	3M	£31,840
*2OD3.5M	3.5M	£34,290
*2OD4M	4M	£36,740
*2OD4.5M	4.5M	£39,190
*2OD5M	5M	£41,640
*2OD5.5M	5.5M	£44,090
*2OD6M	6M	£46,540
*2OD6.5M	6.5M	£48,990
*2OD7M	7M	£51,440

- Comes as a PAIR of cables
 - Fully manufactured and terminated in the USA
 - High purity class 1.003 extruded Fluorinated Ethylene Propylene (FEP) insulation
 - Mechanically tuned lay, length and Dual Mono-Filament construction, TSC design
 - 10 x 23 AWG silver-plated 99.999999% solid core OFC conductors
 - 18.5pF/ft Capacitance
 - 0.05µH/ft Inductance
 - 100% Individually shielded total coverage
 - Velocity of Propagation: 90% Speed of Light
 - HOLO:PLUG® gold-plated RCA or HOLO:PLUG® gold-plated XLR termination
(note: retermination unavailable)
- ▶ Add £2,450 retail per additional 1/2 meter pair

REFERENCE

VALHALLA 2 ETHERNET CABLE



Model	Length	Retail
*2VHNET1M	1M	£2,670
*2VHNET2M	2M	£3,020
*2VHNET3M	3M	£3,370
*2VHNET4M	4M	£3,720
*2VHNET5M	5M	£4,070
*2VHNET6M	6M	£4,420
*2VHNET7M	7M	£4,770

- 8 X 23 AWG Solid Core Conductors
- Twisted Pair Design
- Triple-shielded: Screen foil and Dual Braid
- Mechanically tuned lengths
- High density polyolefin insulation
- Extremely high bandwidth
- Specialized EMI and ESD resistant gold-plated 8P8C/RJ45 connectors

▶ Add £350 retail per additional 1 meter

AVAILABLE SOON

REFERENCE

VALHALLA 2 4K UHD CABLE



Model	Length	Retail
2VHUHD1M	1M	£2,770
2VHUHD2M	2M	£3,690
2VHUHD3M	3M	£4,610
2VHUHD5M	5M	£6,450
2VHUHD7M	7M	£8,290
2VHUHD8M	8M	£9,210



NORDOST 4K UHD CABLES ARE THE FIRST AND ONLY TO BE MADE IN THE USA!

- Fully manufactured and terminated in the USA
- High purity class 1.003 extruded Fluorinated Ethylene Propylene (FEP) insulation
- Mechanically tuned lay and Micro Mono-Filament construction, twin-axial shielded pair design
- 19 x 24 AWG silver-plated 99.999999% solid core OFC conductors
- 100% Total shield coverage
- Velocity of Propagation: 86% Speed of Light
- Terminated with gold-plated, shielded, 19 pin, type A, High Definition connectors
- Approvals: DPL 4K Certification

REFERENCE

VALHALLA 2 USB 2.0 CABLE



Model	Length	Retail
*2VHUSB1M	1M	£3,230
*2VHUSB2M	2M	£4,340
*2VHUSB3M	3M	£5,450
*2VHUSB4M	4M	£6,560
*2VHUSB5M	5M	£7,670
*2VHUSB6M	6M	£8,780
*2VHUSB7M	7M	£9,890

- Fully manufactured and terminated in the USA
- Dual Mono-Filament construction
- 2.0 standard
- 4 x 19 AWG solid core, silver-plated 99.999999% OFC conductors
- Flat, Twin-axial design
- Mechanically tuned lengths
- Individually shielded power and signal conductors
- Gold plated HOLO:PLUG® class A and class B Connectors (standard is A to B)

REFERENCE

VALHALLA 2 DIGITAL – 75 OHM



Model	Length	Retail
*2VH1.25MBNC	1.25M	£3,200
*2VH2MBNC	2M	£4,070
*2VH3MBNC	3M	£5,230
*2VH4MBNC	4M	£6,390
*2VH5MBNC	5M	£7,550
*2VH6MBNC	6M	£8,710

- Fully manufactured and terminated in the USA
- Dual Mono-Filament technology
- 75 Ohm S/PDIF digital cable terminated with HOLO:PLUG® BNC and supplied with gold plated RCA adaptors
- 16 AWG silver plated 99.999999% OFC solid core conductor
- Coaxial design
- 15.3pF/ft capacitance
- Propagation delay: 89% speed of light

▶ Add £1,160 retail per additional 1 meter

REFERENCE

VALHALLA 2 DIGITAL – 110 OHM



Model	Length	Retail
*2VH1.25MXLR	1.25M	£3,200
*2VH2MXLR	2M	£4,070
*2VH3MXLR	3M	£5,230
*2VH4MXLR	4M	£6,390
*2VH5MXLR	5M	£7,550
*2VH6MXLR	6M	£8,710

- Fully manufactured and terminated in the USA
- Dual Mono-Filament technology
- 110 Ohm AES/EBU digital cable terminated with HOLO:PLUG® XLR
- Two 18 AWG silver plated 99.999999% OFC solid core conductors
- Balanced design
- 10.5pF/ft capacitance
- Propagation delay: 89% speed of light

▶ Add £1,160 retail per additional 1 meter

SUPREME REFERENCE

ODIN 2 DIGITAL – 75 OHM



Model	Length	Retail
*2ODD1.25MBNC	1.25M	£10,780
*2ODD2.5MBNC	2.5M	£13,710
*2ODD5MBNC	5M	£19,570

- Fully manufactured and terminated in the USA
- High purity class 1.003 extruded Fluorinated Ethylene Propylene (FEP) insulation
- Mechanically tuned spacing, length and Dual Mono-Filament construction, TSC and Co-axial design
- 1 x 14 AWG Silver-plated 99.999999% solid core OFC conductor
- 15.3pF/ft Capacitance
- 75 Ohm Impedance
- 100% Total shield coverage
- Velocity of Propagation: 90% Speed of Light
- 75 Ohm S/PDIF digital cable terminated with HOLO:PLUG® gold-plated BNCs. Gold-plated BNC to RCA adaptors included

▶ Add £2,930 retail per additional 1.25 meter

SUPREME REFERENCE

ODIN 2 DIGITAL – 110 OHM



Model	Length	Retail
*2ODD1.25MXLR	1.25M	£10,780
*2ODD2.5MXLR	2.5M	£13,710
*2ODD5MXLR	5M	£19,570

- Fully manufactured and terminated in the USA
- High purity class 1.003 extruded Fluorinated Ethylene Propylene (FEP) insulation
- Mechanically tuned spacing, length and Dual Mono-Filament construction, TSC and Twin-axial design
- 2 x 18 AWG Silver-plated 99.999999% solid core OFC conductors
- 10.5pF/ft Capacitance
- 110 Ohm Impedance
- 100% Total shield coverage
- Velocity of Propagation: 90% Speed of Light
- 110 Ohm AES/EBU digital cable terminated with HOLO:PLUG® gold-plated XLRs

▶ Add £2,930 retail per additional 1.25 meter

REFERENCE

VALHALLA 2 TONEARM CABLE +




Model	Length	Retail
*2VHTA+1.25M	1.25M	£4,670
*2VHTA+1.75M	1.75M	£5,250
*2VHTA+2.25M	2.25M	£5,830
*2VHTA+2.75M	2.75M	£6,410
*2VHTA+3.25M	3.25M	£6,990
*2VHTA+3.75M	3.75M	£7,570

- Fully manufactured and terminated in the USA
- High purity 1.11 extruded Fluorinated Ethylene Propylene (FEP) insulation
- Mechanically tuned lay and lengths
- 4 x 24 AWG Silver plated 99.999999% OFC Solid Core Conductors: 2 Twisted pairs individually shielded. Dual Mono-Filament design.
- 24 AWG silver-plated, stranded OFC, Micro Mono-Filament bond wire and removable ground whips
- Capacitance: 14.06pF/ft (46.0pF/m)
- Velocity of Propagation: 87%
- Overall Shield Coverage: 99%
- Tonearm cables are available with straight HOLO:PLUG® DIN, HOLO:PLUG® RCA, or HOLO:PLUG® XLR connectors. Standard model numbers reflect a straight HOLO:PLUG® DIN to HOLO:PLUG® RCA.

- ▶ Add £90 retail for 90° HOLO:PLUG® DIN connector - Must specify pin orientation (A,B,C, or D). See chart on page 4.
- ▶ Add £580 retail for additional 1/2 meter

SUPREME REFERENCE

ODIN 2 TONEARM CABLE +

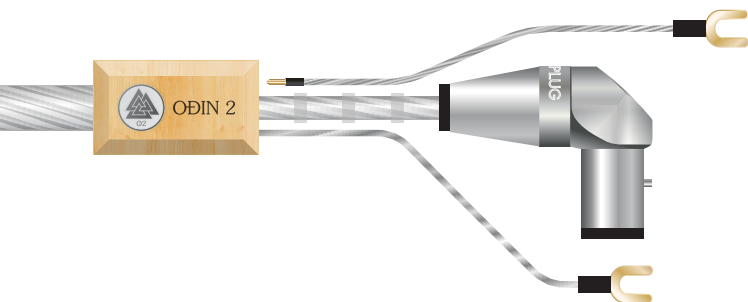

Model	Length	Retail
*2ODTA+1.25M	1.25M	£11,560
*2ODTA+2M	2M	£14,220
*2ODTA+3M	3M	£17,770
*2ODTA+4M	4M	£21,320
*2ODTA+5M	5M	£24,870
*2ODTA+6M	6M	£28,420

- Fully manufactured and terminated in the USA
- High purity 1.11 extruded Fluorinated Ethylene Propylene (FEP) insulation
- Mechanically tuned lay and lengths
- 4 x 23 AWG Silver plated 99.999999% OFC Solid Core Conductors. Dual Mono-Filament design.
- 23 AWG silver-plated, Solid Core OFC, Dual Mono-Filament bond wire and detachable ground whips
- 9.75pF/ft (RCA) or 23.5pF/ft (XLR) Capacitance
- 0.11µH/ft (RCA) or 0.0611µH/ft (XLR) Inductance
- Velocity of Propagation: 90%
- Overall Shield Coverage: 100%
- Tonearm cables are available with straight HOLO:PLUG® DIN, HOLO:PLUG® RCA, or HOLO:PLUG® XLR connectors. Standard model numbers reflect a straight HOLO:PLUG® DIN to HOLO:PLUG® RCA.

- ▶ Add £90 retail for 90° HOLO:PLUG® DIN connector - Must specify pin orientation (A,B,C, or D). See chart on page 4.
- ▶ Add £3,550 retail for additional 1 meter

AVAILABLE SOON

REFERENCE

VALHALLA 2 SPEAKER CABLE



Model	Length	Retail
*2VH1.25M	1.25M	£9,420
*2VH2M	2M	£11,620
*2VH2.5M	2.5M	£13,090
*2VH3M	3M	£14,560
*2VH3.5M	3.5M	£16,030
*2VH4M	4M	£17,500

- Comes as a PAIR of cables
 - Fully manufactured and terminated in the USA
 - Shotgun configuration only
 - 28 x 22 AWG silver plated 99.999999% OFC solid core conductors
 - Dual Mono-Filament design
 - 10.9pF/ft capacitance
 - 0.125µH/ft inductance
 - HOLO:PLUG® spade (8.5mm) or Nordost Z-type banana termination
- ▶ Add £1,470 retail per additional 1/2 meter pair

SUPREME REFERENCE

ODIN 2 SPEAKER CABLE



Model	Length	Retail
*2OD1M	1M	£29,330
*2OD1.5M	1.5M	£33,240
*2OD2M	2M	£37,150
*2OD2.5M	2.5M	£41,060
*2OD3M	3M	£44,970
*2OD3.5M	3.5M	£48,880
*2OD4M	4M	£52,790

- Comes as a PAIR of cables
- Fully manufactured and terminated in the USA
- Shotgun configuration only
- High purity class 1.003 extruded Fluorinated Ethylene Propylene (FEP) insulation
- Mechanically tuned spacing, length and Dual Mono-Filament construction
- 26 x 20 AWG silver-plated 99.999999% solid core OFC conductors
- 8.0pF/ft Capacitance
- 0.125µH/ft Inductance
- Velocity of Propagation: 98% Speed of Light
- HOLO:PLUG® gold-plated Spade (8.5mm) or HOLO:PLUG® gold-plated low-mass Z-plug Banana termination

▶ Add £3,910 retail per additional 1/2 meter pair

REFERENCE

REFERENCE BI-WIRE JUMPERS



Model	Length	Retail
REF7JUMP	7 in	£580
REF14JUMP	14 in	£1,160
REF21JUMP	21 in	£1,750

- Fully manufactured and terminated in the USA
- Set of 4 Jumpers
- Dual Mono-Filament technology
- TSC shielded conductor
- Standard configuration is spade (6.5mm) to banana
- Banana to banana and spade to spade is available
- Dramatically improves speaker performance when replacing the metal strips provided by most speaker companies.

▶ Add £10 retail ea. for Large Spades (8.5mm)

REFERENCE

VALHALLA 2 BI-WIRE JUMPERS



Model	Length	Retail
V2J1	13.5 in	£2,420
V2J2	27 in	£4,850

- Fully manufactured and terminated in the USA
- Set of 4 Jumpers
- 14 x 22 AWG silver plated 99.999999% OFC solid core conductors
- Dual Mono-Filament design
- 10.9pF/ft capacitance
- 0.125 μ H/ft inductance
- HOLO:PLUG[®] spade (8.5mm) or Nordost Z-type banana termination



SUPREME REFERENCE

ODIN 2 BI-WIRE JUMPERS



Model	Length	Retail
O2J1	13.5 in	£6,840
O2J2	27 in	£13,690

- Fully manufactured and terminated in the USA
- Set of 4 Jumpers
- High purity class 1.003 extruded Fluorinated Ethylene Propylene (FEP) insulation
- 13 x 20AWG silver-plated 99.999999% solid core OFC conductors
- Mechanically tuned spacing, length and Dual Mono-Filament
- 8.0pF/ft capacitance
- 0.125μH/ft inductance
- HOLO:PLUG® gold-plated Spade (8.5mm) or HOLO:PLUG® gold-plated low-mass Z-plug Banana termination

VALHALLA 2 APPAREL



Description	Sizes	Retail
V2 T-Shirt Short Sleeve (Black)	S, M, L, XL, 2XL	£POA
V2 Pull-Over Long Sleeve (Black)	S, M, L, XL, 2XL	£POA

While Supplies Last



NÖRDOST